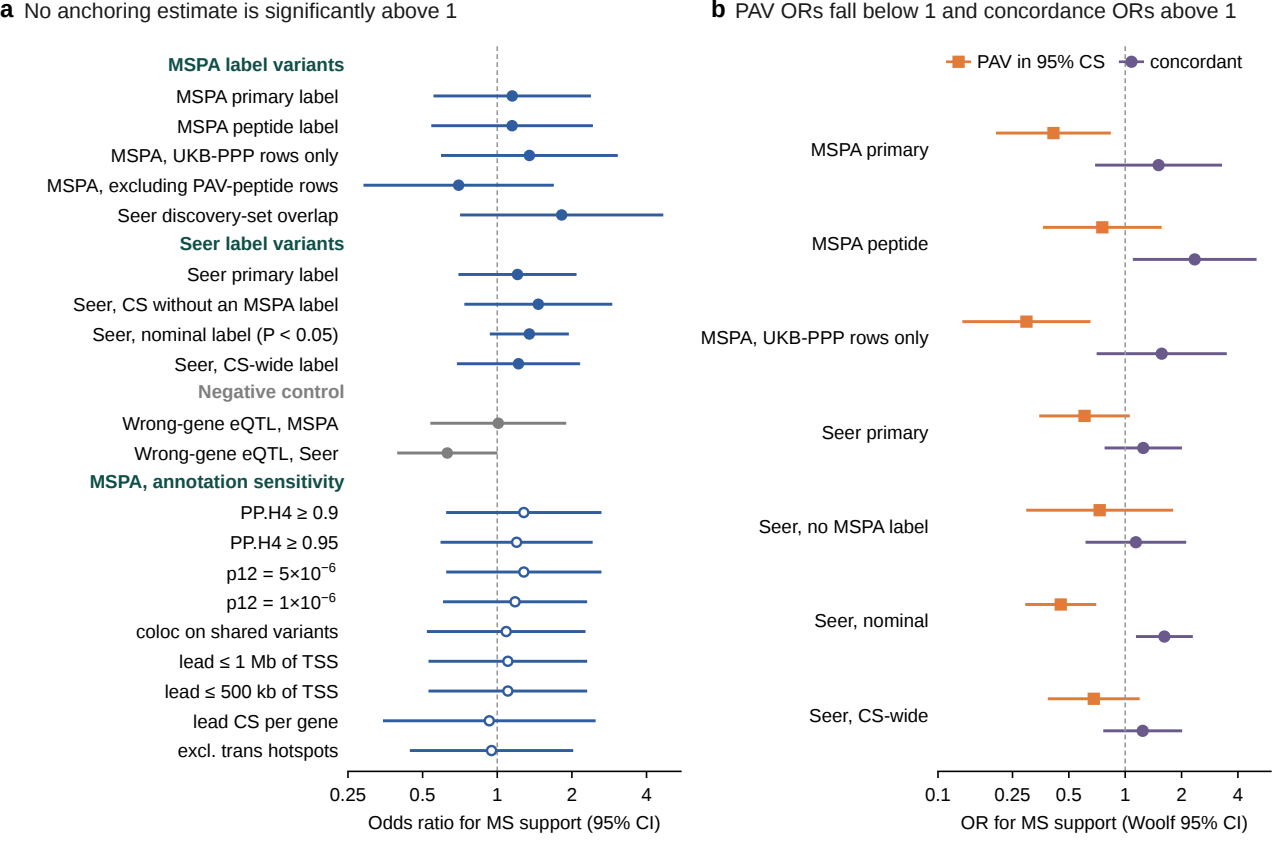
a No anchoring estimate is significantly above 1
MSPA label variants
MSPA primary label
MSPA peptide label
MSPA, UKB-PPP rows only
MSPA, excluding PAV-peptide rows
Seer discovery-set overlap
Seer label variants
Seer primary label
Seer, CS without an MSPA label
Seer, nominal label (P < 0.05)
Seer, CS-wide label
Negative control
Wrong-gene eQTL, MSPA
Wrong-gene eQTL, Seer
MSPA, annotation sensitivity
PP.H4 ≥ 0.9
PP.H4 ≥ 0.95
p12 = 5×10−6
p12 = 1×10−6
coloc on shared variants
lead ≤ 1 Mb of TSS
lead ≤ 500 kb of TSS
lead CS per gene
excl. trans hotspots
0.25
0.5
1
2
4
Odds ratio for MS support (95% CI)
b PAV ORs fall below 1 and concordance ORs above 1
PAV in 95% CS
concordant
MSPA primary
MSPA peptide
MSPA, UKB-PPP rows only
Seer primary
Seer, no MSPA label
Seer, nominal
Seer, CS-wide
0.1
0.25
0.5
1
2
4
OR for MS support (Woolf 95% CI)