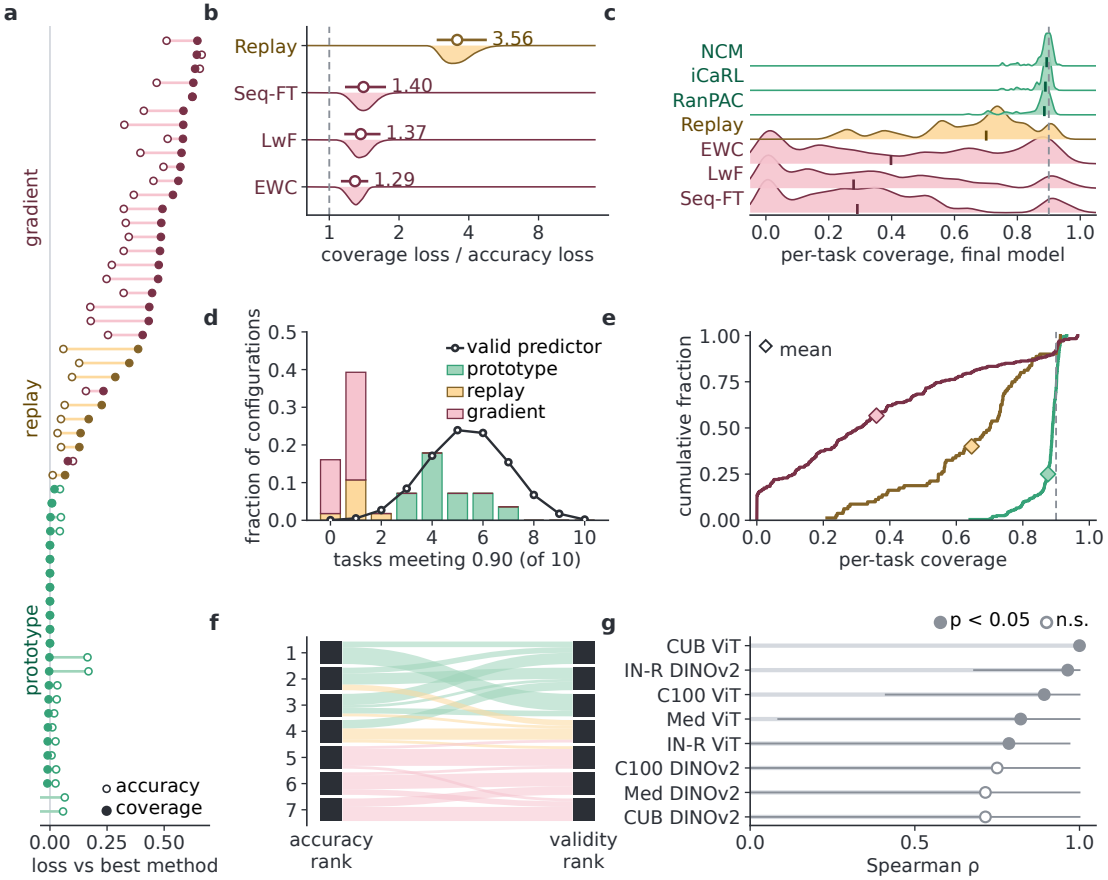

a
gradient
replay
prototype
accuracy
coverage
0.00 0.25 0.50
loss vs best method
b
Replay
Seq-FT
LwF
EWC
3.56
1.40
1.37
1.29
1 2 4 8
coverage loss / accuracy loss
c
NCM
iCaRL
RanPAC
Replay
EWC
LwF
Seq-FT
0.0 0.2 0.4 0.6 0.8 1.0
per-task coverage, final model
d
fraction of configurations
valid predictor
prototype
replay
gradient
0 2 4 6 8 10
tasks meeting 0.90 (of 10)
e
mean
cumulative fraction
0.00 0.25 0.50 0.75 1.00
0.0 0.2 0.4 0.6 0.8 1.0
per-task coverage
f
1 2 3 4 5 6 7
accuracy rank
validity rank
g
p < 0.05
n.s.
CUB ViT
IN-R DINOv2
C100 ViT
Med ViT
IN-R ViT
C100 DINOv2
Med DINOv2
CUB DINOv2
0.0 0.5 1.0
Spearman ρ