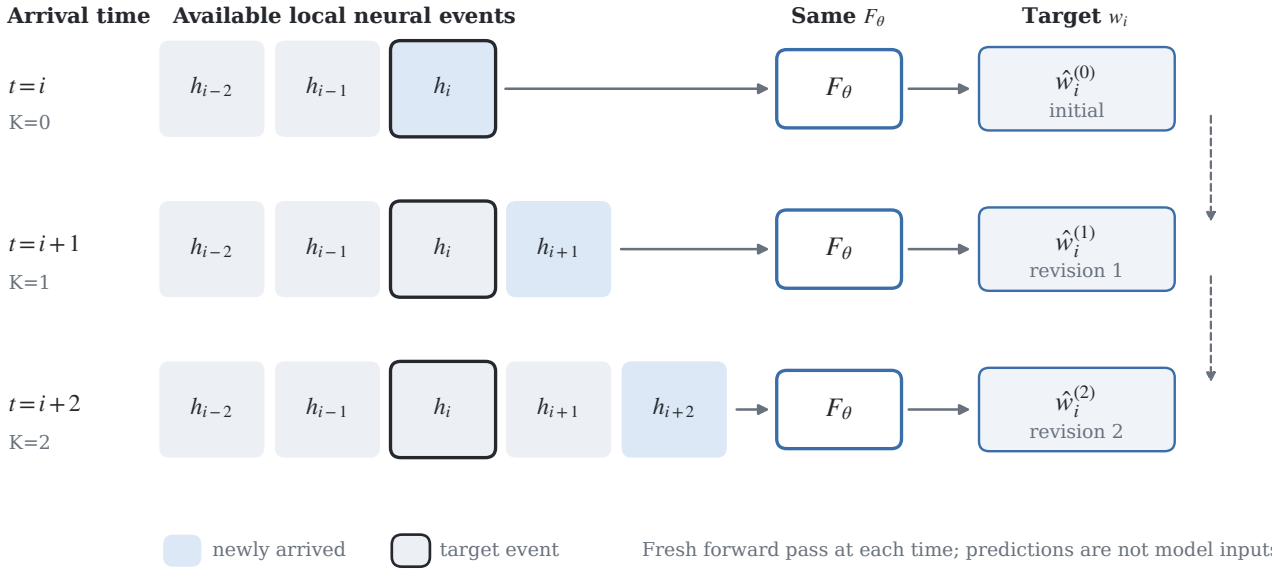
Arrival time
Available local neural events
Same F_θ
Target w_i
$t=i$
K=0
h_{i-2}
h_{i-1}
h_i
F_θ
$\hat{w}_i^{(0)}$
initial
$t=i+1$
K=1
h_{i-2}
h_{i-1}
h_i
h_{i+1}
F_θ
$\hat{w}_i^{(1)}$
revision 1
$t=i+2$
K=2
h_{i-2}
h_{i-1}
h_i
h_{i+1}
h_{i+2}
F_θ
$\hat{w}_i^{(2)}$
revision 2
newly arrived
target event
Fresh forward pass at each time; predictions are not model inputs.