

RPython

A Step Towards Reconciling Dynamically and Statically Typed OO Languages

Antonio Cuni – DISI, Università degli Studi di Genova
joint work with D. Ancona, M. Ancona, N. D. Matsakis

DLS'07 OOPSLA Montreal CA

October 22, 2007

Outline

- 1 Introduction to RPython
- 2 RPython idioms
- 3 Implementation notes and benchmarks
- 4 Conclusions

Dynamic languages for .NET and JVM

- .NET and JVM: widespread platforms
- Designed for static languages
- Great Python implementations: **IronPython**, **Jython**
- Much slower than e.g. C# and Java

Dynamic vs. static

Dynamic languages

- Flexibility
- Rapid development cycle
- **Metaprogramming**

Static languages

- Speed
- Nothing more :-)

Dynamic vs. static

Dynamic languages

- Flexibility
- Rapid development cycle
- **Metaprogramming**

Static languages

- Speed
- Nothing more :-)

RPython Quick Facts

- **Restricted subset** of Python
- Statically typed (**type inference**)
- Still allows metaprogramming
- RPython programs still run under {C,J,Iron}Python
- Three backends: C, .NET, JVM
- **Almost as fast** as C, C#, Java

Type inference

- Top-down, starting from an entry point; whole program analysis
- Assign the most precise type to each variable
- Fail if you try to mix incompatible types

RPython

```
def main():  
    print add(40, 2)  
  
def add(a, b):  
    return a+b
```

Not RPython

```
def fn(flag):  
    if flag:  
        return 42  
    else:  
        return 'hello'
```

Type inference

- Top-down, starting from an entry point; whole program analysis
- Assign the most precise type to each variable
- Fail if you try to mix incompatible types

RPython

```
def main():  
    print add(40, 2)  
  
def add(a, b):  
    return a+b
```

Not RPython

```
def fn(flag):  
    if flag:  
        return 42  
    else:  
        return 'hello'
```


Type inference

- Top-down, starting from an entry point; whole program analysis
- Assign the most precise type to each variable
- Fail if you try to mix incompatible types

RPython

```
def main():  
    print add(40, 2)  
  
def add(a, b):  
    return a+b
```

Not RPython

```
def fn(flag):  
    if flag:  
        return 42  
    else:  
        return 'hello'
```

Other restrictions

- Globals are assumed to be **constant**
- `yield` and generators not supported
- No special `__methods__` (except `__init__` and `__del__`)
- No run-time definition of new functions and classes
- Cannot modify classes at run-time
- Cannot change the `__class__` of an object
- **Single inheritance**, with limited support for mixins

Still pythonic, though

- No syntactic restriction
- Functions and classes are first-order values
- Exceptions work

Lists and dictionaries

- ▶ Work, but they must be homogeneous
- ▶ list of int, dict from string to floats, etc. are OK
- ▶ list of *int and strings* is not
- ▶ Most of methods of `list`, `dict` and `str` are supported


Still pythonic, though

- No syntactic restriction
- Functions and classes are first-order values
- Exceptions work

Lists and dictionaries

- ▶ Work, but they must be homogeneous
- ▶ list of int, dict from string to floats, etc. are OK
- ▶ list of *int and strings* is not
- ▶ Most of methods of `list`, `dict` and `str` are supported

Init-time, translation-time, run-time

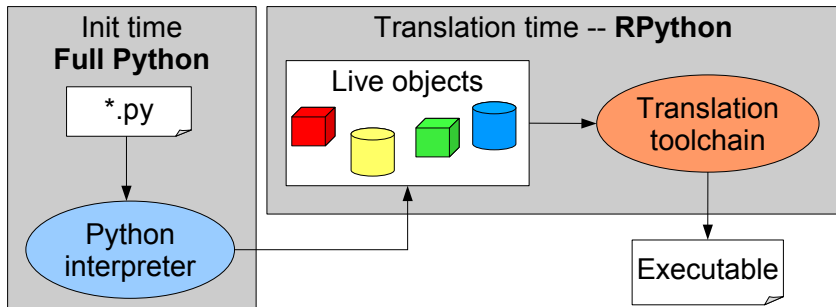

Metaprogramming

- RPython restrictions only apply to live objects
- No restrictions about how they are created
 - ▶ Full Python is allowed at init-time
- Python as a metaprogramming language for RPython
- Code generation considered harmful

Outline

- 1 Introduction to RPython
- 2 RPython idioms
- 3 Implementation notes and benchmarks
- 4 Conclusions

Compute complex constants

Fibonacci's numbers

```
def fibo(N):  
    sequence = []  
    a, b = 1, 1  
    for i in xrange(N):  
        sequence.append(a)  
        a, b = b, a+b  
    return sequence  
  
# computed at init-time  
fibo_numbers = fibo(100)
```


Metaclasses run at init-time

`__extend__` metaclass

```
class MyClass(object):
    def foo(self): ...

class __extend__(MyClass):
    def bar(self): ...

def main():
    obj = MyClass()
    obj.bar()
```

Dynamic classes/functions at init-time

“Static” nested scopes work

```
def make_adder(N):  
    def add(x):  
        return x+N  
    return add  
  
add10 = make_adder(10)  
add20 = make_adder(20)  
  
def main():  
    print add10(32)  
    print add20(22)
```

Outline

- 1 Introduction to RPython
- 2 RPython idioms
- 3 Implementation notes and benchmarks**
- 4 Conclusions

The Translation Toolchain

- **CPython**: *.py --> Python bytecode
- **FlowObjSpace**: bytecode --> flow graphs
- **Annotator**: type inference on flow graphs
 - ▶ High level Python types (`List(Integer)`)
- **RTyper**: high level types --> low level types
 - ▶ `lltype` for C, `ootype` for CLI and JVM
- **Backends**: code generation
 - ▶ C, CLI (.NET), JVM

Benchmarks

- Classic Martin Richard's test
- Available in Java, C#, RPython

Language	Result	Factor
Results on Microsoft CLR		
C#	6.94 ms	1.00x
RPython	7.25 ms	1.04x
IronPython	1675.00 ms	241.35x
Results on JVM		
Java	1.77 ms	1.00x
RPython	2.10 ms	1.18x
Jython	2918.90 ms	1641.80x

Outline

- 1 Introduction to RPython
- 2 RPython idioms
- 3 Implementation notes and benchmarks
- 4 Conclusions

What's good about RPython

- Pythonic enough to be usable
- Very fast
- Testable under CPython

Things to improve

- Originally an implementation detail
- Not designed to be user-friendly; terse error messages
- Lack of documentation/reference manual
- Lack of separate compilation
- Integration with the hosting platform
 - ▶ Good for C/Posix
 - ▶ Proof of concept for .NET
 - ▶ Doesn't exist for JVM

About PyPy

Python in (R)Python

- High level interpreter written in RPython
- Easy to understand
- Easy to extend

Translation Toolchain

- Written in full Python
- Works as a general compiler
- Especially for interpreters (e.g. Javascript, Prolog)

About PyPy

Python in (R)Python

- High level interpreter written in RPython
- Easy to understand
- Easy to extend

Translation Toolchain

- Written in full Python
- Works as a general compiler
- Especially for interpreters (e.g. Javascript, Prolog)

Acknowledgments

- The whole PyPy Team
 - ▶ RPython is **not** mine :-)
 - ▶ Our contributions: CLI and JVM backends
- Thanks for the attention
- Any question?