Aim: To write meta data of your Ecommerce PWA in a Web app manifest file to enable "add to homescreen feature".

Theory:

Regular Web App

A regular web app is a website that is designed to be accessible on all mobile devices such that the content gets fit as per the device screen. It is designed using a web technology stack (HTML, CSS, JavaScript, Ruby, etc.) and operates via a browser. They offer various native-device features and functionalities. However, it entirely depends on the browser the user is using. In other words, it might be possible that you can access a native-device feature on Chrome but not on Safari or Mozilla Firefox because the browsers are incompatible with that feature.

Progressive Web App

Progressive Web App (PWA) is a regular web app, but some extras enable it to deliver an excellent user experience. It is a perfect blend of desktop and mobile application experience to give both platforms to the end-users.

Difference between PWAs vs. Regular Web Apps:

A Progressive Web is different and better than a Regular Web app with features like:

1. Native Experience

Though a PWA runs on web technologies (HTML, CSS, JavaScript) like a Regular web app, it gives user experience like a native mobile application. It can use most native device features, including push notifications, without relying on the browser or any other entity. It offers a seamless and integrated user experience that it is quite tough for one to differentiate between a PWA and a Native application by considering its look and feel.

2. Ease of Access

Unlike other mobile apps, PWAs do not demand longer download time and make memory space available for installing the applications. The PWAs can be shared and installed by a link, which cuts down the number of steps to install and use. These applications can easily keep an app icon on the user's home screen, making the app easily accessible to the users and helps the brands remain in the users' minds, and improving the chances of interaction.

3. Faster Services

PWAs can cache the data and serve the user with text stylesheets, images, and other web content even before the page loads completely. This lowers the waiting time for the

end-users and helps the brands improve the user engagement and retention rate, which eventually adds value to their business.

4. Engaging Approach

As already shared, the PWAs can employ push notifications and other native device features more efficiently. Their interaction does not depend on the browser user uses. This eventually improves the chances of notifying the user regarding your services, offers, and other options related to your brand and keeping them hooked to your brand. In simpler words, PWAs let you maintain the user engagement and retention rate.

5. Updated Real-Time Data Access

Another plus point of PWAs is that these apps get updated on their own. They do not demand the end-users to go to the App Store or other such platforms to download the update and wait until installed.

In this app type, the web app developers can push the live update from the server, which reaches the apps residing on the user's devices automatically. Therefore, it is easier for the mobile app developer to provide the best of the updated functionalities and services to the end-users without forcing them to update their app.

6. Discoverable

PWAs reside in web browsers. This implies higher chances of optimizing them as per the Search Engine Optimization (SEO) criteria and improving the Google rankings like that in websites and other web apps.

7. Lower Development Cost

Progressive web apps can be installed on the user device like a native device, but it does not demand submission on an App Store. This makes it far more cost-effective than native mobile applications while offering the same set of functionalities.

Pros and cons of the Progressive Web App

The main features are:

Progressive — They work for every user, regardless of the browser chosen because they are built at the base with progressive improvement principles.

Responsive — They adapt to the various screen sizes: desktop, mobile, tablet, or dimensions that can later become available.

App-like — They behave with the user as if they were native apps, in terms of interaction and navigation.

Updated — Information is always up-to-date thanks to the data update process offered by service workers.

Secure — Exposed over HTTPS protocol to prevent the connection from displaying information or altering the contents.

Searchable — They are identified as "applications" and are indexed by search engines.

Reactivable — Make it easy to reactivate the application thanks to capabilities such as web notifications.

Installable — They allow the user to "save" the apps that he considers most useful with the corresponding icon on the screen of his mobile terminal (home screen) without having to face all the steps and problems related to the use of the app store.

Linkable — Easily shared via URL without complex installations.

Offline — Once more it is about putting the user before everything, avoiding the usual error message in case of weak or no connection. The PWA are based on two particularities: first of all the 'skeleton' of the app, which recalls the page structure, even if its contents do not respond and its elements include the header, the page layout, as well as an illustration that signals that the page is loading.

Weaknesses refer to:

IOS support from version 11.3 onwards;

Greater use of the device battery;

Not all devices support the full range of PWA features (same speech for iOS and Android operating systems);

It is not possible to establish a strong re-engagement for iOS users (URL scheme, standard web notifications);

Support for offline execution is however limited;

Lack of presence on the stores (there is no possibility to acquire traffic from that channel);

There is no "body" of control (like the stores) and an approval process;

Limited access to some hardware components of the devices;

Little flexibility regarding "special" content for users (eg loyalty programs, loyalty, etc.).

Implementation:


The below steps have to be followed to create a progressive web application:

Step 1: Create an HTML page that would be the starting point of the application. This HTML will contain a link to the file named manifest.json. This is an important file that will be created in the next step.

Step 2: Create a manifest.json file in the same directory. This file contains information about the web application. Some basic information includes the application name, starting URL, theme color, and icons. All the information required is specified in the JSON format. The source and size of the icons are also defined in this file.

```
ndex.html
              {} manifest.json ×
                                 brand-1.jpg
manifest.json > [ ] icons
1
         "name": "PWA Experiment",
2
3
         "short name": "PWA",
         "start url": "index.html",
4
         "display": "standalone",
5
         "background_color": "#5900b3",
6
7
         "theme_color": "black",
         "scope": ".",
8
9
         "description": "This is a PWA experiment.",
0
         "icons":[
1
         "src":"./assets/images/brand-1.jpg",
2
3
         "sizes":"192x192",
         "type": "image/jpg"
4
5
6
7
         "src":"./assets/images/brand-2.jpg",
8
         "sizes":"512x512",
         "type":"image/jpg"
9
0
1
2
```

- **Step 3**: Create a new folder named images and place all the icons related to the application in that folder. It is recommended to have the dimensions of the icons at least 192 by 192 pixels and 512 by 512 pixels. The image name and dimensions should match that of the manifest file.
- **Step 4**: Serve the directory using a live server so that all files are accessible.
- **Step 5**: Open the index.html file in Chrome navigate to the Application Section in the Chrome Developer Tools. Open the manifest column from the list.

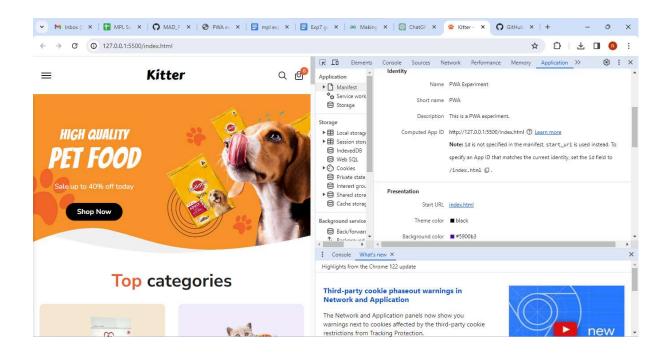

Step 6: Under the installability tab, it would show that no service worker is detected. We will need to create another file for the PWA, that is, serviceworker.js in the same directory. This file handles the configuration of a service worker that will manage the working of the application.

```
index.html
               11 manifest, ison
                                   JS serviceworker.is X
                                                        brand-1.jpq
JS serviceworker.js > ...
      var staticCacheName = "pwa";
 2
      self.addEventListener("install", function (e) {
 3
 4
      e.waitUntil(
           caches.open(staticCacheName).then(function (cache) {
 5
 6
           return cache.addAll(["/"]);
 7
           })
 8
      );
 9
      });
 10
      self.addEventListener("fetch", function (event) {
11
12
      console.log(event.request.url);
13
14
      event.respondWith(
           caches.match(event.request).then(function (response) {
15
16
           return response || fetch(event.request);
17
           })
18
      );
19
      });
```


Step 7: The last step is to link the service worker file to index.html. This is done by adding a short JavaScript script to the index.html created in the above steps. Add the below code inside the script tag in index.html.

```
1 manifest.json
                                              35 serviceworker.js
 index.html ×
                                                                        bra bra
  o index.html > O html > O head
            <html lang="en">
      4
            <head>
    41
    42
              <script>
                 window.addEventListener('load', () => {
    43
                 registerSW();
    44
    45
                 });
    46
                 // Register the Service Worker
    47
    48
                 async function registerSW() {
    49
                 if ('serviceWorker' in navigator) {
    50
                    try {
                    await navigator
    51
                         .serviceWorker
    52
                         .register('serviceworker.js');
    53
     54
    55
                    catch (e) {
                    console.log('SW registration failed');
    57
     58
     59
     60
               </script>
    61
① 127.0.0.1:5500/index.html
                                                                                                           🖫 🗖 Elements Console Sources Network Performance Memory Application Security Lighthouse >>
                Kitter
\equiv
                                                          Service workers
                                                          Storag
                                                           http://127.0.0.1:5500/
                                                                                                          Network requests Update Unregister
              HIGH QUALITY
                                                                 Source <u>serviceworker.js</u>
                                                ▶ I Local s
                                                                      Received 3/26/2024, 9:41:08 AM
                                                ▶ ⊞ Sessio
                                                 A Indexe
                                                                 Status #82 activated and is running stop
                                                 Web S
                                                                                                             Push
                                                                  Push Test push message from DevTools.
                                                Private
                                                 lnteres
                                                                  Sync test-tag-from-devtools
                                                                                                             Sync
                                                ▶ A Sharec
                                                              Periodic Sync test-tag-from-devtools
                                                ► 🖯 Cache
                                               Background s
                                                Back/fr
                                                                       ► #82 Install
                                                                       ▶ #82 Wait
                                               : Console What's new X
                                                Highlights from the Chrome 122 update
           Top categories
                                                Third-party cookie phaseout warnings in Network and Applica
                                                                                               Snipping Tool
                                                The Network and Application panels now show you warnings next to cookies
                                                                                               Screenshot copied to clipboard and saved
                                                affected by the third-party cookie restrictions from Tracking Protection.
                                                Improved debugging in the Network panel
```

Installing the application:

- Navigating to the Service Worker tab, we see that the service worker is registered successfully and now an install option will be displayed that will allow us to install our app.
- Click on the install button to install the application. The application would then be installed, and it would be visible on the desktop.
- For installing the application on a mobile device, the Add to Home screen option in the mobile browser can be used.

This will install the application on the device.

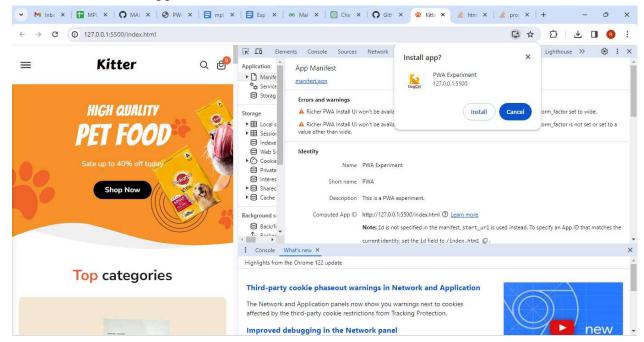

This is how it looks on the desktop as an icon:



Conclusion: This experiment involved creating a straightforward HTML E-commerce home page showcasing products with images, titles, prices, descriptions, and "Add to

Cart" buttons. This foundational layout offers a starting point for developing a more robust E-commerce platform, with the potential for expansion into categories, navigation.