

Central Coast Regional Water Quality Control Board

December 14, 2022

Sent Via Electronic Mail

Shannon Sweeney
Public Works Director/City Engineer
City of Guadalupe
918 Obispo Street
Guadalupe, CA 93434
e-mail: ssweeney@ci.guadalupe.ca.us

Dear Shannon Sweeney:

CITY OF GUADALUPE WASTEWATER TREATMENT PLANT, 5125 WEST MAIN STREET, GUADALUPE, CA 93434, SANTA BARBARA COUNTY WDID # 3 420103001, TRANSMITTAL OF REVISED MONITORING AND REPORTING PROGRAM NO. R3-2005-0015

Please find attached revised Monitoring and Reporting Program (MRP) No. R3-2005-0015. The MRP applies to the monitoring and reporting requirements for the City of Guadalupe wastewater treatment plant (WWTP) owned and operated by the City of Guadalupe and regulated by Individual Waste Discharge Requirements Order No. R3-2005-0015. This revised MRP supersedes and replaces MRP No. R3-2005-0015 dated September 9, 2005. Central Coast Regional Water Quality Control Board staff revised your MRP to include:

- Addition of water supply, Biolac®, and pond monitoring;
- Modifications to influent, effluent, disposal area, and groundwater monitoring frequency and analytical constituents; and
- Revised reporting schedule.

This MRP will also be available electronically on our GeoTracker website:

https://geotracker.waterboards.ca.gov/profile_report?global_id=WDR100031582

Please contact **Cecile Blancarte at (805) 542-4782 or by email at Cecile.Blancarte@waterboards.ca.gov** or Jennifer Epp at (805) 594-6181 or by email at Jennifer.epp@waterboards.ca.gov with any questions you may have concerning this matter.

Sincerely,

for Matthew T. Keeling
Executive Officer

Attachment: Revised Monitoring and Reporting Program No. R3-2005-0015

cc:

David Miklas, City of Guadalupe, dmiklas@ci.guadalupe.ca.us

Devin Valdivia, City of Guadalupe, dvaldivia@ci.guadalupe.ca.us

Todd Bodem, City of Guadalupe, tbodem@ci.guadalupe.ca.us

Jennifer Epp, jennifer.epp@waterboards.ca.gov

Cecile Blancarte, cecile.blancarte@waterboards.ca.gov

Jesse Woodward, jesse.woodard@Waterboards.ca.gov

WDR Program *GeoTracker*, RB3-WDR@Waterboards.ca.gov

Place ID#: CW-228104

GeoTracker No. GT- WDR100031582

ECM Subject Name = City of Guadalupe WWTP MRP

\\ca.epa.local\RB\RB3\Shared\WDR\WDR Facilities\Santa Barbara Co\Guadalupe City
WWTP\2022 Revised MRP\Trns Ltr Guadalupe Revised MRP.docx

CENTRAL COAST REGIONAL WATER QUALITY CONTROL BOARD

MONITORING AND REPORTING PROGRAM NO. R3-2005-0015

REVISED DECEMBER 14, 2022

FOR CITY OF GUADALUPE WASTEWATER FACILITY GUADALUPE, SANTA BARBARA COUNTY

This Monitoring and Reporting Program applies to the monitoring and reporting requirements for City of Guadalupe Wastewater Facility (Wastewater System) regulated by individual Waste Discharge Requirements Order No. R3-2005-0015 (WDR Permit).

The City of Guadalupe owns and operates the Wastewater System that is subject to the WDR Permit. The City of Guadalupe must not implement any changes to this monitoring and reporting program unless and until a revised monitoring and reporting program is issued by the Central Coast Regional Water Quality Control Board (Central Coast Water Board).

The State Water Resources Control Board (State Water Board) and Regional Water Quality Control Boards are transitioning to the use of the publicly accessible State Water Board's GeoTracker database for the tracking of environmental and regulatory data for sites that operate under waste discharge requirements. This monitoring and reporting program directs the City of Guadalupe to submit reports (both technical and monitoring reports) and analytical data electronically to the State Water Board's GeoTracker database (see monitoring and reporting program section VII.C).

I. SAMPLING AND ANALYSIS

The City of Guadalupe must collect representative samples and validate analytical results prior to submittal to the Central Coast Water Board. All samples (e.g., wastewater, groundwater, soil, sludge) must be representative of the volume and nature of the discharge or matrix of materials sampled.

All samples must be collected by a qualified person, trained in proper procedures for collecting the samples. The name of the sampler, sample type (grab or composite), time, date, location, bottle/container type, and any preservative used for each sample must be recorded on the sample chain of custody form. The chain of custody form must also contain all custody information including date, time, and to whom samples were relinquished. If composite samples are collected, the basis for sampling (time or flow weighted) must be discussed in the monitoring report.

A. Sampling Schedule – Unless otherwise specified below, sampling must be performed in accordance with Table 1.

Table 1. Sampling Schedule

Monitoring Period	Sample Collection Time
Quarterly	January, April, July, and October
Semiannual	April and October
Annual	October

Field test instruments (such as those used to test pH, dissolved oxygen, and electrical conductivity) may be used if they are used by a State Water Board Environmental Laboratory Accreditation Program accredited laboratory, or:

1. The user is trained in proper use and maintenance of the instruments;
2. The instruments are field calibrated prior to monitoring events at the frequency recommended by the manufacturer;
3. Instruments are serviced and/or calibrated by the manufacturer at the recommended frequency; and
4. Field calibration reports are maintained and available for at least three years.

B. Monitoring Location Descriptions – All samples including influent samples (IS), effluent samples (ES), groundwater monitoring well (MW). must be collected at the locations described in Table 2. These locations must be consistent with the Central Coast Water Board approved sampling locations. The **City of Guadalupe must upload the GeoTracker field point information for each sampling location in the GeoTracker database once, prior to uploading laboratory data (see Table 2 and Table 11).**

Table 2. Sample Identification Details

GeoTracker Field Point Class	GeoTracker Field Point Name (Sample ID)	GeoTracker Field Point Description
Influent Sample	IS-1	Raw wastewater sample collected at the headworks
Effluent Sample	ES-1	Treated wastewater sample collected downstream of the last AIPS treatment pond No. 4 and prior to mixing with Biolac® treated effluent.
Effluent Sample	ES-2	Treated wastewater sample collected after the Biolac® clarifiers and prior to mixing with the AIPS treated effluent.
First Monitoring Well	MW-5	Spray field groundwater monitoring well named MW-5

GeoTracker Field Point Class	GeoTracker Field Point Name (Sample ID)	GeoTracker Field Point Description
Second Monitoring Well	MW-6R	Spray field groundwater monitoring well named MW-6R
Third Monitoring Well	MW-7	Spray field groundwater monitoring well named MW-7
Fourth Monitoring Well	MW-8	Spray field groundwater monitoring well named MW-8
Fifth Monitoring Well	MW-9	Spray field groundwater monitoring well named MW-9
Sixth Monitoring Well	MW-10	Spray field groundwater monitoring well named MW-10

II. WATER SUPPLY MONITORING

Representative samples of City of Guadalupe's raw water supply (sampled before use or treatment) must be collected and analyzed, at a minimum, for constituents specified in Table 3.

In lieu of the required water supply sampling, City of Guadalupe may request Central Coast Water Board approval to submit a Well Identification Number and the reporting year's consumer confidence report (annual water quality report or drinking water quality report), as required by the State Water Board Division of Drinking Water and/or county, provided, at a minimum, all of the required constituents are sampled at the frequency specified in Table 3. City of Guadalupe must report the results of any constituent monitored more frequently than is required by the monitoring program shown in Table 3. City of Guadalupe must also report detectable concentrations (above the reporting limit) for any other constituent that has a published maximum contaminant level (MCL).

City of Guadalupe must evaluate and provide a tabular summary of the water supply data with the annual monitoring report.

Table 3. Water Supply Monitoring

Constituent	Units ^[1]	Sample Type	Sampling Frequency
Nitrate (as N)	mg/L	Grab	Annually
Total Dissolved Solids	mg/L	Grab	Annually
Chloride	mg/L	Grab	Annually
Sodium	mg/L	Grab	Annually
Sulfate	mg/L	Grab	Annually

Constituent	Units ^[1]	Sample Type	Sampling Frequency
Boron	mg/L	Grab	Annually
Carbonate	mg/L	Grab	Annually
Bicarbonate	mg/L	Grab	Annually
Calcium	mg/L	Grab	Annually
Potassium	mg/L	Grab	Annually
Magnesium	mg/L	Grab	Annually

[1] mg/L denotes milligrams per liter

III. INFLUENT AND EFFLUENT MONITORING

A. Influent and Effluent Flow Monitoring – City of Guadalupe must monitor and report flow in gallons per day, as described in Table 4, with each monitoring report.

Table 4. Influent and Effluent Flow Monitoring

	INFLUENT	INFLUENT	EFFLUENT ES-1 and ES-2	EFFLUENT
Parameter	Sample Type	Reporting Frequency	Sample Type	Reporting Frequency
Daily Flow ^[1]	Metered	Daily	Metered	Daily
Maximum Daily Flow	Metered	Monthly	Metered	Monthly
Mean Daily Flow	Calculated	Monthly	Calculated	Monthly

[1] City of Guadalupe must evaluate and provide a comparison of monitored flow to the permitted flow.

B. Wastewater System Monitoring – Representative samples of the City of Guadalupe's influent (raw wastewater) into the Wastewater System and effluent (treated wastewater) discharged to land must be collected and analyzed in accordance with the treatment technology-based monitoring requirements (including sample type and frequency) summarized in the tables below. See Figure 1 for the location of samples and GeoTracker field points.

III b

City of Guadalupe Wastewater Treatment Plant Schematic

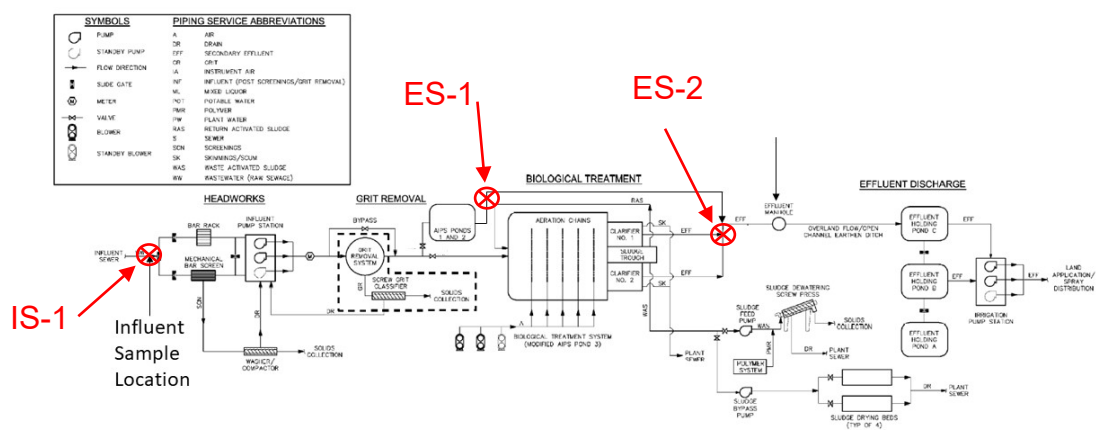


Figure 1. Process Flow Diagram and Sample Locations Referenced in Table 3

1. Pond System Monitoring

- i. **Required Pond Monitoring** – All wastewater treatment and treated wastewater storage/disposal ponds (lined and unlined) must be monitored as specified in Table 5.

Table 5. Wastewater Treatment/Storage/Disposal Pond Monitoring

Parameter/ Constituent	Units	Sample Type	Sampling/Monitoring Frequency
Freeboard	0.1 feet	Measured	Weekly
pH	pH Units	Grab	Weekly
Dissolved Oxygen (in pond)	mg/L	Grab	Monthly
Odors	Not Applicable	Observation	Weekly
Berm condition	Not Applicable	Observation	Monthly
Sludge Depth	0.1 feet	Measured	Annually
Precipitation	inches/day and date	Measured ^[1]	Each precipitation event

[1] The City of Guadalupe may use a rain gauge or use a National Oceanic and Atmospheric Administration, United States Geological Survey, or California Irrigation Management Information System weather station, such as <http://scacis.rcc-acis.org/>.

- ii. **Influent and Effluent Monitoring** – At a minimum, influent and effluent constituent monitoring for the AIPS pond treatment system must be monitored as specified in Table 6.

Table 6. Influent and Effluent Monitoring for AIPS Pond Treatment System

		INFLUENT (IS-1)	INFLUENT (IS-1)	EFFLUENT (ES-1)	EFFLUENT (ES-1)
Parameter/ Constituent	Units [2]	Sample Type	Sampling Frequency	Sample Type	Sampling Frequency
pH	units	Not Applicable	Not Applicable	Grab	Weekly
Biochemical Oxygen Demand, 5-Day	mg/L	24-hour composite	Monthly	Grab	Weekly
Total Suspended Solids	mg/L	24-hour composite	Monthly	Grab	Weekly
Settleable Solids	ml/L	Not Applicable	Not Applicable	Grab	Daily
Total Nitrogen [1]	mg/L	Calculated	Monthly then Quarterly [3]	Calculated	Monthly then Quarterly [3]
Nitrate (as N) + Nitrite (as N) or separate species	mg/L	24-hour composite	Monthly then Quarterly [3]	Grab	Monthly then Quarterly [3]
Total Kjeldahl Nitrogen (as N)	mg/L	24-hour composite	Monthly then Quarterly [3]	Grab	Monthly then Quarterly [3]
Ammonia (as N)	mg/L	24-hour composite	Monthly then Quarterly [3]	Grab	Monthly then Quarterly [3]
Total Dissolved Solids	mg/L	Not Applicable	Not Applicable	Grab	Monthly then Quarterly [3]
Chloride	mg/L	Not Applicable	Not Applicable	Grab	Monthly then Quarterly [3]
Sodium	mg/L	Not Applicable	Not Applicable	Grab	Monthly then Quarterly [3]
Sulfate	mg/L	Not Applicable	Not Applicable	Grab	Quarterly
Boron	mg/L	Not Applicable	Not Applicable	Grab	Quarterly
Total Trihalomethanes (TTHMs) [4]	µg/L	Not Applicable	Not Applicable	Grab	Monthly
Haloacetic Acids (HAAs) [4]	µg/L	Not Applicable	Not Applicable	Grab	Monthly

		INFLUENT (IS-1)	INFLUENT (IS-1)	EFFLUENT (ES-1)	EFFLUENT (ES-1)
Parameter/ Constituent	Units [2]	Sample Type	Sampling Frequency	Sample Type	Sampling Frequency
Carbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Bicarbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Calcium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Potassium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Magnesium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually

[1] Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

[2] ml/L denotes milliliters per liter.

[3] Monthly monitoring is initially required to obtain a minimum of four sample points providing an understanding of how nitrogen and salts are treated through the AIPS pond treatment system. The frequency will be quarterly once the Guadalupe Wastewater System has collected and analyzed the four sample data points.

[4] Disinfection byproducts from the fruit and vegetable processing plant industrial wastewater.

2. Biolac® Extended Aeration Activated Sludge System

- i. **Influent and Effluent Monitoring** – At a minimum, influent and effluent constituent monitoring for the Biolac® extended aeration activated sludge wastewater treatment system must be consistent with Table 7.

Table 7. Influent and Effluent Monitoring for Biolac® Extended Aeration Activated Sludge System

		INFLUENT (IS-1)	INFLUENT (IS-1)	EFFLUENT (ES-2)	EFFLUENT (ES-2)
Constituent	Units	Sample Type	Sampling Frequency	Sample Type	Sampling Frequency
pH	units	Not Applicable	Not Applicable	Grab	Weekly
Biochemical Oxygen Demand, 5-Day	mg/L	24-hour composite	Monthly	Grab	Weekly
Total Suspended Solids	mg/L	24-hour composite	Monthly	Grab	Weekly
Settleable Solids	ml/L	Not Applicable	Not Applicable	Grab	Daily
Total Nitrogen ^[1]	mg/L	Calculated	Monthly	Calculated	Monthly

		INFLUENT (IS-1)	INFLUENT (IS-1)	EFFLUENT (ES-2)	EFFLUENT (ES-2)
Constituent	Units	Sample Type	Sampling Frequency	Sample Type	Sampling Frequency
Nitrate (as N) + Nitrite (as N) or separate species	mg/L	24-hour composite	Monthly	Grab	Monthly
Total Kjeldahl Nitrogen (as N)	mg/L	24-hour composite	Monthly	Grab	Monthly
Ammonia (as N)	mg/L	24-hour composite	Monthly	Grab	Monthly
Total Dissolved Solids	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Chloride	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Sodium	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Sulfate	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Boron	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Total Trihalomethanes (TTHMs) ^[2]	µg/L	Not Applicable	Not Applicable	Grab	Monthly
Haloacetic Acids (HAAs) ^[2]	µg/L	Not Applicable	Not Applicable	Grab	Monthly
Carbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Bicarbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Calcium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Potassium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Magnesium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually

[1] Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

[2] Disinfection byproducts from the fruit and vegetable processing plant industrial wastewater.

IV. WASTEWATER DISPOSAL MONITORING

The City of Guadalupe must monitor all wastewater disposal areas (e.g., land application areas, percolation ponds) when wastewater and/or supplemental irrigation water is applied. Inspections (observations) must be conducted as described in Table 8. Notations must be made in a bound logbook and problems must be promptly corrected and recorded. A log of these inspections must be maintained onsite and made available

to Central Coast Water Board upon inspection. Observations do not need to be reported in the monitoring reports unless a violation of permit conditions is observed. If violations are observed, planned and implemented mitigation measures to address the violations must be reported.

The City of Guadalupe must evaluate and summarize wastewater disposal application rates, loading rates (pounds/acre/day), violations found during the inspections, with each monitoring report.

If wastewater and/or supplemental irrigation water is not discharged to land during a reporting period, the monitoring report must still be submitted and indicate that there was no discharge during the reporting period.

Table 8. Wastewater Disposal Monitoring (Beginning February 1, 2023)

Parameter/Constituent	Units	Sample Type	Monitoring Frequency
Supplemental Irrigation	Gallons per day	Metered/Estimated ^[1]	Daily
Local Precipitation	Inches/day	Weather Station ^[2]	Each precipitation event
Acreage Applied ^[3]	Acres	Measured	Daily
Application Rate	Gallons per day	Metered/Estimated ^[1]	Daily
Maximum Daily BOD ₅ Applied ^[5]	lbs/acre/day	Calculated	Daily
Total Nitrogen Applied ^{[4] [5]}	lbs/acre/day	Calculated	Monthly
Salts Applied ^{[4] [5]} (total dissolved solids, sodium, chloride, sulfate, boron)	lbs/acre/day	Calculated	Monthly
Soil Erosion Evidence	Not Applicable	Observation	Monthly
Containment Berm Condition	Not Applicable	Observation	Monthly
Soil Saturation/Ponding	Not Applicable	Observation	Monthly
Nuisance Odors/Vectors	Not Applicable	Observation	Monthly
Discharge Offsite	Not Applicable	Observation	Monthly
Landuse Verification	Not Applicable	Non-Dairy Cattle Grazing Signed Declaration from Cattle Rancher	Annually

- [1] Requires meter reading, a pump run time meter, or other approved method. If the flow is estimated, the City of Guadalupe is required to provide an explanation (e.g., no meter- estimated using pump operations including rate and time) with each monitoring report.
- [2] City of Guadalupe must have a rain gauge or use a NOAA or USGS rain station, such as <http://scacis.rcc-acis.org/>.
- [3] Acreage applied denotes the acreage to which wastewater is applied.
- [4] The total nitrogen, salts, and BOD applied loading rates must be calculated from wastewater flow volumes, applied acreage, and concentrations reported in effluent analytical testing as follows:

Total Nitrogen/Salts/BOD Applied (pounds/acre/ day) =

$$\frac{X \text{ [mg/L]} \times Q \text{ [million gallons per day]} \times 8.34 \text{ [(conversion from mg/L to pounds/million gallons per day)]}}{\text{Acreage Applied [acres]}}$$

Where X = Total nitrogen, salts, or BOD concentration

Where Q = Application Rate (often effluent flow rate)

- [5] Frequencies of analytical testing are defined in the influent and effluent monitoring tables (Table 6 and Table 7).

V. SLUDGE/BIOSOLIDS DISPOSAL MONITORING

The City of Guadalupe must report the handling and disposal of all sludge/biosolids generated at the Wastewater System. Records must include the date removed from the Wastewater System, name/contact information for the hauling company, the type and volume of waste transported, the disposal facility name and address, and copies of analytical data required by the entity accepting the waste. These records must be submitted as part of the annual monitoring report.

City of Guadalupe must also monitor sludge/biosolids consistent with a Central Coast Water Board approved sludge management plan and in accordance with the requirements specified by the receiving party, including a regulated landfill and/or regulated composting facility.

If sludge/biosolids are not removed during the year, City of Guadalupe must explain the absence of this monitoring in the annual report.

VI. GROUNDWATER MONITORING

All groundwater monitoring wells listed in Table 3 must be, at a minimum, sampled and analyzed as specified in Table 9.

Prior to sampling, depth to groundwater must be measured and groundwater elevations¹ must be calculated. The monitoring wells must be purged of at least three well volumes and until measurements of the following parameters have stabilized (i.e., are reproducible within 10 percent): pH, temperature, dissolved oxygen, electrical conductivity, and turbidity. No-purge, low-flow, or other sampling techniques are acceptable only if they are approved in advance by the Central Coast Water Board.

¹ The locations and top-of-casing elevations for the existing groundwater monitoring wells must be surveyed by a licensed land surveyor if not already completed at the time of installation.

Once the groundwater level in each of the wells has recovered sufficiently to ensure the collection of representative groundwater samples, a qualified individual (e.g., consultant, technician) trained in using proper sampling methods must recover samples using approved USEPA methods. Laboratories analyzing groundwater samples must be accredited by the State Water Board Environmental Laboratory Accreditation Program, in accordance with California Water Code section 13176, and must include quality assurance/quality control data with their reports.

The City of Guadalupe must provide monitoring well field sheets and report monitoring data with each monitoring report.

1. Groundwater monitoring must be consistent with Table 9.

Table 9. Groundwater Monitoring

Constituent	Units	Sample Type	Sampling Frequency
Groundwater Elevation ^[1]	0.01 ft msl	Calculated	Annually
Depth to Groundwater ^[1]	0.01 ft bgs	Measurement	Annually
Gradient	feet/feet	Calculated	Annually
Groundwater Flow Direction ^[2]	degrees	Calculated	Annually
Total Nitrogen ^[3]	mg/L	Calculated	Annually
Nitrate (as N)	mg/L	Grab	Annually
Nitrite (as N)	mg/L	Grab	Annually
Total Kjeldahl Nitrogen (as N)	mg/L	Grab	Annually
Ammonia (as N)	mg/L	Grab	Annually
Total Dissolved Solids	mg/L	Grab	Annually
Chloride	mg/L	Grab	Annually
Sodium	mg/L	Grab	Annually
Sulfate	mg/L	Grab	Annually
Boron	mg/L	Grab	Annually
Carbonate	mg/L	Grab	Semiannually
Bicarbonate	mg/L	Grab	Semiannually
Calcium	mg/L	Grab	Semiannually

Constituent	Units	Sample Type	Sampling Frequency
Potassium	mg/L	Grab	Semiannually
Magnesium	mg/L	Grab	Semiannually

- [1] ft.msl denotes feet above mean sea level and ft bgs denotes feet below ground surface.
 [2] Calculations must be prepared by, or under the responsible charge of, a California licensed professional.
 [3] Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

VII. REPORTING REQUIREMENTS

A. MONTHLY, QUARTERLY AND ANNUAL MONITORING REPORTS

Monthly, quarterly and annual monitoring reports are due as described in Table 10. Monthly reports are only required for the first four months.

Table 10. Quarterly and Annual Monitoring Reporting

Report	Monitoring Period	Report Due Date
January 2023	Month	March 1, 2023
February 2023	Month	April 1, 2023
March 2023	Month	May 1, 2023
April 2023	Month	June 1, 2023
First Quarter Monitoring Report	January 1 to March 31	May 1
Second Quarter Monitoring Report	April 1 to June 30	August 1
Third Quarter Monitoring Report	July 1 to September 30	November 1
Fourth Quarter Monitoring Report	October 1 to December 31	February 1
Annual Report	January 1 to December 31	March 1
State Water Board Volumetric Annual Reporting	January 1 to December 31	April 30

1. **Quarterly Monitoring Reporting** – At a minimum, the quarterly reports must include:
 - i. Results of all required monitoring in tabular format.
 - ii. The results of any pollutant or parameter monitored more frequently than is required by this monitoring program. Values obtained through additional monitoring must be used in calculations as appropriate.

- iii. A comparison of monitoring data to the discharge specifications, applicable effluent limitations, disclosure of any violations of the notice of applicability and/or WDR Permit, and an explanation of any violation of those requirements. **City of Guadalupe must calculate daily averages and 30-day averages for select analytes when comparing monitoring data to applicable effluent limitations specified in the WDR Permit.** Data must be presented in tabular format.
 - iv. Copies of laboratory analytical report(s) and chain of custody form(s).
 - v. Copies of groundwater monitoring well field sheets with purge methods and data.
2. **Annual Reporting** – City of Guadalupe must submit annual reports in compliance with Standard Provisions 2013², (and any updates to the Standard Provisions) Section C, General Reporting Requirements, Item 16 using the most recent annual report template provided by Central Coast Water Board.

The current annual report template can be found here:

https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/wdr_annual_report_format.pdf

- i. The annual report must provide an updated hydrogeologic conceptual site model with the groundwater monitoring reporting requirements based on new information generated from the monitoring well boring logs, groundwater elevation data, and water quality data.

B. VERBAL NON-COMPLIANCE REPORTING:

The City of Guadalupe must verbally notify and report to Central Coast Water Board noncompliance of limits related to pond freeboard, flow rate, bypass or overflow, delivery of off-specification recycle water, and wastewater containment failure.

C. ELECTRONIC GEOTRACKER SUBMITTAL

All monitoring reports must be provided electronically in a searchable PDF format, with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page. The transmittal sheet must be signed.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permiitting/docs/transmittal_sheet.pdf

² See Attachment E, Standard Provisions, 2013:

https://www.waterboards.ca.gov/centralcoast/board_decisions/docs/wdr_standard_provisions_2013.pdf

The City of Guadalupe must submit all reports/documents and laboratory analytical data to the State Water Board's GeoTracker^{3,4} database consistent with applicable Electronic Submittal of Information (ESI) requirements under the Wastewater System-specific global identification number **WDR100031582** at:

<https://geotracker.waterboards.ca.gov/esi/login>

For general questions, please contact the GeoTracker Help Desk at:

Geotracker@waterboards.ca.gov.

Table 11 summarizes all the GeoTracker electronic reporting requirements. Central Coast Water Board may request submittal of some documents on paper, particularly drawings or maps that require a large size to be readable, or in other electronic formats where evaluation of data is required.

Table 11. GeoTracker Electronic Submittal Information Data Requirements

Electronic Submittal	Description of Action	Action	Frequency
Reports and Documents	Complete copy of all documents including monitoring reports (in searchable PDF format) and any other associated documents related to the Wastewater System.	Upload directly to GeoTracker all monitoring reports (in searchable PDF format) and any other associated documents.	On or before the due dates required by this WDR Permit and for other documents when required by the Central Coast Water Board.
Laboratory Data	All analytical data (including geochemical data) in electronic deliverable format (EDF). This includes all water, soil, and vapor samples collected when monitoring a discharge.	Upload, or direct your California ELAP-accredited laboratory staff to upload, all EDF laboratory data directly to GeoTracker.	On or before the due date of the required monitoring report.
Depth to Groundwater	Monitoring wells must have the depth-to-water information reported. Report data only for wells defined as permanent sampling points.	Upload depth-to-water information to the GeoTracker GEO_WELL file.	On or before the due date of the required monitoring report.

³ Information for first-time GeoTracker users is available at:

https://www.waterboards.ca.gov/ust/electronic_submittal/docs/beginnerguide2.pdf

⁴ Additional information available at:

<https://geotracker.waterboards.ca.gov/>

Electronic Submittal	Description of Action	Action	Frequency
Boring Logs and Well Screen Intervals	Boring logs must be prepared by a registered professional and submitted in PDF format separately (not only as attachments to reports).	Upload boring logs (in searchable PDF format) to GeoTracker GEO_BORE file whenever a new boring is drilled.	Every time a new boring is drilled.
Field Points, Location Data (Geo XY) ^[1]	Name, classify, and identify the location (latitude and longitude) of all sampling points. Monitoring wells must be surveyed, influent and effluent sample locations must be identified on the GeoTracker mapping tool under “non-surveyed data.” These data points are required prior to laboratory data uploads.	Upload the location data (surveyed and non-surveyed) to the GeoTracker Geo_XY file.	Every time a permanent monitoring point is established.
Elevation Data (Geo Z) ^[2]	Survey and mark the elevation at the top of groundwater well casings for all permanent groundwater wells. These points are required prior to depth-to-water data uploads.	Upload the survey data to the GeoTracker GEO_Z file.	One-time, for all groundwater monitoring wells.
Geo Map	Site layout, map of facilities, Wastewater System including treatment and disposal area(s).	Upload the Site layout PDF to the GeoTracker site plan file.	Year one and every five years thereafter and when the facilities are modified.

[1] Geo XY required for all wells. New wells must be surveyed. For existing wells, use original well installation survey data. City of Guadalupe must also upload sample locations (e.g., influent and effluent samples) that are not defined as a **permanent monitoring well** and have not been surveyed by a licensed professional.

[2] Geo Z required for all wells. New wells must be surveyed. For existing wells, use original well installation survey data.

VIII. TECHNICAL REPORTS & CERTIFICATIONS

The technical reports is due as described in Table 12.

Table 12. Technical Report & Certification Documents Submittal Due Date

Report/Certification Document	Report Due Date
Title 22 Engineering Report for the Production and Distribution of Undisinfected Secondary Recycled Water	June 14, 2023
Undisinfected Secondary Off-Specification Contingency Plan	January 16, 2023

IX. LEGAL REQUIREMENTS

The Central Coast Water Board's requirements that the City of Guadalupe submit the technical and monitoring reports described in this monitoring and reporting program are made pursuant to [section 13267 of the California Water Code](#). Failure to submit reports in accordance with schedules established by **Monitoring and Reporting Program R3-2005-0015** with attachments or failure to submit a report of sufficient technical quality to be acceptable to the Central Coast Water Board may subject the City of Guadalupe to enforcement action pursuant to section 13268 of the California Water Code. Pursuant to [section 13268 of the Water Code](#), a violation of a request made pursuant to section 13267 may subject the City of Guadalupe to civil liability assessment of up to \$1,000 per day in which the violation occurs.

The Central Coast Water Board needs the required information to ensure compliance with the WDR Permit. The City of Guadalupe is required to submit this information because it is subject to the WDR Permit and is responsible for the discharge.

The burden, including costs, of the reports bears a reasonable relationship to their need and the benefits to be obtained. The requirement for the reports is necessary to ensure compliance with the WDR Permit and monitoring and reporting program to protect water quality.

The City of Guadalupe must implement the above monitoring program on January 1, 2023. The Central Coast Water Board may rescind or modify this monitoring and reporting program at any time.

Ordered By:

for Matthew T. Keeling
Executive Officer

MRP No. R3-2005-0015
City of Guadalupe Wastewater Treatment Facility

December 14, 2022

\\ca.epa.local\RB\RB3\Shared\WDR\WDR Facilities\Santa Barbara Co\Guadalupe City
WWTP\2022 Revised MRP\Revised_MRP_Guad2022.docx
Last modified: 10/07/2022