
Central Coast Regional Water Quality Control Board

November 20, 2025

Sent Via Electronic Mail

John Diodati
County of San Luis Obispo - Public Works Department
976 Osos St. Room 206
San Luis Obispo, CA, 93408

Email: jdiodati@co.slo.ca.us

Dear John Diodati,

**SAN LUIS OBISPO COUNTY SERVICE AREA 18, COUNTRY CLUB ESTATES
RECLAMATION FACILITY, 1045 GRAYSTONE PLACE, SAN LUIS OBISPO, CA,
93401, SAN LUIS OBISPO COUNTY:**

- **NOTICE OF APPLICABILITY FOR ENROLLMENT IN ORDER WQ 2014-0153-DWQ, GENERAL WASTE DISCHARGE REQUIREMENTS FOR SMALL DOMESTIC WASTEWATER TREATMENT SYSTEMS**
- **TRANSMITTAL OF MONITORING AND REPORTING PROGRAM R3-2025-0062**
- **TERMINATION OF ORDERS R3-2003-0004 and R3-2003-0005**

The Central Coast Regional Water Quality Control Board (Central Coast Water Board) reviewed the Form 200, Report of Waste Discharge (received on June 10, 2022), and available documents associated with the domestic wastewater treatment system at San Luis Obispo County Service Area 18, Country Club Estates, owned by County of San Luis Obispo - Public Works Department (County of San Luis Obispo). The wastewater system is currently regulated pursuant to Order R3-2003-0004.

On September 23, 2014, the State Water Resources Control Board (State Water Board) adopted Order WQ 2014-0153-DWQ, General Waste Discharge Requirements for Small Domestic Wastewater Treatment Systems (General Permit). The Central Coast Water Board reviewed your facility information and determined the updated General Permit requirements and monitoring and reporting program contained in the General Permit are more appropriate for your facility than Order R3-2003-0004.

JANE GRAY, CHAIR | RYAN E. LODGE, EXECUTIVE OFFICER

In accordance with California Code of Regulations (CCR) title 22, division 4, chapter 3, water recycling criteria (title 22), the County of San Luis Obispo updated the facility's title 22 Engineering Report in April of 2025. The County of San Luis Obispo produces recycled water, and the water is recycled at the San Luis Obispo Golf and Country Club (Country Club) golf course.

This letter serves as a notice of applicability for the County of San Luis Obispo's enrollment in the General Permit for the discharge of and recycling of wastewater from the San Luis Obispo County Service Area 18, Country Club Estates Reclamation Facility which is currently regulated pursuant to Order R3-2003-0005.

This letter also includes a wastewater facility operation summary and site-specific requirements and limitations (Attachment 1), figures (Attachment 2), a monitoring and reporting program (Attachment 3), and title 22 conditional acceptance letter from the Division of Drinking Water (Attachment 4).

The County of San Luis Obispo must comply with the following:

1. General Permit

- 1.1. The County of San Luis Obispo must comply with all conditions and requirements of the General Permit and this notice of applicability, including attachments. As described in the General Permit, ongoing operation, maintenance, monitoring, and reporting are required. A copy of the General Permit can be found electronically at the following link:

https://www.waterboards.ca.gov/board_decisions/adopted_orders/water_quality/2014/wqo2014_0153_dwq.pdf

2. Monitoring and Reporting Program

- 2.1. The County of San Luis Obispo must comply with the requirements of Monitoring and Reporting Program R3-2025-0062, enclosed with this letter (Attachment 3). The County of San Luis Obispo must start implementing the monitoring on January 1, 2026. The County of San Luis Obispo must comply with the previous monitoring and reporting program until January 1, 2026. Your first semiannual report, associated with the General Permit, is due on August 1, 2026.

- 2.1.1. Monitoring reports must be provided electronically in searchable PDF with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page:

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/docs/transmittal_sheet.pdf

- 2.1.2. The transmittal sheet describes who can sign reports. To authorize someone to sign and submit reports on your behalf, you must submit the

“designation of duly authorized representatives form” found at the link below to the Central Coast Water Board.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/

- 2.1.3. The County of San Luis Obispo must submit all reports/documents and laboratory data (using the transmittal sheet as the cover page) to the publicly accessible State Water Board’s GeoTracker^{1,2} database with applicable Electronic Submittal of Information (ESI) requirements under the wastewater system-specific global identification number **WDR100035388** at:

https://www.waterboards.ca.gov/ust/electronic_submittal/index.html

- 2.1.4. The attached monitoring and reporting program outlines the GeoTracker electronic reporting requirements.

3. Recycled Water Production and Use

- 3.1. The County of San Luis Obispo is permitted to produce disinfected secondary-23 recycled water and distribute it at the San Luis Obispo County Club golf course. As described in the General Permit section B.7.f, production and use of recycled water must comply with: CCRs title 22, division 4, chapter 3, water recycling criteria; the General Permit; this Notice of Applicability; an approved title 22 Engineering Report; and Division of Drinking Water’s conditional approval of the Engineering Report. Therefore, the County of San Luis Obispo must produce and use recycled water in accordance with the title 22 Engineering Report and Division of Drinking Water’s most recent conditional acceptance letter. The current title 22 Engineering Report is dated April 8, 2025, and the conditional acceptance letter (Attachment 4) is dated April 21, 2025.

4. Fees

- 4.1. The County of San Luis Obispo paid an annual fee of \$11,678 on January 10, 2025, for coverage in the existing individual permit, Order R3-2003-0004. This payment covers permit fees for the 2025-2026 fiscal year.

¹ Information for first-time GeoTracker users is available at:

https://www.waterboards.ca.gov/ust/electronic_submittal/docs/beginnerguid2.pdf

² Additional information available at: <http://geotracker.waterboards.ca.gov/>

4.2. The County of San Luis Obispo must pay an annual fee to maintain coverage in the General Permit. Annual fees are determined by the State Water Board fee program and cover the state fiscal year of July 1 through June 30. Your annual fee is currently \$13,178. Fees are charged (and updated) annually and are based on the facility's threat and complexity ratings and contains a surcharge for water recycling as described in the fee schedule. Your facility is currently rated with a threat and complexity of 3B and is a producer and user of recycled water.

4.3. A copy of the current state fee schedule is available at the following link:

https://www.waterboards.ca.gov/resources/fees/water_quality/#wdr

5. Notification

5.1. The Central Coast Water Board will be notified of your enrollment at a regularly scheduled public meeting on February 26-27, 2026. Details about that meeting are available on our website at:

http://www.waterboards.ca.gov/centralcoast/board_info/agendas/

6. Future Discharge Modifications

6.1. Pursuant to Water Code section 13260, you must inform the Central Coast Water Board at least 120 days prior to modifying your discharge. If there are any significant changes in either treatment or disposal methodologies, or the volume or character of the treated wastewater, you must notify the Central Coast Water Board immediately of such changes.

7. Responsible Party

7.1. The County of San Luis Obispo is responsible for the management and disposal of the wastewater in compliance with the conditions of the General Permit. Any noncompliance with this General Permit constitutes a violation of the California Water Code and subjects the County of San Luis Obispo to enforcement action and termination of enrollment under this General Permit.

8. Change In Ownership

8.1. In the event of any change in control or ownership of the property, the County of San Luis Obispo must notify the succeeding owner or operator of the existence of this General Permit by letter, a copy of which shall be immediately forwarded to the Central Coast Water Board. In addition, the succeeding owner must submit a Form 200 for enrollment in the General Permit. Once both of these things have occurred, the new owner or operator can be enrolled in the General Permit and your enrollment in the General Permit can be terminated.

9. Certified Operator

9.1. The County of San Luis Obispo is required to comply with the operator certification requirements³ administered by the State Water Board's Office of Operator Certification, which currently requires a Class II certified operator onsite to maintain and operate the treatment system. The County of San Luis Obispo must:

9.1.1. Keep a current Wastewater Treatment Plant Classification Form on file with the Office of Operator Certification and update the form when modifications to the Wastewater System treatment processes occur.

9.1.2. Provide the Office of Operator Certification with a Chief Plant Operator Acknowledgement Form and update this information within 30 days of a change of Chief Plant Operator.

9.1.3. If a contract operator is used, the contract operator must register with the Office of Operator Certification and obtain a contract operator certificate for the Wastewater System.

9.1.4. Forms are available at the following link:

https://www.waterboards.ca.gov/water_issues/programs/operator_certification/form.html

10. Disposal and Use Areas

10.1. Discharge to areas other than the designated recycled water irrigation area shown in Figure 4 of Attachment 2 is prohibited. If produced water is not adequately treated per Title 22 requirements, off-specification water must be disposed of in accordance with the contingency plan described in the title 22 Engineering Report.

11. Termination of Permit

11.1. The existing individual permit, Order R3-2003-0004, and the recycled use permit, Order R3-2003-0005, are terminated, except for enforcement purposes. The County of San Luis Obispo is responsible for compliance with Order R3-2003-0004 and R3-2003-0005 prior to the date of this letter.

³ Title 23 Division 3. Chapter 26 Wastewater Treatment Plant Classification, Operator Certification and Contract Operator Registration.

https://www.waterboards.ca.gov/water_issues/programs/operator_certification/docs/ocr_clean.pdf

If you have any questions, please contact **Lauren Sipich at (805) 549-3504 or by email at Lauren.Sipich@waterboards.ca.gov**, or Jennifer Epp at Jennifer.Epp@waterboards.ca.gov.

Sincerely,



for Ryan E. Lodge
Executive Officer

Attachments:

Attachment 1: Wastewater System Operation Summary and Site-Specific Requirements and Limitations

Attachment 2: Figures

Attachment 3: Monitoring and Reporting Program R3-2025-0062

Attachment 4: Conditional acceptance letter from the Division of Drinking Water

cc:

Corissa Burnett, CBurnett@co.slo.ca.us
Faith Zenker, fzenker@co.slo.ca.us
Luis Gonzales, pw.lowrf@co.slo.ca.us
Barrie Valencia, bvalencia@co.slo.ca.us
Alejandro Simental, asimental@co.slo.ca.us
Mladen Bandov, mbandov@co.slo.ca.us
Sean Loveridge, sloveridge@co.slo.ca.us
Stephen Carroll, scarroll@co.slo.ca.us
Paul Barr, pbarr@slocc.net
Ginachi Amah, Ginachi.Amah@waterboards.ca.gov
Rachel Hohn, Rachel.Hohn@waterboards.ca.gov
Lauren Sipich, Lauren.Sipich@waterboards.ca.gov
Todd Stanley, Todd.Stanley@waterboards.ca.gov
Kristina Olmos, Kristina.Olmos@waterboards.ca.gov
Jennifer Epp, Jennifer.Epp@waterboards.ca.gov
WDR Program, RB3-WDR@waterboards.ca.gov

ECM/CIWQS = CW-215915

GeoTracker = GT- WDR100035388

Subject Name = County of San Luis Obispo, Service Area 18, Country Club Estates
\\ca.epa.local\rb\rb3\shared\wdr\wdr facilities\san luis obispo co\slo csa 18_producer\1-permit\permit\2025_csa18_noa_final.docx

**ATTACHMENT 1
WASTEWATER SYSTEM OPERATION SUMMARY AND SITE-SPECIFIC
REQUIREMENTS AND LIMITATIONS**

1. OWNERSHIP AND WASTEWATER SYSTEM DESCRIPTION

1.1. Ownership and facility information submitted by the County of San Luis Obispo to the Central Coast Water Board is shown in Table 1.

Table 1. Owner and Wastewater Facility Information

Facility Name	San Luis Obispo County Service Area 18, Country Club Estates Reclamation Facility
Facility Address	1045 Graystone Place San Luis Obispo, CA 93401
Parcel Numbers	044-571-006 / 044-571-026 (Recycled Water Use Area)
Latitude/Longitude	35.21438 / -120.63046
Owner of Facility	County of San Luis Obispo - Public Works Department
Legally Responsible Official of Owner	John Diodati
Owner Mailing Address	976 Osos Street, Room 206 San Luis Obispo, CA 93408
Billing Address	976 Osos Street, Room 206 San Luis Obispo, CA 93408
Permitted Design Flow, Max Monthly Average (gallons per day, gpd)	100,000 gpd
Baseline Flow (Average Annual Flow) in gpd	55,000 gpd
Operators	Sean Loveridge, Chief Plant Operator, Grade IV, (Number 45086) Luis Gonzales, Supervising Wastewater Systems, Grade 3 (Number 7293) Stephen Carroll, Supervising Wastewater Systems Worker, Grade 3, (Number 28808)

Waste Type and Service Area	Domestic wastewater from customers residing at the Country Club homes, the Country Club, the Los Ranchos School, and the Jack Ranch Development.
Threat to Water Quality	3
Complexity	B
For Internal Use	
Fee Code	58
Fees Received	--
Primary Place Type	Wastewater Treatment Facility
Facility Type	Municipal/Domestic
Facility Waste Type	Domestic Wastewater
Regulatory measure Type	Enrollee - WDR
Reclamation Included	Yes-Producer Non-Potable, Distribution/Use
EPA Approved Pretreatment Program	No

- 1.2. A tributary of the San Luis Obispo Creek runs through the site and is the nearest surface water body to the site.
- 1.3. Monitoring wells were installed in 2002 to a depth of 100 feet and 45 feet below ground surface. According to information provided by the County of San Luis Obispo, both wells have been dry during recent sampling events. As a result, it is expected that seasonally high groundwater levels up and down gradient of the facility are below 100 feet and 45 feet, respectively.

2. WASTEWATER SYSTEM OPERATION SUMMARY

- 2.1. The San Luis Obispo County Service Area 18, Country Club Estates Reclamation Facility (CSA-18) produces disinfected secondary-23 recycled water. The CSA-18 facility and collection system is owned and operated by the County of San Luis Obispo. The County of San Luis Obispo delivers recycled water to the San Luis Obispo Country Club (Country Club) for use as irrigation on the restricted golf course. The Country Club historically held a recycled water user permit, Order R3-2003-0005, however, the County of San Luis Obispo and Country Club have opted to combine permitting under one permit. The Country Club, along with any additional recycled water users, must enter into a User Agreement with the County of San Luis Obispo. In addition, the County of San Luis Obispo is required to update the title 22 Engineering Report to incorporate all new users.
- 2.2. CSA-18 wastewater is primarily of domestic origin. Total dissolved solids (TDS), chloride, and sodium are known problem constituents. In 1993, San Luis Obispo County Ordinance 2597 banned the use of water softening systems or devices which cause high concentration of salts to be discharged into the public sewer at CSA-18. The ordinance establishes a supplemental water quality service charge for any buildings and lots that do not comply with this measure.
- 2.3. The treatment plant process consists of Aeration Ponds 1 and 2 which have aerators and can be operated individually in parallel or together in series with a detention time of five or more days in each aeration pond. The operator typically runs the aeration ponds in series. After aeration, wastewater flows to Settling Ponds 1, 2, and 3 which are operated in parallel with a detention time of one or more days. One settling pond can alternatively be used for sludge storage when not being used for settling operations. A summary of the system is included in Table 2 below. A facility site map and dispersal system layout are shown in Attachment 2.

Table 2. Wastewater Pond Treatment System, Disposal, and Capacity

Design Flows	100,000 gpd as a monthly average
Headworks/Preliminary Treatment	n/a – headworks grinder is not installed The County of San Luis Obispo plans to install a manual bar screen and must include details about system upgrades in their annual report.
Secondary Treatment	Wastewater is treated via two aerated ponds (Aeration Pond 1 and Aeration Pond 2) that are followed by three settling ponds operated in parallel. Each aerated pond has a volume of 600,000 gallons. Each settling pond has a capacity of 80,000 gallons.
Disinfection	Disinfection includes a chlorine contact channel with a design detention time of 60-minutes. The chlorination system uses 20-25 gpd 12.5% sodium hypochlorite for disinfection. The Multi-Functional Controller sends an alarm if chlorine residual drops below 2 mg/L. The chlorine contact channel has a 5,000-gallon capacity.
Effluent Pump	Two pumps with 180,000 gpd capacity each.
Effluent Storage and Disposal	Treated, disinfected secondary-23 effluent is discharged to a blending pond that is owned and operated by the San Luis Obispo Golf and Country Club for use in the golf course irrigation system.
Biosolids/Sludge Production and Handling	Solids accumulate at the bottom of the settling ponds and are removed 1 to 2 times per year depending on sludge judge measurements.
Non-Potable, Title 22 Recycled Water	This wastewater system produces non-potable disinfected secondary-23 recycled water for use on a restricted access golf course. The Country Club Estates blends the recycled water supplied by the County of San Luis Obispo with well water and uses it for irrigation.

3. WASTEWATER SYSTEM-SPECIFIC REQUIREMENTS AND LIMITATIONS

The County of San Luis Obispo must operate the facility in accordance with the General Permit and this notice of applicability⁴. The facility is an aerated wastewater pond treatment system. The County of San Luis Obispo must operate the system to comply with the effluent limits below.

3.1. Effluent Limits

3.1.1. The County of San Luis Obispo must comply with the site-specific limits listed in Table 3 and the recycled water producer requirements in Table 5.

Table 3. Wastewater Limits for Pond System

Constituent	Unit	Limit	Point of Compliance ¹
Flow	gpd ²	100,000 (monthly average) ³	Influent (IS-1)
Total Suspended Solids (TSS)	mg/L ⁴	30 (monthly average) ³ 45 (7-day average) ³	Chlorine Contact Channel Effluent (ES-1)
Five-Day Biochemical Oxygen Demand (BOD ₅)	mg/L	30 (monthly average) ³ 45 (7-day average) ³	Chlorine Contact Channel Effluent (ES-1)
Total Nitrogen (as N) ⁵	% Influent versus Effluent	50% Removal	Effluent (ES-1) compared to IS-1
pH ⁶	pH units	6.5 - 8.3	Effluent after chlorine contact basin (ES-1)

¹ Refer to monitoring and reporting program for sampling locations

² Denotes gallons per day

³ Monthly average flow is the sum of the daily flow that occurs each day in a calendar month, divided by the number of days in the month. Monthly average TSS and BOD is the sum of the values of each sample taken during the month, divided by the number of

⁴ General Permit section B.1.b. states that treatment and disposal of wastewater must demonstrate best practicable treatment or control for wastewater, which shall be demonstrated by compliance with the General Permit, effluent limits in the General Permit, and compliance with site-specific limits set forth in this notice of applicability.

samples taken during the month. 7-day average is calculated as the average concentration of the results for the last seven calendar days. If only one sample is collected within a seven-day period, then that one sample becomes the seven-day average value.

⁴ Denotes milligrams per liter

⁵ Nitrogen limits are required because the flow exceeds 20,000 gpd.

⁶ pH limits are based on municipal and domestic supply beneficial uses in the Basin Plan, and previous permit limits.

3.1.2. Although the system is designed for 120,000 gallons per day gpd, the General Permit applies only to facilities with monthly average flows below 100,000 gpd. Therefore, the County of San Luis Obispo must obtain coverage under *General Waste Discharge Requirements Order R3-2020-0020 for Discharges from Domestic Wastewater Systems with Flows Greater than 100,000 Gallons Per Day* before increasing flows above the 100,000 gpd threshold.

4. POND REQUIREMENTS

4.1. The County of San Luis Obispo's wastewater treatment system includes extended aeration ponds, settling ponds, a chlorine contact channel, and additional storage ponds. Therefore, the County of San Luis Obispo must comply with General Permit Section 5 requirements for pond systems.

5. SETBACK REQUIREMENTS

5.1. General Permit Section B.1.I, Table 3, includes setback requirements for the wastewater treatment system, wastewater storage, and for land application. The County of San Luis Obispo produces disinfected secondary-23 recycled water that is applied via spray and drip irrigation, and therefore must comply with the wastewater system, land application, and wastewater storage and/or treatment ponds setback requirements outlined in Table 3 of the General Permit.

6. GROUNDWATER LIMITS

6.1. As stated in the General Permit, Section C, the discharge (effluent) must not pollute groundwater or surface waters, adversely affect beneficial uses of groundwater, or cause an exceedance of the *Water Quality Control Plan for the Central Coastal Basin* (Basin Plan)⁵ water quality objectives. Specifically, the County of San Luis Obispo must manage the facility to comply with water quality objectives for groundwater found in Section 3.3.4 of the Basin Plan. These objectives include:

⁵ Current edition, June 2019 is available at:

https://www.waterboards.ca.gov/centralcoast/publications_forms/publications/basin_plan/docs/2019_basin_plan_r3_complete_webaccess.pdf

- 6.1.1. General objectives for taste and odors and radioactivity for all groundwaters.
- 6.1.2. Objectives for bacteria and organic chemicals, inorganic chemicals, and radionuclides, which are established at the drinking water maximum contaminant levels (MCLs) as defined in California Code of Regulations, title 22, division 4, chapter 15.
- 6.1.3. Specific objectives for the groundwater basin where the discharge occurs. This facility discharges into the Estero Bay Groundwater Basin, San Luis Obispo Sub-Area. The applicable Basin Plan's groundwater objectives are included in Table 4.

Table 4. Basin Plan, Median Groundwater Objectives (mg/L)

Constituent	Median Groundwater Objective for Estero Bay Aquifer San Luis Obispo Sub-Area
Total Dissolved Solids (TDS)	900
Chloride	200
Sulfate	100
Boron	0.2
Sodium	50
Total Nitrogen as N	5

7. RECYCLED WATER PRODUCTION REQUIREMENTS

- 7.1. The County of San Luis Obispo produces disinfected secondary-23 recycled water for reclamation area irrigation and must therefore comply with CCRs title 22, division 4, chapter 3, water recycling criteria. The County of San Luis Obispo is responsible for complying with any future updates and additions to CCRs title 22.
- 7.2. The County of San Luis Obispo must produce disinfected, secondary-23 recycled water that is "oxidized and disinfected so that the median concentration of total coliform bacteria in the disinfected effluent does not exceed a most probable number (MPN) of 23 per 100 milliliters using the bacteriological results of the last seven days for which analyses have been completed, and the number of coliform bacteria does not exceed an MPN of 240 per 100 milliliters in more than one sample in any 30 day period." See Table 5 for a tabular summary of this requirement.

Table 5. Effluent Limit for Title 22 Non-Potable Disinfected Secondary-23 Recycled Water ¹

Constituent	Units	Sampling Frequency	Regulatory Limitations	Point of Compliance
Total Coliform	MPN/100 mL ²	Daily	Must not exceed: a. Seven-day median concentration of 23 MPN/100mL; and b. 240 MPN/100mL in more than one sample in any 30-day period	ES-1

¹ See title 22, division 4, chapter 3, water recycling criteria Section 60301.225 for complete requirements.

² MPN/mL denotes most probable number per milliliter

7.3. As described in the title 22 Engineering Report, the County of San Luis Obispo operates a chlorine contact basin for disinfection. To ensure that there is adequate chlorine available for disinfection, an alarm is set to notify the standby operator if chlorine residual reaches 2.0 mg/L or below. The permitted minimum chlorine residual is 1.0 mg/L. In the semiannual reports, the County of San Luis Obispo must report when the residual chlorine is low (detected at 2.0 mg/L or below). If an alarm is triggered for low residual chlorine, the County of San Luis Obispo must describe in the semiannual report actions taken to remedy the issue.

7.4. The County of San Luis Obispo is required to provide annual trainings to operation staff (irrigation system operators) regarding recycled water production, safety, and emergency planning.

7.5. The Central Coast Water Board solicits input and approval from the State Water Board Division of Drinking Water prior to General Permit enrollment for any recycled water project. The Central Coast Water Board received a final title 22 Engineering Report, dated April 8, 2025, for production of disinfected secondary-23 recycled water at the County of San Luis Obispo Country Club CSA-18. On April 21, 2025, the Division of Drinking Water issued a conditional acceptance letter. The County of San Luis Obispo must comply with all the conditions of the Division of Drinking Water's conditional acceptance letter included as Attachment 4.

- 7.6. Pursuant to title 22, the County of San Luis Obispo must implement the contingency plan described in the title 22 Engineering Report to assure that no untreated or inadequately treated wastewater will be delivered to the use area. Any discharge of untreated or partially treated wastewater to the use area, and the cessation of same, must be reported immediately by telephone and email to the Central Coast Water Board, the Division of Drinking Water, and the local health officer.

Central Coast Water Board contacts: RB3-WDR@waterboards.ca.gov, 805-549-3891

8. RECYCLED WATER USE AREA OPERATIONS AND REQUIREMENTS

- 8.1. The use of disinfected secondary-23 recycled water is overseen by the County of San Luis Obispo in its role as the recycled water distributor. As the recycled water distributor, the County of San Luis Obispo is responsible for complying with the regulations set forth in CCR title 22, division 4, chapter 3, water recycling criteria which establish the standards for producing and distributing recycled water. Recycled water must be managed and used consistent with the most current approved title 22 Engineering Report, the General Permit, and the most current Division of Drinking Water's conditional approval requirements (Attachment 4).
- 8.2. Table 6 summarizes the County of San Luis Obispo's description of the use areas and users; complete details are provided in the title 22 Engineering Report. The County of San Luis Obispo must also comply with the site-specific operations outlined below:
- 8.2.1. Recycled water must be applied between 10:00 PM and 5:00 AM. The County of San Luis Obispo must receive approval from Central Coast Water Board staff prior to adjusting the regular spray hours.

Table 6. Uses of Recycled Water

Volume of Recycled Water Used:	All treated water is recycled; there is no alternative disposal treatment. Approximately 70 acre-feet per year is recycled.
Distribution Details (Consistent with Title 22 Requirements):	The recycled water is stored in Pond 1, Recycled Reservoir, and is owned and operated by the Country Club.
Recycled Water Uses:	Recycled water is used year-round to irrigate the golf course.

Attachment 1

Recycled Water Administrator:	County of San Luis Obispo
Recycled Water Users:	San Luis Obispo Golf and Country Club
Recycled Water User Supervisor:	Golf Course Superintendent, Paul Barr

ATTACHMENT 2 FIGURES

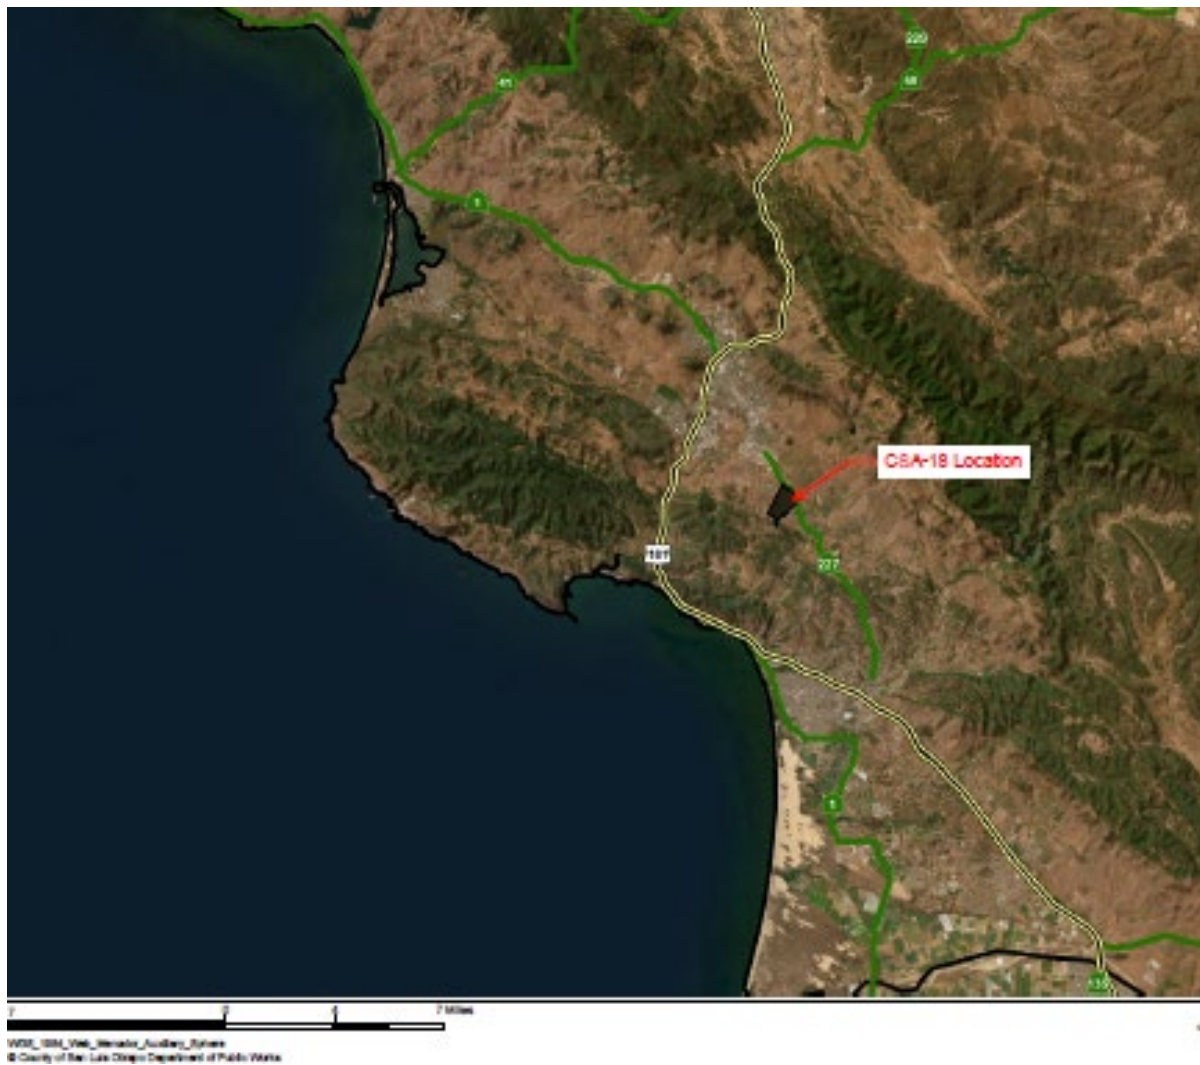


Figure 1. Site Location Map

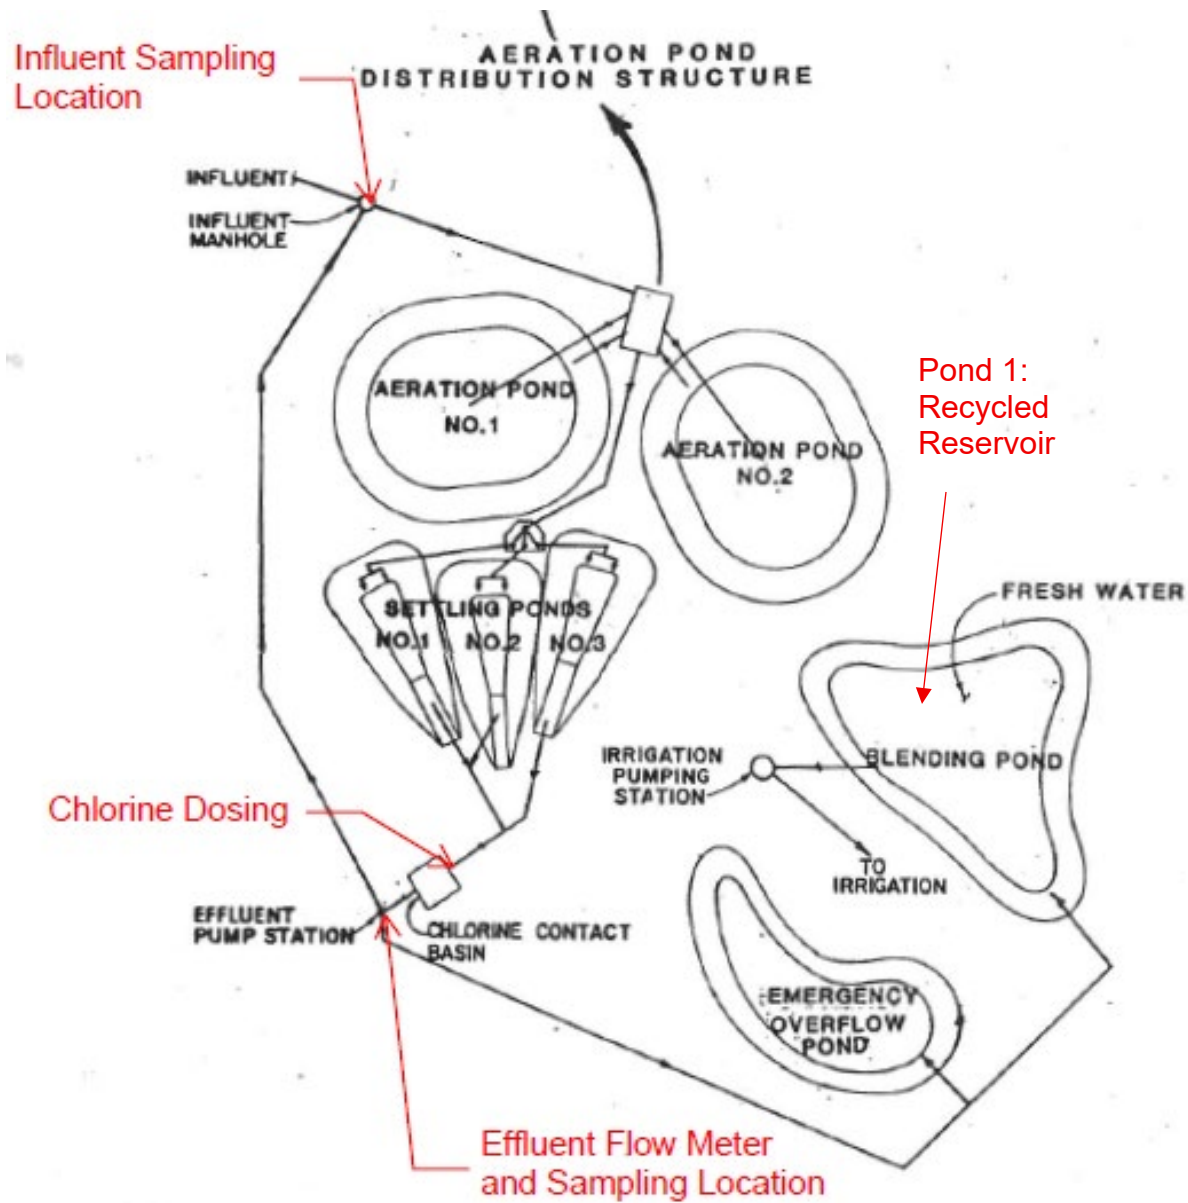


Figure 2. County of San Luis Obispo CSA-18 Treatment Train and Process Flow Schematic (from title 22 Engineering Report, Pg. 10)



Figure 3. County of San Luis Obispo CSA-18 Aerial Site Map

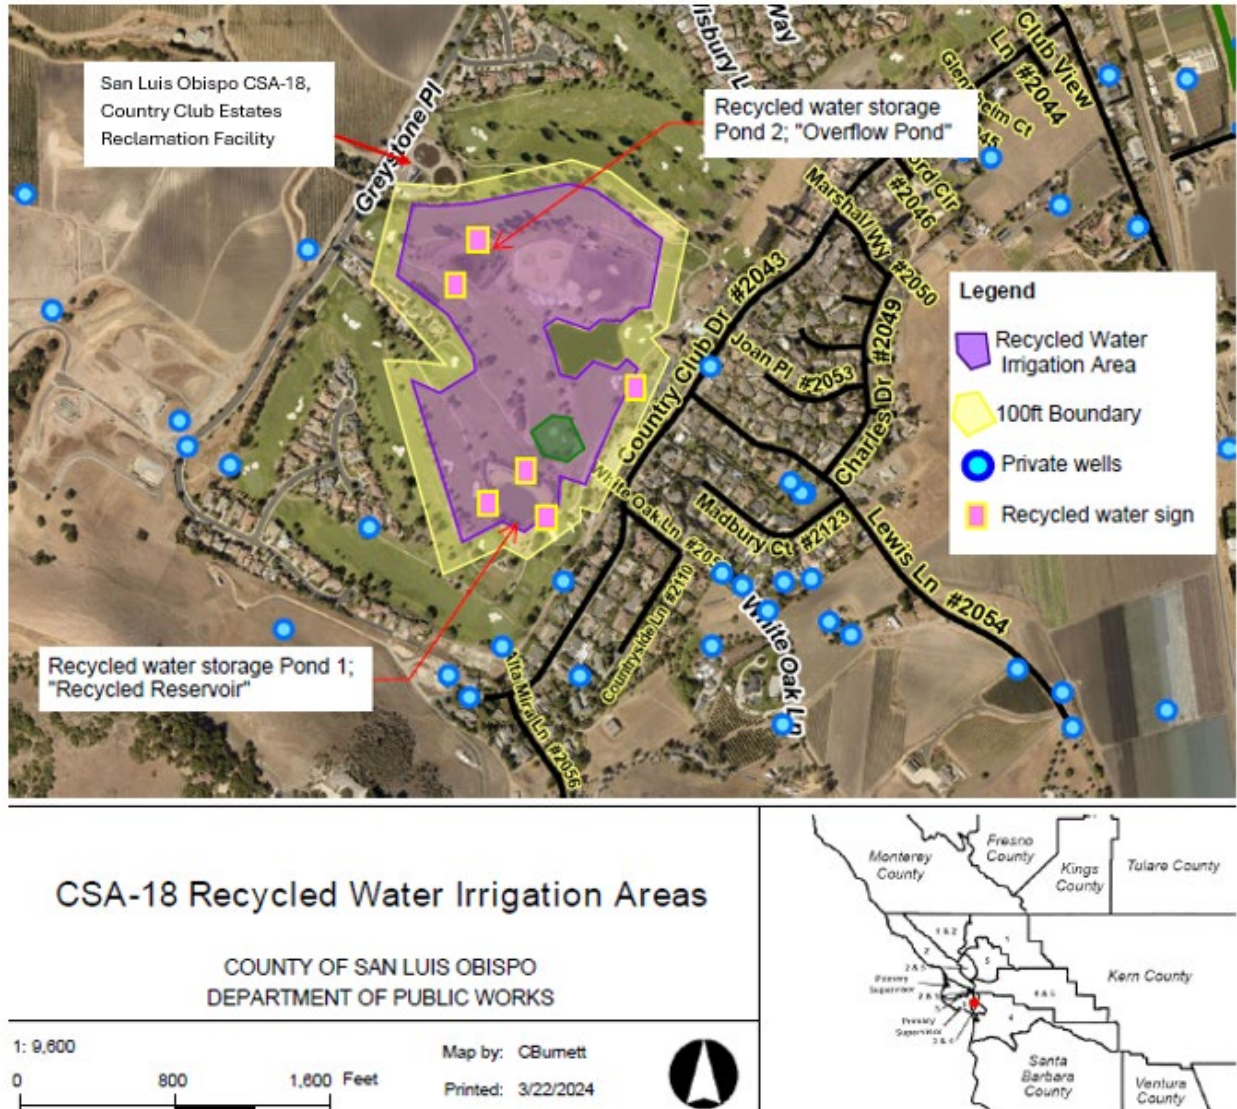


Figure 4. County of San Luis Obispo CSA-18 Aerial Site Map (from title 22 Engineering Report, Figure 6, Pg. 27)



Figure 5. County of San Luis Obispo CSA-18 Off-Specification Water Disposal Location (from title 22 Engineering Report, Figure 5, Pg. 22)

ATTACHMENT 3
MONITORING AND REPORTING PROGRAM R3-2025-0062
NOVEMBER 20, 2025
FOR
SAN LUIS OBISPO COUNTY SERVICE AREA 18 COUNTRY CLUB ESTATES
RECLMATION FACILITY

This monitoring and reporting program establishes requirements for monitoring a wastewater treatment system and recycled water use area for San Luis Obispo County Service Area 18, Country Club Estates, owned by the County of San Luis Obispo located at 1045 Graystone Place in San Luis Obispo, California.

The County of San Luis Obispo owns and operates the wastewater system that is subject to the notice of applicability dated November 20, 2025, issued by the Central Coast Regional Water Quality Control Board (Central Coast Water Board) for coverage in *Order WQ 2014-0153-DWQ, General Waste Discharge Requirements for Small Domestic Wastewater Treatment Systems* (General Permit).

1. SAMPLING AND ANALYSIS

- 1.1. All samples must be representative of the volume and nature of the discharge or matrix of materials sampled. The name of the sampler, sample type (grab or composite), time, date, location, bottle type, and any preservative used for each sample must be recorded on the sample chain of custody form. The chain of custody form must also contain all custody information including date, time, and to whom the samples were relinquished. If composite samples are collected, the basis for sampling (time or flow weighted) must be approved by the Central Coast Water Board. Unless otherwise specified below, sampling must be performed as shown in Table 1.

Table 1. Sampling and Monitoring Schedule

Monitoring Period	Sample Collection Months
Annually	October
Semiannually	April and October
Quarterly	January, April, July, and October
Monthly	Each month of the year

- 1.2. Field test instruments (such as those to test pH, dissolved oxygen, and electrical conductivity) may be used provided that they are used by a State Water Resources Control Board (State Water Board) California Environmental Laboratory Accreditation Program certified laboratory, or:

- 1.2.1. The user is trained in proper use and maintenance of the instruments;
- 1.2.2. The instruments are field calibrated prior to monitoring events at the frequency recommended by the manufacturer;
- 1.2.3. Instruments are serviced and/or calibrated by the manufacturer at the recommended frequency; and
- 1.2.4. Field calibration reports are maintained and available for at least three years.

2. WATER SUPPLY MONITORING

- 2.1. Representative samples of the water supply must be collected and analyzed as shown in Table 2 from the production wells prior to any disinfection.
- 2.2. In lieu of the required water supply sampling, the County of San Luis Obispo may request approval to submit a Well Identification Number and the reporting year's consumer confidence report (annual water quality report or drinking water quality report), as required by the State Water Board Division of Drinking Water and/or county. The County of San Luis Obispo must report the results of any constituent monitored more frequently than is required by this monitoring and reporting program. The County of San Luis Obispo must also report detectable concentrations (above the reporting limit) for any other constituent that has a published maximum contaminant level (MCL).

Table 2. Water Supply Monitoring

Parameter	Units	Type of Sample	Sampling Frequency	Reporting Frequency
TDS	mg/L ¹	Grab	Annually	Annually
Nitrate and Nitrite (as N)	mg/L	Grab	Annually	Annually
Chloride	mg/L	Grab	Annually	Annually
Sodium	mg/L	Grab	Annually	Annually
Sulfate	mg/L	Grab	Annually	Annually
Boron	mg/L	Grab	Annually	Annually

¹ denotes milligrams per liter

3. MONITORING LOCATIONS

3.1. Monitoring location information, including nomenclature that must be used when reporting data to the GeoTracker database and in reports (described below), is shown in Table 3. The field point code and latitude and longitude of all monitoring locations, except supply wells, must be loaded to GeoTracker once. (See Electronic Submittal section, below.)

Table 3. Monitoring Locations

Sample Title	GeoTracker Field Point Code (Sample ID)	Sample Description
Influent Sample – 1	IS-1	Representative grab sample from the influent manhole.
Effluent Sample – 1	ES-1	Representative grab sample from the effluent pump station after the chlorine contact basin.
Monitoring Well – 1	MW-1	100-foot monitoring well located on the southeast side of the site
Monitoring Well – 2	MW-2	45-foot monitoring well on the northwest side of the site
Water Supply	WSW-1 ¹	Representative sample from potable well serving the development

¹ Water supply sample data should be included in the semiannual report but does not need to be uploaded to GeoTracker if the Central Coast Water Board approves submittal of a Well Identification Number pursuant to the Water Supply Monitoring section above.

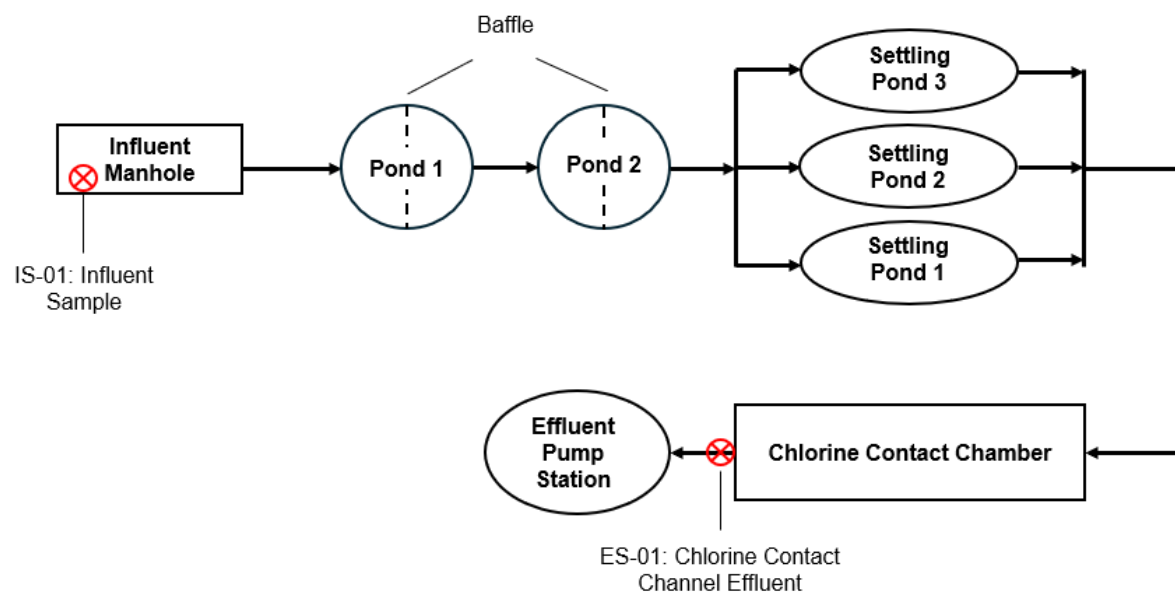


Figure 1. Process Flow Diagram with Sampling Locations

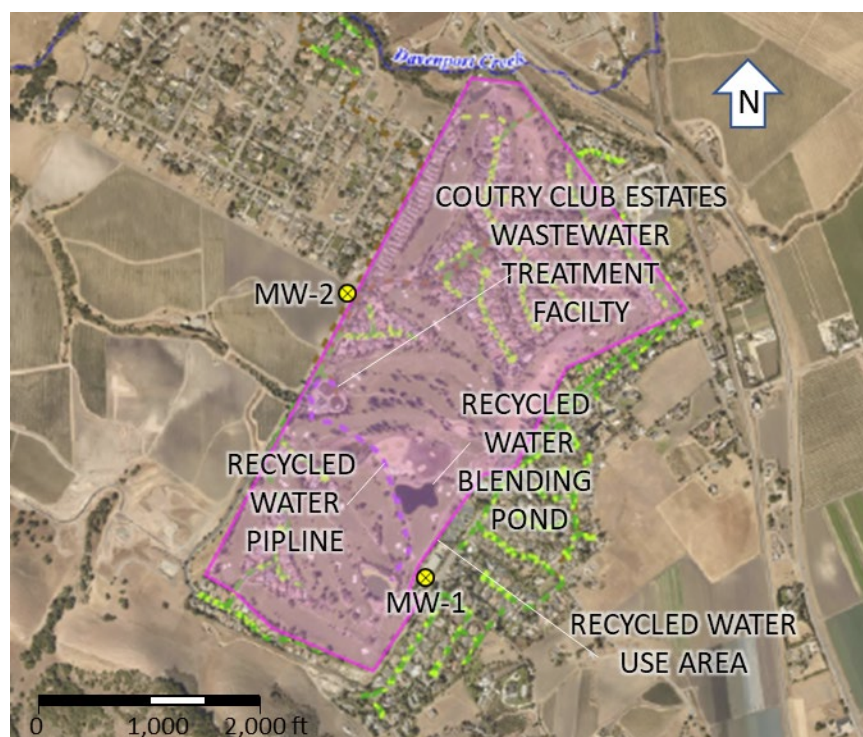


Figure 2. Monitoring Well Locations

4. POND TREATMENT UNIT MONITORING

- 4.1. Representative samples of the County of San Luis Obispo's influent (raw wastewater) into the wastewater system and effluent (treated wastewater) discharged and recycled to land must be monitored, collected, and analyzed as follows in Table 4. Therefore, the County of San Luis Obispo must additionally comply with CCRs title 22 requirements for recycled water monitoring and reporting and the most recently approved title 22 Engineering Report.
- 4.2. An influent flow meter had not been historically installed at the site. The Central Coast Water Board understands that the County of San Luis Obispo has installed a temporary influent flow meter. Influent flow must be monitored in accordance with the General Permit. Effluent samples are collected after the chlorine contact channel at ES-1. All samples in Table 4 must be grab.

Table 4. Influent and Effluent Monitoring

Parameter/ Constituent	Units	Influent (IS-1) Sampling Frequency	Effluent (ES-1) Sampling Frequency
Daily Flow ¹	gpd	Daily	Daily
Maximum Daily Flow ²	gpd	Monthly	Monthly
Average Daily Flow ³	gpd	Monthly	Monthly
Biochemical Oxygen Demand, 5-Day (BOD ₅)	mg/L	Monthly	Monthly
Total Suspended Solids	mg/L	Monthly	Monthly
pH	pH units	Not Required	Monthly
Total Nitrogen	mg/L	Quarterly	Quarterly
Nitrate (as N) + Nitrite (as N) or separate species ⁴	mg/L	Quarterly	Quarterly
Total Kjeldahl Nitrogen (as N)	mg/L	Quarterly	Quarterly

Parameter/ Constituent	Units	Influent (IS-1) Sampling Frequency	Effluent (ES-1) Sampling Frequency
Ammonia (as N)	mg/L	Quarterly	Quarterly
Total Dissolved Solids	mg/L	Not Required	Semiannually
Chloride	mg/L	Not Required	Semiannually
Sodium	mg/L	Not Required	Semiannually
Sulfate	mg/L	Not Required	Semiannually
Boron	mg/L	Not Required	Semiannually
Total Coliform	MPN/100 mL	Not Required	Daily
Total Chlorine, Residual ⁵	mg/L	Not Required	Daily

¹ Flow must be measured through influent and effluent flow meters

² Maximum daily flow is the maximum daily flow that occurs during the calendar month.

³ Average flow is based on the sum of the daily flow that occurs each day in a calendar month, divided by the number of days in the month.

⁴ Nitrate and nitrite sample may be combined

⁵ If monitored continuously, report a daily average and maximum daily results

5. POND MONITORING

- 5.1. All wastewater treatment and treated wastewater storage/disposal ponds (lined and unlined) must be monitored as specified in Table 5. Sampling for pH and dissolved oxygen must be a grab sample taken from 1 foot below pond surface.
- 5.2. Observations do not need to be reported in the monitoring reports unless a violation, significant change, or treatment issue is observed. However, photos of the pond(s) verifying the observations must be collected annually and included in the subsequent monitoring report. Observations must be noted in a logbook or database and made available to the Central Coast Water Board upon request. Any problems must be promptly corrected and recorded. The County of San Luis Obispo must submit a summary of violations found during the visual inspections with each subsequent monitoring report, or a note that there were no violations.

Table 5. Wastewater Treatment/Storage/Disposal Pond Monitoring

Parameter/ Constituent	Units	Sample Type	Sampling/Monitoring Frequency
Freeboard	0.1 feet ¹	Measured	Weekly
pH	pH Units	Grab in Pond	Weekly
Dissolved Oxygen	mg/L	Grab in Pond	Monthly
Sludge Depth	0.1 feet	Measured	Annually
Color	Not Applicable	Visual Observation	Monthly
Odors	Not Applicable	Observation	Monthly
Vegetation in and surrounding ponds	Not Applicable	Visual Observation	Monthly
Berm condition	Not Applicable	Visual Observation	Monthly
Precipitation	inches/day and date	Measured ²	Each precipitation event ³
Photos	Not Applicable	Observation ⁴	Annually

¹ Units must be in feet rounded to the nearest tenth of a foot (i.e., 2.4 feet)

² County of San Luis Obispo may use a rain gauge or use a National Oceanic and Atmospheric Administration, United States Geological Survey, or California Irrigation Management Information System weather station, such as <http://scacis.rcc-acis.org/>

³ A precipitation event is one producing precipitation of ½ inch or more

⁴ The date and location of the photo must be clearly marked. Pond photos must be submitted annually in the subsequent semiannual report.

6. RECYCLED WATER USE AREA MONITORING

6.1. The County of San Luis Obispo must monitor recycled water use areas and setback areas. The following must be recorded for each user with additional reporting for use areas as appropriate. The frequency of use area inspections must be based on the complexity and risk of each use area with additional observational monitoring during rain events. Use areas may be aggregated to combine acreage for calculation or observation purposes. Use area monitoring requirements are shown in Table 6.

6.2. The County of San Luis Obispo must additionally monitor the setback areas for nuisance odors/vectors, soil saturation/ponding, and the following parameters listed in Table 6 below, where recycled water is applied near a setback boundary for a sensitive receptor (e.g. residences/domestic wells/creeks).

- 6.3. A log of the visual observations must be maintained onsite in a logbook, or database, and made available to the Central Coast Water Board upon request. Any problems must be promptly corrected and recorded. The log does not need to be reported to GeoTracker, but the County of San Luis Obispo must submit a summary of violations found during the visual inspections with each subsequent monitoring report, or a note that there were no violations.

Table 6. Use Area Monitoring Requirements

Parameter	Units	Monitoring Type	Frequency	Reporting Frequency
Recycled Water User	NA	NA	NA	Annually
Recycled Water Flow	gpd	Meter ¹	Monthly	Annually
Recycled Water Volume	acre-feet	Meter ¹	Monthly	Annually
Local Rainfall	Inches	Weather Station ²	Monthly	Annually
Acreage Applied ³	Acres	Calculated	NA	Annually
Application Rate	inches/acre/year	Calculated	NA	Annually
Soil Saturation/Ponding ⁴	NA	Observation	Quarterly	Annually
Nuisance Odors/Vectors	NA	Observation	Quarterly	Annually
Discharge Off-Site	NA	Observation	Quarterly	Annually
Notification Signs ⁵	NA	Observation	Quarterly	Annually
Setback Area ⁶	NA	Observation	Monthly	Annually

¹ Meter requires meter reading, a pump run time meter, or other approved method.

² County of San Luis Obispo may use a rain gauge or use a National Oceanic and Atmospheric Administration, United States Geological Survey, or California Irrigation Management Information System weather station, such as <http://scacis.rcc-acis.org/>.

³ Acreage applied denotes the acreage to which recycled water is applied.

⁴ Additional observation during significant precipitation events (greater than one inch).

⁵ Notification signs shall be consistent with the requirements of CCRs, title 22, division 4, chapter 3, section 60310 (g).

⁶ Monitor the setback area for nuisance odors/vectors and soil saturation/ponding.

7. SOLIDS DISPOSAL MONITORING

- 7.1. The County of San Luis Obispo must report the handling and disposal of all solids (e.g., screenings, grit, sludge, biosolids, grease, etc.) generated at the wastewater treatment system. Records must include the name/contact information for the hauling company, the type and amount of waste transported, the date removed from the wastewater system, the disposal facility name and address, and copies of analytical data required by the entity accepting the waste. These records must be submitted as part of the subsequent monitoring report.
- 7.2. If solids are not removed during the year, the County of San Luis Obispo must explain the absence of this monitoring in the report.

8. COLLECTION SYSTEM MAINTENANCE

- 8.1. The County of San Luis Obispo must submit records of any maintenance performed on the sewer collection system within the past year.

9. GROUNDWATER MONITORING

- 9.1. The County of San Luis Obispo must implement a groundwater monitoring program to demonstrate compliance with the groundwater limitations in the notice of applicability and water quality objectives specified in the Basin Plan. Groundwater monitoring reports, workplans, and other technical reports that interpret groundwater data must be prepared and stamped by a California licensed civil engineer or professional geologist.
- 9.2. The County of San Luis Obispo must:
 - 9.2.1. Monitoring wells must, at a minimum, be sampled and analyzed as specified in Table 7 and in accordance with the Central Coast Water Board approved sampling and analysis plan.
 - 9.2.2. Prior to sampling, depth to groundwater must be measured and groundwater elevations¹ must be calculated. The monitoring wells must be purged of at least three well volumes and until measurements of the following parameters have stabilized (i.e., are reproducible within 10 percent): pH, temperature, dissolved oxygen, electrical conductivity, and turbidity. No-purge, low-flow, or other sampling techniques are acceptable only if they are approved in advance by the Central Coast Water Board and described in an approved sampling and analysis plan. Once the groundwater level in each of the wells has recovered

¹ The locations and top-of-casing elevations for the existing groundwater monitoring wells must be surveyed by a licensed land surveyor if not already completed at the time of installation.

sufficiently to ensure the collection of representative groundwater samples, a qualified individual (e.g., consultant, technician) trained in using proper sampling methods must recover samples using approved USEPA methods. Laboratories analyzing groundwater samples must be accredited by the State Water Board Environmental Laboratory Accreditation Program, in accordance with California Water Code section 13176, and must include quality assurance/quality control data with their reports.

9.2.3. The County of San Luis Obispo must provide monitoring well field sheets and report monitoring data, as described in Table 7, with each monitoring report.

9.2.4. Groundwater monitoring, at a minimum, must be consistent with Table 7.

Table 7. Groundwater Monitoring

Constituent	Units	Sample Type	Sampling Frequency
Groundwater Elevation ¹	0.01 ft msl	Calculated	Quarterly
Depth to Groundwater ¹	0.01 ft bgs	Measurement	Quarterly
Total Nitrogen ²	mg/L	Calculated	Quarterly
Nitrate (as N)	mg/L	Grab	Quarterly
Nitrite (as N)	mg/L	Grab	Quarterly
Total Kjeldahl Nitrogen (as N)	mg/L	Grab	Quarterly
Ammonia (as N)	mg/L	Grab	Quarterly
Total Dissolved Solids	mg/L	Grab	Quarterly
Chloride	mg/L	Grab	Quarterly
Sodium	mg/L	Grab	Quarterly
Sulfate	mg/L	Grab	Quarterly
Boron	mg/L	Grab	Quarterly
pH	pH Units	Metered	Quarterly
Dissolved Oxygen	mg/L	Metered	Quarterly
Electrical Conductivity	µS/cm ³	Metered	Quarterly
Oxidation Reduction Potential	mV ⁴	Metered	Quarterly
Temperature	degrees Celsius	Metered	Quarterly

¹ ft.msl denotes feet above mean sea level and ft bgs denotes feet below ground surface.

² Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

³ µS/cm denotes microsiemens per centimeter

⁴ mV denotes millivolts

10. REPORTING

10.1. The County of San Luis Obispo must submit semiannual monitoring reports in accordance with Table 8. In addition to the items referenced in this Reporting section, the second semiannual report must include tabular and graphical summaries of all monitoring data collected during the year.

Table 8. Semiannual Monitoring Reports

Report	Monitoring Period	Report Due Date
First Semiannual Report	January 1 to June 30	August 1
Second Semiannual Report	July 1 to December 31	February 1

10.2. The semiannual reports must include:

10.2.1. Facility Information and Description

10.2.1.1. Briefly describe your facility, treatment process, and disposal process with references to figures.

10.2.1.2. A wastewater treatment process flow diagram with a label for the monitoring locations and a scaled facility map showing the treatment system, discharge points, and wells (supply and groundwater, if present).

10.2.2. Data Tables

10.2.2.1. Tabular summaries of all monitoring data (water supply, influent, effluent, and groundwater) compared to effluent limits, as appropriate. Submit the results of any pollutant or parameter monitored more frequently than is required by this monitoring program.

10.2.2.2. A summary in tabular format of the maximum and average flows for each month and comparison to permitted flows.

10.2.3. Compliance and Performance Discussion

10.2.3.1. Disclosure of any noncompliance (violations) with the notice of applicability and/or General Permit requirements, including a description, it's cause, the exact date(s) and time(s), and the steps taken or planned to reduce, eliminate and prevent recurrence of the noncompliance. Include any violations of title 22 requirements. Include any violations from the visual inspections for pond and use area monitoring.

- 10.2.3.2. An evaluation (graphs recommended) of the treatment facilities' performance, including percent removal of the main pollutants (BOD₅, TSS, total nitrogen, total coliforms) and flow over time, nuisance conditions, system problems, etc.
- 10.2.3.3. Include the number of days the facility did not adequately treat recycled water and describe the contingency plan and measures taken to not distribute adequately treated water.
- 10.2.3.4. A discussion of any data gaps and potential deficiencies in the monitoring system or reporting program.

10.2.4. Pond Monitoring

- 10.2.4.1. Report the results of any violations of the pond monitoring visual inspections, as described in the Pond Monitoring section.
- 10.2.4.2. Submit annual photos of the ponds to confirm the results of the visual inspections. The photos must include the date and corresponding pond location for reference.

10.2.5. Recycled Water Use

- 10.2.5.1. A summary table of all recycled water users, use areas, and volumes of recycled water delivered. Maps may be included to identify use areas.
- 10.2.5.2. Report the results of any violations of the recycled water use area visual inspections, as described in the Recycled Water Use Area Monitoring section.

10.2.6. Solids Disposal

- 10.2.6.1. If solids are disposed of offsite, comply with the reporting in the Solids Disposal Monitoring section. Or, if no solids were disposed of offsite, note that no solids were removed during the monitoring period.

10.2.7. Operator Information

- 10.2.7.1. The name, grade, and license number for the wastewater operator responsible for operation, maintenance, and system monitoring, and all operator personnel.
- 10.2.7.2. A copy of the current Office of Operator Certification Wastewater Treatment Plant Classification Form.
- 10.2.7.3. A copy of the current Office of Operator Certification Chief Plant Operator Acknowledgement Form.
- 10.2.7.4. If a contract operator is used, a copy of the contract operator certificate from the Office of Operator Certification.

10.2.8. Laboratory Sheets

10.2.8.1. Copies of laboratory analytical report(s) and chain of custody form(s).

10.2.9. Collection System Maintenance

10.2.9.1. Records of any collection system maintenance performed on the sewer collection system during the reporting period.

11. ELECTRONIC SUBMITTAL

11.1. All monitoring reports must be provided electronically in a searchable PDF format, with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page. The transmittal sheet must be signed.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/docs/transmittal_sheet.pdf

11.2. The transmittal sheet describes who can sign reports. To authorize someone to sign and submit reports on your behalf, you must submit the "designation of duly authorized representatives form" found at the link below to the Central Coast Water Board.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/

11.3. The County of San Luis Obispo must submit all reports/documents and laboratory analytical data (influent, effluent, groundwater data) to the State Water Board's GeoTracker^{2,3} database consistent with applicable Electronic Submittal of Information (ESI) requirements under a wastewater system-specific global identification number **WDR100035388** at:

<https://geotracker.waterboards.ca.gov/esi/login>

² Information for first-time GeoTracker users is available at:

https://www.waterboards.ca.gov/ust/electronic_submittal/docs/beginnerguid2.pdf

³ Additional information available at:

<https://geotracker.waterboards.ca.gov/>

11.4. Table 9 summarizes the GeoTracker electronic reporting requirements. For general questions, please contact the GeoTracker Help Desk:
Geotracker@waterboards.ca.gov.

Table 9. GeoTracker Electronic Submittal Information (ESI) Data Requirements

Electronic Submittal	Description of Action	Action	Frequency
Reports and Documents	Complete copy of all documents including monitoring reports (in searchable PDF format) and any other documents related to the Wastewater System.	Upload directly to GeoTracker all monitoring reports (in searchable PDF format) and any other associated documents.	On or before the due dates required by this General Permit and for other documents when required by the Central Coast Water Board.
Laboratory Data	All analytical data (including geochemical data) in electronic deliverable format (EDF). This includes all water quality samples from the laboratory, field monitoring not required.	Upload, or direct your State Certified Laboratory staff to upload, all laboratory data directly to GeoTracker.	On or before the due date of the required monitoring report
Depth to Groundwater	Monitoring wells must have the depth-to-water information reported. Report data only for wells defined as permanent sampling points.	Upload depth-to-water information to the GeoTracker GEO_WELL file.	On or before the due date of the required monitoring report
Boring Logs and Well Screen Intervals	Boring logs must be prepared by a registered professional and submitted in PDF format separately (not only as attachments to reports)	Upload boring logs (in searchable PDF format) to GeoTracker whenever a new boring is drilled.	Every time a new boring is drilled.

Electronic Submittal	Description of Action	Action	Frequency
Location data (Geo XY)	Name, classify, and identify the location (latitude and longitude) of all sampling points (excluding supply wells). Monitoring wells must be surveyed, influent and effluent sample locations must be identified on the GeoTracker mapping tool under "non-surveyed data."	Upload the location data (surveyed and non-surveyed) to the GeoTracker Geo_XY file.	These data points are required prior to laboratory data uploads. Must be added every time a permanent monitoring point is established.
Elevation Data (Geo Z)	Mark the elevation at the top of groundwater well casings for all permanent groundwater wells. These points are required prior to depth-to-water data uploads.	Upload the survey data to the GeoTracker GEO_Z File.	One-time, for all groundwater monitoring wells.
Geo Map	Site layout, map of facilities, wastewater treatment system, and disposal area(s).	Upload the Site layout PDF to the GeoTracker site plan file.	One time, or when the facility is modified.

12. TECHNICAL REPORTS

- 12.1. The County of San Luis Obispo must submit to GeoTracker the reports described in General Permit Section E. 1. Technical Report Preparation Requirements by the dates included in Table 10. If this information is already contained in an operation and maintenance manual or similar document, that may be submitted in compliance with this requirement.

Table 10. Technical Report Submittal Due Dates

Report	Report Due Date
Spill Prevention & Emergency Response Plan	February 20, 2026
Sampling and Analysis Plan	February 20, 2026
Sludge Management Plan	February 20, 2026
Training Records Log	Included with Semiannual Reports
Salt and Nutrient Management Plan	November 20, 2027
Collection System Maintenance Plan	February 20, 2026
Updated Title 22 Engineering Report	November 20, 2026

12.1.1. Sampling and Analysis Plan

12.1.2. The County of San Luis Obispo's Operation and Maintenance Manual must contain a sampling and analysis plan that meets the requirements specified herein. Anyone performing sampling on behalf of the County of San Luis Obispo must be familiar with the sampling and analysis plan. At a minimum, the sampling and analysis plan must contain the following:

- 12.1.2.1. A wastewater treatment process flow schematic with the monitoring locations labeled and scaled Wastewater System maps with treatment components, discharge locations (both treated wastewater and non-potable recycled water), monitoring locations, groundwater wells, storage locations (e.g., chemical, sludge, emergency overflow ponds, etc.), buildings, etc. (if the County of San Luis Obispo needs to update Figure 1 to comply with this requirement, a copy of the updated process flow schematic will also be included with the annual report).
- 12.1.2.2. Sample identification details in tabular format. The table must include the sample titles, GeoTracker field point information, sample description(s), and sampling frequencies.
- 12.1.2.3. Sample chain-of-custody procedures and documentation.
- 12.1.2.4. Sample handling/preservation procedures.
- 12.1.2.5. A description of the analytical methods.
- 12.1.2.6. A description of sample containers, preservatives, and holding times.

- 12.1.2.7. For water supply monitoring, a description of the location and method of data collection (e.g., onsite well sampling, use of consumer confidence report, etc.). For groundwater monitoring, a description of the well purging and field methods.

12.1.3. Sludge Management Plan

- 12.1.4. The County of San Luis Obispo's Operation and Maintenance Manual must contain a sludge management plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. At a minimum, the plan must describe the following:

- 12.1.4.1. An estimated volume/amount and quality of sludge and scum that will be generated.
- 12.1.4.2. How sludge, scum, and supernatant will be stored and disposed of to protect groundwater quality.
- 12.1.4.3. If sludge will be subject to further treatment, describe the treatment and storage requirements.
- 12.1.4.4. Procedures for cleaning of digesters or storage vessels and the treatment and disposal of the residuals. If drying of residuals is planned, describe how that will be performed to prevent nuisance odors, prevent vectors, and protect groundwater quality.

12.1.5. Spill Prevention & Emergency Response Plan

- 12.1.6. The County of San Luis Obispo's Operation and Maintenance Manual must contain a spill prevention and emergency response plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. The spill prevention and emergency response plan must describe operation and maintenance activities to prevent accidental releases of wastewater and to effectively respond to such releases and minimize the environmental impact. At a minimum, the spill prevention and emergency response plan must address the following:

- 12.1.6.1. Operation and Control of Wastewater System - A description of the wastewater treatment equipment, operational controls, flow measurement and calibration procedures, and treatment system schematic including valve/gate locations.
- 12.1.6.2. Sludge Handling - A description of the sludge handling equipment, operational controls, and disposal procedures.
- 12.1.6.3. Collection System Maintenance - A description of collection system cleaning and maintenance, equipment tests, and alarm functionality tests to minimize the potential for wastewater spills originating in the collection system or headworks. For collection

systems subject to State Water Board Order 2006-0003-DWQ, Statewide General Waste Discharge Requirements for Sanitary Sewer Systems (or its replacement), reports prepared to comply with State Water Board Order 2006-0003-DWQ satisfy this requirement

- 12.1.6.4. Emergency Response - A description of emergency response procedures for emergencies such as power outage, severe weather, flooding, or inadequate freeboard (for systems with wastewater treatment, storage, or disposal ponds or treated non-potable recycled water storage ponds). An equipment and telephone list for contractors/consultants, emergency personnel, and equipment vendors.
- 12.1.6.5. Finance - At a minimum, discuss current fees, projected fees, current budget for spill prevention and emergency response, projected budget for spill prevention and emergency response.
- 12.1.6.6. Notification Procedures - Coordination procedures with fire, police, Governor's Office of Emergency Services (CalOES), Central Coast Water Board, and local county health department personnel.

12.1.7. Training Records Logs

- 12.1.8. The County of San Luis Obispo's Operation and Maintenance Manual must contain updated training records logs that demonstrates the County of San Luis Obispo is complying with General Permit.

12.1.9. Salt and Nutrient Management Plan

- 12.1.10. The County of San Luis Obispo must prepare and submit a Salt and Nutrient Management Plan to ensure that the overall impact of treated wastewater and/or non-potable water recycling projects does not degrade groundwater resources. At a minimum, the salt and nutrient management plan must address the following:

- 12.1.10.1. An outline and description of an implementable salt and nutrient management program to reduce mass loading of salts and nutrients (with an emphasis on nitrogen species) in treated effluent to a level that will ensure compliance with effluent limitations and protect beneficial uses of groundwater.
- 12.1.10.2. A description of salt reduction measures that identify and focus on all potential salt contributors to the collection system (e.g., water supply, commercial, industrial, residential, etc.) and wastewater treatment process.

- 12.1.10.3. A description of nutrient reduction measures that focus on source control and optimizing wastewater treatment processes for nitrogen removal.

12.1.11. Collection System Maintenance Plan

- 12.1.12. The County of San Luis Obispo must also submit to GeoTracker a Collection System Maintenance Plan to ensure that it is properly monitoring and maintaining the collection system to minimize the potential for overflow, bypass, and seepage from wastewater transport systems to adjacent drainage ways or properties. The Collection System Maintenance Plan should address the following elements:

- 12.1.12.1. Goal
- 12.1.12.2. Organization
- 12.1.12.3. Legal Authority
- 12.1.12.4. Operation and Maintenance Program
- 12.1.12.5. Design and Performance Provisions
- 12.1.12.6. Overflow Emergency Response Plan
- 12.1.12.7. Fats, Oils, and Grease (FOG) Control Program
- 12.1.12.8. System Evaluation and Capacity Assurance Plan
- 12.1.12.9. Monitoring, Measurement, and Program Modifications
- 12.1.12.10. Collection System Maintenance Plan Audits
- 12.1.12.11. Communication Program

12.1.13. Updated Title 22 Engineering Report

- 12.1.13.1. The County of San Luis Obispo must update their Title 22 Engineering Report, and associated contingency plan, for review and approval by Division of Drinking Water.

13. LEGAL REQUIREMENTS

- 13.1. The Central Coast Water Board's requirements that the County of San Luis Obispo submit the technical and monitoring reports described in this monitoring and reporting program are made pursuant to [section 13267 of the California Water Code](#). Failure to submit reports in accordance with schedules established by this General Permit and notice of applicability with attachments or failure to submit a report of sufficient technical quality to be acceptable to the Central Coast Water Board may subject the County of San Luis Obispo to enforcement action pursuant to [section 13268 of the California Water Code](#).
- 13.2. The Central Coast Water Board needs the required information to ensure compliance with the notice of applicability and the General Permit. The County of San Luis Obispo is required to submit this information because it is subject to the General Permit and is responsible for the discharge.
- 13.3. The burden, including costs, of the reports bears a reasonable relationship to their need and the benefits to be obtained. The requirement for the reports is necessary to ensure compliance with the General Permit, notice of applicability, and monitoring and reporting program to protect water quality.
- 13.4. The County of San Luis Obispo must implement the above monitoring program on January 1, 2026. The Central Coast Water Board may rescind or modify the monitoring and reporting program at any time. The County of San Luis Obispo must not implement any changes to this monitoring and reporting program unless and until a revised monitoring and reporting program is issued by the Central Coast Water Board.

Ordered by:



for Ryan E. Lodge
Executive Officer

State Water Resources Control Board

Division of Drinking Water

April 21, 2025

Ryan Lodge
Executive Officer
Central Coast Regional Water Quality Control Board
(Sent via email: ryan.lodge@waterboards.ca.gov)

CONDITIONAL ACCEPTANCE OF THE TITLE 22 ENGINEERING REPORT FOR COUNTRY SERVICE AREA NO. 18 – COUNTRY CLUB ESTATES; SAN LUIS OBISPO COUNTY, COUNTY SERVICE AREA NO. 18 (4090008-701)

Dear Mr. Lodge,

This letter transmits the State Water Resources Control Board, Division of Drinking Water's (DDW) conditional acceptance for the San Luis Obispo County's (County) County Service Area No. 18 – Country Club Estates revised Title 22 Engineering Report (Engineering Report), dated April 8, 2025. The April 2025 Engineering Report is the final version in response to DDW's comment letters dated March 12, 2024 and August 30, 2024.

The Engineering Report states that the County will produce disinfected secondary-23 recycled water (RW) for non-potable use. The wastewater treatment system was permitted under Recycled Water Requirements Order No. R3-2003-0004 (RWRs) issued by the Central Coast Regional Water Quality Control Board (CCRWQCB).

The County's CSA No. 18 is a wastewater treatment plant (WWTP) located inside San Luis Obispo Country Club Estates at 255 Country Club Dr, San Luis Obispo, CA 93401. County's CSA No. 18's WWTP includes aeration basins, settling ponds, and a chlorine contact channel. The sludge is removed on an as-needed basis. This WWTP treats an average of 60,000 gallon per day (gpd) and the recycled water effluent is delivered to the sole recycled water user, the San Luis Obispo Golf and Country Club which is not open to the public.

The County will be the recycled water producer, distributor, and Recycled Water Program Administrator.

DDW has reviewed the Engineering Report and deemed it to be conditionally acceptable. The WWTP described in the Engineering Report is adequate for producing disinfected secondary 23 recycled water and the proposed recycled water uses meet

E. JOAQUIN ESQUIVEL, CHAIR | ERIC OPPENHEIMER, EXECUTIVE DIRECTOR

the California Code of Regulations (CCR), Title 22, Recycled Water Criteria. DDW requests that the following provisions be included in the updated permit.

Recommended Provisions

General Requirements

1. The County's recycled water program must comply with all applicable requirements set forth in CCR, Title 22 for the production, distribution, and use of recycled water.
2. Cross connection control must comply with the State Water Resources Control Board's Cross Connection Control Policy Handbook.
3. In accordance with CCR, Title 22, Section 60301.225, the disinfected secondary 23 recycled water must meet the following:
 - a. Sampling for total coliform bacteria shall be sampled daily on the days that disinfected secondary water is discharged to the pond system. The median concentration of total coliform bacteria measured in the disinfected effluent must not exceed an MPN of 23 per 100 milliliters utilizing the bacteriological results of the last seven days for which analyses have been completed and the number of total coliform bacteria must not exceed an MPN of 240 per 100 milliliters in more than one sample in any 30-day period. Report daily values, rolling seven-day median values, and maximum monthly values.
4. The County must provide enough qualified personnel to operate WWTP effectively to always achieve the required level of treatment. Qualified personnel must be those meeting requirements pursuant to Division 7, Chapter 9 (commencing with Section 13625) of the California Water Code.
5. Per CCR, Title 22, Articles 8 and 10 of the Water Recycling Criteria, the County must always maintain the reliability features and contingency measures for the WWTP processes and ensure non-compliant RW is not being delivered for RW use.
6. The County must not bypass untreated or partially treated wastewater from WWTP, or any intermediate unit processes, to the point of use. Excess flows and/or non-compliant process flows must be returned to the headwork of WWTP for full treatment. Any non-compliant water inadvertently delivered to the golf club must be disposed of in the manner that is described in the approved Title 22 Engineering Report.
7. No changes, additions, or modifications can be made to WWTP unless approval is obtained from DDW and the CCRWQCB.

Use Areas Prohibitions and Requirements

8. The application and use of disinfected secondary 23 recycled water must be in accordance with the CCR, Title 22, Recycled Water Criteria. The County must ensure the RW uses, and practices adhere to the following:
 - a. An engineering report must be submitted to DDW and CCRWQCB for review and approval of any future use of RW or expansion of existing irrigation areas beyond those described in the approved Title 22 Engineering Report.
 - b. Plans for future uses of recycled water or expanded irrigation areas, when available, must be submitted to DDW and RWQCB for review and approval.
 - c. No irrigation with disinfected secondary-23 recycled water can take place within 100 feet of any domestic water supply well. No impoundment of disinfected secondary-23 recycled water can take place within 100 feet of any domestic water supply well.
 - d. Per CCR, Title 22, Section 60310(e), the use of recycled water must comply with the following:
 - i. Any RW irrigation runoff must be confined to the recycled water use area unless the runoff does not pose a public health threat and is authorized by the regulatory agency.
 - ii. Spray, mist, or runoff must not enter dwellings, designated outdoor eating areas, or food handling facilities.
 - iii. Drinking water fountains shall be protected against contact with recycled water spray, mist, or runoff.
 - e. Per CCR, Title 22, Section 60310(g), all recycled water use areas must be posted with signs that are visible to the public, in a size no less than 4 inches high by 8 inches wide, that states the following: "RECYCLED WATER - DO NOT DRINK." Each sign must display an international symbol like that shown in figure 60310-A, of CCR, Title 22, Section 60310. DDW may accept alternative signage and wording, or an educational program, provided the applicant demonstrates to DDW that the alternative approach will assure an equivalent degree of public notification. These signs need to be placed in conspicuous places including at each entrance to the RW irrigated area.
 - f. Per CCR, Title 22, Section 60310(h), no physical connection can be made or allowed to exist between the recycled water system and any separate system conveying potable water. Supplementing RW with potable water must always be through an approved air gap separation.
 - g. The installation of RW pipeline(s) at the use site area(s) must be in accordance with the separation criteria pursuant to the California Waterworks Standards Chapter 16, Article 3, Section 64572.
 - h. Pipeline(s), control valves and other appurtenances located at the RW use areas must have identification markings and color coding. Purple color coding

- must be used, such as purple identification tape, or a purple polyethylene vinyl wrap color Pantone 522C to tag the RW pipelines and appurtenances.
- i. Per CCR, Title 22, Section 60310(i), the recycled water system in irrigated areas must not include hose bibs. Only quick couplers that differ from those used on potable water system can be used.
 - j. The installation of recycled water pipeline(s) at use area(s) must be in accordance with the separation criteria pursuant to Section 64572, Article 3, Chapter 16, California Waterworks Standards.
 - k. Pipeline(s), control valves and other appurtenances located at the recycled water use areas must have identification markings and color coding. Purple color coding must be used, such as purple identification tape, or a purple polyethylene vinyl wrap color Pantone 522C to tag the recycled water pipelines and appurtenances.

Operations, Maintenance and Reporting

- 9. The County must maintain a current operations and maintenance (O&M) manual for the WWTP. The O&M manual plan shall be submitted to DDW and CCRWQCB upon any changes or modifications to the treatment facilities and/or operations.
- 10. Pursuant to Title 22 Section 60327, a preventive maintenance program must be developed for the WTS to ensure all equipment is kept in a reliable operating condition.
- 11. Pursuant to Title 22 Section 60329(a), operating records must be maintained at the WWTP or a central depository. The operating records must include: all analyses specified in the water recycling criteria; records of operational problems, plant and equipment breakdowns, and diversions to emergency storage or disposal; and all corrective or preventive action(s) taken.
- 12. Pursuant to Title 22 Section 60329(b), process or equipment failures triggering an alarm must be recorded and maintained as a separate record file. The recorded information must include the time and cause of failure and corrective action taken.
- 13. Pursuant to Title 22 Section 60329(d), any discharge of untreated or partially treated wastewater to the use area, and the cessation of same, must be reported immediately by telephone to the CCRWQCB, DDW, and the local health officer.

If you have any questions regarding this letter, please contact Thomas Tsui at (818) 551-2036 or via email at Thomas.Tsui@waterboards.ca.gov or me at (818) 551-2046 or via email at Ginachi.Amah@waterboards.ca.gov.

Sincerely,

Ginachi
Amah

A blue digital signature scribble is written over the name "Ginachi Amah".

Digitally signed
by Ginachi Amah
Date: 2025.04.21
11:57:59 -07'00'

Ginachi Amah, D. Env, P.E.
Recycled Water Unit Supervisor
Division of Drinking Water
State Water Resources Control Board
500 North Central Avenue, Suite 500
Glendale, CA 91203

Cc: Ginachi Amah, DDW (via email)
Thomas Tsui, DDW (via email)

Jennifer Epp, Central Coast RWQCB (via email)
Rachel Hohn, Central Coast RWQCB (via email)

Corrisa Burnett, County of San Luis Obispo (via email)
Alejandro Simental, County of San Luis Obispo (via email)
John Auston, County of San Luis Obispo (via email)
Mladen Bandov, County of San Luis Obispo (via email)
Sean Loveridge, County of San Luis Obispo (via email)

RWU file