
Lab-9

1

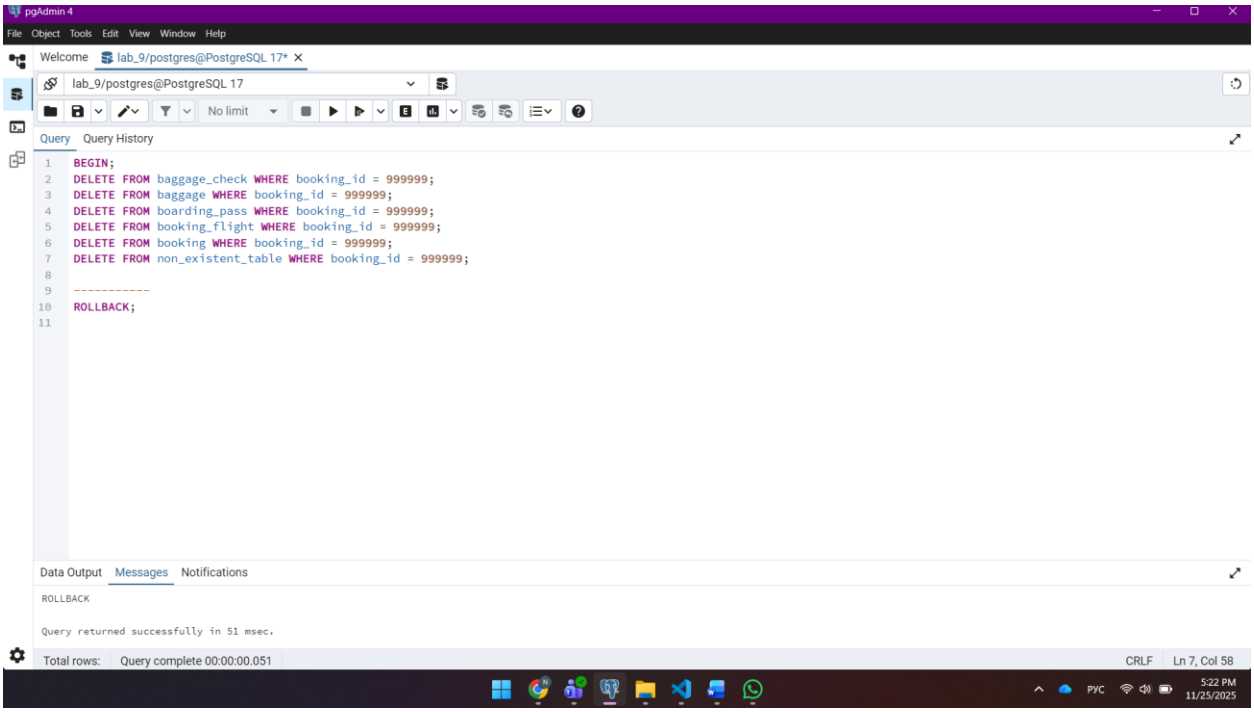

BEGIN;

DELETE FROM baggage_check WHERE booking_id = 999999;

DELETE FROM baggage WHERE booking_id = 999999;

DELETE FROM boarding_pass WHERE booking_id = 999999;


DELETE FROM booking_flight WHERE booking_id = 999999;

DELETE FROM booking WHERE booking_id = 999999;

DELETE FROM non_existent_table WHERE booking_id = 999999;

ROLLBACK;

2

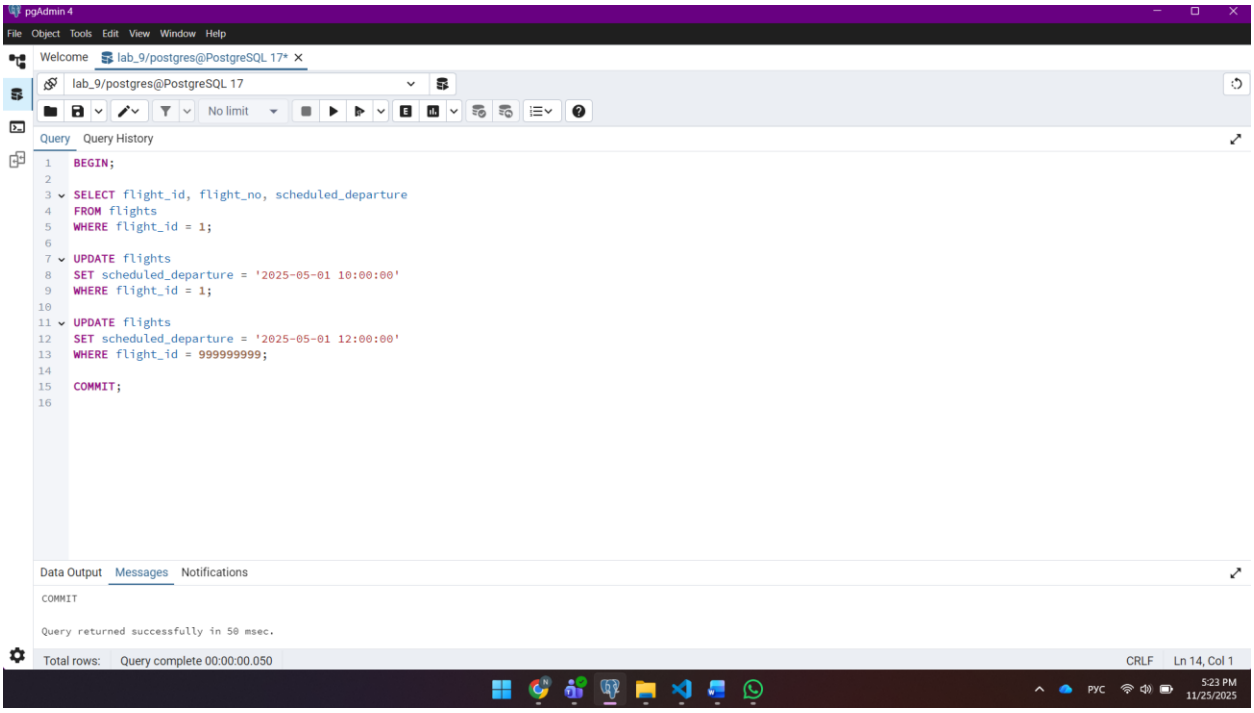

BEGIN;

SELECT flight_id, flight_no, scheduled_departure

FROM flights

WHERE flight_id = 1;

UPDATE flights

SET scheduled_departure = '2025-05-01 10:00:00'

WHERE flight_id = 1;


UPDATE flights

SET scheduled_departure = '2025-05-01 12:00:00'

WHERE flight_id = 999999999;

COMMIT;

3

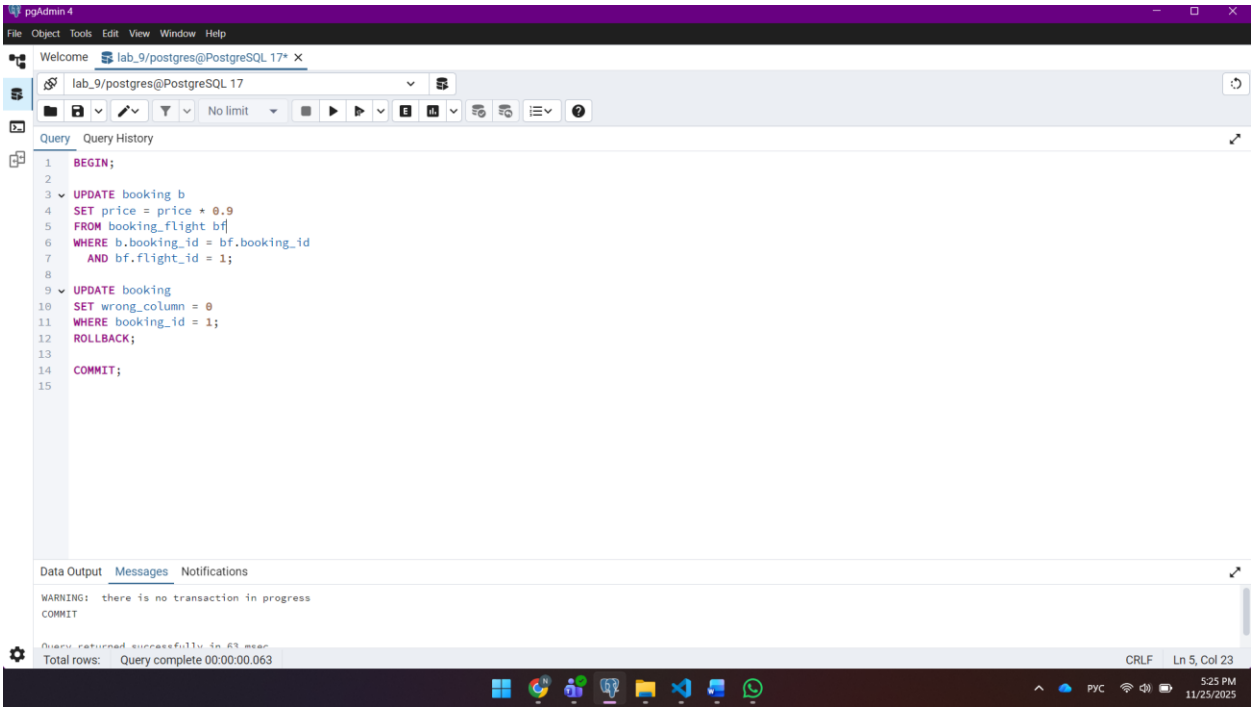

BEGIN;

UPDATE booking b

SET price = price * 0.9

FROM booking_flight bf

WHERE b.booking_id = bf.booking_id

AND bf.flight_id = 1;

UPDATE booking


SET wrong_column = 0

WHERE booking_id = 1;

ROLLBACK;

COMMIT;

4

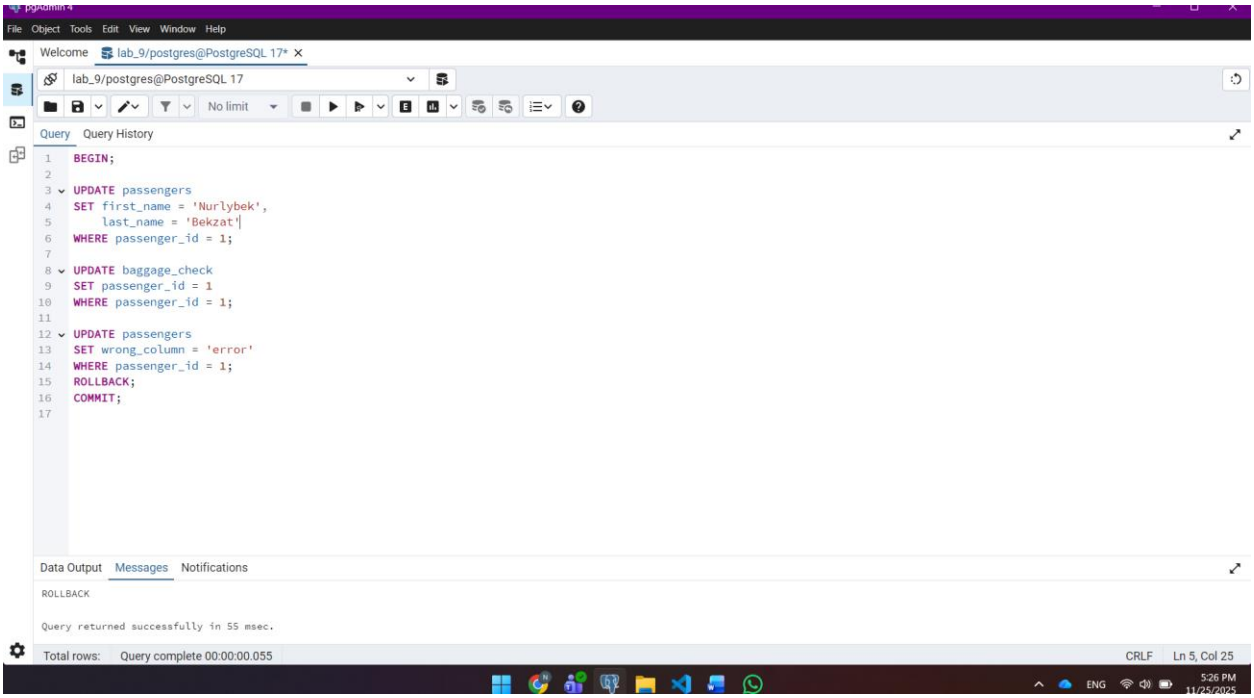

BEGIN;

UPDATE passengers

SET first_name = 'Nurlybek',

last_name = 'Bekzat'

WHERE passenger_id = 1;

UPDATE baggage_check

SET passenger_id = 1

WHERE passenger_id = 1;

UPDATE passengers


SET wrong_column = 'error'

WHERE passenger_id = 1;

ROLLBACK;

COMMIT;

5

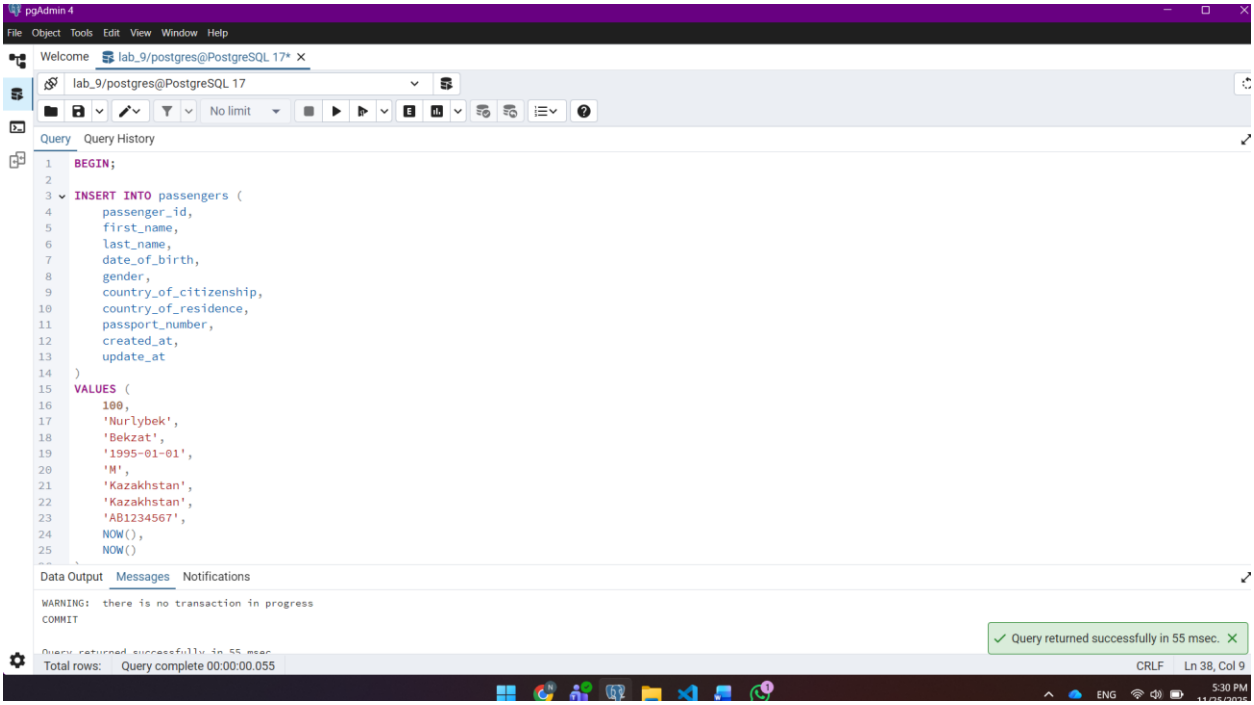

BEGIN;

INSERT INTO passengers (

passenger_id,

first_name,

last_name,


date_of_birth,

```
    gender,
    country_of_citizenship,
    country_of_residence,
    passport_number,
    created_at,
    update_at
)
VALUES (
    100,
    'Nurlybek',
    'Bekzat',
    '1995-01-01',
    'M',
    'Kazakhstan',
    'Kazakhstan',
    'AB1234567',
    NOW(),
    NOW()
);

INSERT INTO booking (
    booking_id,
    passenger_id,
    booking_platform,
```

```
    status,
    price,
    created_at,
    update_at
)
VALUES (
    200,
    100,
    'Website',
    'Confirmed',
    250.00,
    NOW(),
    NOW()
);

UPDATE passengers
SET first_name = 'error'
WHERE passenger_id = 100;
ROLLBACK;
COMMIT;
6
```

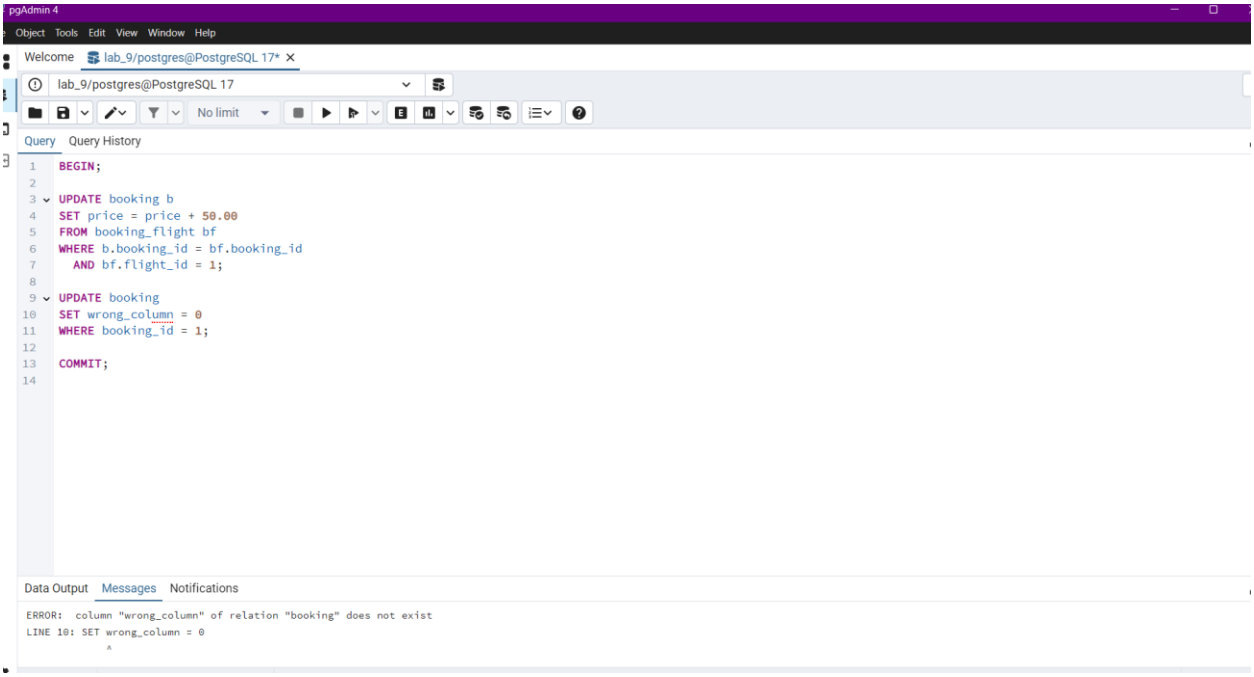

BEGIN;

UPDATE booking b

SET price = price + 50.00

FROM booking_flight bf

WHERE b.booking_id = bf.booking_id

AND bf.flight_id = 1;


UPDATE booking

SET wrong_column = 0

WHERE booking_id = 1;

COMMIT;

7

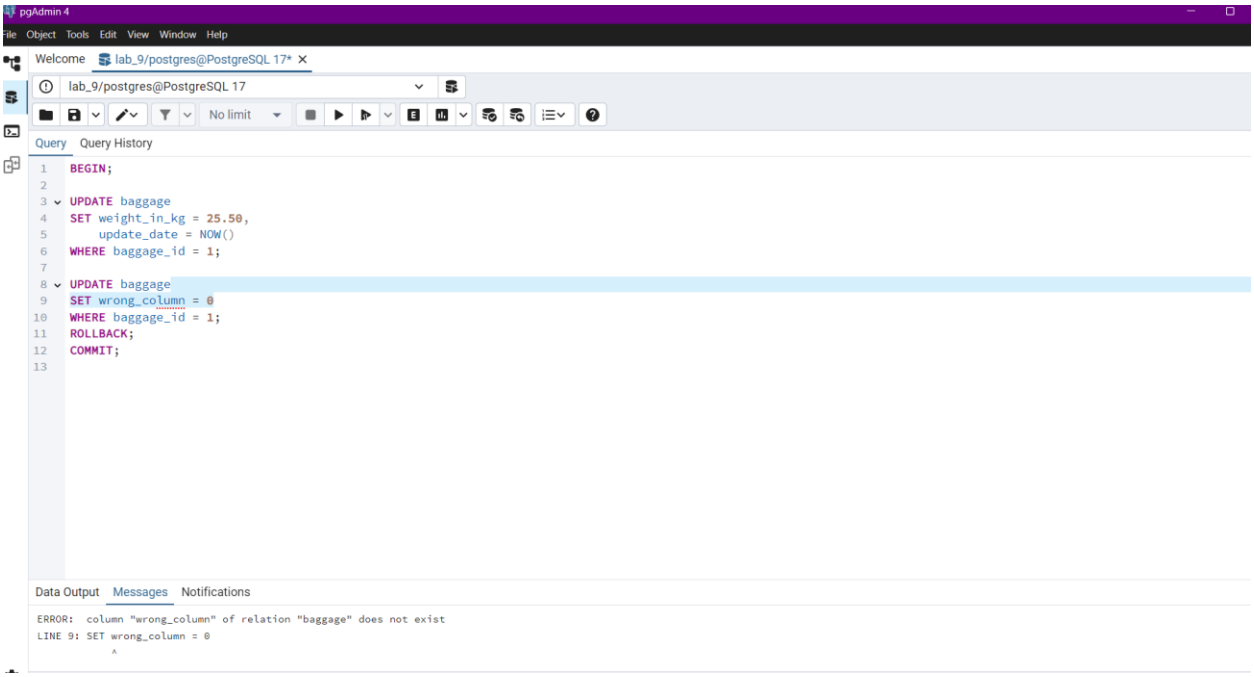

BEGIN;

UPDATE baggage

SET weight_in_kg = 25.50,

update_date = NOW()

WHERE baggage_id = 1;

UPDATE baggage


SET wrong_column = 0

WHERE baggage_id = 1;

ROLLBACK;

COMMIT;

8

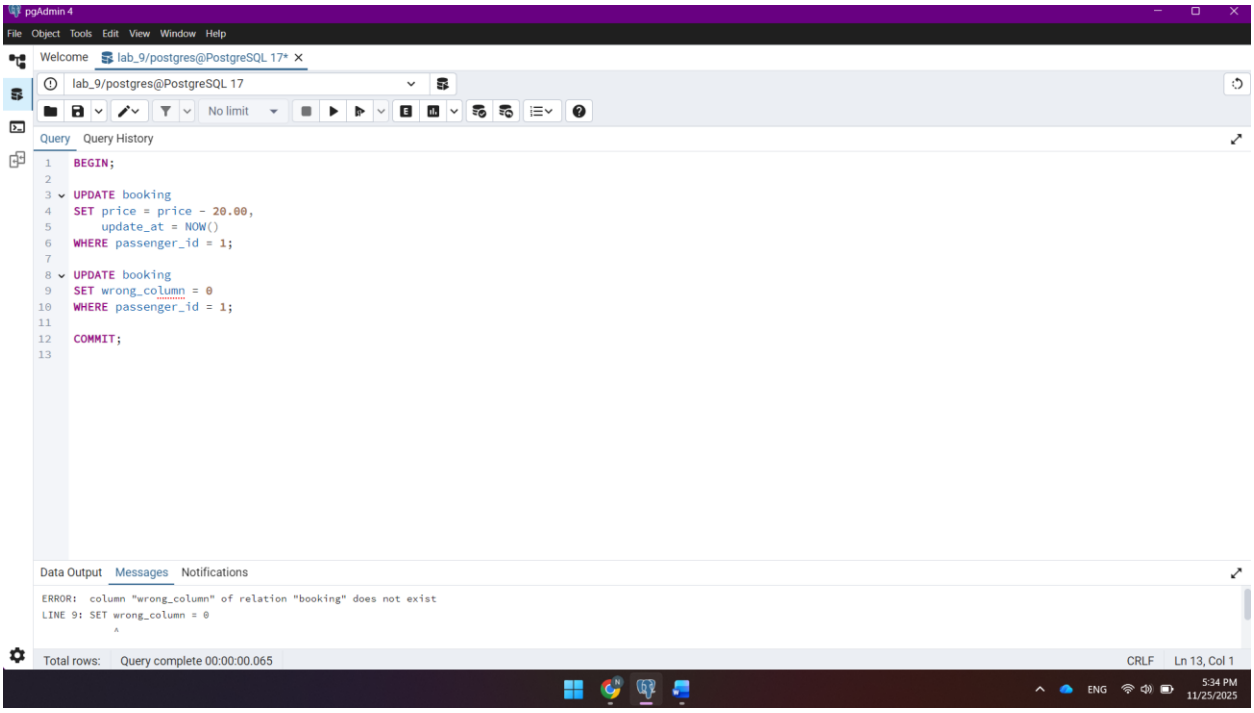

BEGIN;

UPDATE booking

SET price = price - 20.00,

update_at = NOW()

WHERE passenger_id = 1;


UPDATE booking

SET wrong_column = 0

WHERE passenger_id = 1;

COMMIT;

9

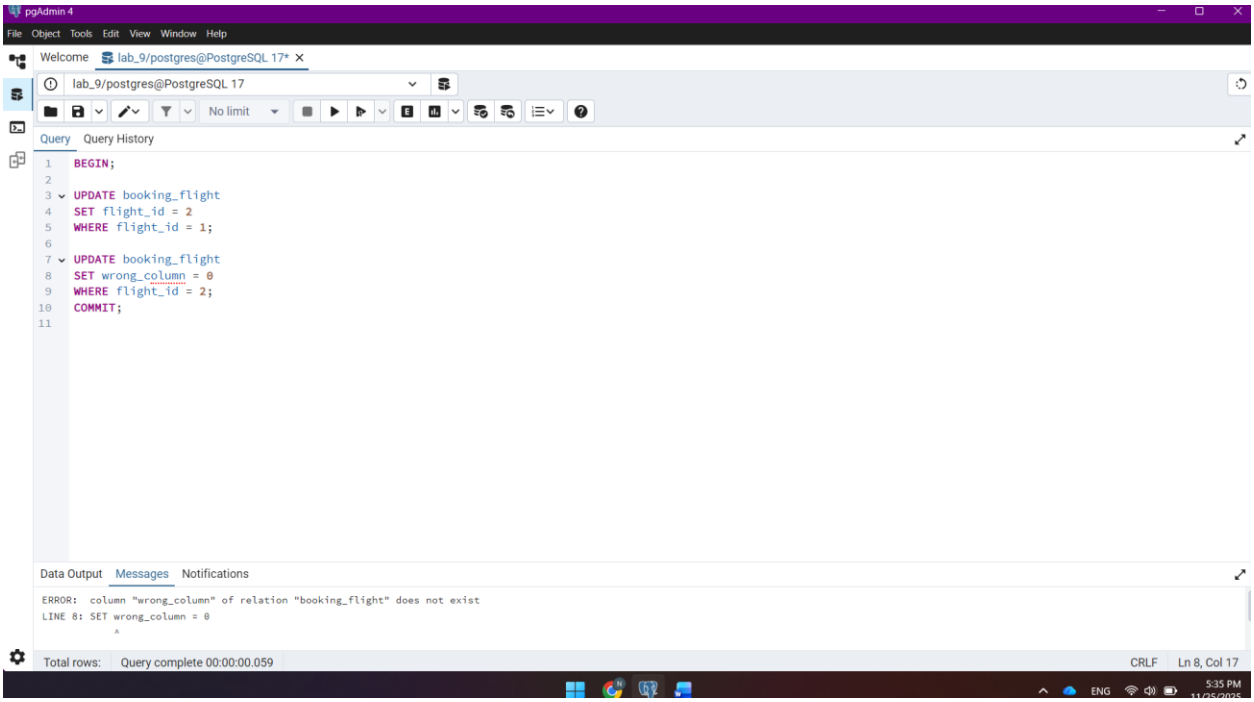

BEGIN;

UPDATE booking_flight

SET flight_id = 2

WHERE flight_id = 1;

UPDATE booking_flight

SET wrong_column = 0

WHERE flight_id = 2;

COMMIT;