

Asio execution relative to native

Median of 30 fresh executions; O3, no LTO. 1.00 = native; lower is faster.
All workloads initialize a timer/reactor. Native macOS kqueue polling affects these ratios; see diagnostic.

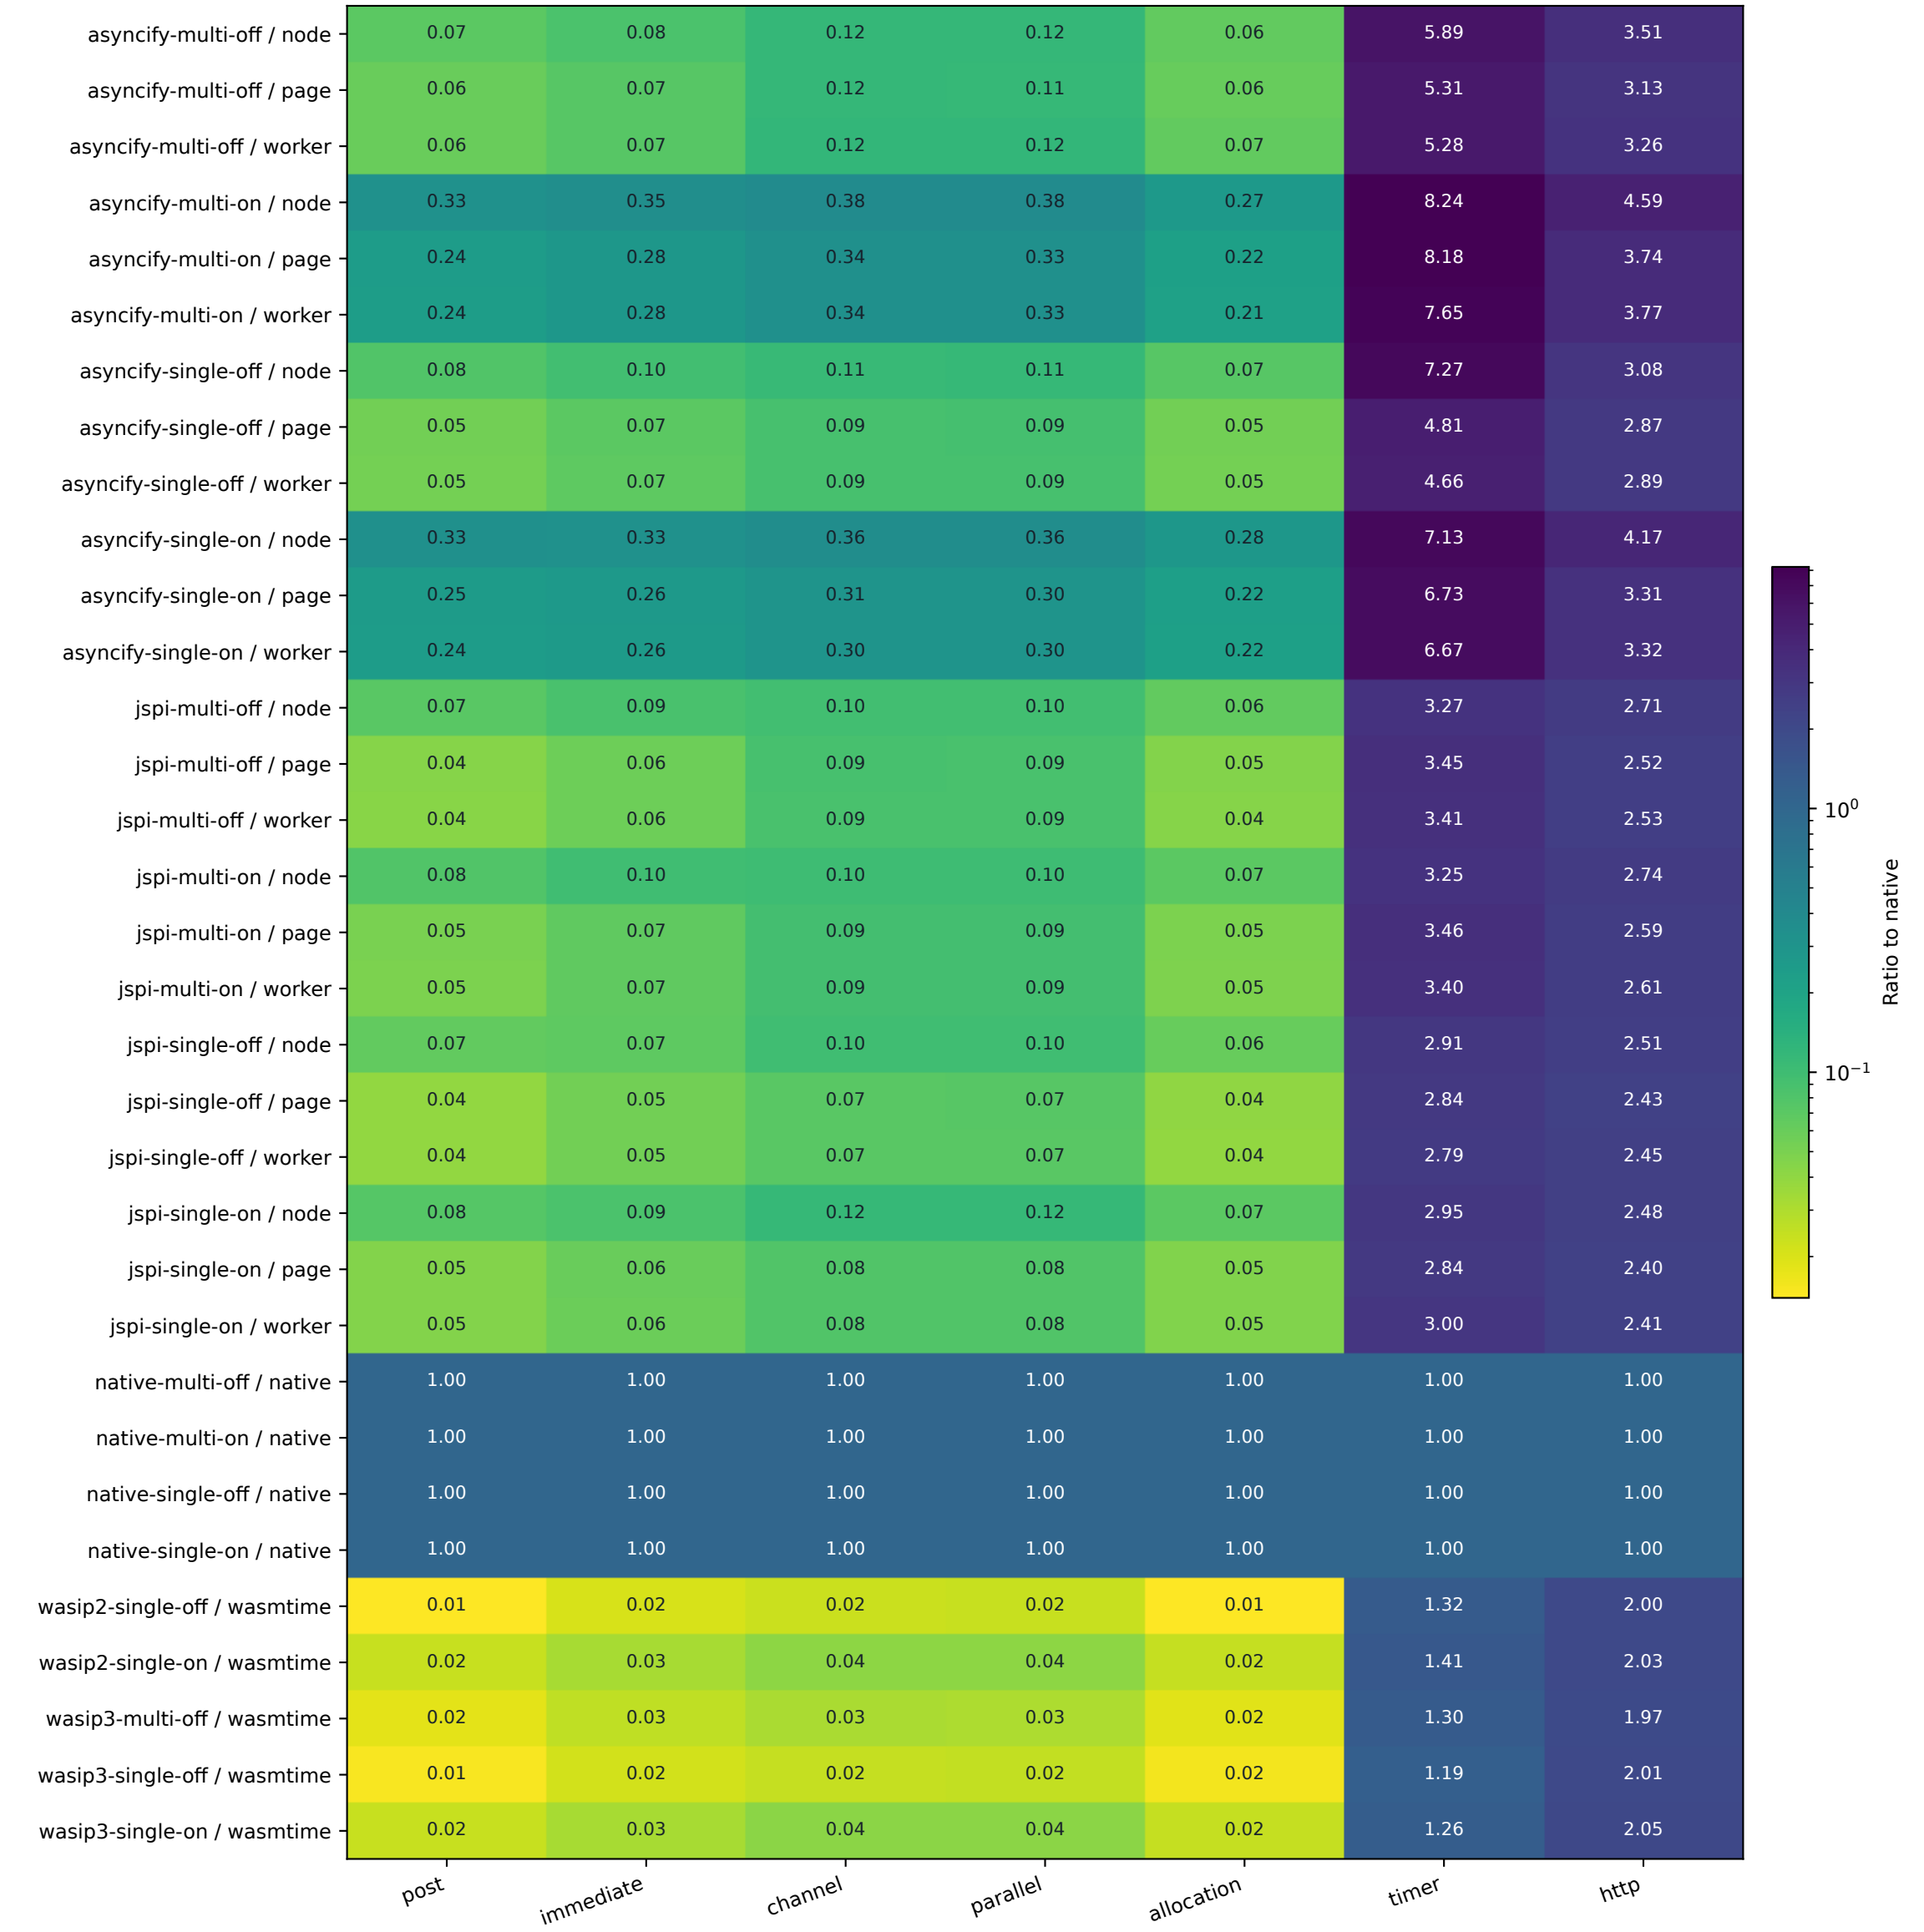


Cobalt execution relative to native

Median of 30 fresh executions; O3, no LTO. 1.00 = native; lower is faster.
All workloads initialize a timer/reactor. Native macOS kqueue polling affects these ratios; see diagnostic.

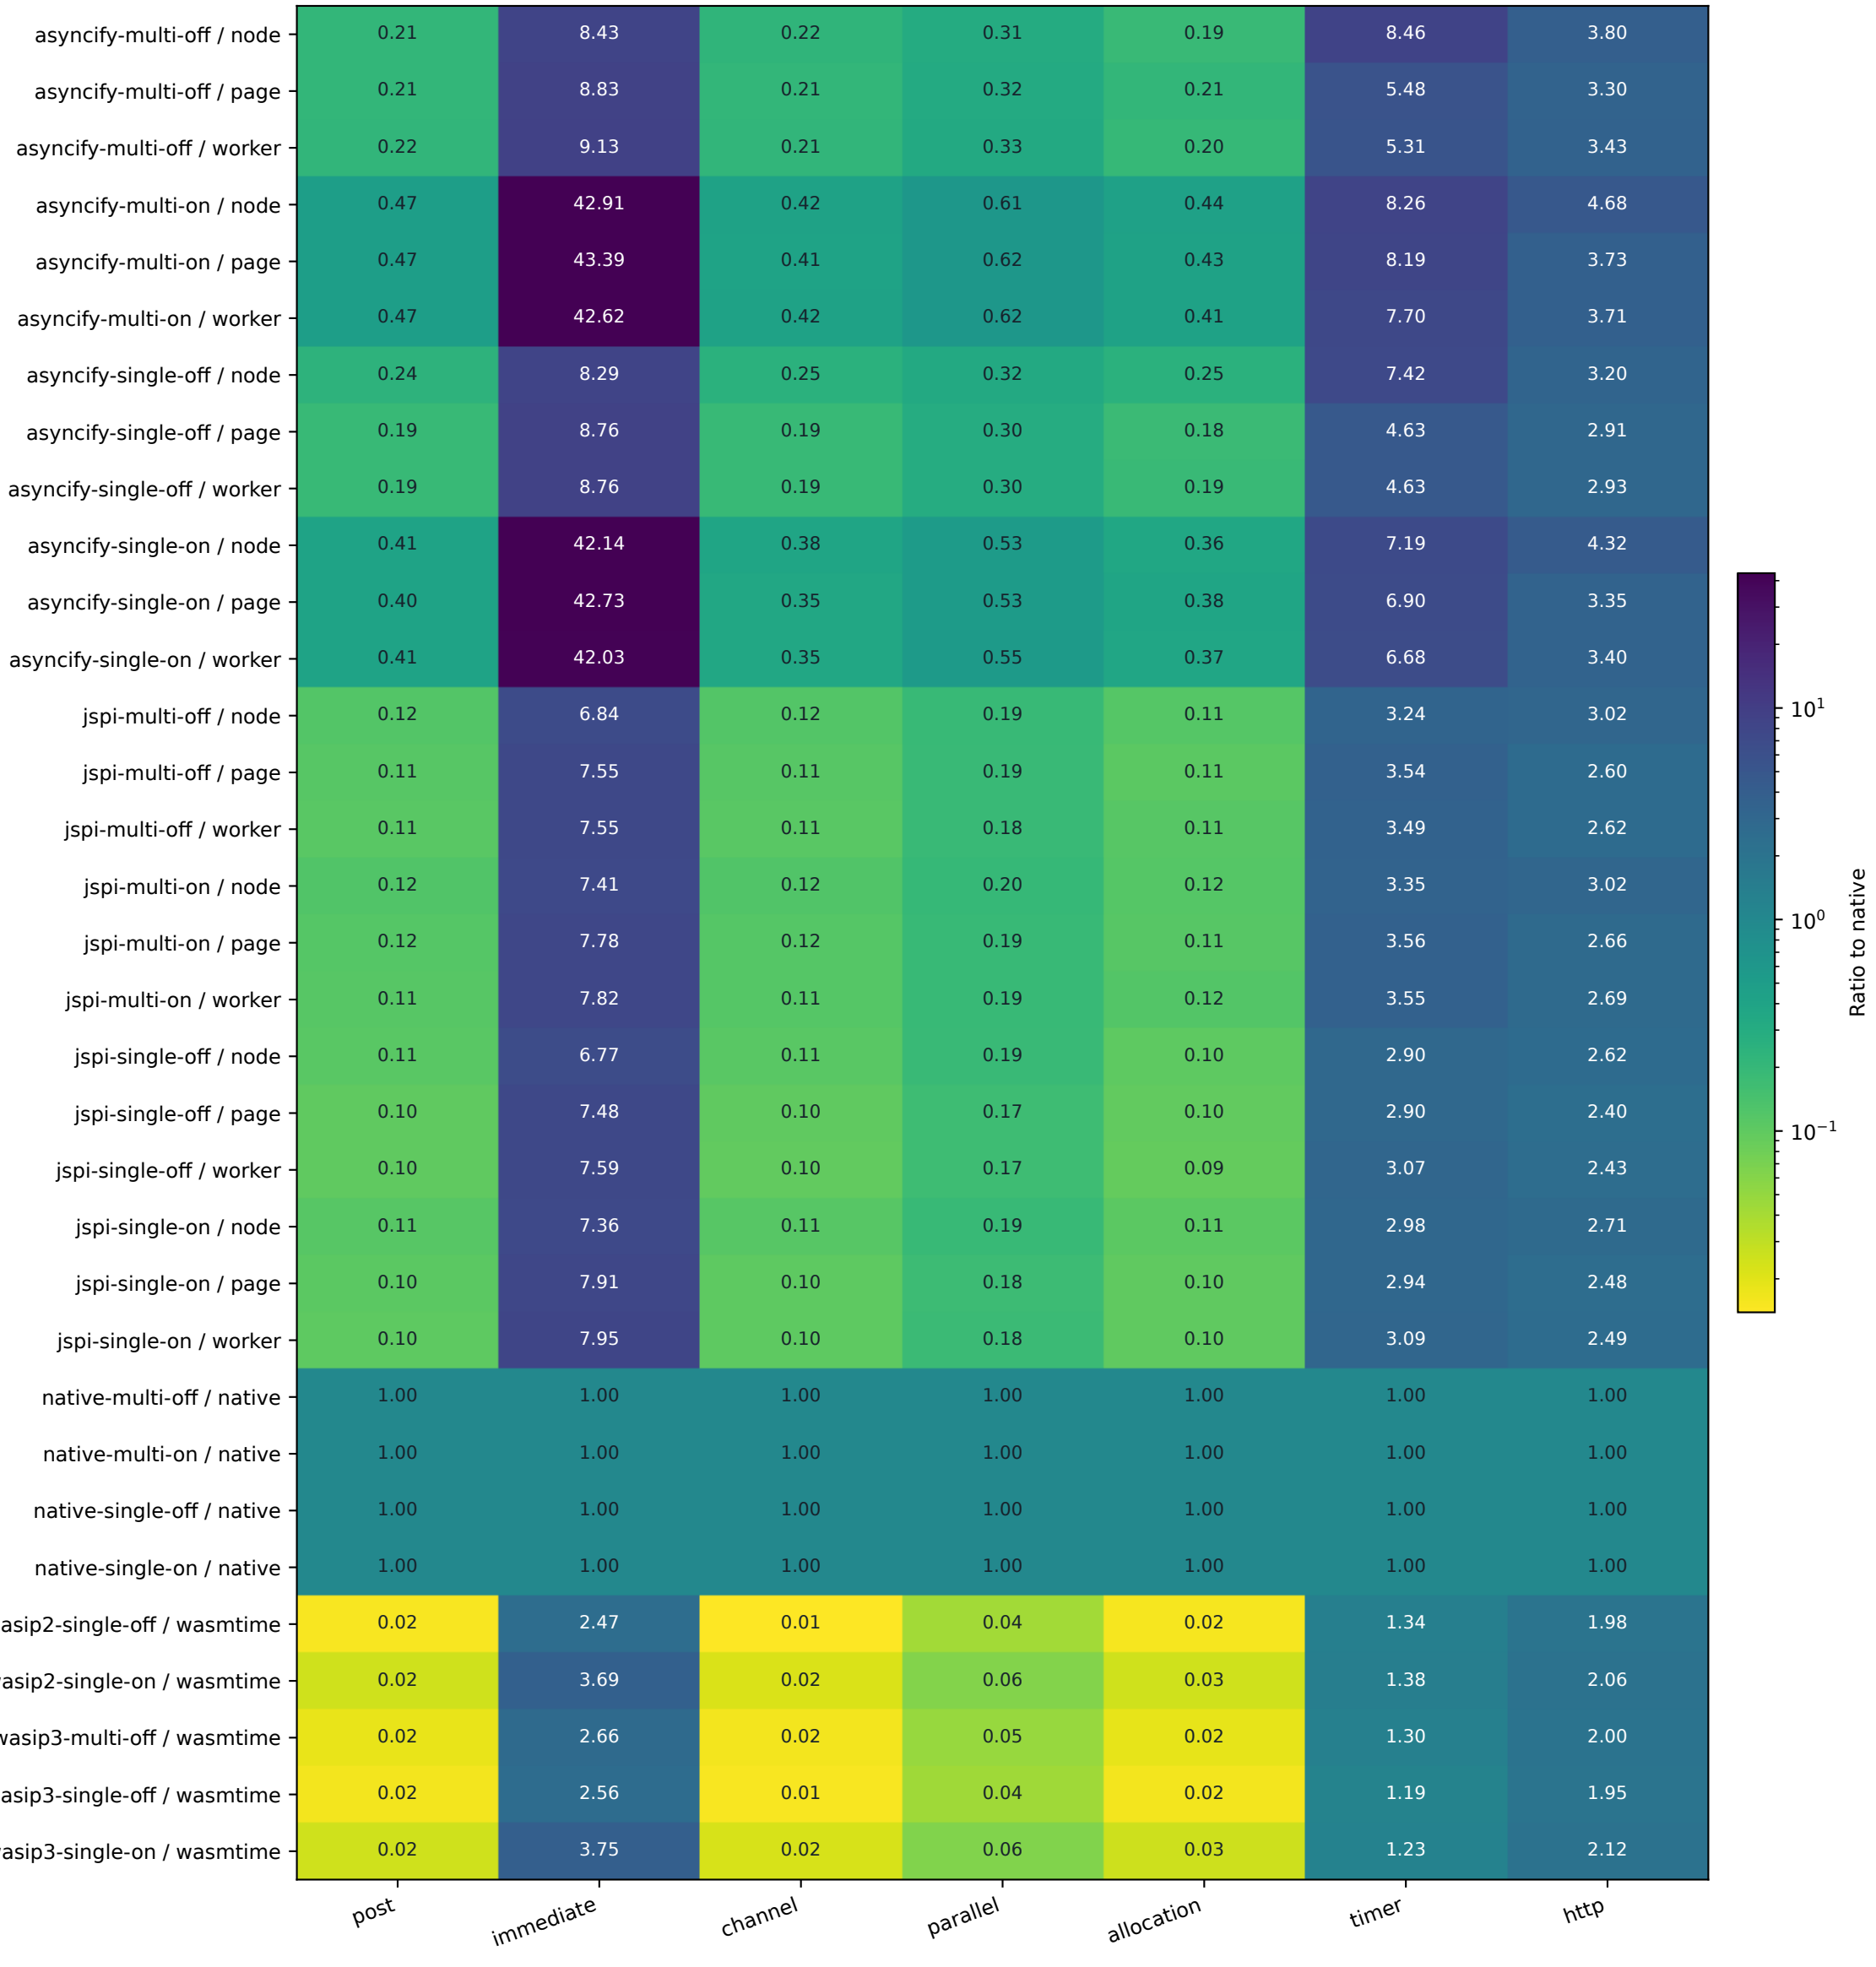


Asio workload payload

Release, uninstrumented. Native executable; WASI component; Emscripten JavaScript + Wasm. Raw KiB.

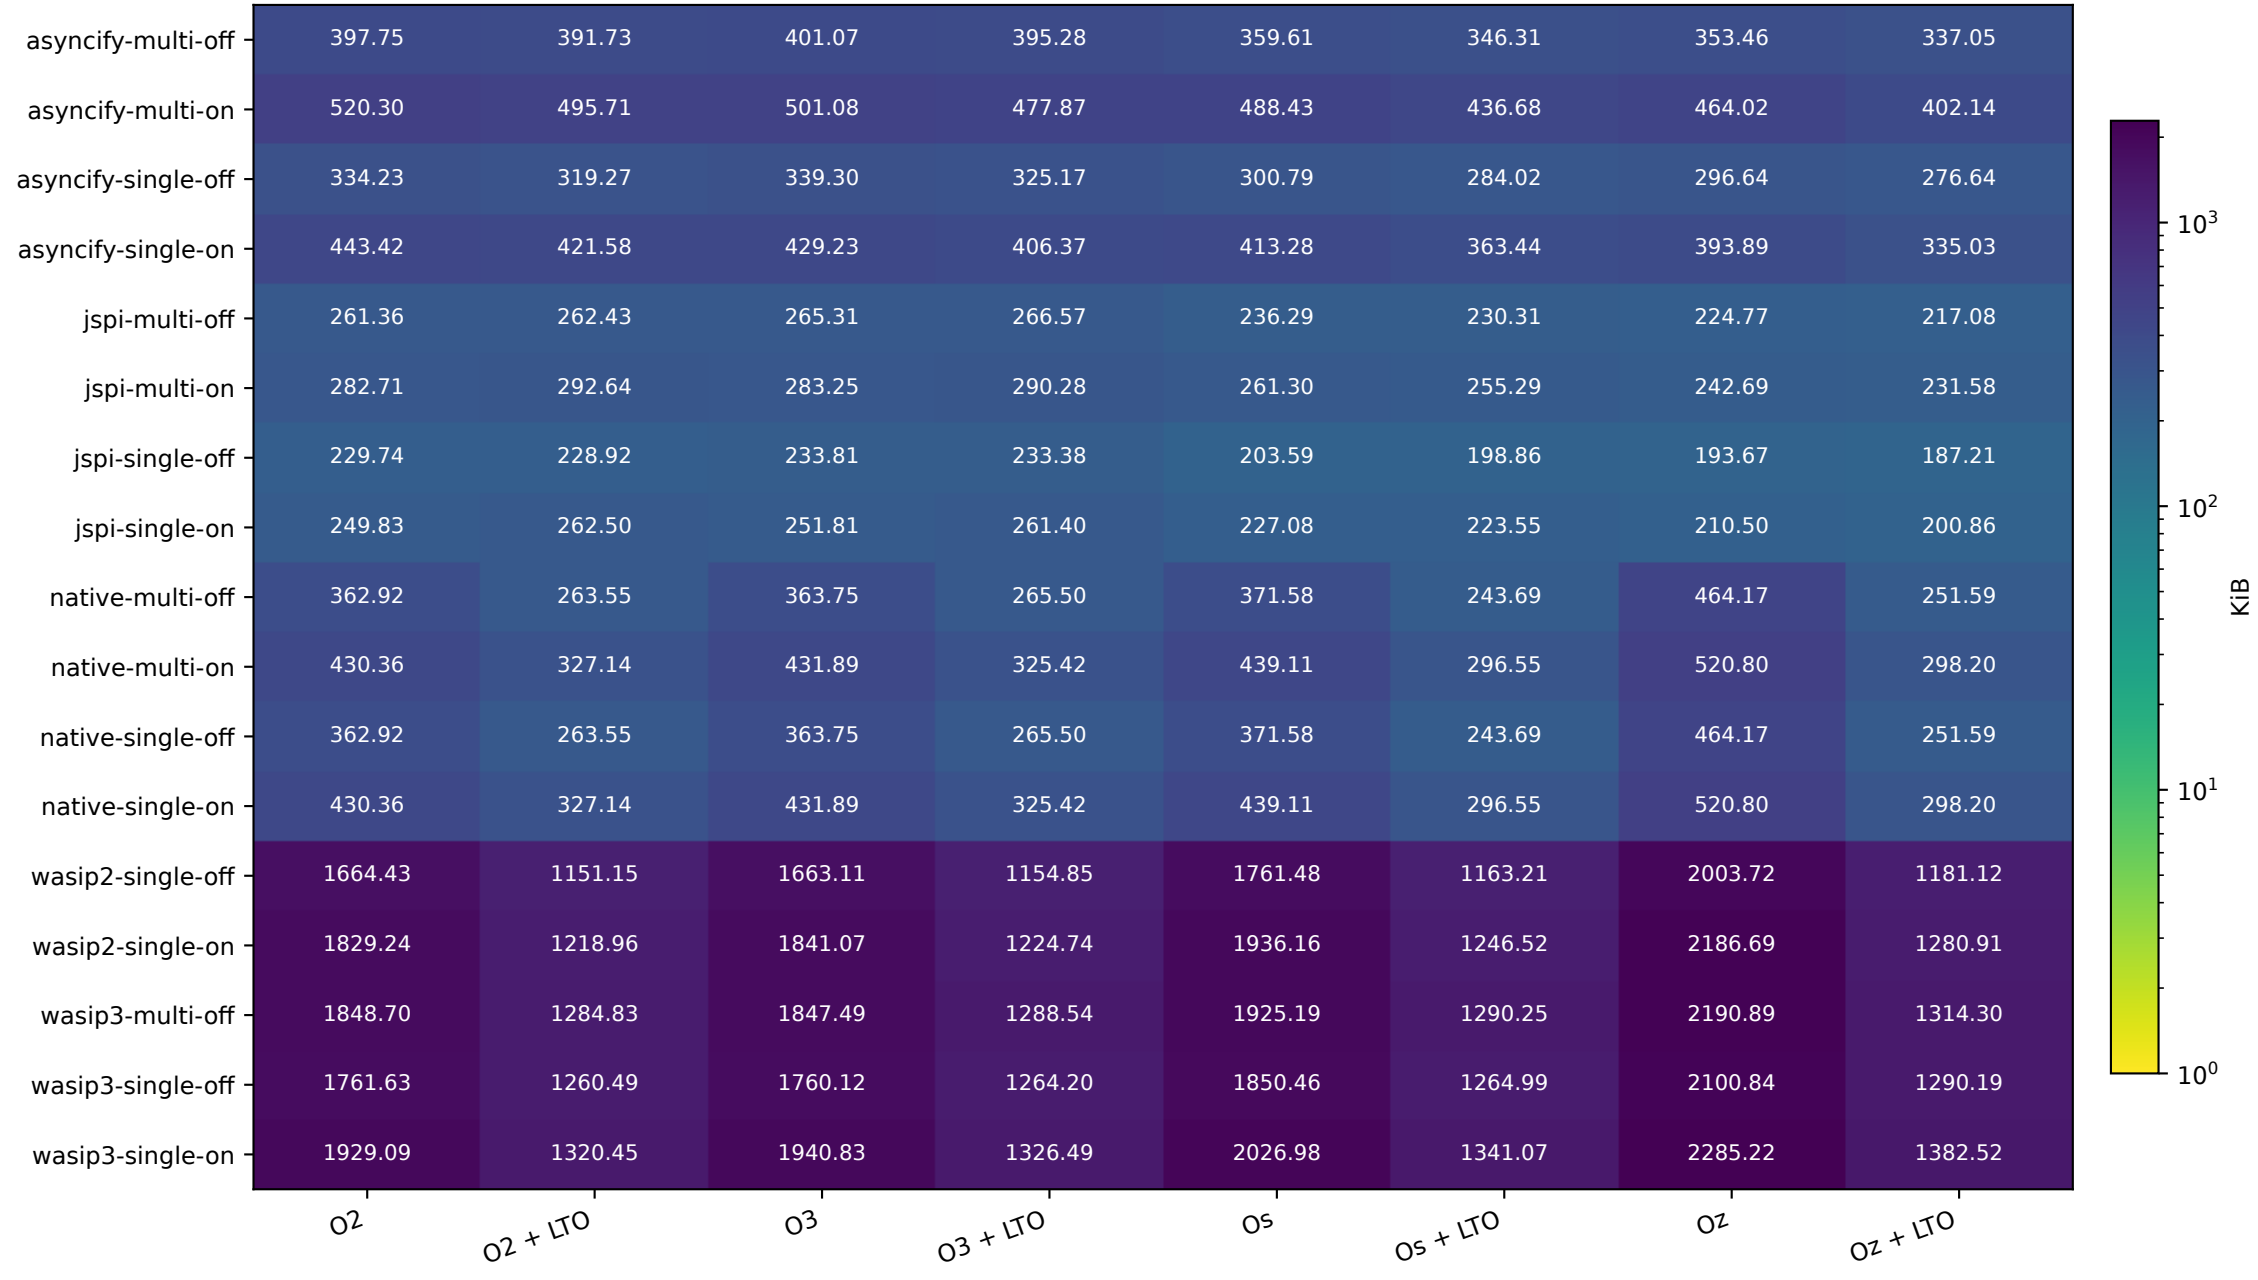

Cobalt workload payload

Release, uninstrumented. Native executable; WASI component; Emscripten JavaScript + Wasm. Raw KiB.

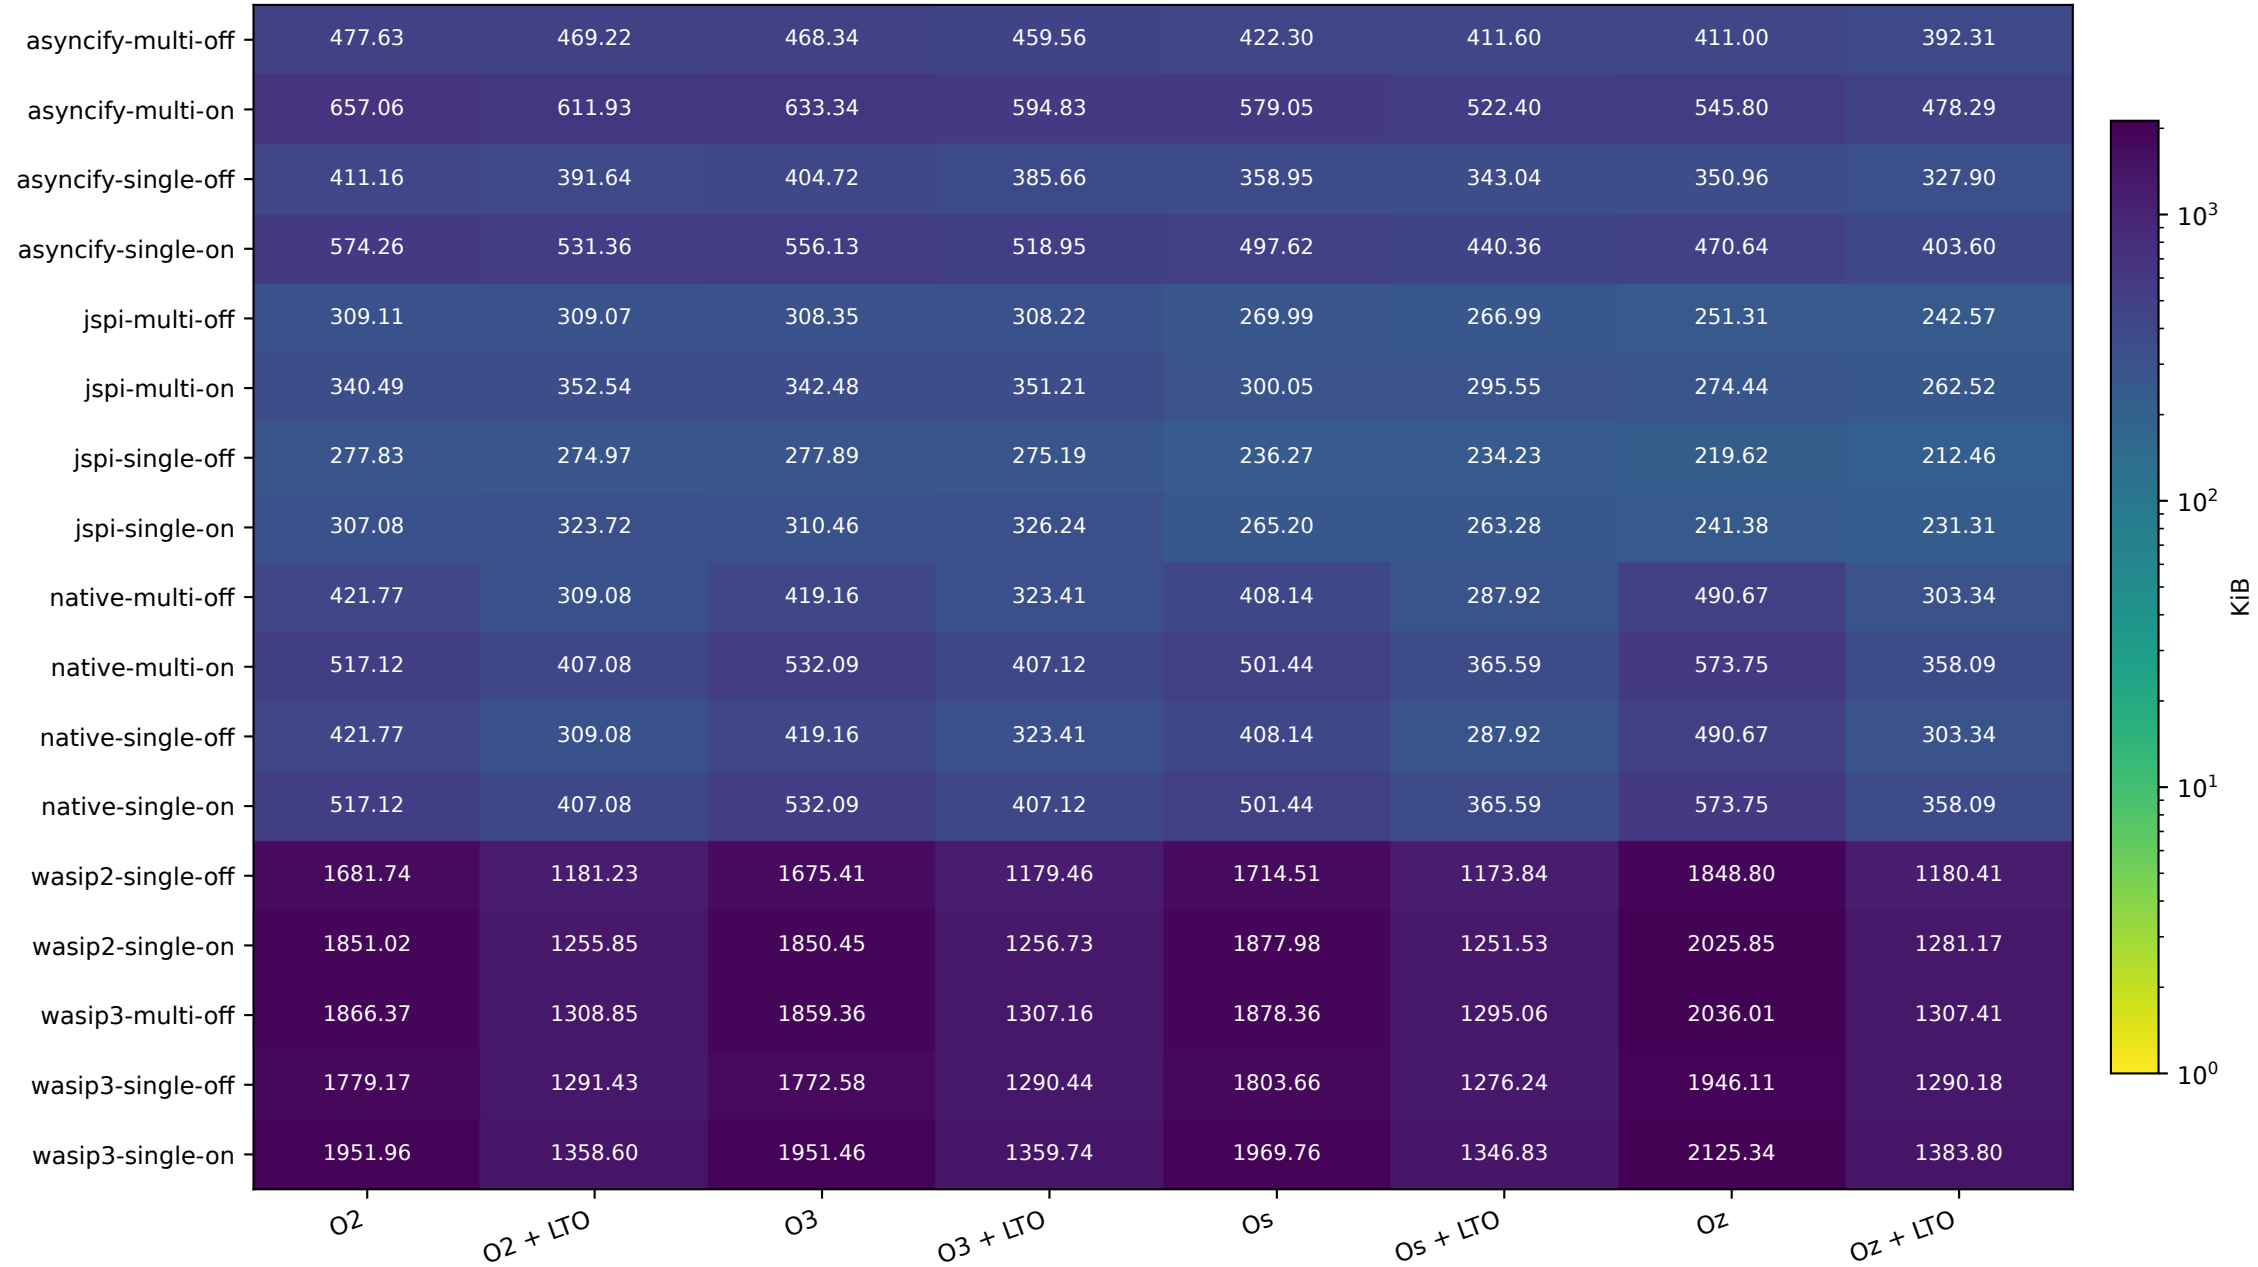

Forced Release build of six programs

One observation per setting; three compiler jobs, warm SDK cache. Not a timing distribution.

