

FRONTEND DEVELOPMENT WINTERSEMESTER 2020

FEEDBACK

- » old standard vs. new standard
 - » We can review some of the features next lecture
- » Speed of lecture
 - » I'll try to stay longer on the code examples (please interrupt if I'm too fast)
- » Test exam (see next slides =))

EXAMPLE QUESTIONS

- » What will be logged?
- » Explain the difference between block-scoped and function scoped.

```
function myFunction() {  
  let university1 = 'FHS1'  
  var university2 = 'FHS2'
```

EXAMPLE QUESTIONS

- » Explain the difference between UMD and AMD modules.
- » Write a module './calculator.js' which can be used as the following:

```
import currentValue, { add, subtract } from './calculator.js'  
  
add(5)  
subtract(4)  
  
console.log(currentValue) // result should be 1
```

EXAMPLE QUESTIONS

- » Explain the difference between UMD and AMD modules.
- » Write a module './calculator.js' which can be used as the following:

```
import currentValue, { add, subtract } from './calculator.js'

add(5)
subtract(4)

console.log(currentValue) // result should be 1
```

EXAMPLE QUESTIONS

- » How can you run promises in parallel?
 - » write a function which calls `fetch` (`'/current-user'`, `'/weather'`) in parallel
 - » after both resolved the result should be logged

EXAMPLE QUESTIONS

- » What will be logged?
- » Explain the difference between block-scoped and function scoped.

```
function myFunction() {  
  let university1 = 'FHS1'  
  var university2 = 'FHS2'
```

EXAMPLE QUESTIONS

» Create a new promise which resolves after 200ms

» wrap the following function to use promises

```
const fetchWithCallback = (url, callback) => {}
```




Traditional

Every request for new information gives you a new version of the whole page.

SPA

You request just the pieces you need.


SPA VS TRADITIONAL APPS

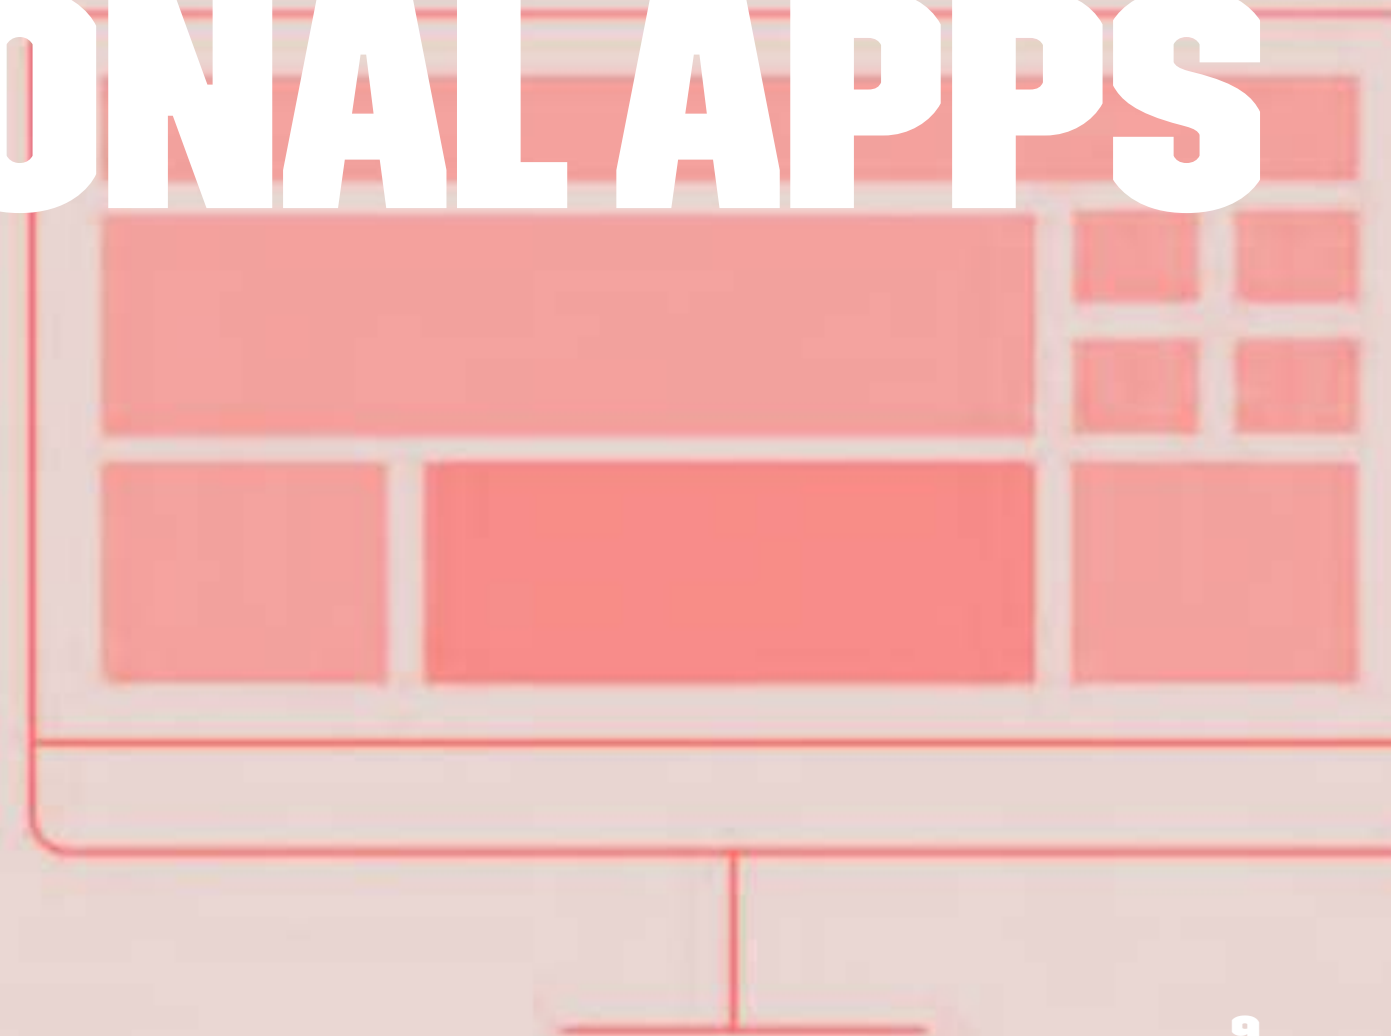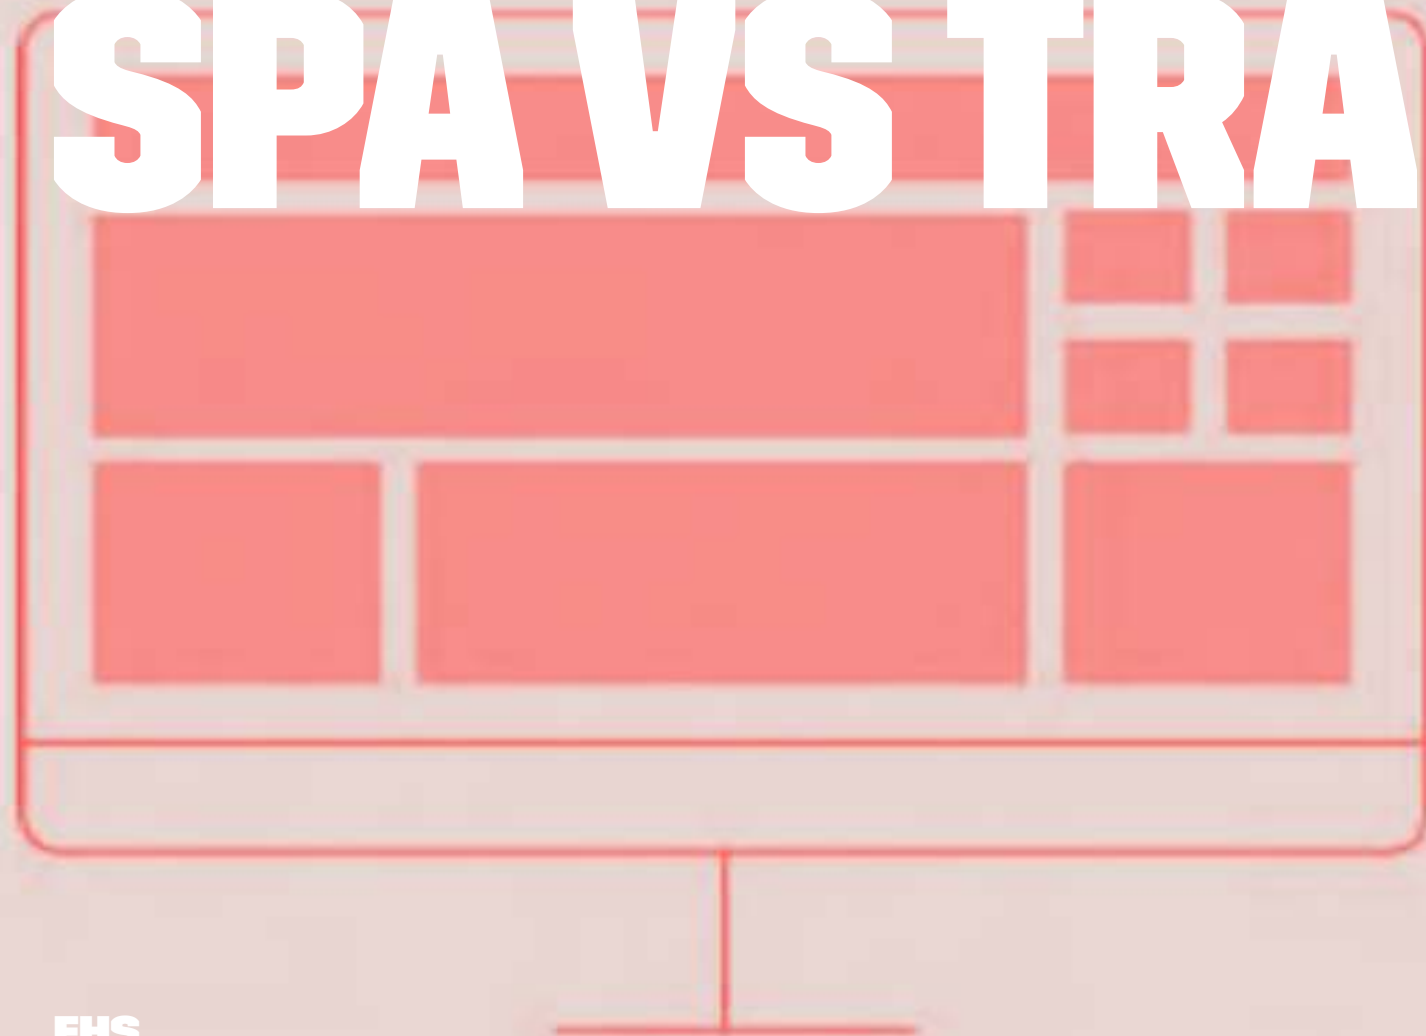


TRADITIONAL WEB APPLICATIONS

Traditional

Every request for new information gives you a new version of the whole page.

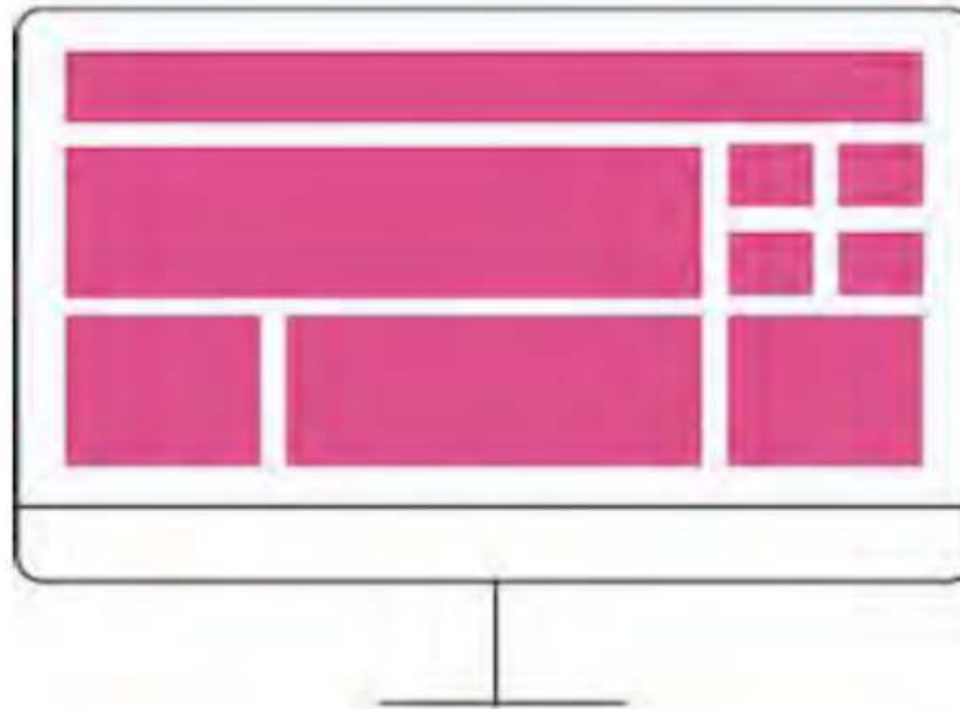

TRADITIONAL WEB APPLICATIONS

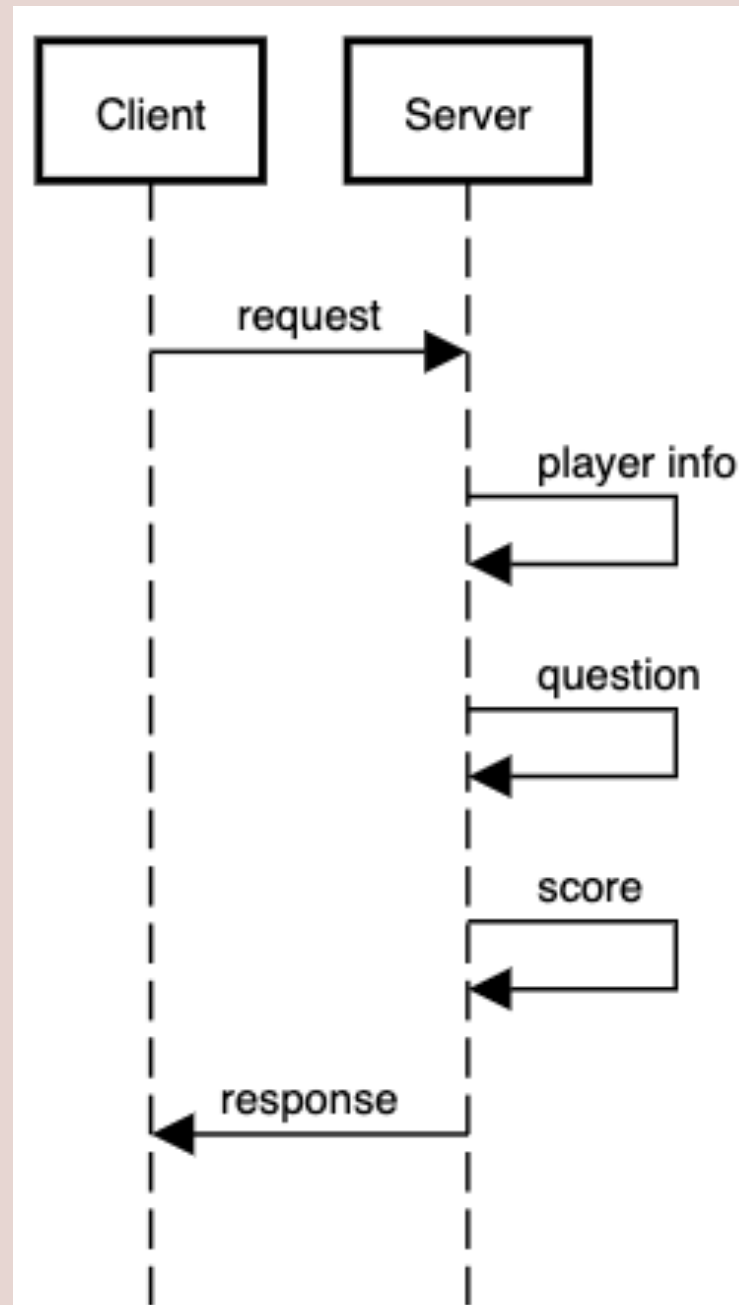

TRADITIONAL WEB APPLICATIONS

- » client /quiz
- » server gets request
 - » fetches player info
 - » fetches question
 - » fetches score
- » when all data fetched returns rendered HTML


TRADITIONAL WEB APPLICATIONS

» Video

SINGLE PAGE APPLICATIONS

SPA


You request just the pieces you need.

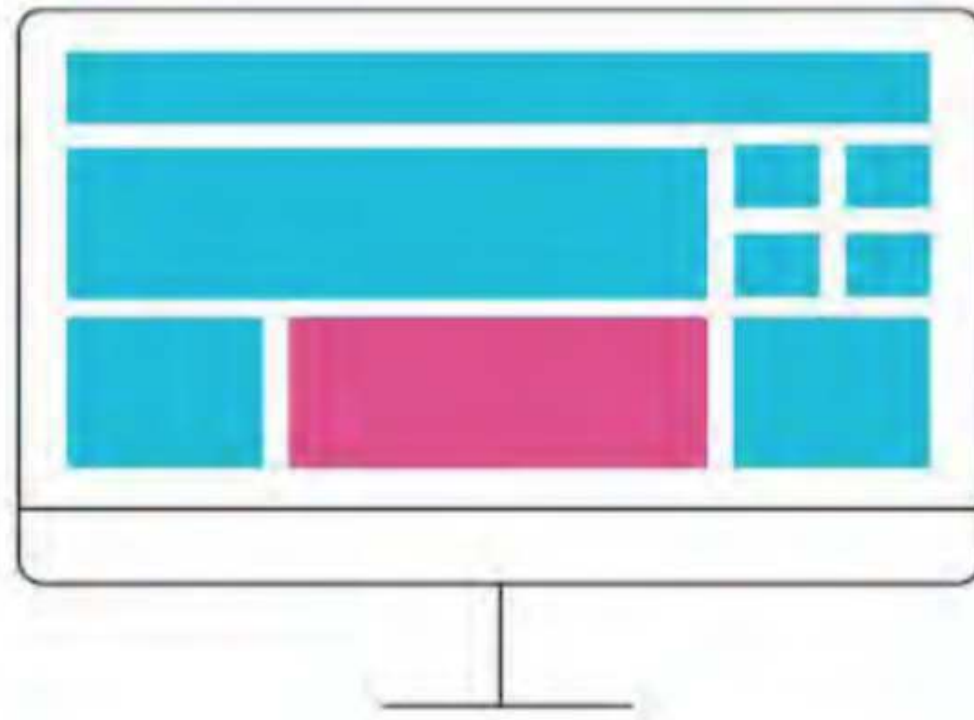

SINGLE PAGE APPLICATIONS

“A single-page application (SPA) is a web application or web site that fits on a single web page with the goal of providing a user experience similar to that of a desktop application.”

TRADITIONAL WEB APPLICATIONS

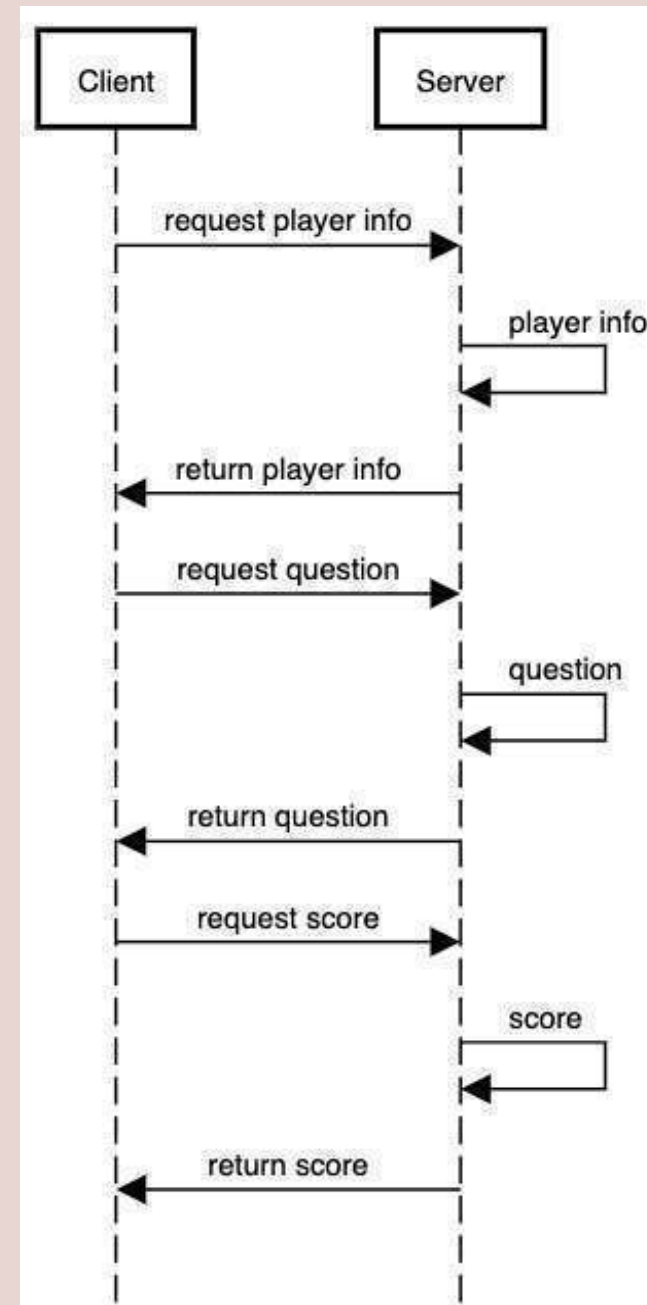

SINGLE PAGE APPLICATIONS

- » client requests /quiz
- » client requests in parallel
 - » player-info
 - » question
 - » score
- » when one of these requests return
 - » client displays data immediately

SINGLE PAGE APPLICATIONS

» video

SINGLE PAGE APPLICATIONS

ADVANTAGES²

- » No redundant Queries to Server
- » Fast and Responsive Front-end Built
- » Enhanced User Experiences

² <https://www.bloomreach.com/en/blog/2018/07/what-is-a-single-page-application.html#whatssingle-page-application>

SINGLE PAGE APPLICATIONS

NO REDUNDANT QUERIES²


- » client requests data which he needs
- » no need for a full rerender of app
 - » removes unnecessary/expensive DB queries

² <https://www.bloomreach.com/en/blog/2018/07/what-is-a-single-page-application.html#whatssingle-page-application>

SINGLE PAGE APPLICATIONS FAST AND RESPONSIVE FRONT- END BUILT

SINGLE PAGE APPLICATIONS

FAST AND RESPONSIVE FRONT-END BUILT ²

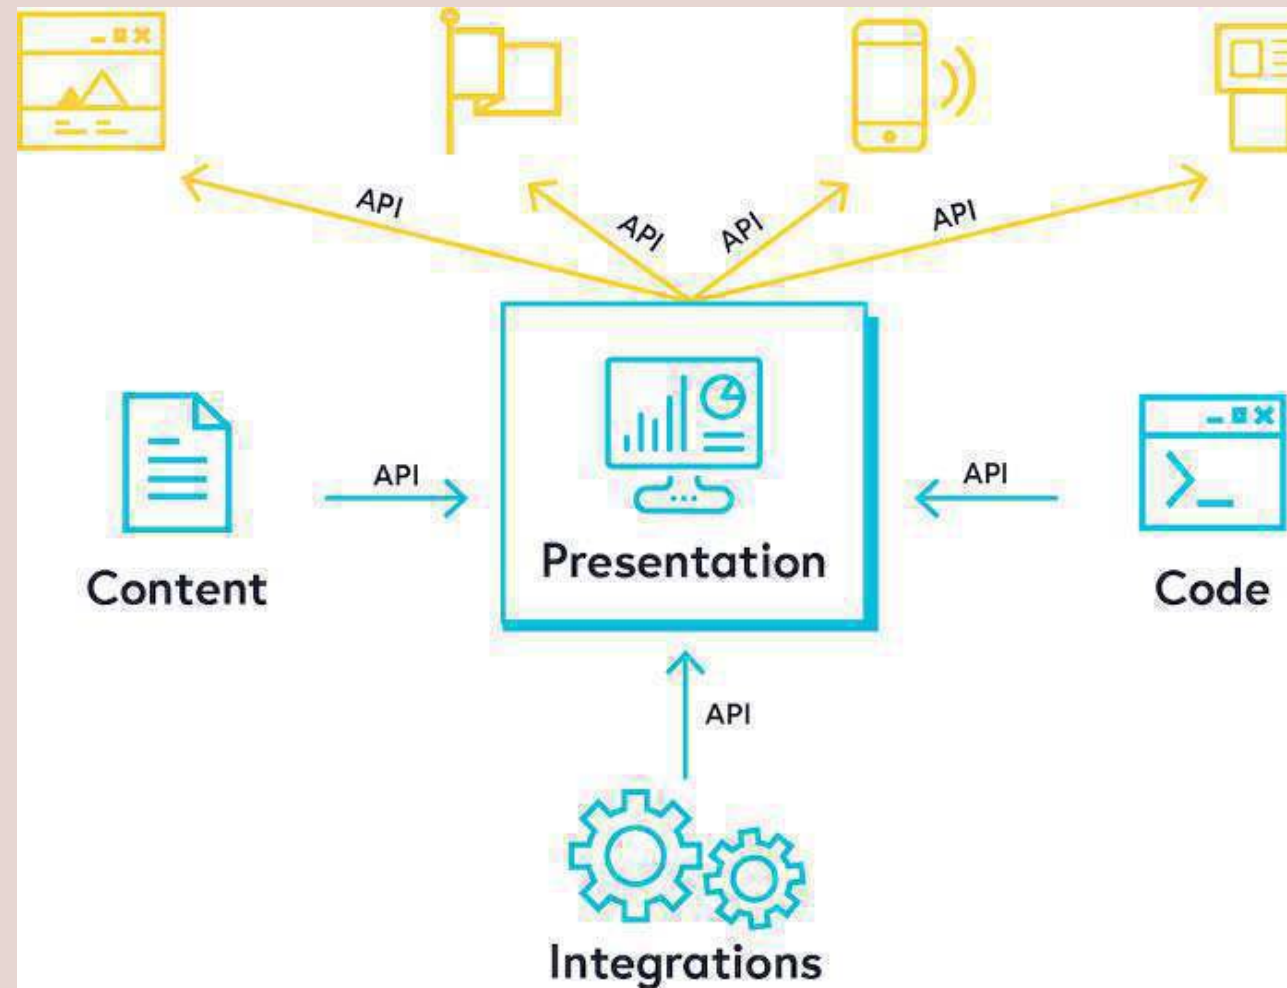

² <https://www.bloomreach.com/en/blog/2018/07/what-is-a-single-page-application.html#whatssingle-page-application>

SINGLE PAGE APPLICATIONS

FAST AND RESPONSIVE FRONT-END BUILT²

- » many clients can be built with same backend
- » one client could be composed of different backends
 - » blog served from own backend
 - » comments served from third party service (eg. facebook/disqus)

² <https://www.bloomreach.com/en/blog/2018/07/what-is-a-single-page-application.html#whatssingle-page-application>

SINGLE PAGE APPLICATIONS

ENHANCED USER EXPERIENCE

- » no full page refresh required
- » dynamic content loading possible
- » faster page transitions
 - » HTML/CSS already loaded


BUILDING AN SPA

BUILDING AN SPA

- » An SPA consists of the following:
 - » Data (see Async JS slides)
 - » Routing
 - » Templates

ROUTING


“A location-based SPA render can immediately render the desired content ¹”

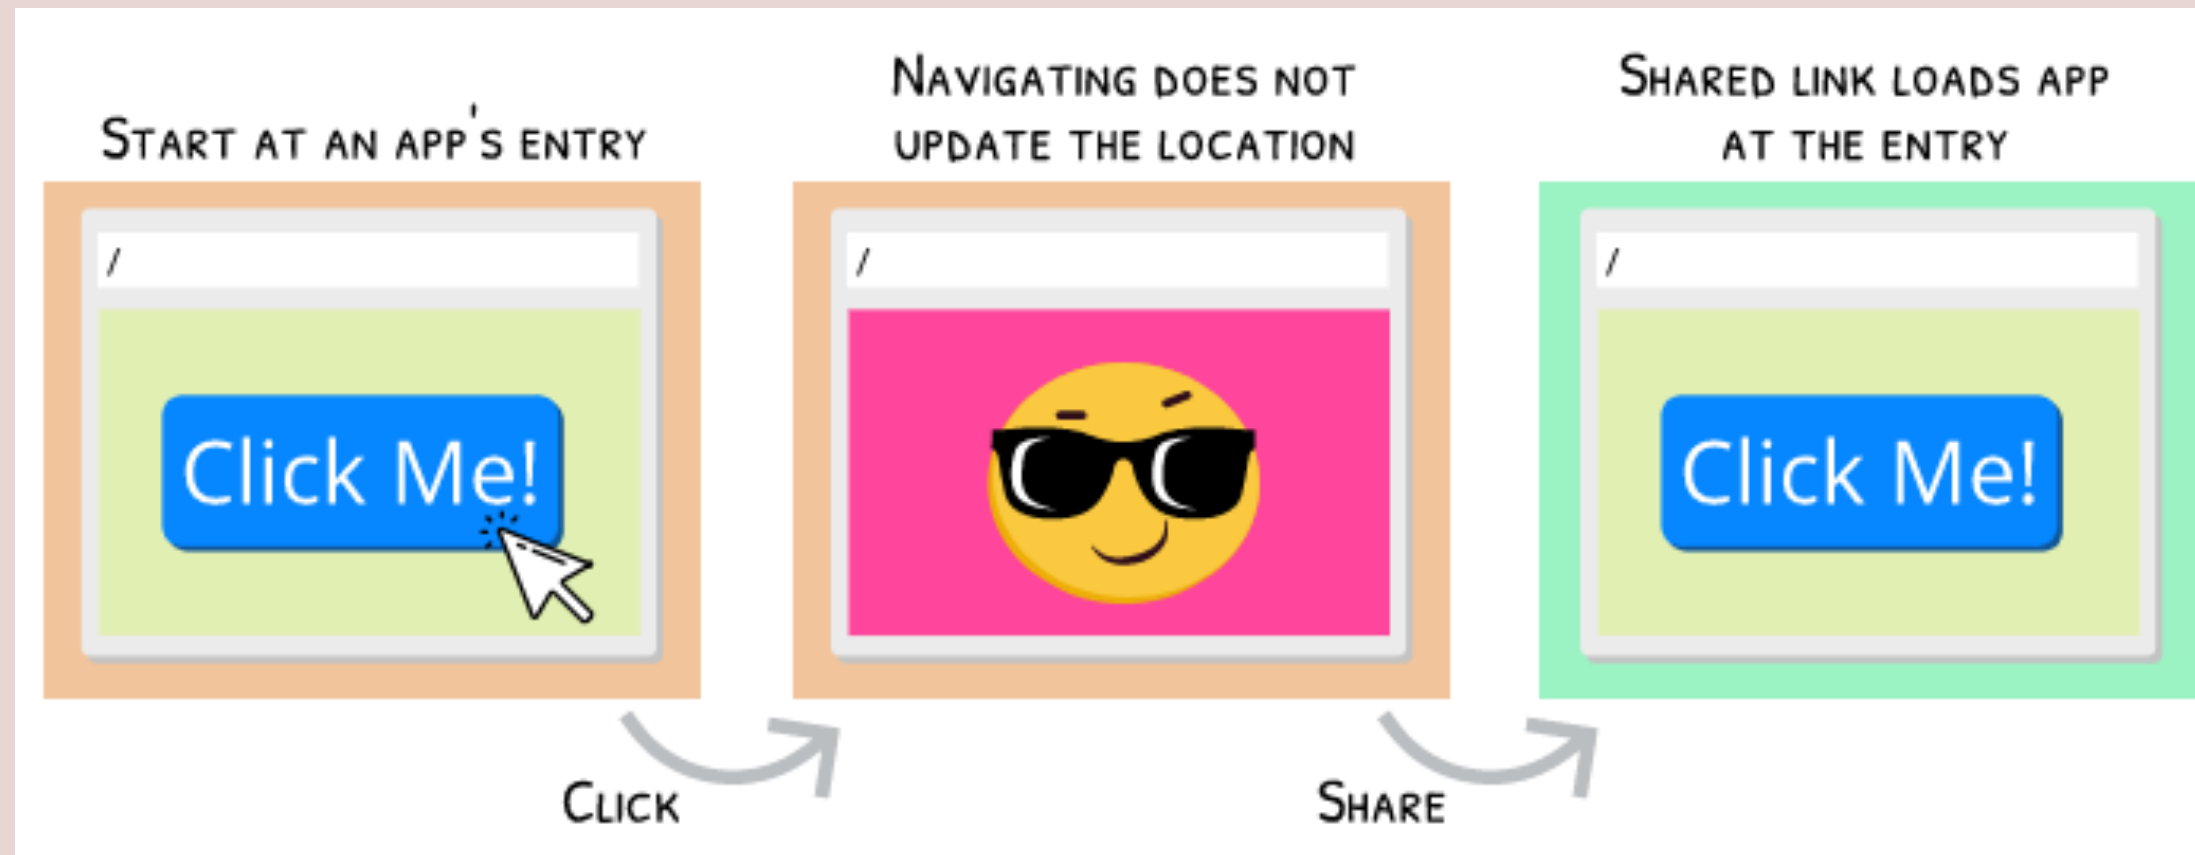

¹ <https://blog.pshrmn.com/how-single-page-applications-work/>

ROUTING LOCATION

“The `window.location` properties map directly from the URL¹”

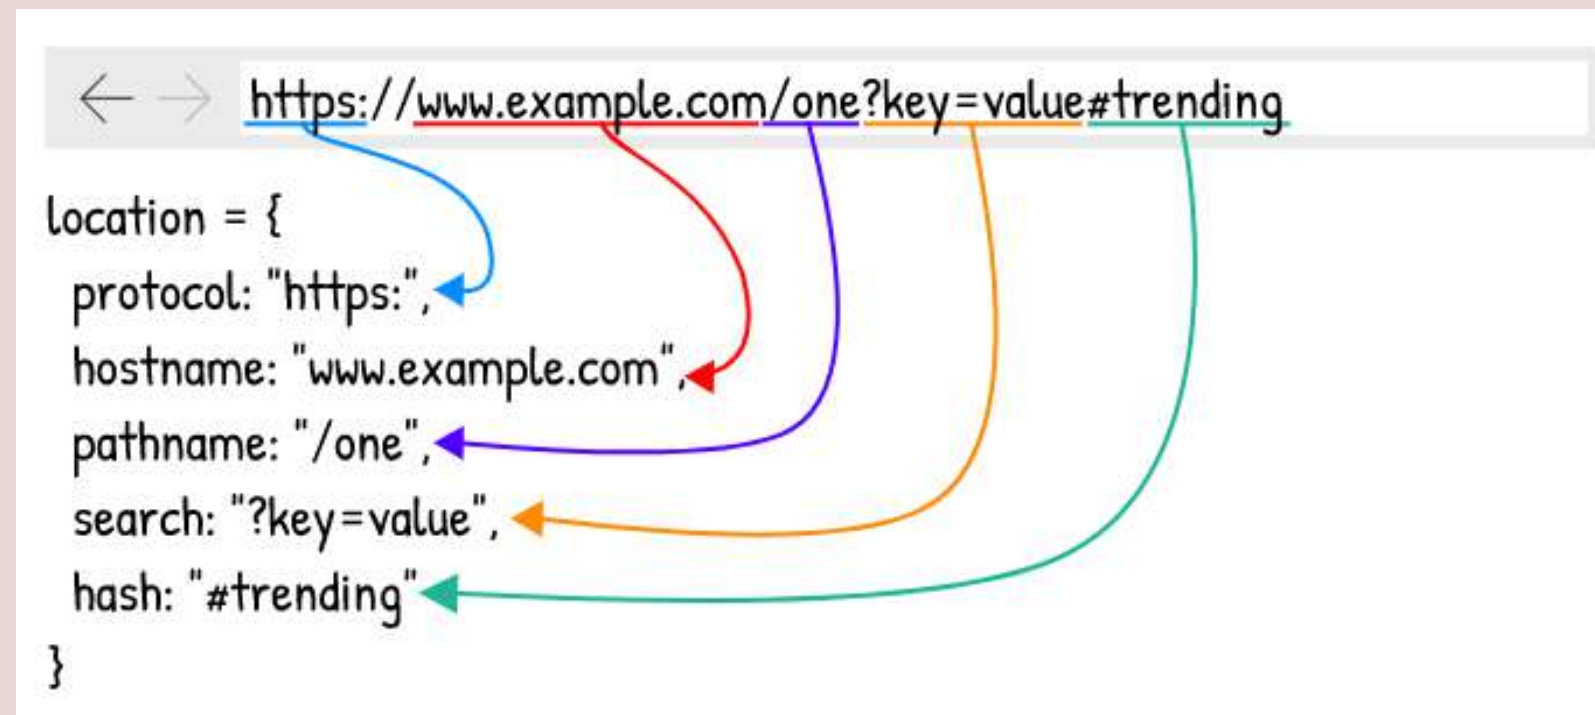

¹ <https://blog.pshmn.com/how-single-page-applications-work/>

ROUTING


LOCATION

`window.location` // returns information about the current location


```
// {  
//   "ancestorOrigins": {},  
//   "href": "https://www.fh-salzburg.ac.at/studium/dmk/multimediatechnology-bachelor",  
//   "origin": "https://www.fh-salzburg.ac.at",  
//   "protocol": "https:",  
//   "host": "www.fh-salzburg.ac.at",  
//   "hostname": "www.fh-salzburg.ac.at",  
//   "port": "",  
//   "pathname": "/studium/dmk/multimediatechnology-bachelor",  
//   "search": "",  
//   "hash": ""  
// }
```

BROWSER SESSION


BROWSER SESSION LINKS

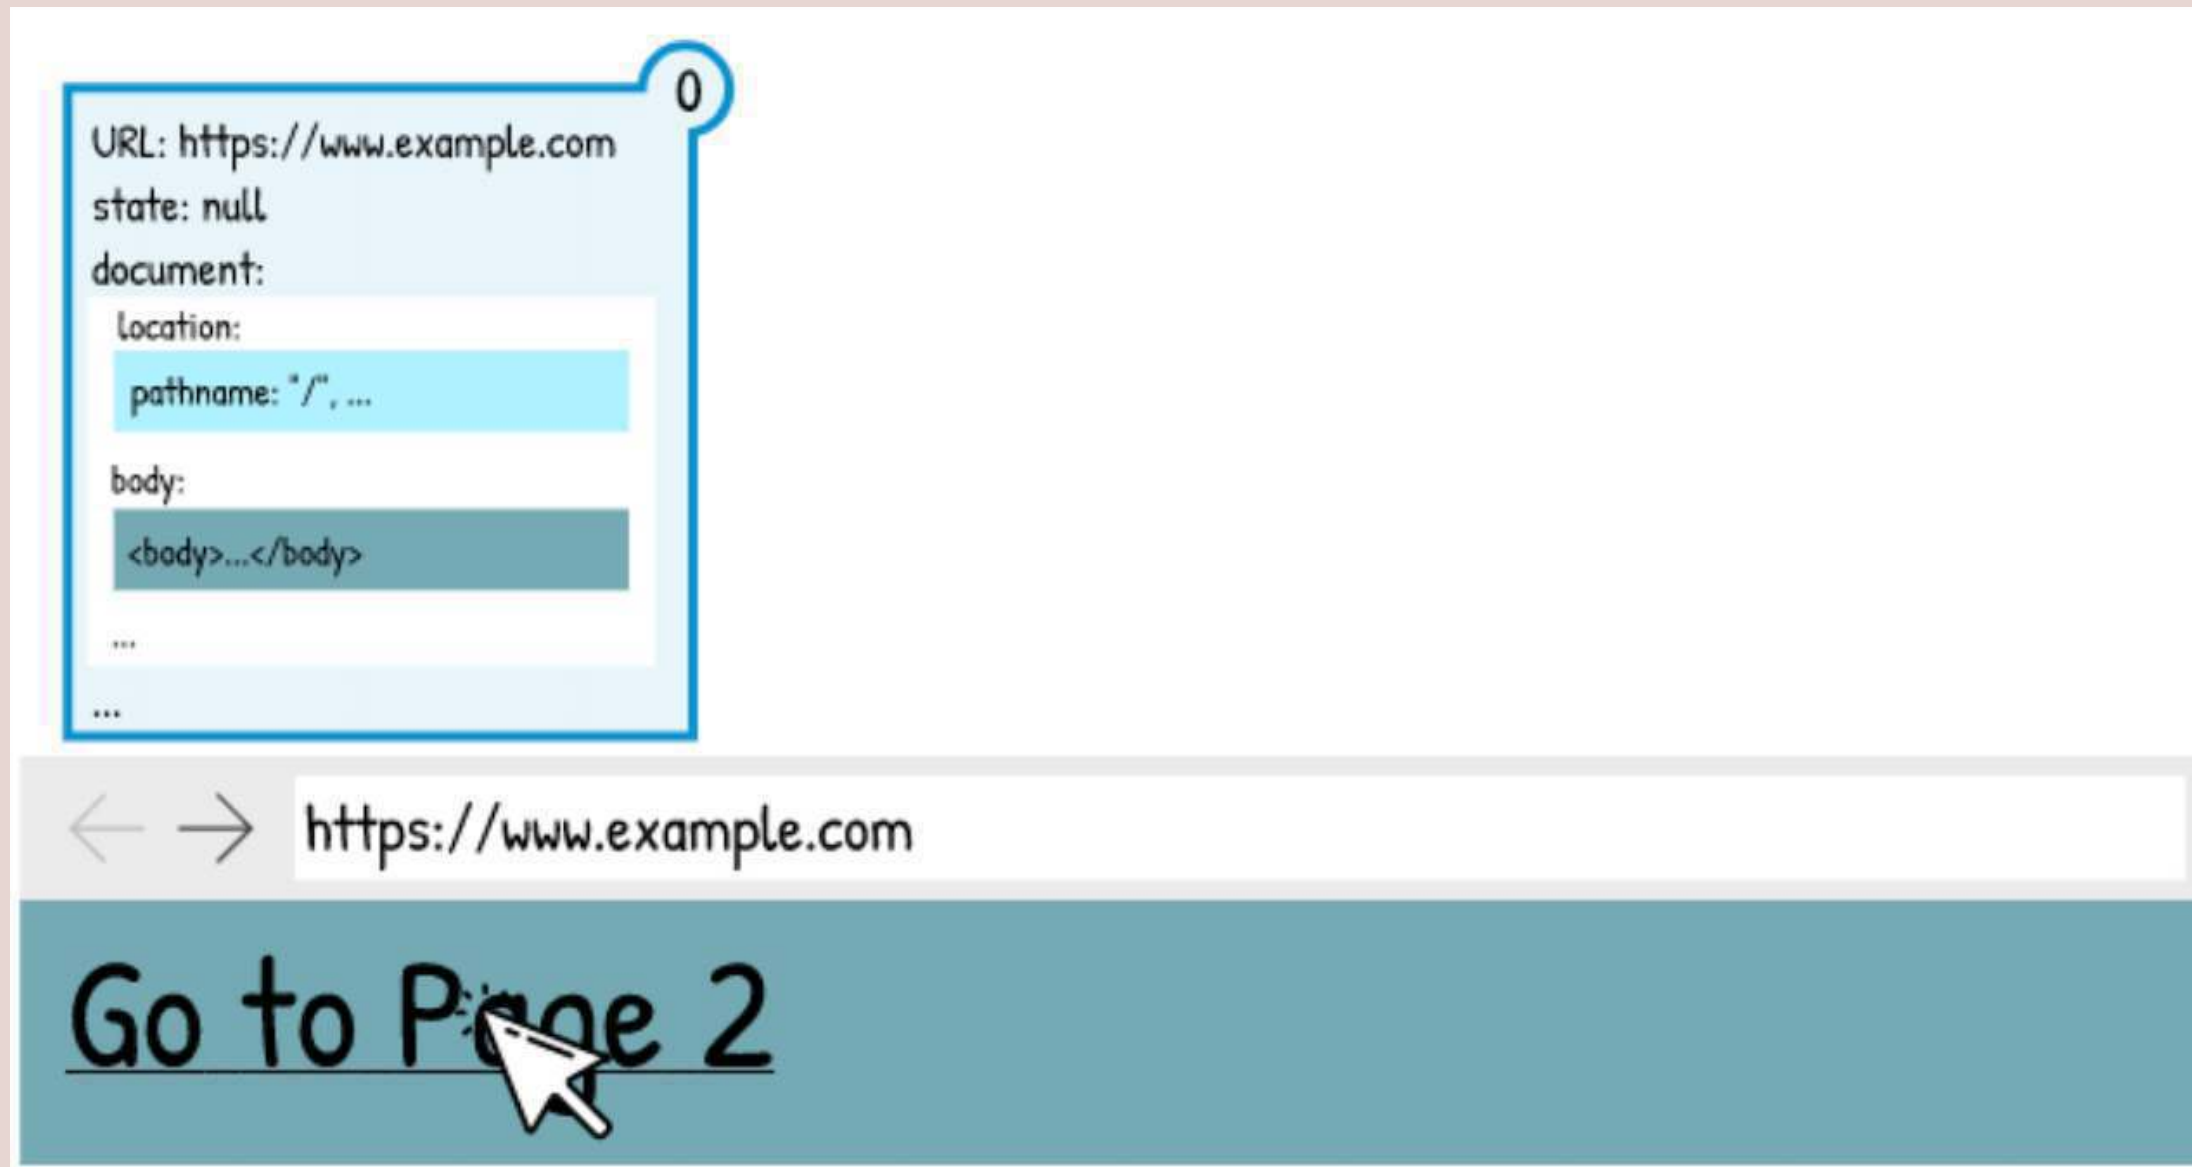

BROWSER SESSION LINKS

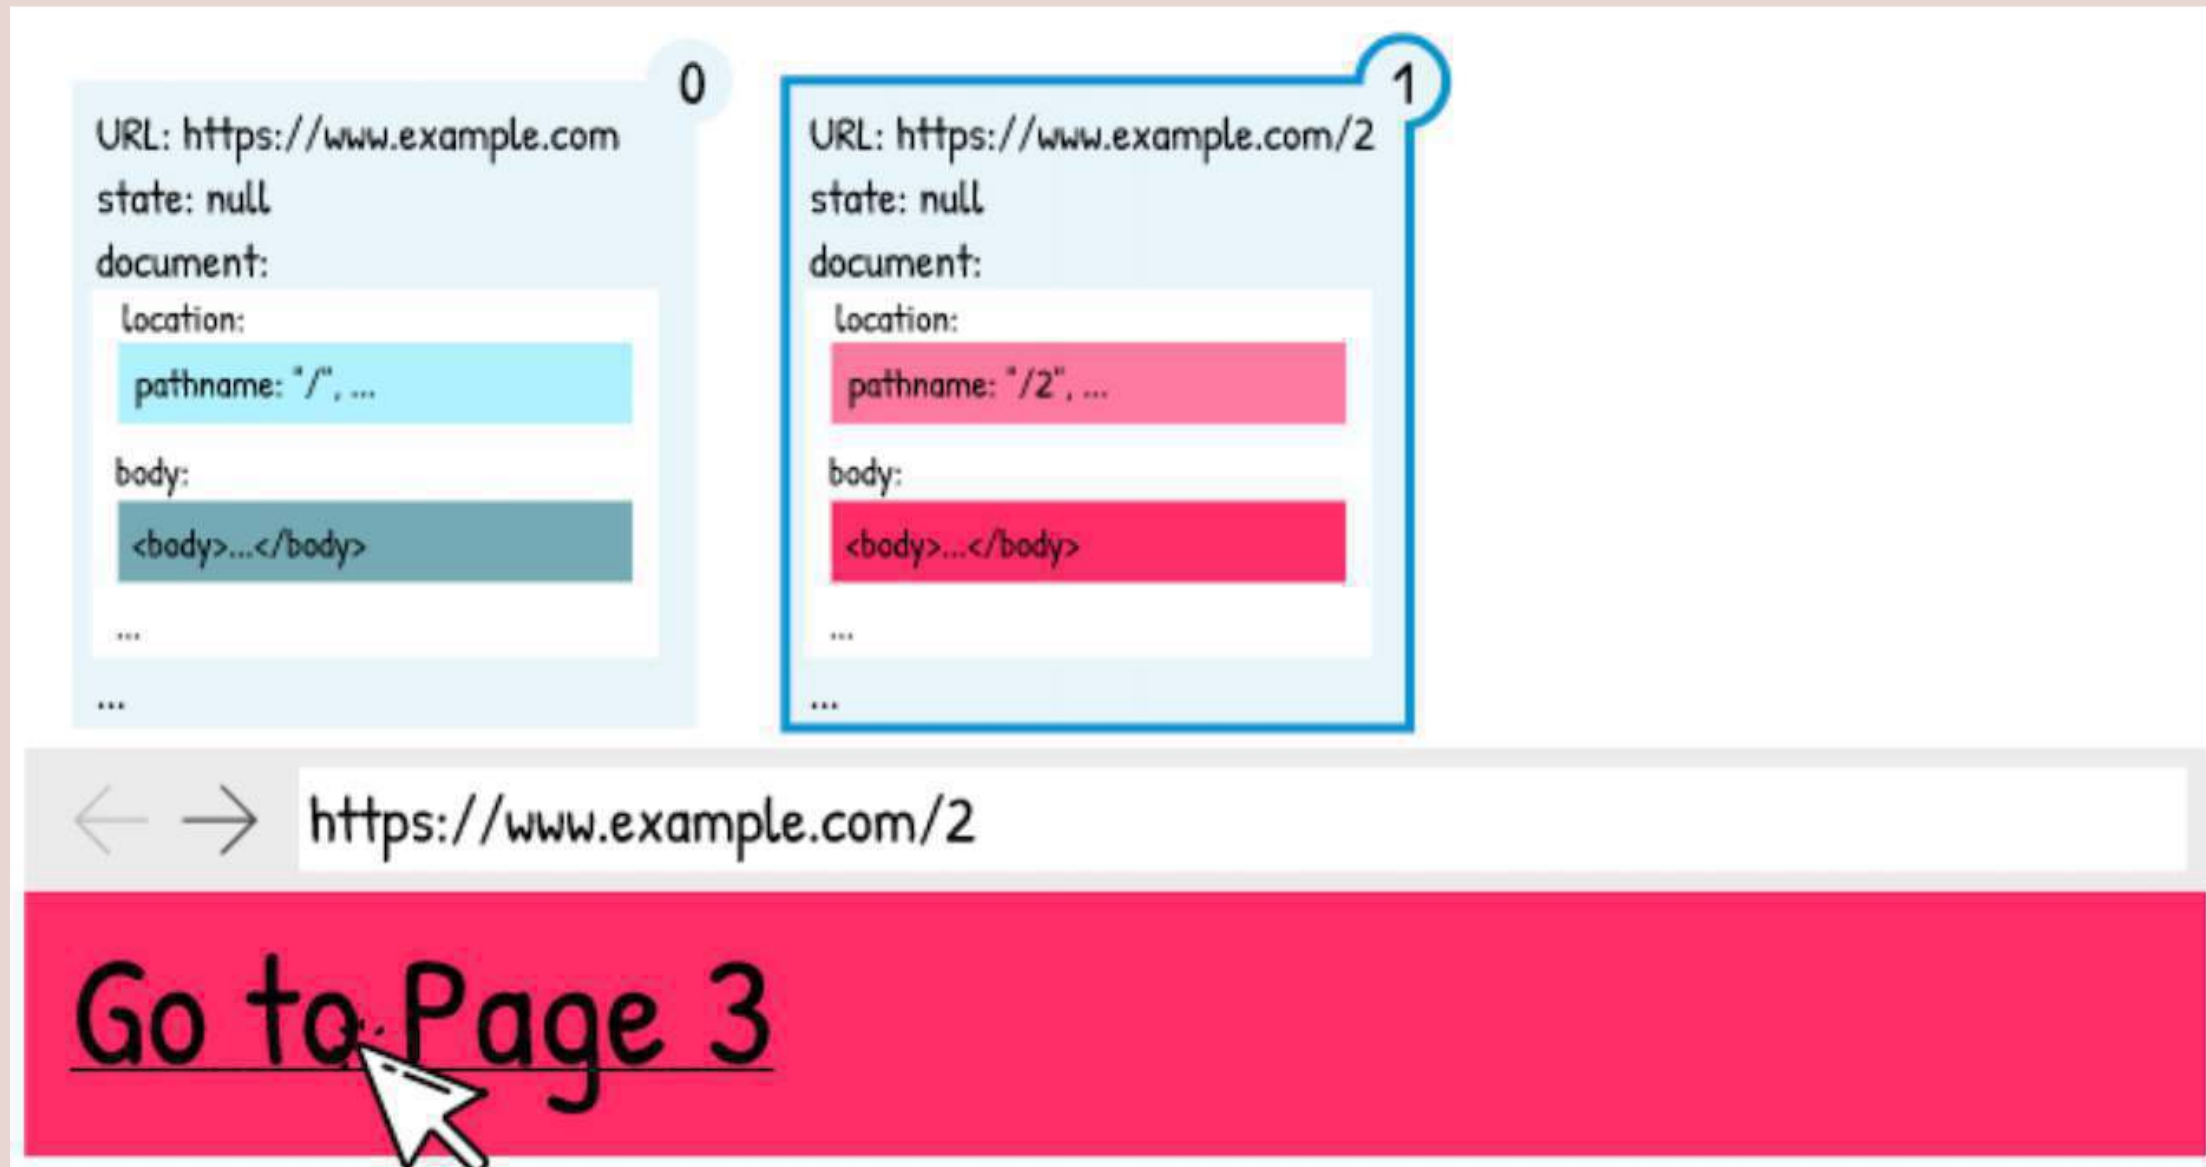


BROWSER SESSION LINKS

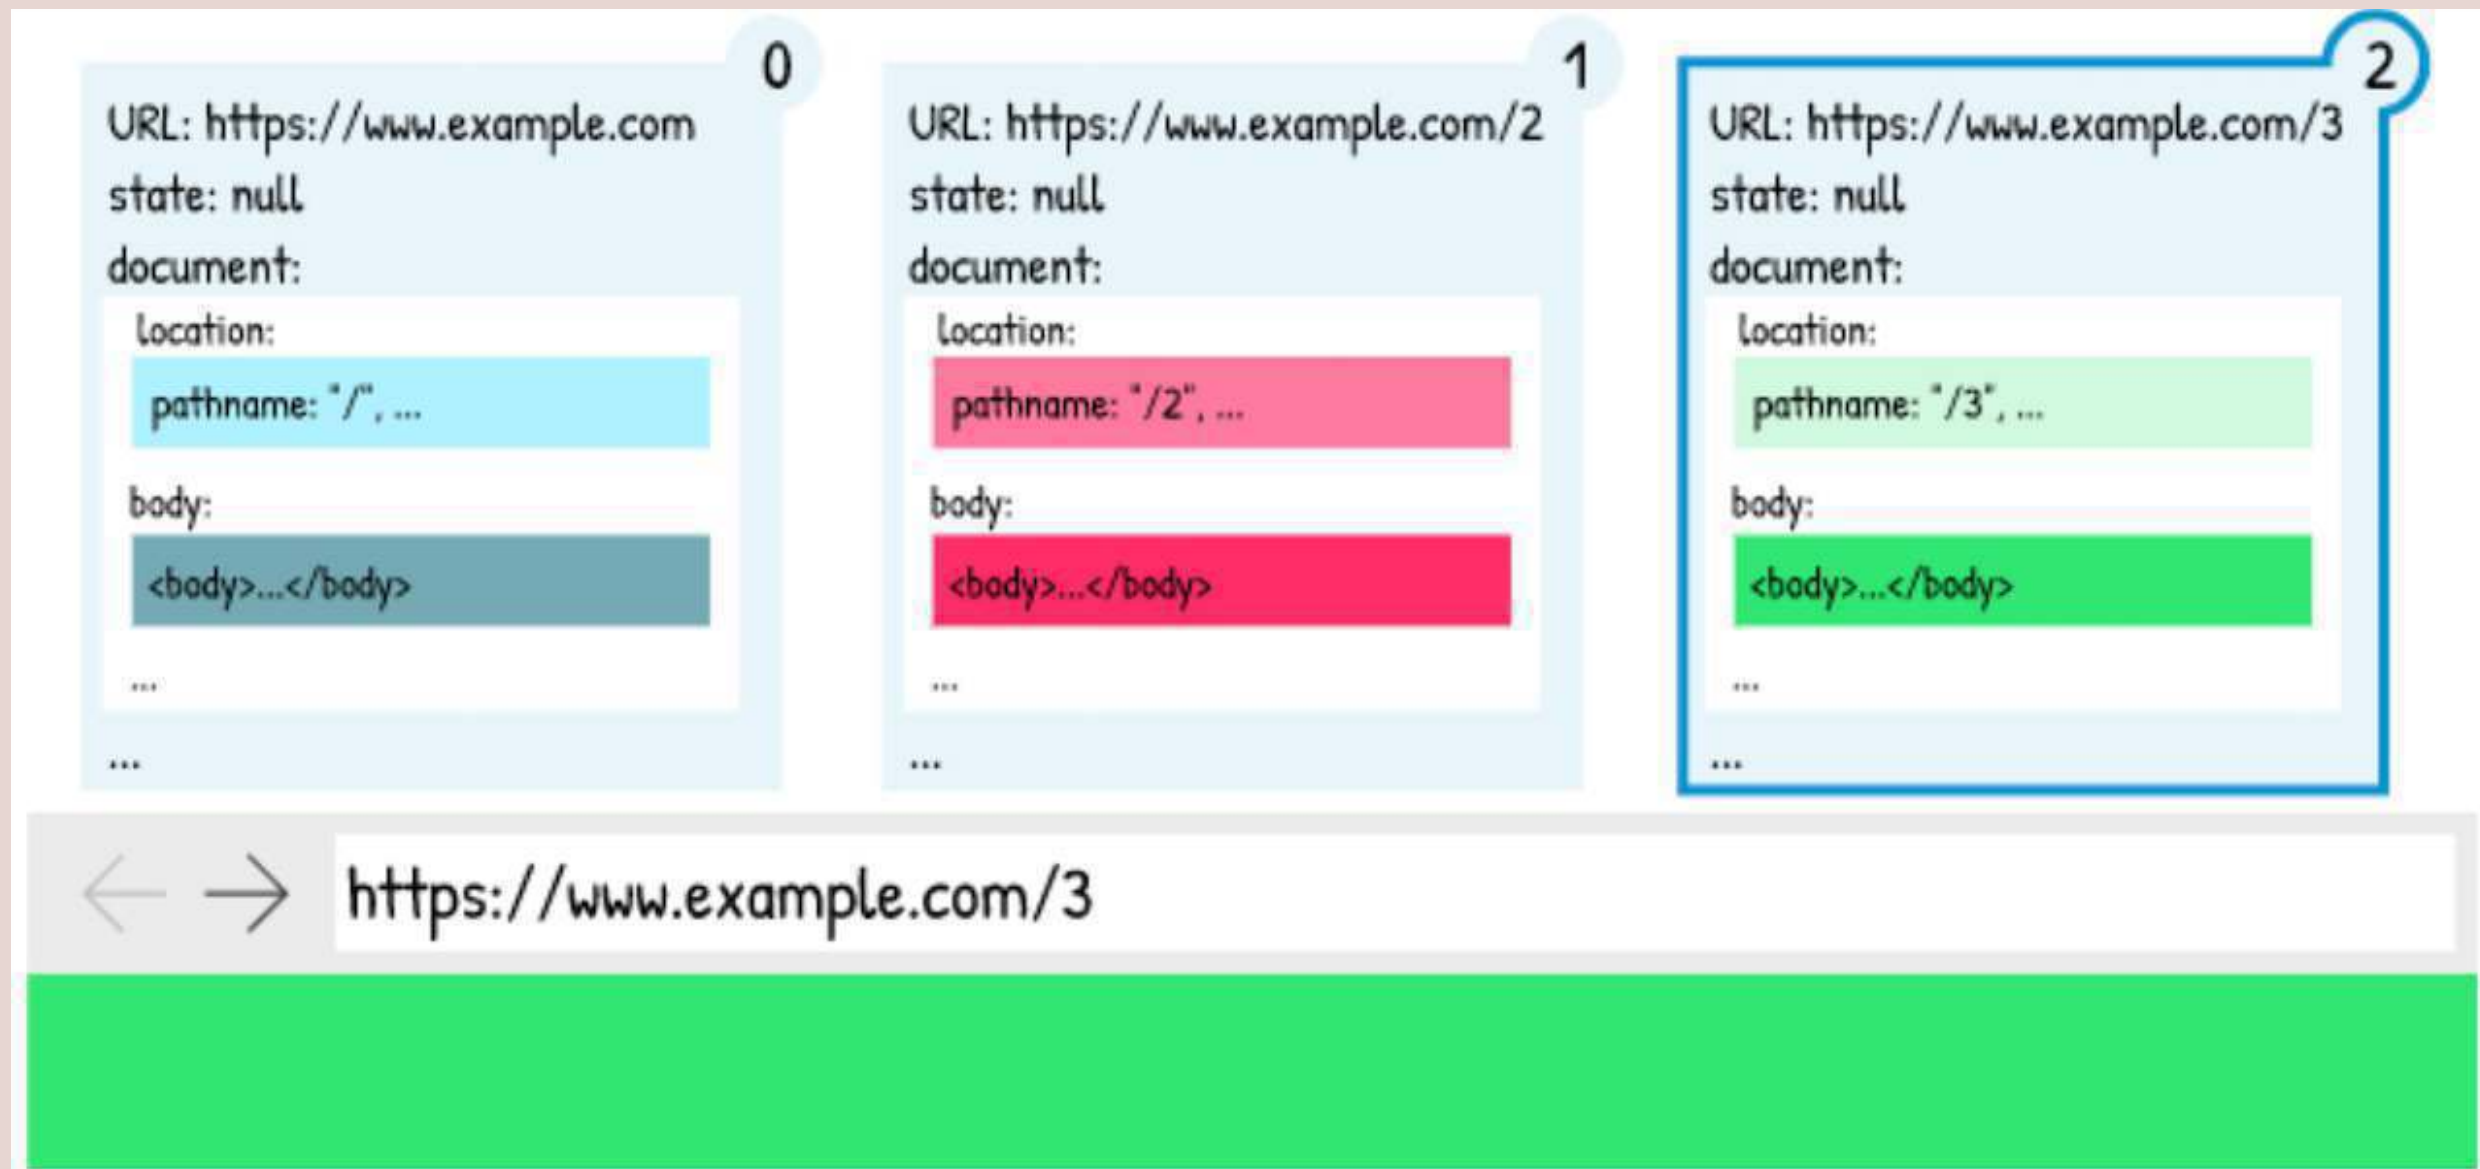

BROWSER SESSION BACK BUTTON



BROWSER SESSION BACK BUTTON

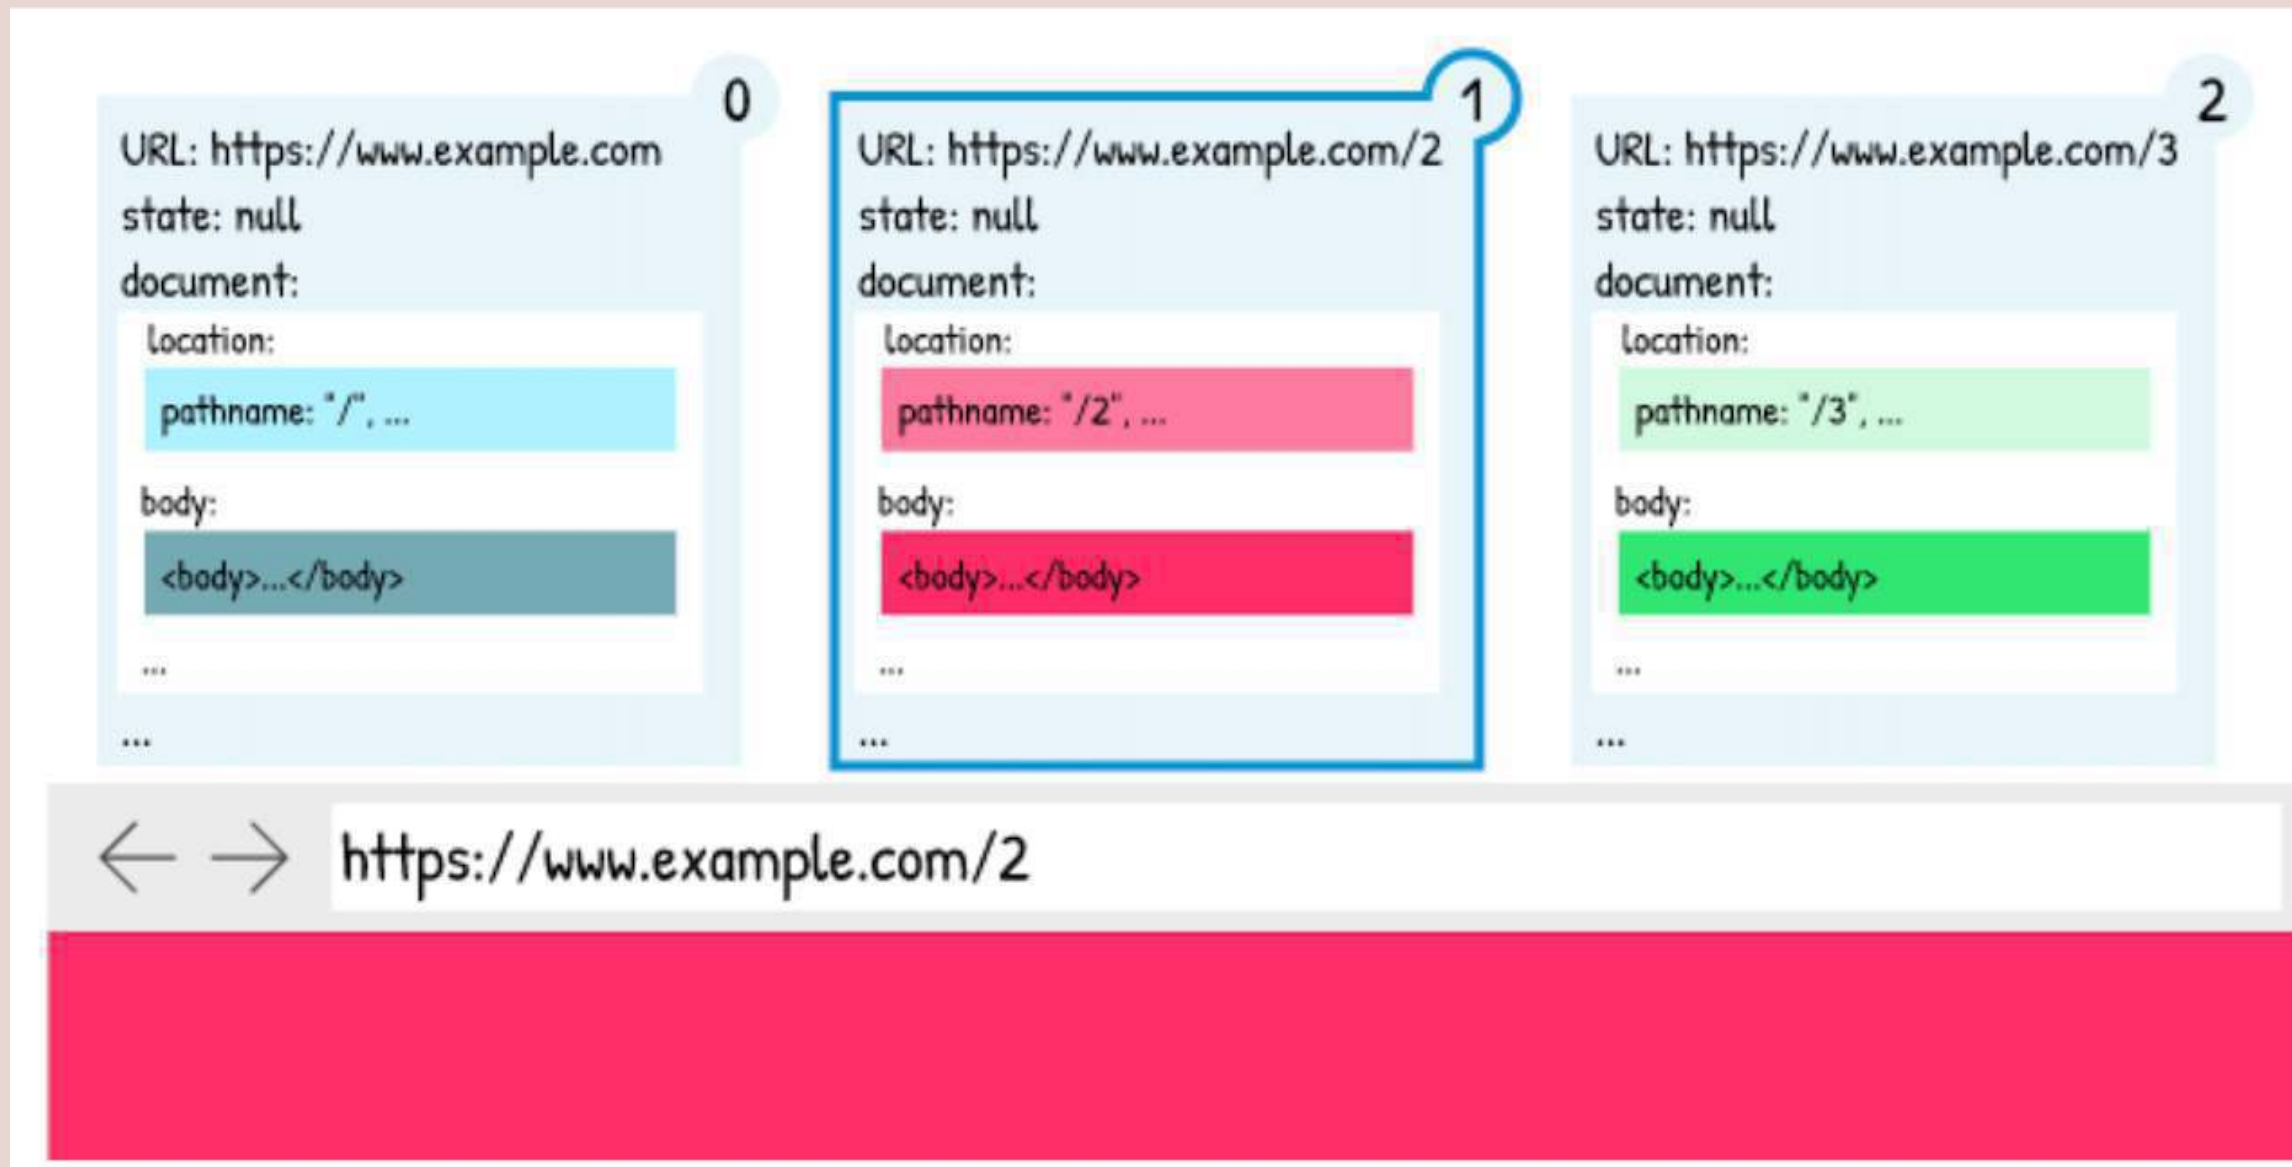

ROUTING LOCATION

“Each browser tab has a “browsing context”. The browsing context maintains a “session history”, which is essentially an array of location entries.”



BROWSER HISTORY

The History API has three core functions:

» `pushState()`

» `replaceState()`

» `go()`

BROWSER HISTORY

PUSHSTATE

```
// history.pushState(<state>, <title>, <url>)
```

```
history.pushState({}, 'page 1', '/page1')  
// `pushState` adds a new entry to the history  
// current history object ['/page1']
```

```
history.pushState({}, 'page 2', '/page2')  
// current history object ['/page1', '/page2']  
//                               ^^^^  
// adds /page2 to the history
```

BROWSER HISTORY

HISTORY.PROTOTYPE.REPLACESTATE

```
// history.replaceState(<state>, <title>, <url>)
```

```
history.pushState({}, 'page 1', '/page1')
```

```
// current history object ['/page1']
```

```
history.replaceState({}, 'page 2', '/page2')
```

```
// current history object ['/page2']
```

```
//                ^^^^
```

```
// replaces /page1 with /page2
```

BROWSER HISTORY

HISTORY.PROTOTYPE.BACK

```
history.pushState({}, 'page 1', '/page1')  
// current history object ['/page1']
```

```
history.pushState({}, 'page 2', '/page2')  
// current history object ['/page1', '/page2']
```

```
history.back()  
// history ['/page1', '/page2']  
//           ^^^^  
//           ^^^^
```


BROWSER HISTORY EXERCISE

- » Go to any webpage (e.g. `medium.com`) and navigate around
- » Then open the console and type `history` or `window.history`
- » Type `history.go(-1)` or `history.back()`

BROWSER HISTORY EXERCISE

- » Push a new state: `history.pushState({ name: 'FHS' }, '', '/user')`
- » Check the bar on top and see how it changes the path
- » Check the history object again with `history`
- » Replace the current state with `replaceState()`, see how the length of the history doesn't change
- » Check the history state with `history.state`

ROUTING IN SPA

LINKS & NAVIGATION

- » Classic Website
 - » Click on a link
 - » Browser send request
 - » Presents document

LINKS & NAVIGATION

- » Single Page Application
 - » Click on a link
 - » Browser might do something (e.g. fetch data)
 - » A certain area or complete page gets replaced within the current document

SINGLE PAGE APPLICATIONS

ROUTING


- » Single-page application generally rely on a router.
- » Routers are made up of routes, which describe the location that they should match.

```
const routes = [  
  { path: '/' },  
  { path: '/about' }, // static  
  { path: '/album/:id' } // dynamic  
  //          ^^^^  
  // dynamic part  
];
```

SINGLE PAGE APPLICATIONS

ROUTE MATCHING

- » The application renders based on the route that matches the location

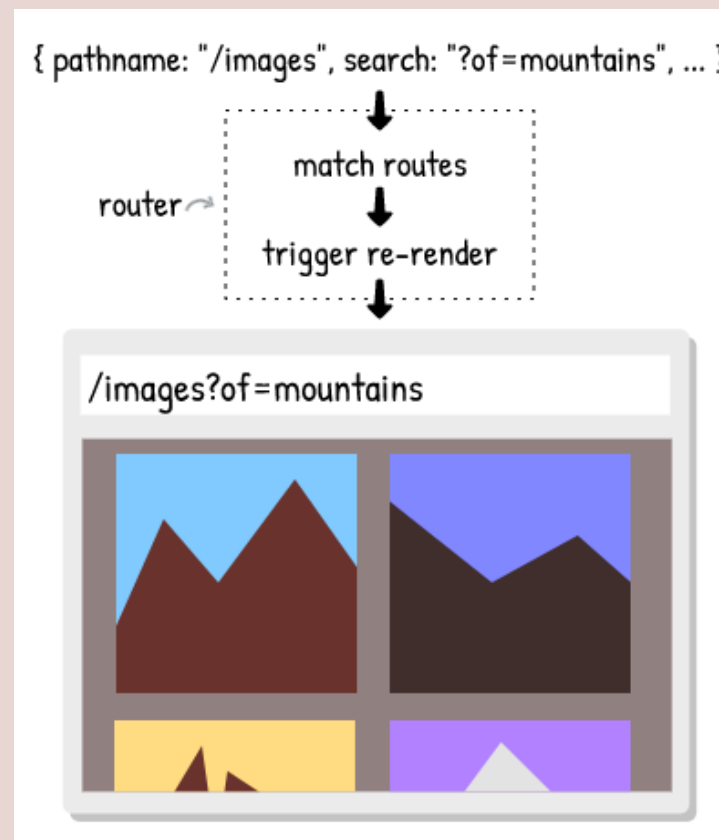

NAVIGATING IN SPAS

LINK HANDLING

- » add click handler to link
 - » call `event.preventDefault()`
 - » removes native behavior
- » call `history.pushState` / `history.replaceState`

NAVIGATING IN SPAS

LINK HANDLING

```
const link = document.querySelector( '#my-link' )

link.addEventListener( 'click', (evt) => {
  // ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
  // attach event listener on click

    evt.preventDefault()
    // removes default behaviour (no navigation will take place)

    history.pushState( null, "My new page", evt.target.href)
    // navigate to URL from link
})
```

NAVIGATING IN SPAS

ATTACH TO ALL LINKS

```
const allLinks = document.querySelectorAll('a')
//                ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
// find all links in the document

Array.from(allLinks).forEach((link) => {
//  ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
// convert NodeList to Array

    link.addEventListener('click', (evt) => {
        evt.preventDefault() // remove default behaviour from link
        history.pushState(null, "My new page", evt.target.href)
    })
})
```

NAVIGATING IN SPAS

READING THE CURRENT URL

```
const url = new URL(window.location);  
//                      ^^^^^^^^^^^^^^^  
// reads the current URL as string  
  
url.host // "website.com"  
url.hostname // "website.com"  
url.href // "https://website.com/homepage"  
url.origin // "https://website.com"  
url.pathname // "/homepage"  
url.protocol // "https:"
```

NAVIGATING IN SPAS

RENDER SOME CONTENT

```
const onRouteChange = () => {
  const pathname = new URL(window.location).pathname;
  const domElement = document.querySelector('#content')
  //      ^^^^^^^^^^^
  // the element to render our content

  if (pathname === '/test1') {
    domElement.innerHTML = 'test1'
  } else if (pathname === '/test2') {
    domElement.innerHTML = 'test1'
  } else {
    domElement.innerHTML = 'not found =( '
  }
}
```

FULL EXAMPLE

» [https://gist.github.com/webpapaya/
f97f430b7c4f2c894f68644d2cd5ced5](https://gist.github.com/webpapaya/f97f430b7c4f2c894f68644d2cd5ced5)



TEMPLATES

TEMPLATES

- » Presentation of Data
- » Reuse of Code
- » The View Part of an Application

TEMPLATES

- » Server vs. Client
- » Logic vs. Logic-less Templates
- » EJS vs . Handlebars
- » Native Templates aka. Tagged Template Literals

TEMPLATING

- » Best Practices
- » Templates should:
 - » not include business logic
 - » not include a lot of logic
 - » be easy to read
 - » be easy to maintain

TEMPLATES

TAGGED TEMPLATE LITERALS³

```
const myTemplate = () => {  
  return html(`  
    <section>  
      <h1>Hello FHS</h1>  
    </section>  
  `)  
}
```

```
render(document.getElementById('content'), myTemplate())
```

³ html and render are non-standard function and needs to be added to your code

TEMPLATES

TAGGED TEMPLATE LITERALS

```
const myTemplate = () => {  
  return html(`  
    <section>  
      <h1>Hello FHS</h1>  
    </section>  
  `)  
}
```

TEMPLATES

ADDING DYNAMIC DATA

```
const myTemplate = () => {  
  return html(`  
    <section>  
      <h1>Today is: ${new Date().toLocaleDateString()}</h1>  
    </section>  
  `)  
}
```

TEMPLATES

CONDITIONALS

```
const myTemplate = (someCondition) => {  
  return html(`  
    <section>  
      <h1>${  
        someCondition  
          ? 'This is the correct'  
          : 'This is the wrong'  
      }</h1>  
    </section>  
  `)  
}
```

TEMPLATES

LOOP OVER LISTS

```
const myTemplate = (someArray) => {  
  return html(`  
    <section>  
      <ul>  
        ${someArray.map((value) => `<li>${value}</li>`).join(' ')}  
      </ul>  
    </section>  
  `)  
}
```

TEMPLATES

CONVERT TEMPLATE STRING TO DOM NODES⁵

```
const html = (templateString) => {  
  return new DOMParser()  
    .parseFromString(templateString, 'text/html')  
    .body
```

```
const render = (nodeToRenderTo, nodeToRender) => {  
  nodeToRenderTo.innerHTML = ''  
  nodeToRenderTo.appendChild(nodeToRender)  
}
```

⁵ not relevant for the exam. (next semester we'll look into react). For the exercise simply copy this functions.

TEMPLATES

USER INTERACTIONS

```
const myTemplate = (someCondition) => {
  const domElements = html(`
    <section>
      <h1>My heading</h1>
    </section>
  `)

  domElements.querySelector('h1').addEventListener('click', () => {
    // 1) ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
    // 2)                                     ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
    //
    // 1) select element on which you'd like to add a listener
    // 2) add a listener on the click event

    console.log('I was clicked, it worked!!')
  })

  return domElements
}
```


HOMework

» see [wiki](#)

FEEDBACK

» Questions: tmayrhofer.lba@fh-salzburg.ac.at

» [Feedback Link](#)