

# FULLSTACK DEVELOPMENT REACT

# REACT

- » Component based library to build composable UIs
- » OpenSourced in 2013
- » Implemented and Maintained by Facebook
- » Learn once, write anywhere
  - » React-Native
  - » React-Native-Desktop
  - » React-Native-Windows

# COMPONENTS

“Components let you split the UI into independent, reusable pieces.<sup>1</sup>”

- » Main Building block of a React App
- » Describe the look and feel of one section in the UI

<sup>1</sup> <https://reactjs.org/docs/components-and-props.html>

# REACT COMPONENTS

```
const Button = () => {
  return (
    <button type='button'>
      A button
    </button>
  )
}

// Usage
React.renderComponent(<Button />, document.body)
```

# REACT CLASS COMPONENTS

## » Alternative syntax for components

```
class Button extends React.Component {  
  render() {  
    return (  
      <button type='button'>  
        A button  
      </button>  
    )  
  }  
}  
  
// Usage  
React.renderComponent(<Button />, document.body)
```

# JSX

» JavaScript XML

» extension to write XML in JS

» Allows to combine data preparation with render logic

```
const Button = () => {
  return (
    <button type='button'>
      A button
    </button>
  )
}
```

# REACT WITHOUT JSX

» React can be used without JSX

```
const Button = () => {
  return React.createElement(
    'button',
    { type: 'button' },
    'A button'
  )
}
```

# WHICH COMPONENTS DO YOU SEE

Sign In

Email

Password

Sign in

Sign Up

# WHICH COMPONENTS DO YOU SEE

App

Button

I owe somebody      Somebody owes me

User	Amount	
Select		Create
A user	10,40\$	Paid
A user	10,40\$	
A user	10,40\$	
A user	-10,40\$	Paid
A user	10,40\$	

# BUILDING THE FIRST REACT COMPONENT

# EMBEDDING EXPRESSIONS

```
const CurrentTime = () => {
  return (
    <h1>
      {((new Date()).toLocaleDateString())}
    </h1>
  )
}
```

# EMBEDDING EXPRESSIONS

```
const FagoMenu = () => {
  return (
    <a href={`/menu/${(new Date()).toLocaleDateString()}`}>
      Go to todays menu
    </a>
  )
}
```

# CONDITIONAL RENDERING

```
const CurrentTime = () => {
  // ...
  return (
    <h1>
      {isToday
        ? 'Today'
        : 'Not Today'}
    </h1>
  )
}
```

# CONDITIONAL RENDERING

```
const CurrentTime = () => {
  // ...
  return (
    <h1>
      {isToday && 'Today'}
      {!isToday && 'Not today'}
    </h1>
  )
}
```

# LOOP OVER ARRAYS

```
const UserList = ({ users }) => {
  return (
    <ul>
      {users.map(user) => {
        return (<li key={user.id}>{user.name}</li>)
      })}
    </ul>
  )
}
```

# FRAGMENTS

- » Groups a list of children without adding a dom element

```
const AComponent = () => {
  return (
    <>
    <label>An input</label>
    <input type='text' />
    </>
  )
}
```

# KEYED FRAGMENTS

- » Same as fragment but a key can be provided (eg.: definition list)


```
const AComponent = ({ items }) => {
  return (
    <dl>
      {items.map(item => (
        // Without the `key`, React will fire a key warning
        <React.Fragment key={item.id}>
          <dt>{item.term}</dt>
          <dd>{item.description}</dd>
        </React.Fragment>
      ))}
    </dl>
  )
}
```

# KEY PROPERTY IN LOOPS

- » Is required when interating over lists
- » Helps react to decide if an element needs to be rerendered
- » Video explanation
- » Detailed explanation

# COMPONENT COMPOSITION

» Components can be nested and composed together

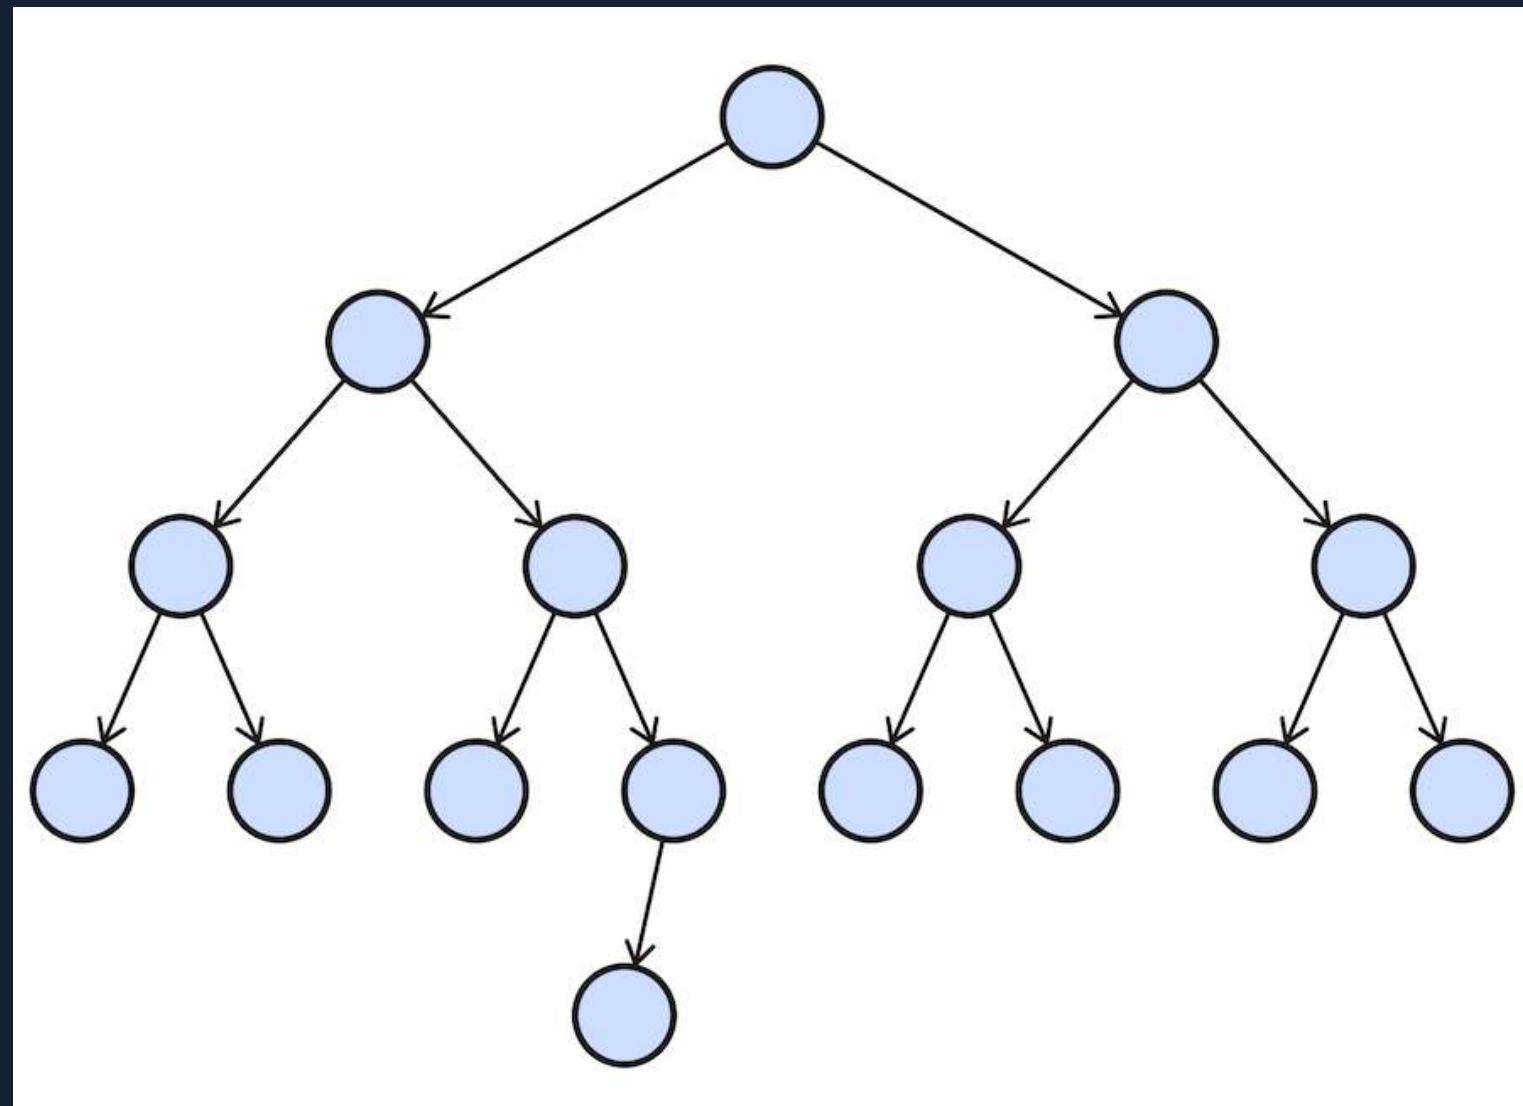

# REACT PROPS

- » Possibility to customize components
- » Can be seen as component configuration
- » Props are passed to the component
- » A component at a lower level of the tree can't modify given props directly

# REACT PROPS

```
const Button = ({ children, disabled = false }) => {
  // ^^^^^^
  // props which are passed to the component

  return (
    <button disabled={disabled} className='button'>
      {children}
    </button>
  )
}
```

```
const usage = <Button disabled>A button</Button>
// 1) ^^^^^^
// 2) ^^^^^^
// 1) shortcut for disabled={true}
// 2) child components/nodes passed to a component
```

# EXERCISE: 30MIN

- » I'll create breakout rooms
- » Fork/clone the following <https://github.com/webpapaya/fhs-react-redux-starter-kit>
- » execute `npm run start:storybook`

# EXERCISE: 30MIN

- » extend the sign in component to display
  - » Input with username
  - » Input with password
  - » A Sign In Button (reuse existing button)
- » Extract an Input Component
  - » make it configurable via props

# STATE IN REACT

- » What we've seen so far:
- » Components can render chunks of UI
- » Components can be nested

# STATE IN REACT

“How can we interact with components?”

# STATE IN REACT

“The State of a component is an object that holds some information that may change over the lifetime of the component <sup>5</sup>”

<sup>5</sup> [geeksforgeeks.com](https://www.geeksforgeeks.org/react-state/)

# REACT STATE (WITHOUT HOOKS)

```
class ToggleButton extends React.Component {
  state = { backgroundColor: 'red' };
  // define a default value for background color

  toggleBackgroundColor = () => {
    const nextBackgroundColor = backgroundColor === 'red' ? 'blue' : 'red'
    this.setState({ backgroundColor: nextBackgroundColor })
    //      ^^^^^^^^^^
    // setState calls render method with updated state
  }
  render() {
    return (
      <button
        onClick={() => this.toggleBackgroundColor() }
        style={{ backgroundColor: this.state.backgroundColor }}
      >
        {children}
      </button>
    );
  }
}
```

# REACT STATE (WITH HOOKS)

## » Alternative syntax with hooks

```
const ToggleButton = () => {
  const [backgroundColor, setBackground] = useState('red')
  // 1)                                     ^^^^^^^^^^
  // 2) ^^^^^^^^^^^^^^^^^^^^^^
  // 3)           ^^^^^^^^^^
  // 1) define a state with a default value "red"
  // 2) the current value of the state
  // 3) function to set the state to something else

  return (
    <button
      onClick={() => setBackground(backgroundColor === 'red' ? 'blue' : 'red')}
      style={{ backgroundColor }}
    >
      {children}
    </button>
  )
}
```

# REACT HOOKS

“Hooks allow you to reuse stateful logic without changing your component hierarchy. React Docs”

# REACT HOOKS

- » Introduced recently to reduce boilerplate
- » Makes it possible to use state in functional components
- » Previously one had to convert between functional/class components when state introduced
- » hooks are prefixed with use
- » Can't be called inside loops, conditions or nested

# USESTATE

```
const App = () => {
  const [count, setCount] = useState(0)
  const handleIncrement = () => setCount(count + 1)

  return (
    <div>
      <div>{count}</div>
      <button onClick={handleIncrement}>Increment by 1</button>
    </div>
  )
}
```

# EXTRACT INTO CUSTOM HOOK

```
const useCounter = () => {
  const [count, setCount] => useState(0);
  const handleIncrement = () => setCount(count + 1);
  return { count, handleIncrement };
}

const App = () => {
  const {count,handleIncrement} => useCounter();

  return (
    <div>
      <div>{count}</div>
      <button onClick={handleIncrement}>Increment by 1</button>
    </div>
  );
}
```

# STATE VS. PROPS

## PROPS

## STATE


Can get initial value from parent Component?	Yes
Can be changed by parent Component?	Yes
Can set default values inside Component?*	Yes
Can change inside Component?	No
Can set initial value for child Components?	Yes
Can change in child Components?	Yes

## SOURCE

# UNIDIRECTIONAL DATAFLOW

- » Props only flow from parent to children
- » Parent is responsible to update data
  - » might provide callbacks to do so
- » set state rerenders all children of component

# UNIDIRECTIONAL DATAFLOW

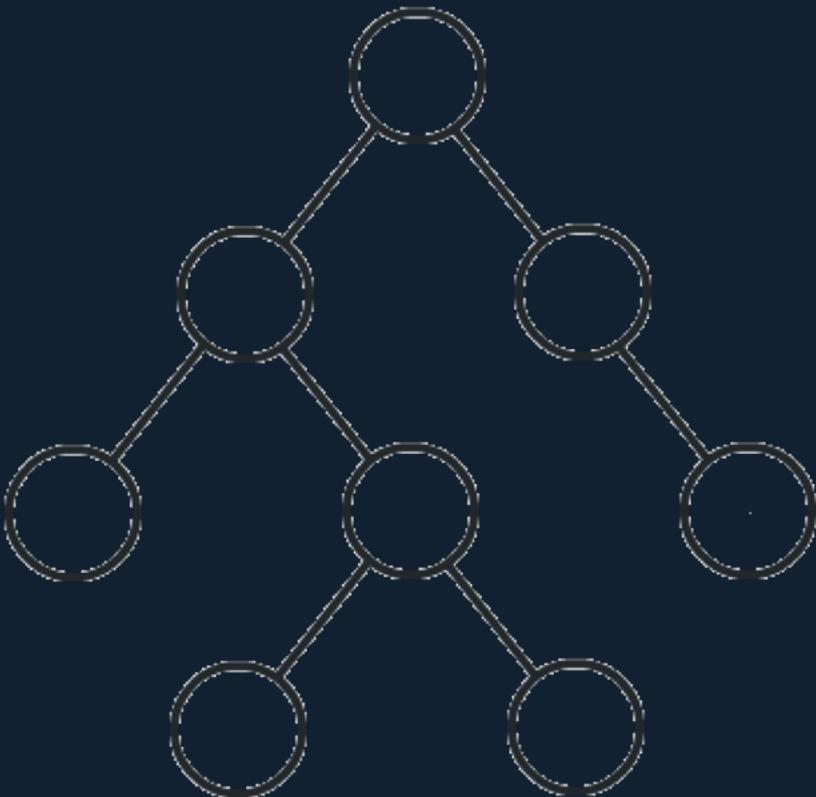

“Source”

# VIRTUAL DOM

- » makes DOM updates faster
- » after `setState` subtree is rerendered in memory
- » compares DOM to in memory representation
- » applies DOM changes when needed

# FORMS WITH REACT HOOKS

```
const App = () => {
  const [username, setUsername] => useState('');
  //                                     ^^^^^^^^^^
  // define a new state with an initial value of empty string

  return (
    <div>
      <input onChange={(evt) => setUsername(evt.target.value)} value={username}>
      { /*                                         ^^^^^^^^^^ */
        { /* set the state of the username */
          <button onClick={() => console.log({ username })}>Submit form</button>
        }
      }
    </div>
  );
}
```

## EXERCISE 1/2 (20 MINUTES)

- » Enhance the SignIn form
  - » store username/password in a component state
- » once the submit button is clicked log all values to the console

## EXERCISE 2/2 (20 MINUTES)

» Bonus: extract a useForm hook

```
const [values, setValue] =  
useForm({  
  
  username: '',  
  
  password: ''  
  
})  
  
return <Input  
onChange={setValue('username')}>
```

# OTHER HOOKS



# USEEFFECT<sup>4</sup>

```
// Executed on every rerender
useEffect(() => {})

// Executed when component rendered initially
useEffect(() => {}, [])

// Executed when component rendered initially
// and when variable changes.
useEffect(() => {}, [variable])

// Cleanup when component unmounts (eg. eventHandlers, setInterval/setTimeout)
useEffect(() => {
  // do something fancy
  return () => { console.log('cleanup') }
}, [variable])
```

<sup>4</sup> this will be covered in more detail in the side effect lecture

## PREVIOUS EXAMPLE

```
const useCounter = () => {
  const [count, setCount] => useState(0);
  const handleIncrement = () => setCount(count + 1);
  return { count, handleIncrement };
}

const App = () => {
  const {count,handleIncrement} => useCounter();

  return (
    <div>
      <div>{count}</div>
      <button onClick={handleIncrement}>Increment by 1</button>
    </div>
  );
}
```

# UPDATE TITLE WITH COUNTER

```
const useCounter = () => {
  const [count, setCount] => useState(0);
  const handleIncrement = () => setCount(count + 1);
  return { count, handleIncrement };
}

const App = () => {
  const {count,handleIncrement} => useCounter();

  // Is executed when component is rendered for the first time
  // And when the counter variable changes.
  useEffect(() => {
    document.title = `Counter clicked ${count} times`;
  }, [count]);

  return (
    <div>
      <div>{count}</div>
      <button onClick={handleIncrement}>Increment by 1</button>
    </div>
  );
}
```

# EXTRACT TO CUSTOM HOOK

```
const useCounter = () => {
  const [count, setCount] => useState(0);
  const handleIncrement = () => setCount(count + 1);
  useEffect(() => {
    document.title = `Counter clicked ${count} times`;
  }, [count]);
  // ^^^^^^ moved to hook

  return { count, handleIncrement };
}

const App = () => {
  const {count, handleIncrement} => useCounter();


  return (
    <div>
      <div>{count}</div>
      <button onClick={handleIncrement}>Increment by 1</button>
    </div>
  );
}
```

# REACT.MEMO

“Memoizing a function makes it faster by trading space for time. It does this by caching the return values of the function in a table.<sup>7</sup>”

<sup>7</sup> <https://metacpan.org/pod/Memoize>

# REACT.MEMO

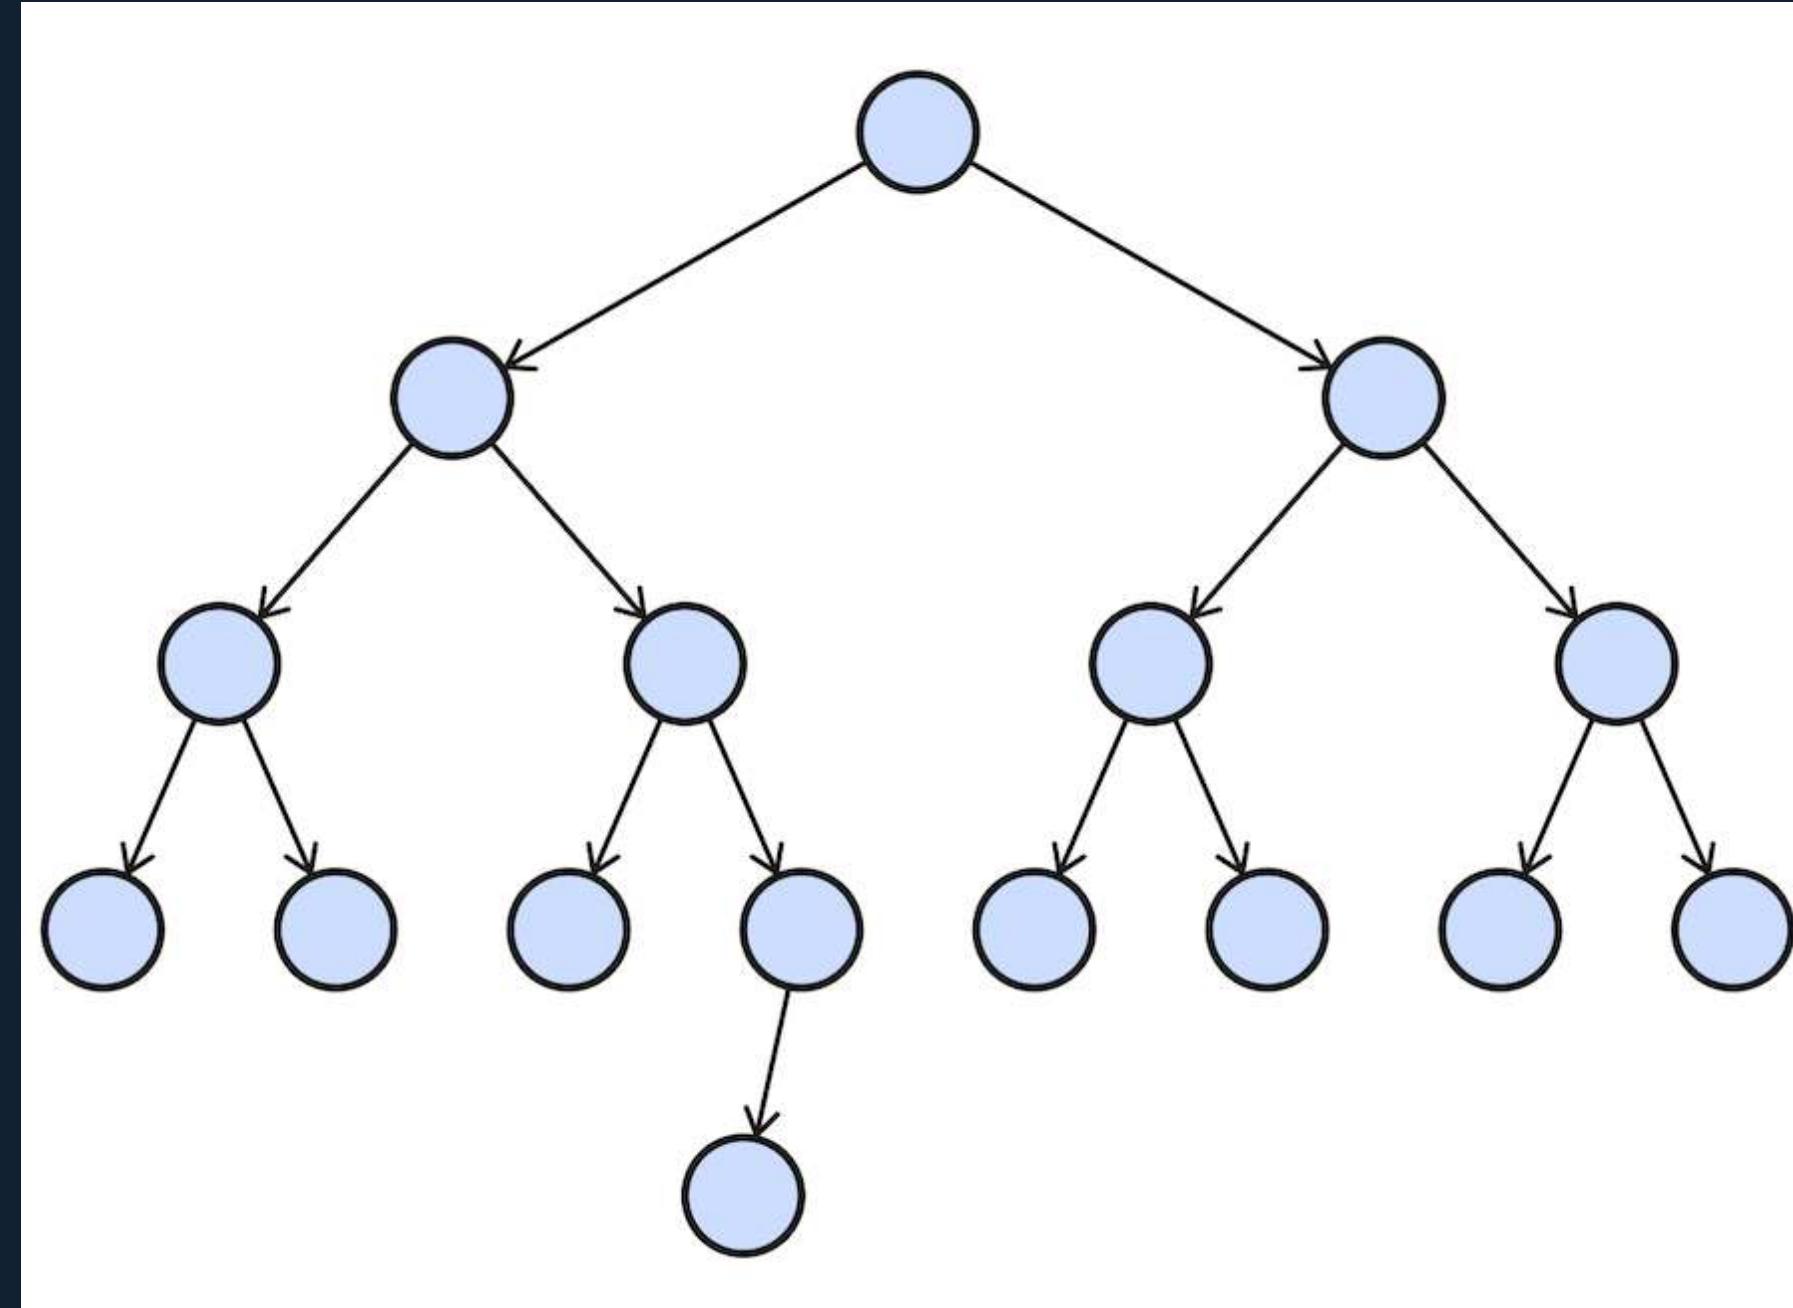

# REACT.MEMO


- » Caches the rendered component
- » Only rerenders when one of the props changes
  - » shallow comparison

```
const MyComponent = React.memo(function MyComponent(props) {  
  /* render using props */  
});
```

# REACT CONTEXT API

- » Available since the beginning of React
- » Prevent "prop drilling"


# REACT CONTEXT API

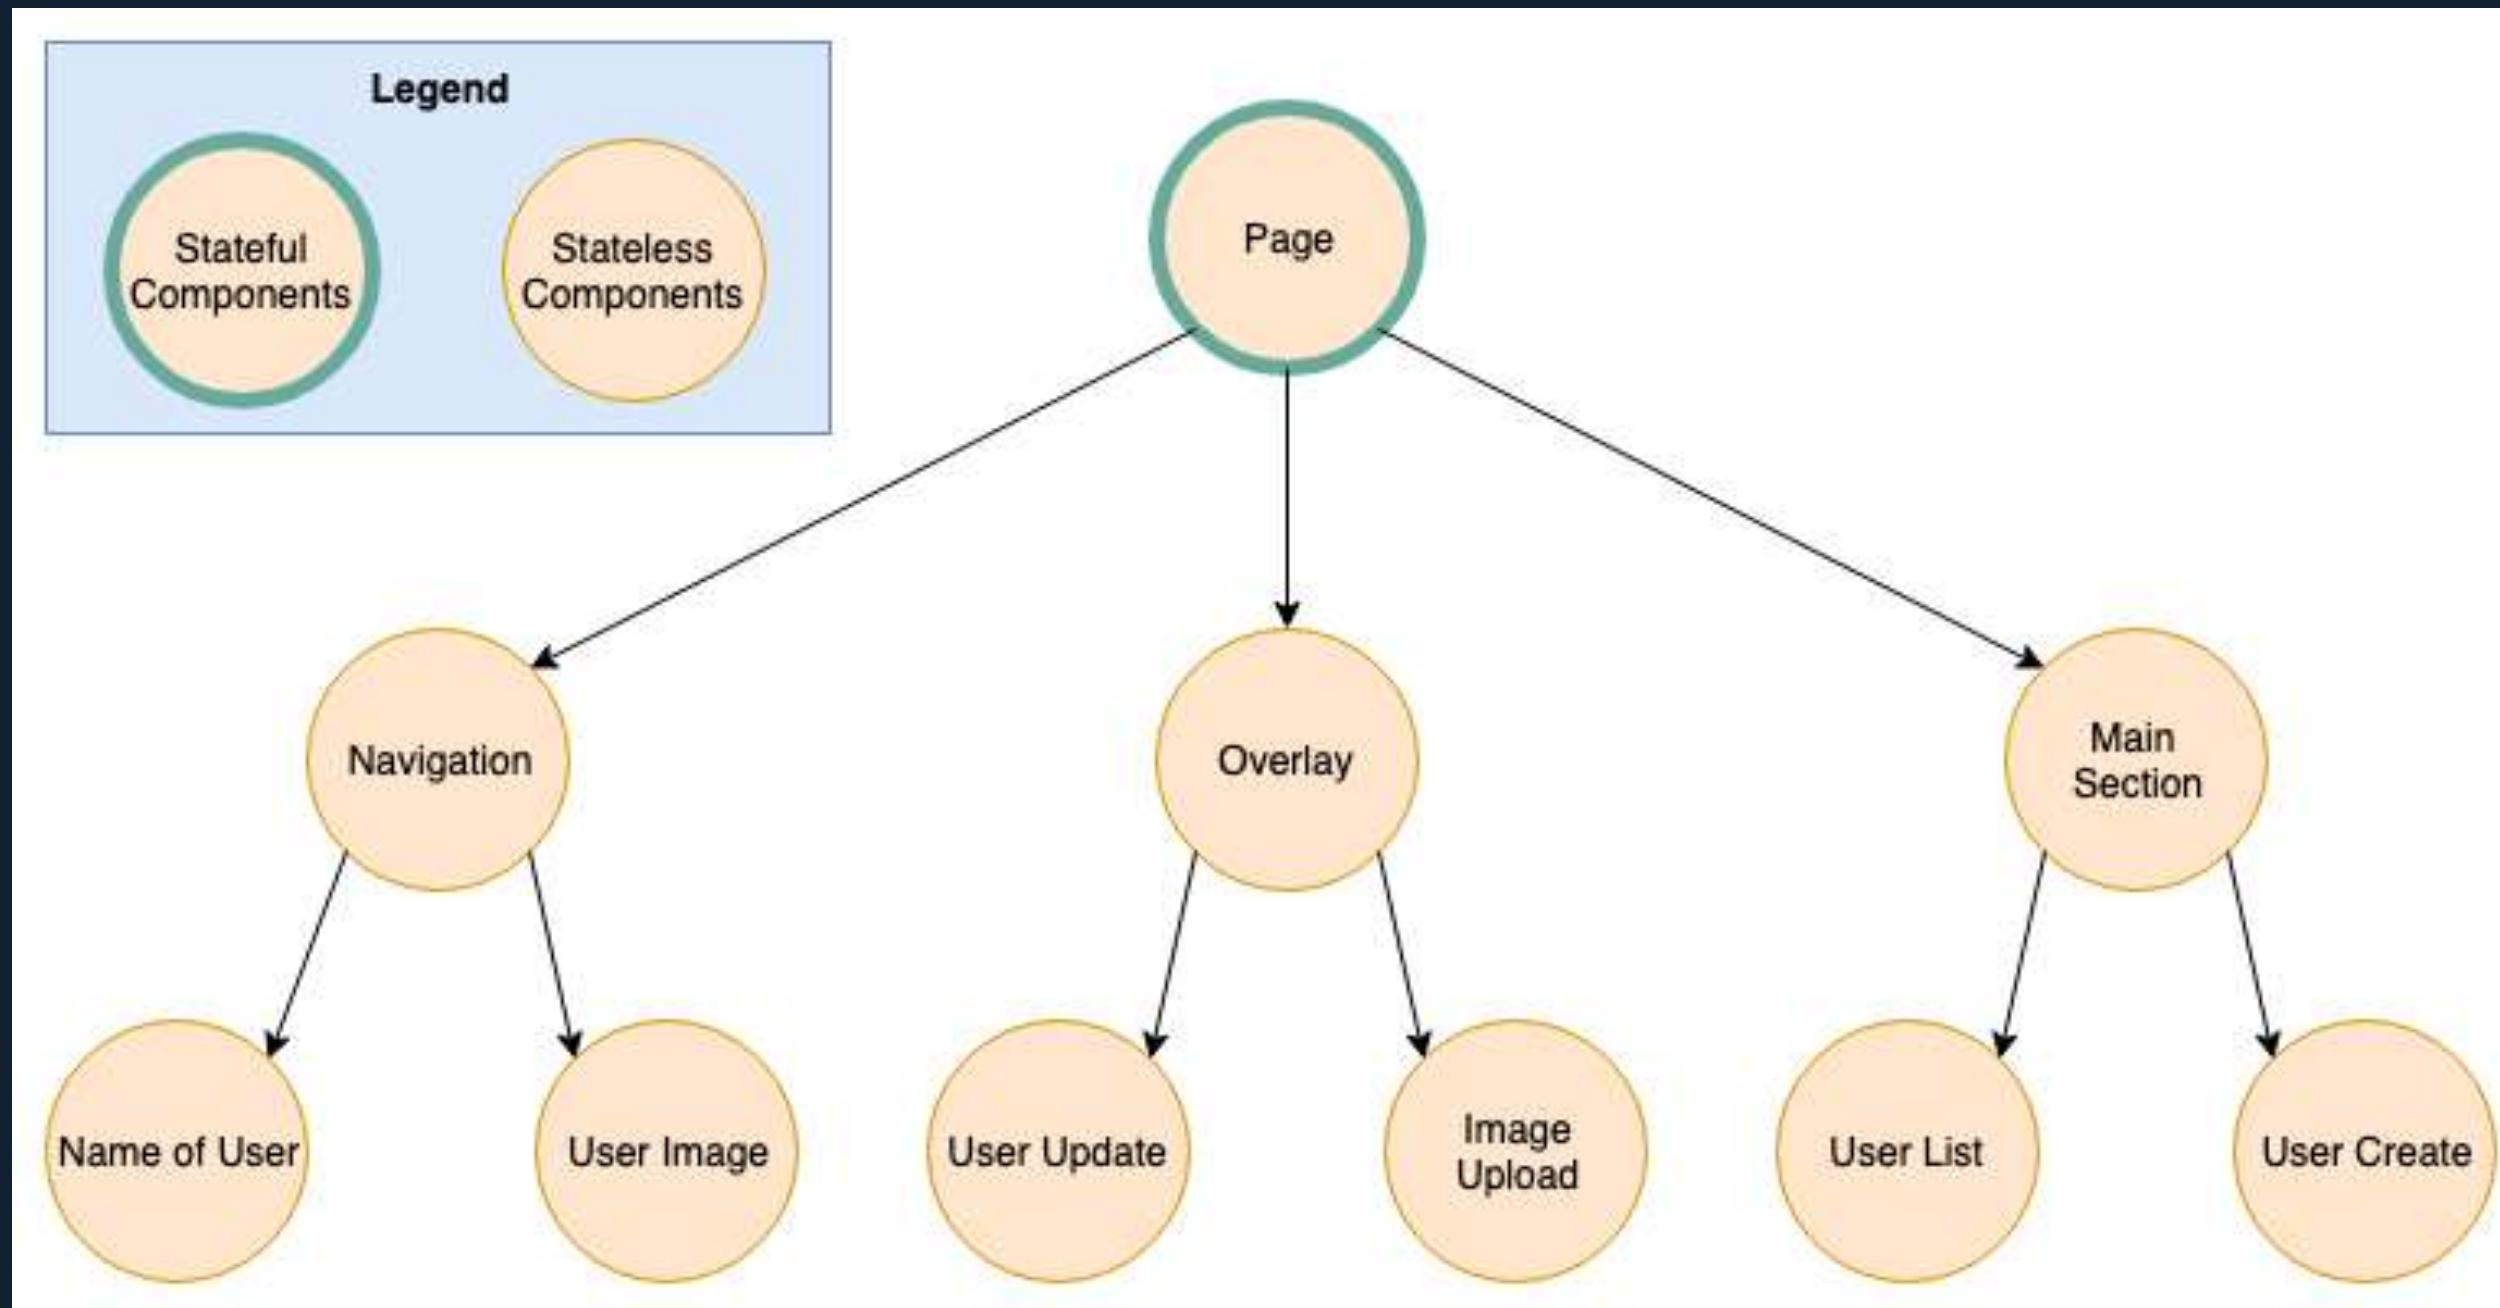

# REACT CONTEXT API

```
▼ <div>
  ▼ <View pointerEvents="box-none" style={281}>
    ▼ <div className="css-1dbjc4n r-13awgt0 r-12vffkv">
      ▼ <View key="1" pointerEvents="box-none" style={281}>
        ▼ <div className="css-1dbjc4n r-13awgt0 r-12vffkv">
          ▼ <t isNightMode={false}>
            ▼ <t>
              ▼ <r>
                ▼ <Context.Consumer>
                  ▼ <Context.Provider>
                    ▼ <Connect(t)>
                      ▼ <t language="de" loggedInUserId="253431163">
                        ▼ <t>
                          ▼ <Router.Consumer.Provider>
                            ▼ <withRouter(n)>
                              ▼ <t>
                                ▼ <Router.Consumer.Consumer>
                                  ▼ <Router.Consumer.Provider>
                                    ▼ <n>
                                      ▼ <t>
                                        ▼ <Router.Consumer.Consumer>
                                          ▼ <t>
                                            ▼ <Router.Consumer.Consumer>
                                              ▼ <Router.Consumer.Provider>
                                                ▼ <Unknown>
                                                  ▼ <t>
                                                    ▼ <withRouter(t)>
                                                      ▼ <t>
                                                        ▼ <Router.Consumer.Consumer>
                                                          ▼ <Router.Consumer.Provider>
                                                            ▼ <t>
                                                              ▼ <Connect(t)>
                                                                ▼ <t scale="normal">
                                                                  ▼ <t>
                                                                    ▼ <t showReload={true}>
                                                                      ▶ <SideEffect(t) title="Twitter">...</SideEffect(t)>
                                                                      ▶ <withRouter(Connect(t))>...</withRouter(Connect(t))>
                                                                      ▶ <t zIndex={1}>...</t>
                                                                    ▼ <View>
                                                                      ▼ <div className="css-1dbjc4n r-1pi2tsx r-sa2ff0 r-13qz1uu r-417010">
                                                                        ▶ <withRouter(Connect(i))>...</withRouter(Connect(i))>
                                                                      ▼ <@twitter/Responsive>
                                                                        ▼ <View accessibilityRole="main" style={245}>
                                                                          ▼ <main role="main" className="css-1dbjc4n r-16y2uox r-1wbh5a2">
                                                                            ▼ <View style={248}>
```

# REACT CONTEXT API

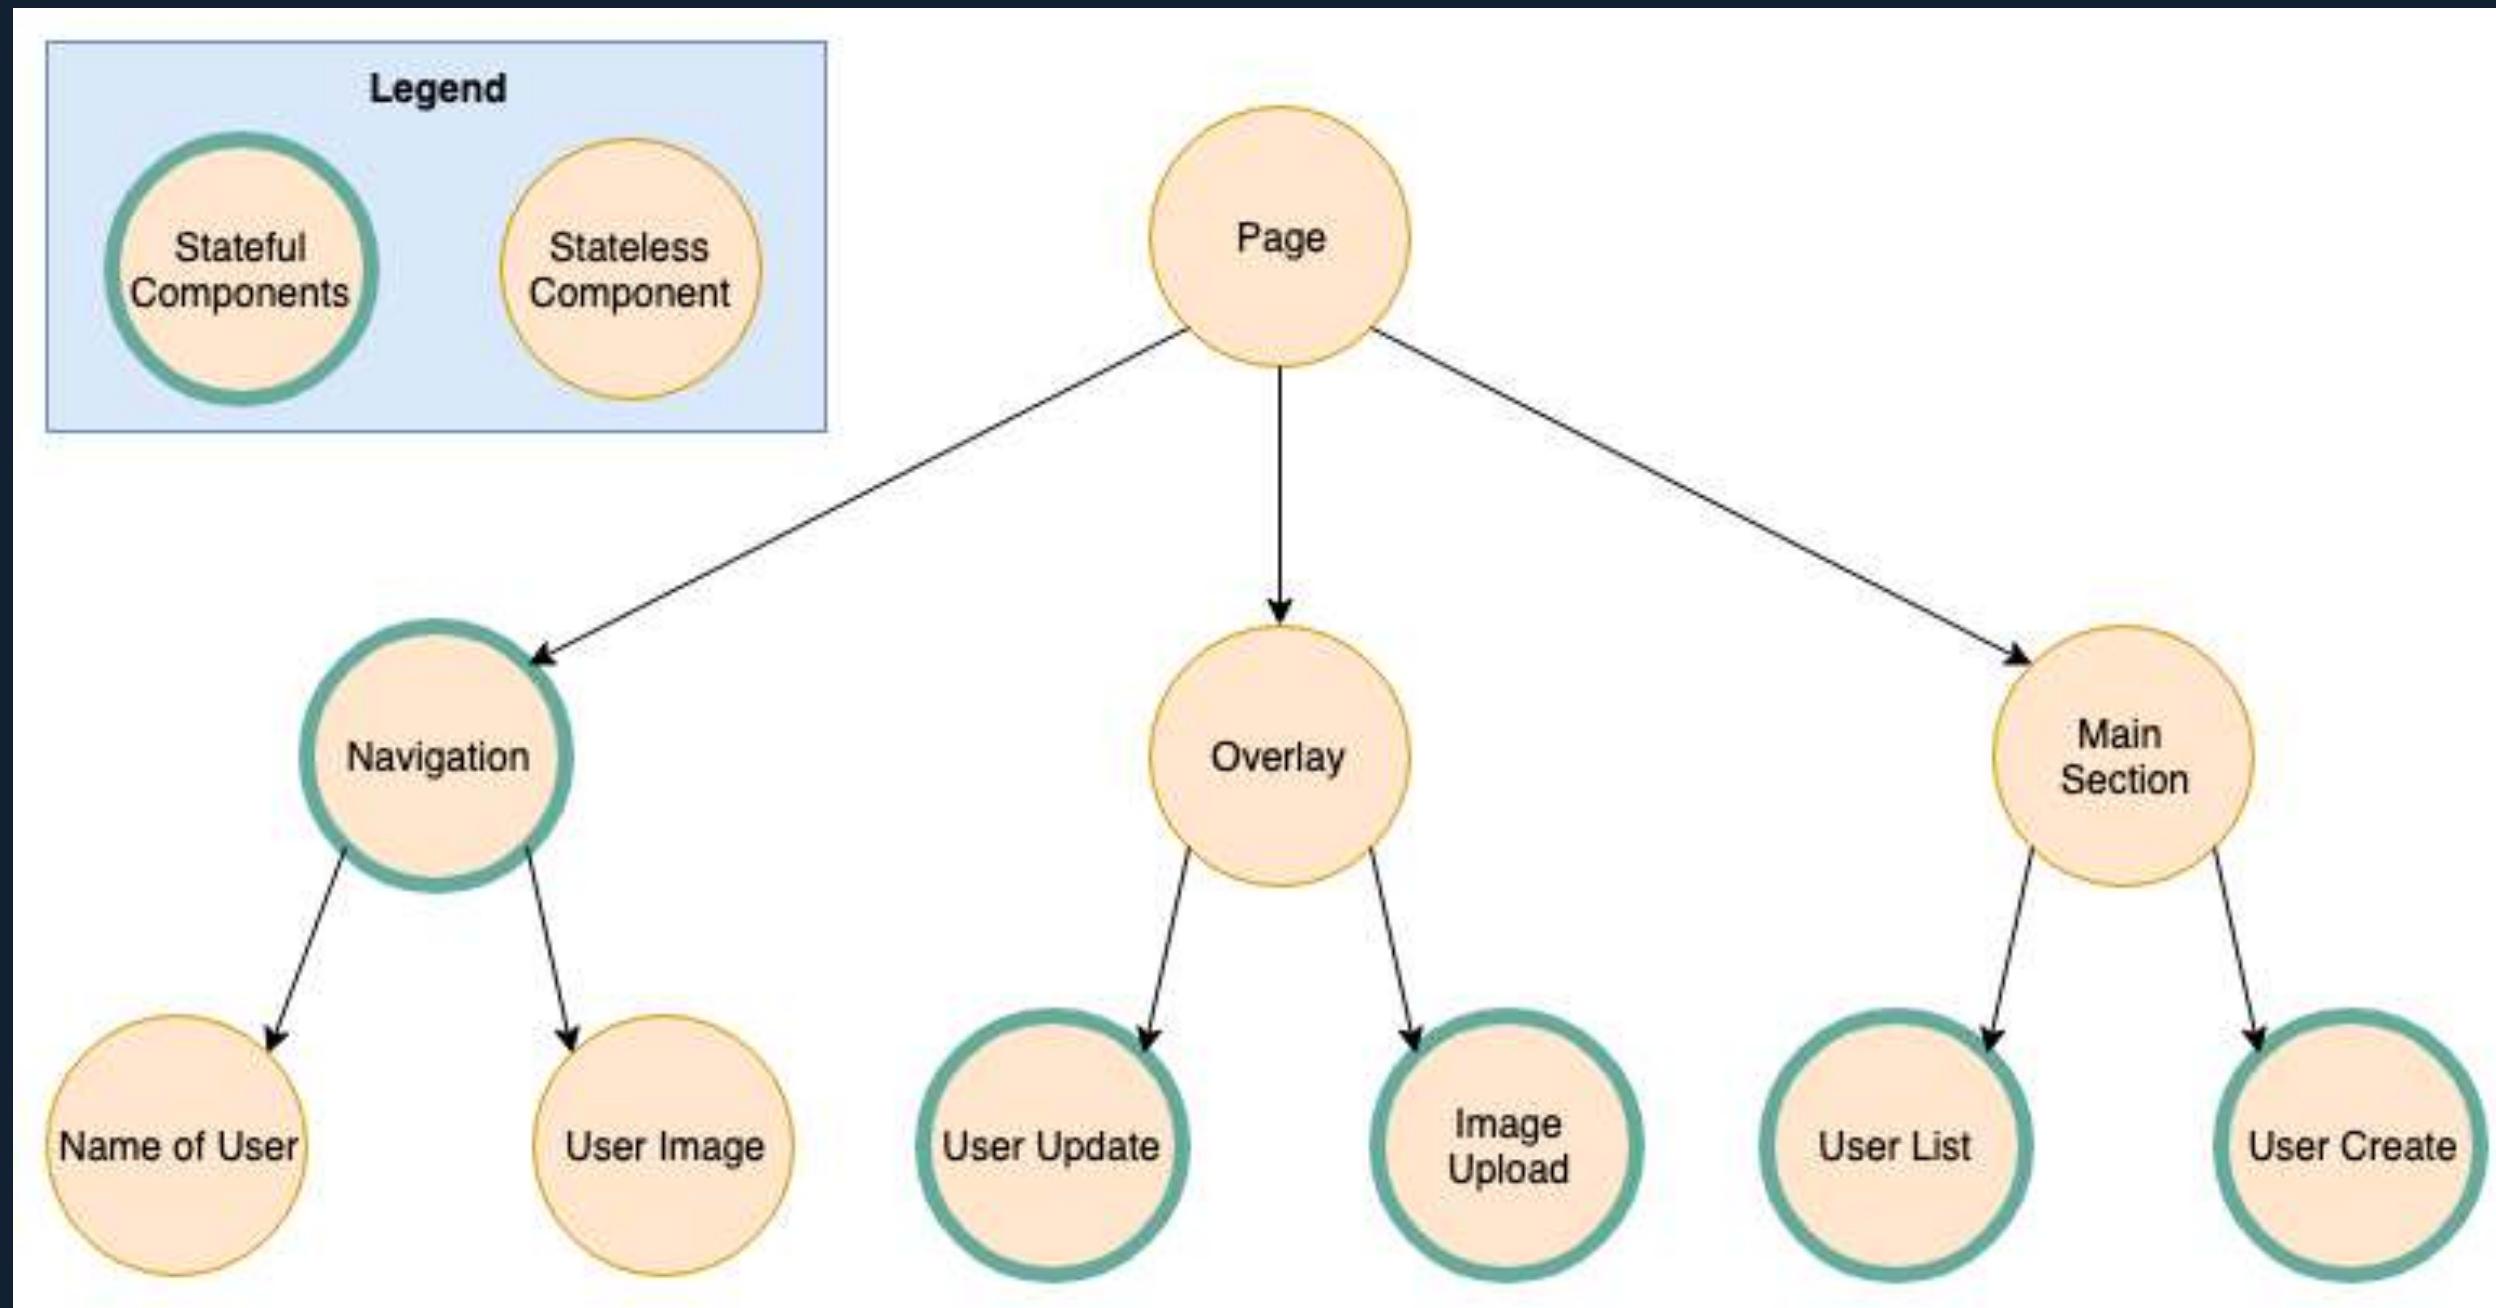

# CREATING A CONTEXT

```
const DEFAULT_VALUE = 1
const MyContext = React.createContext(DEFAULT_VALUE)


const RootComponent = () => {
  return (
    <MyContext.Provider value={2}>
      <ANestedComponent />
    </MyContext.Provider>
  )
}

const ANestedComponent = () => {
  const value = useContext(MyContext)
  return (
    <h1>The value from context is {value}</h1>
  )
}
```

# PITFALLS 1

## » fine granular context

```
const RootComponent = () => {
  return (
    <Context.Provider>
      <Context.Provider>
        <Context.Provider>
          <Context.Provider>
            <Context.Provider>
              <Context.Provider>
                <Context.Provider>
                  <Context.Provider>
                    <div>Here starts the app</div>
                  </Context.Provider>
                </Context.Provider>
              </Context.Provider>
            </Context.Provider>
          </Context.Provider>
        </Context.Provider>
      </Context.Provider>
    </Context.Provider>
  )
}
```

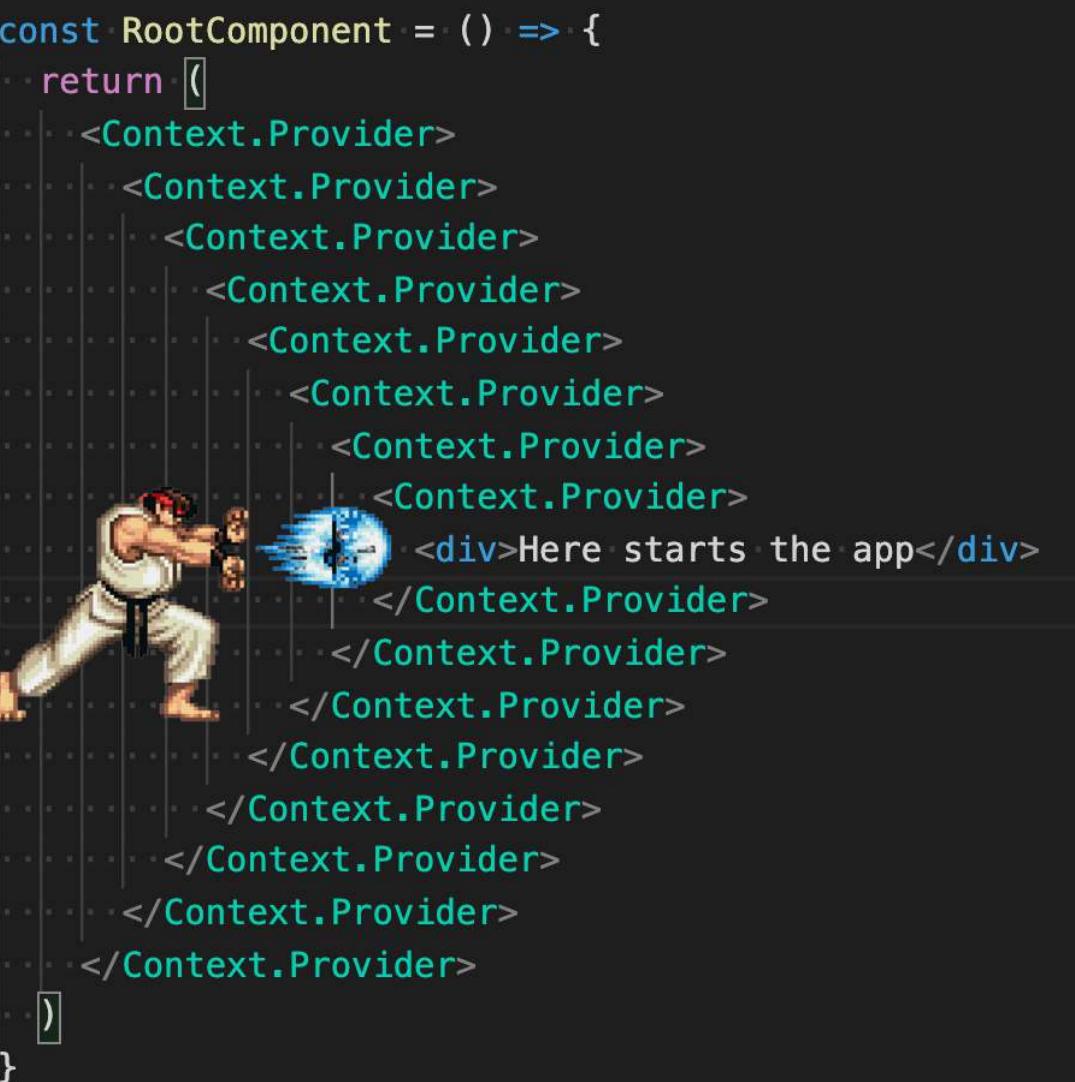

## PITFALLS/TIPS

- » Prefer passing props down to components
  - » prefer explicit (pass down) vs implicit (context)
- » only use when multiple components need to access same data
  - » if possible pass data down
- » don't overuse

# OTHER HOOKS

- » API Reference
- » useReducer
- » useCallback
- » useMemo
- » useRef
- » useImperativeHandle
- » useLayoutEffect

## TASK ADVANCED HOOKS TASK

- » build a clock component
- » component displays current time in seconds
- » automatically updates itself
- » remove setInterval when component unmounts
- » You'll need
  - » useEffect, useState
  - » setInterval or setTimeout

# FEEDBACK

- » Questions: [tmayrhofer.lba@fh-salzburg.ac.at](mailto:tmayrhofer.lba@fh-salzburg.ac.at)
- » <https://de.surveymonkey.com/r/8TW92LL>