


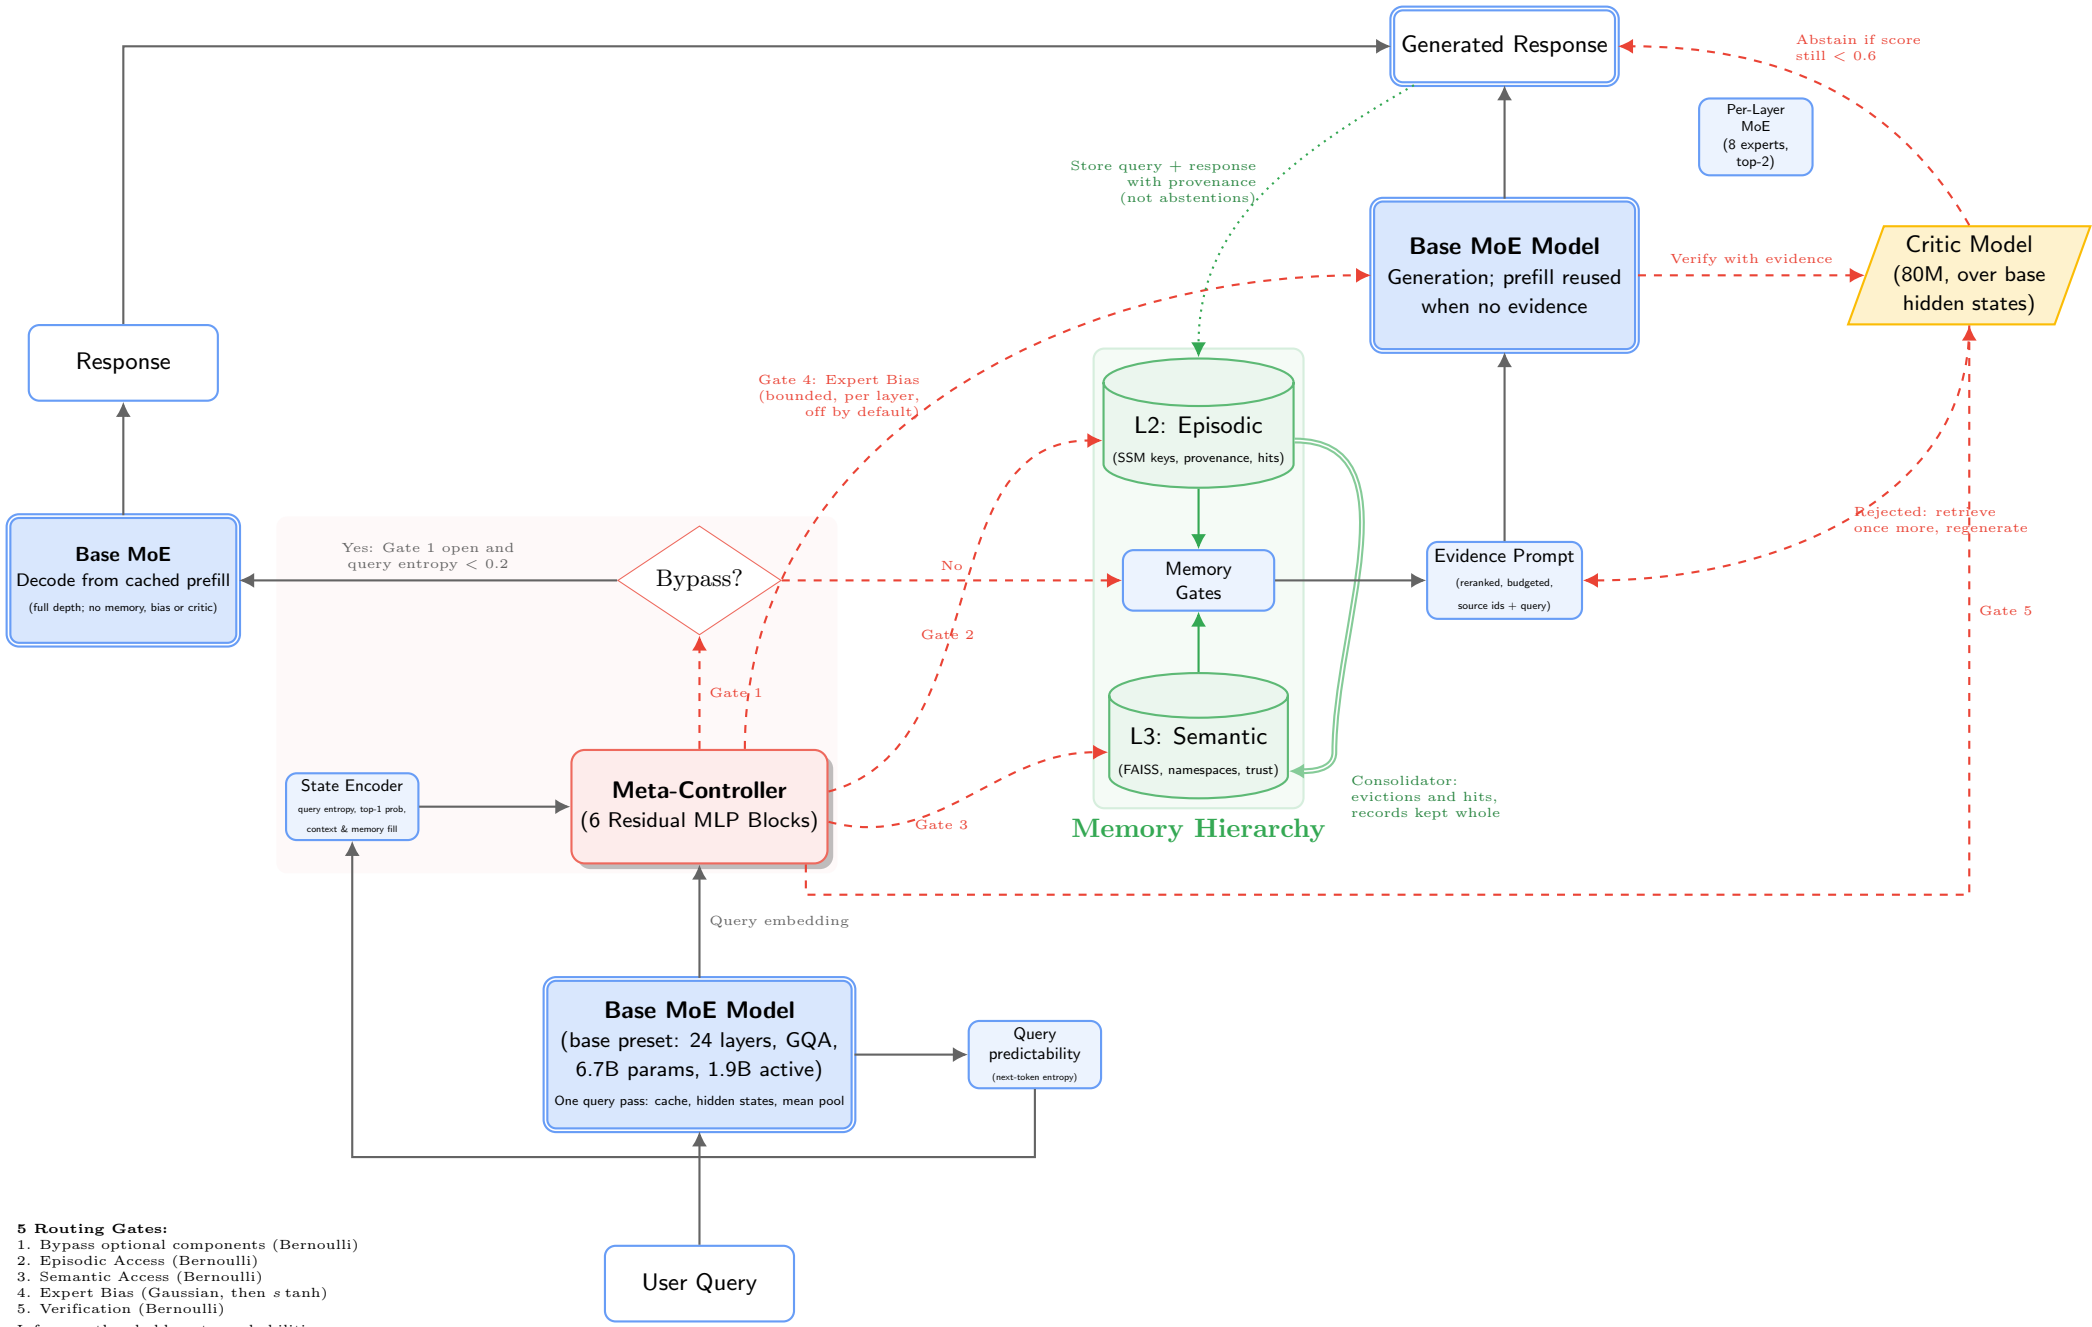

5 Routing Gates:

1. Bypass optional components (Bernoulli)
2. Episodic Access (Bernoulli)
3. Semantic Access (Bernoulli)
4. Expert Bias (Gaussian, then $s \tanh$)
5. Verification (Bernoulli)

Inference thresholds gate probabilities at 0.5 and uses the Gaussian mean. A gate whose component is missing stays closed; ignored actions leave the policy log-probability.