

1. BALANCE INQUIRY WEB SERVICES

DOCUMENT OBJECTIVE
This document presents the requirement results of SELECTSystem® solution implementation for Balance Inquiry Web service.

MODIFICATIONS HISTORY				
Date	Version	Status	Main Updates	Author

SUMMARY_____

SUMMARY_____	3
1 INTRODUCTION_____	4
1.1 AUDIENCE.....	4
REVISION TO THIS DOCUMENT.....	4
1.3 PURPOSE OF THIS DOCUMENT.....	4
2 INTERFACES SPECIFICATION_____	5
2.1 INTERFACE.....	5
2.1.1 INTERFACE DESCRIPTION.....	5
2.1.1.1 BALANCE INQUIRY.....	5
2.1.1.1.1 METHOD NAME.....	5
2.1.1.1.2 INPUT PARAMETERS.....	5
2.1.1.1.3 OUTPUT PARAMETERS.....	5
2.1.1.1.4 WSDL SPECIFICATIONS.....	6

2.1.1.1.1.5	WSDL FILE.....	6
2.1.1.1.1.6	SOAP SAMPLE.....	6
2.2	ANNEXS.....	7
2.2.1	ANNEX 1: RESPONSE CODE.....	7
2.2.2	ANNEX 2: MAC SPECIFICATION.....	8 2.2.3
	ANNEX 3: MAC-IN STRUCTURE.....	9

1 INTRODUCTION

1.1 AUDIENCE

This document is intended to as a deliverable of **SELECTSystem®** interface **Balance Inquiry**.

1.2 REVISION TO THIS DOCUMENT

Revisions to this document may be required to enhance the comprehension of some concepts and accommodate future **SELECTSystem®** changes. The impacts of these changes will be communicated in the new releases of this document.

1.3 PURPOSE OF THIS DOCUMENT

This document details the interface specification of the API Balance Inquiry.

2 INTERFACES SPECIFICATION

2.1 INTERFACE

2.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to get balance.

2.1.1.1 BALANCE INQUIRY

2.1.1.1.1 METHOD NAME

wsBalanceInquiry

2.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
pChannel	String	M	The pChannel as defined by the bank on CMS.
pUser	String	M	Username
pPassword	String	M	Password
pCustomerId	String	M	Customer Identity
pPan	String	M	Card number
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3

2.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
pResponsecode	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code

pMacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3
balance	String	Available amount
accNumbMxp	String	Account number
currency	String	Amount currency

2.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

2.1.1.1.1.5 WSDL FILE

2.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsBalanceInquiry>
      <pChannel>014</pChannel>
      <pUser>AMB</pUser>
      <pPassword>AMB_123$</pPassword>
      <pCustomerId>0100101P004947923008</pCustomerId>
      <pPan>5322020027430857</pPan>
      <pMacInput>MAC_OK</pMacInput>
      <pResponsecode>?</pResponsecode>
      <pRespMsg>?</pRespMsg>
      <pMacOut>?</pMacOut>
      <pAllParamBl>
        <!--Zero or more repetitions:-->
        <typ:TBalanceUser>
          <typ:balance>?</typ:balance>
```

```

        <typ:accNumbMxp>?</typ:accNumbMxp>
        <typ:currency>?</typ:currency>
    </typ:TBalanceUser>
</pAllParamBl>
</egat:wsBalanceInquiry>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsBalanceInquiryResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <pResponsecode>000</pResponsecode>
      <pRespMsg xsi:nil="true"/>
      <pMacOut>8E674FD05645A1392E4B3C29D9AC7A0C</pMacOut>
      <pAllParamBl>
        <typ:TBalanceUser xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
          <typ:balance>958.95</typ:balance>
          <typ:accNumbMxp>0100101P000004947923008</typ:accNumbMxp>
          <typ:currency>840</typ:currency>
        </typ:TBalanceUser>
      </pAllParamBl>
    </m:wsBalanceInquiryResponse>
  </env:Body>
</env:Envelope>

```

2.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MONDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR

69	FORMAT ERROR : CUSTOMER NOT FOUND
----	-----------------------------------

2.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

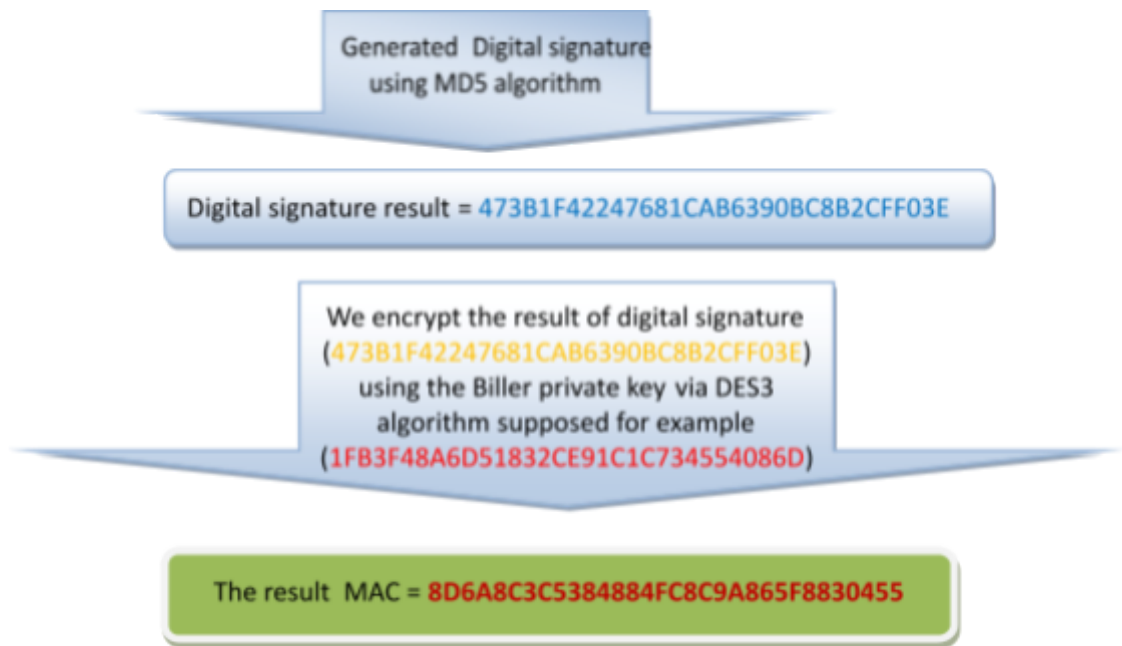

2.CARD LIST INQUIRY WEB SERVICES

2 INTERFACES SPECIFICATION

2.1 INTERFACE

2.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to get balance.

2.1.1.1 BALANCE INQUIRY

2.1.1.1.1 METHOD NAME

wsBalanceInquiry

2.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
pChannel	String	M	The pChannel as defined by the bank on CMS.
pUser	String	M	Username
pPassword	String	M	Password
pCustomerId	String	M	Customer Identity
pPan	String	M	Card number
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3

2.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
pResponsecode	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code

pMacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3
balance	String	Available amount
accNumbMxp	String	Account number
currency	String	Amount currency

2.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

2.1.1.1.1.5 WSDL FILE

2.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsBalanceInquiry>
      <pChannel>014</pChannel>
      <pUser>AMB</pUser>
      <pPassword>AMB_123$</pPassword>
      <pCustomerId>0100101P004947923008</pCustomerId>
      <pPan>5322020027430857</pPan>
      <pMacInput>MAC_OK</pMacInput>
      <pResponsecode>?</pResponsecode>
      <pRespMsg>?</pRespMsg>
      <pMacOut>?</pMacOut>
      <pAllParamBl>
        <!--Zero or more repetitions:-->
        <typ:TBalanceUser>
          <typ:balance>?</typ:balance>
```

```

        <typ:accNumbMxp>?</typ:accNumbMxp>
        <typ:currency>?</typ:currency>
    </typ:TBalanceUser>
</pAllParamBl>
</egat:wsBalanceInquiry>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsBalanceInquiryResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <pResponsecode>000</pResponsecode>
      <pRespMsg xsi:nil="true"/>
      <pMacOut>8E674FD05645A1392E4B3C29D9AC7A0C</pMacOut>
      <pAllParamBl>
        <typ:TBalanceUser xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
          <typ:balance>958.95</typ:balance>
          <typ:accNumbMxp>0100101P000004947923008</typ:accNumbMxp>
          <typ:currency>840</typ:currency>
        </typ:TBalanceUser>
      </pAllParamBl>
    </m:wsBalanceInquiryResponse>
  </env:Body>
</env:Envelope>

```

2.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MONDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR

69	FORMAT ERROR : CUSTOMER NOT FOUND
----	-----------------------------------

2.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

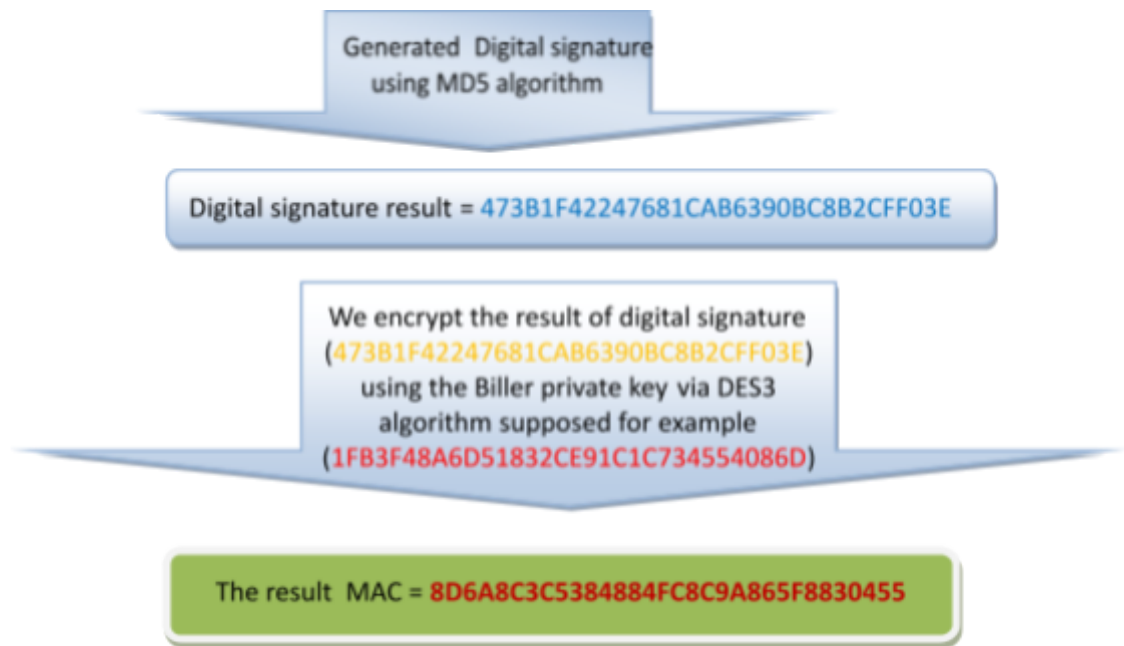

2.1.4 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = Customer id , pan;

3. WS_CARD_CHANGE_STATUS_V1.DOCX

3 INTERFACES SPECIFICATION

3.1 INTERFACE

3.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank either to activate or cancel a card, or to hot list a card. The card can be credit, prepaid, or debit.

3.1.1.1 WS_CARD_STATUS_CHANGE

3.1.1.1.1 METHOD NAME

WS_CARD_CHANGE_STATUS

3.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on MEPS CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
customerId	String	M	Customer ID
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3

status	String	M	Only when action is “change status”. The new status of the card: 1 In Instance, 2 Active, 3 Blocked, 4 Monitoring, 5 Deactivated, 6 Cancelled, 7 Replaced, 8 Ready For Personalization --EGATE VALUES: 1 In Instance 2 Active 3 Blocked 4 Hold 5 Inactive 6 Cancelled
			7 Replaced 8 Ready For Personalization 9 KYC Pending 10 Verification 11 Blocked without Activation
cardIden			Card identity

3.1.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response_Code	String	Refer to Annex 1 (Response code Annex)
Serverdatetime	String	Server response time (Format : DDMMYYYYHH24MISS)
Addrespcodedesc	String	More details about Error code
Macout	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3
AddDataOut	String	More details about Error code

3.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

3.1.1.1.1.5 WSDL FILE

3.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
<soapenv:Header/>
<soapenv:Body>
<egat:wsCardChangeStatus>
<bankId>014</bankId>
<ebankingUser>AMB</ebankingUser>
<ebankingPassword>AMB_123$</ebankingPassword>
<customerId>0100101P004947923008</customerId>
<cardIden>230303</cardIden>
<status>2</status>
<cardExpDate>25/01</cardExpDate>
<macin>FDAF1FD516B1145657009FD2FA6A734E</macin>
<addDataIn>?</addDataIn>
<serverdatetime>?</serverdatetime>
<responsecode>?</responsecode>
<addrespcodedesc>?</addrespcodedesc>
<macout>?</macout>
<addDataOut>?</addDataOut>
</egat:wsCardChangeStatus>
</soapenv:Body>
</soapenv:Envelope>
```

Output Response Success:

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
<env:Header/>
<env:Body>
<m:wsCardChangeStatusResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
<result>0</result>
<serverdatetime>17072025105639</serverdatetime>
<responsecode>000</responsecode>
<addrespcodedesc>SUCCESS CHANGE CARD STATUS</addrespcodedesc>
<macout>79160049D3E9A6F6D92059C22CA2065F</macout>
<addDataOut xsi:nil="true"/>
</m:wsCardChangeStatusResponse>
</env:Body>
```

</env:Envelope>

3.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
001	CARD NOT FOUND
002	System Error
003	Input data not valid
004	CARD HOT LISTED'
005	CARD STATUS NOT AUTHORIZED
006	CARD NOT LINKED TO Bank
007	USER_NOT_FOUND
010	token_NOT_FOUND

3.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

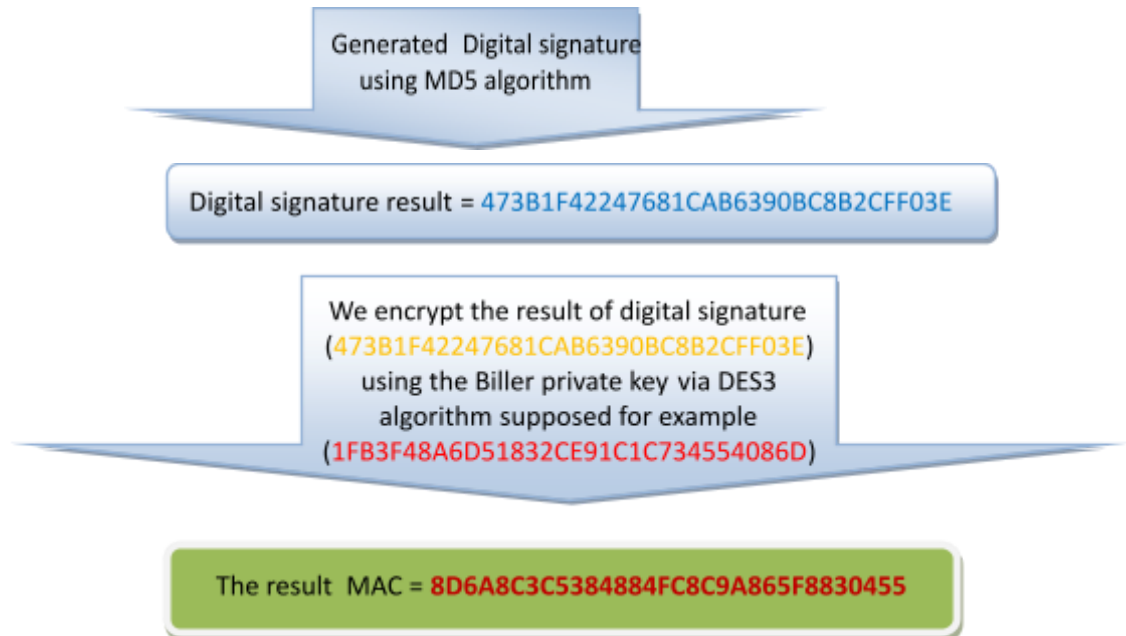

3.1.4 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN||STATUS||CARD_EXP_DATE;

4.CARD LIST INQUIRY WEB SERVICES

4 INTERFACES SPECIFICATION

4.1 INTERFACE

4.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to get information about all customer cards.

4.1.1.1 WS_CARD_DETAIL

4.1.1.1.1 METHOD NAME

WS_CARD_Detail

4.1.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
CUSTOMER_ID	String	M	Customer ID
CardMaskEn	String	M	
CARD_Iden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2,3

4.1.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code

Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3
cardTabAlphaP	TAB	Table of records
cprIden	String	Card program Id
cprName	String	Card program name
carChldFirsName	String	
carNumb	String	Card number
carExpiDate	String	Card Expiry Date
bralden	String	Branch ID
addData	String	
cprUrlLogo	String	
carChldName	String	Card holder name
carOpposedFlag	String	
accountList	String	
carInteOrde	String	
carMobile	String	Mobile number
CarCityCode	String	City code
carChldLastName	String	Card holder last name
Carden	String	Card identity
carCstCode	String	
cprVirtualFlag	String	
carChldMiddName	String	Card holder middle name
carPrimarySeco	String	
carAutoRenewFlag	String	
carDefaultFlag	String	
carMailOrde	String	

4.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

4.1.1.1.1.5 WSDL FILE

4.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:egat="http://egatebanking/Egate\_Ebanking\_AMB\_WS.wsdl"
  xmlns:typ="http://egatebanking/Egate\_Ebanking\_AMB\_WS.wsdl/types/">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsCardDetail>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
      <customerId>0100101P004947923008</customerId>
      <cardIden>230303</cardIden>
      <cardMaskEnc>E</cardMaskEnc>
      <macin>BB5868A3161D183D18DB0FCA26307524</macin>
      <addDataIn>?</addDataIn>
      <serverdatetime>?</serverdatetime>
      <responsecode>?</responsecode>
      <addrespcodedesc>?</addrespcodedesc>
      <macout>?</macout>
      <addDataOut>?</addDataOut>
      <cardTabAlphaP>
        <!--Zero or more repetitions:-->
        <typ:CardTypeAlphaUser>
          <typ:cprIden>?</typ:cprIden>
          <typ:cprName>?</typ:cprName>
          <typ:carChldFirsName>?</typ:carChldFirsName>
          <typ:carOpposedRaison>?</typ:carOpposedRaison>
          <typ:carExpiDate>?</typ:carExpiDate>
          <typ:carNumb>?</typ:carNumb>
          <typ:bralden>?</typ:bralden>
          <typ:addData>?</typ:addData>
          <typ:cprUrlLogo>?</typ:cprUrlLogo>
          <typ:carChldName>?</typ:carChldName>
          <typ:carOpposedFlag>?</typ:carOpposedFlag>
          <typ:accountList>
            <!--Zero or more repetitions:-->
            <typ:array>
              <typ:accCurrencyBalance>?</typ:accCurrencyBalance>
              <typ:accNumb>?</typ:accNumb>
              <typ:accBalance>?</typ:accBalance>
              <typ:accCreditLimit>?</typ:accCreditLimit>
              <typ:accOutstandingBalance>?</typ:accOutstandingBalance>
              <typ:addData>?</typ:addData>
              <typ:accCategory>?</typ:accCategory>
            </typ:array>
          </typ:accountList>
          <typ:carInteOrde>?</typ:carInteOrde>
```

```

<typ:carMobile>?</typ:carMobile>
<typ:carCtyCode>?</typ:carCtyCode>
<typ:carChldLastName>?</typ:carChldLastName>
<typ:carIden>?</typ:carIden>
<typ:carCstCode>?</typ:carCstCode>
<typ:cprVirtualFlag>?</typ:cprVirtualFlag>
<typ:carChldMiddName>?</typ:carChldMiddName>
<typ:carPrimarySeco>?</typ:carPrimarySeco>
<typ:carAutoRenewFlag>?</typ:carAutoRenewFlag>
<typ:carDefaultFlag>?</typ:carDefaultFlag>
<typ:cprContactlessFlag>?</typ:cprContactlessFlag>
<typ:carMailOrde>?</typ:carMailOrde>
</typ:CardTypeAlphaUser>
</cardTabAlphaP>
</egat:wsCardDetail>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsCardDetailResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <serverdatetime>16072025095143</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS</addrespcodedesc>
      <macout>3C69155014CC70980326426C1579DC76</macout>
      <addDataOut xsi:nil="true"/>
      <cardTabAlphaP>
        <typ:CardTypeAlphaUser
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
          <typ:cprIden>AMB_002</typ:cprIden>
          <typ:cprName>MASHRIQ PREPAID IQD</typ:cprName>
          <typ:carChldFirsName>ANAS</typ:carChldFirsName>
          <typ:carOpposedRaison xsi:nil="true"/>
          <typ:carExpiDate>01/25</typ:carExpiDate>
          <typ:carNumb>C8DF1EC968EB4F53</typ:carNumb>
          <typ:bralden>101</typ:bralden>
          <typ:addData xsi:nil="true"/>
          <typ:cprUrlLogo>NO_LOGO</typ:cprUrlLogo>
          <typ:carChldName>ANAS ABDULHAMEED</typ:carChldName>
          <typ:carOpposedFlag>N</typ:carOpposedFlag>
          <typ:accountList>
            <typ:array>
              <typ:accCurrencyBalance>USD</typ:accCurrencyBalance>
              <typ:accNumb>9647813367303</typ:accNumb>
              <typ:accBalance>958.95</typ:accBalance>

```

```

        <typ:accCreditLimit>0</typ:accCreditLimit>
        <typ:accOutstandingBalance>0</typ:accOutstandingBalance>
        <typ:addData xsi:nil="true"/>
        <typ:accCategory>R</typ:accCategory>
    </typ:array>
</typ:accountList>
<typ:carInteOrde>Y</typ:carInteOrde>
<typ:carMobile>+9647813367303</typ:carMobile>
<typ:carCtyCode>4</typ:carCtyCode>
<typ:carChldLastName xsi:nil="true"/>
<typ:carIden>230303</typ:carIden>
<typ:carCstCode>2</typ:carCstCode>
<typ:cprVirtualFlag>N</typ:cprVirtualFlag>
<typ:carChldMiddName>ABDULHAMEED</typ:carChldMiddName>
<typ:carPrimarySeco>P</typ:carPrimarySeco>
<typ:carAutoRenewFlag>Y</typ:carAutoRenewFlag>
<typ:carDefaultFlag>Y</typ:carDefaultFlag>
<typ:cprContactlessFlag>N</typ:cprContactlessFlag>
<typ:carMailOrde>Y</typ:carMailOrde>
</typ:CardTypeAlphaUser>
</cardTabAlphaP>
</m:wsCardDetailResponse>
</env:Body>
</env:Envelope>

```

4.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MONDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

4.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

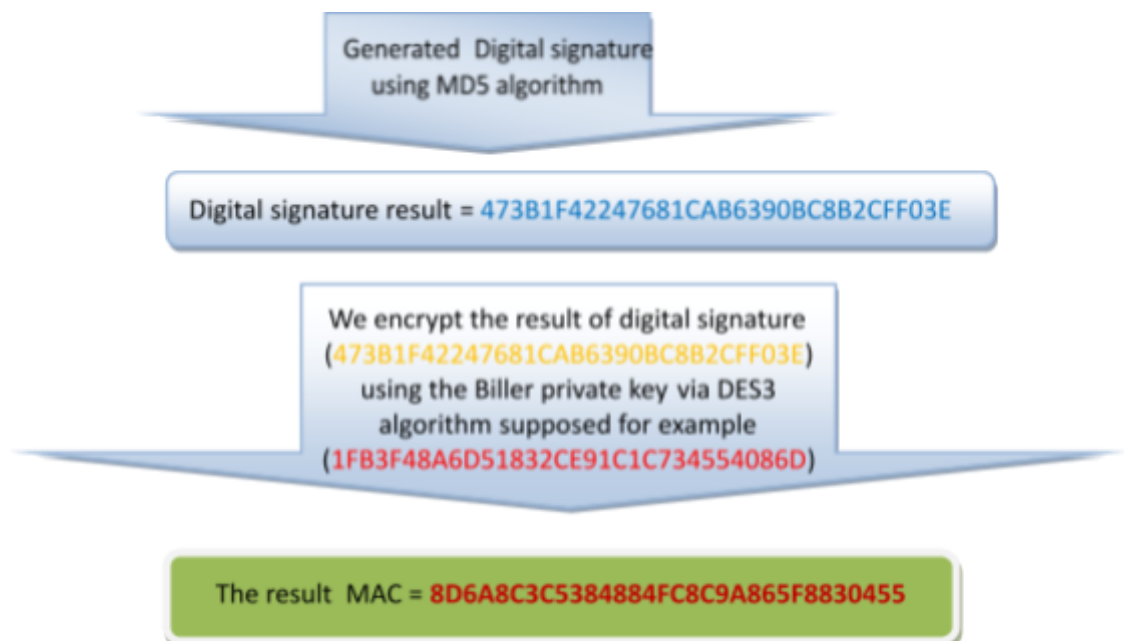

4.1.4 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CUSTOMER_ID||CARD_IDEN||CARD_MASK_ENC;

5.GENERATE OTP SERVICE WEB SERVICE

5 INTERFACES SPECIFICATION

5.1 INTERFACE

5.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to create transactions for online authorisation.

5.1.1.1 WS_ GENERATE OTP SERVICE

5.1.1.1.1 METHOD NAME

GENERATE OTP SERVICE

5.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
pRequestdatetime	String	M	Request DateTime: 'YYYYMMDDHHmm'
pMobileNbr	String	M	Phone number
customerId	String	M	Customer Identification
cardIden	String	M	Internal_code
Mac In	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3
Additional Data In	String	O	Future usage

5.1.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
pOtp	String	Encrypted generated OTP
response_label	String	Failure description
MacOut	String	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2,3
Additional Data out	String	Future usage

5.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

5.1.1.1.1.5 WSDL FILE

5.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsGenerateOtpService>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
      <requestdatetime>202507171640</requestdatetime>
      <mobileNbr>+9647705079356</mobileNbr>
      <customerId>0100101A059362125198</customerId>
      <cardIden>867543</cardIden>
      <macin>A052031BC79FC1CAFDf23B8B9D5A8C32</macin>
      <addDataIn>?</addDataIn>
      <serverdatetime>?</serverdatetime>
      <responsecode>?</responsecode>
      <addrespcodedesc>?</addrespcodedesc>
```

```

<otp>?</otp>
<macout>?</macout>
<addDataOut>?</addDataOut>
</egat:wsGenerateOtpService>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsGenerateOtpServiceResponse
xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <serverdatetime>17072025145902</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS > GENERATION OTP</addrespcodedesc>
      <otp xsi:nil="true"/>
      <macout>D013B7556527E2C49D268D06F6E3BDFF</macout>
      <addDataOut xsi:nil="true"/>
    </m:wsGenerateOtpServiceResponse>
  </env:Body>
</env:Envelope>

```

5.2 ANNEXS

5.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
00	Success
01	Connection Problem
02	System Error
96	System Error
30	Input data not valid
05	Merchant Not Found
69	USER_NOT_FOUND

5.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.

Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)


NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function Generate_OTP_Service Patameters
(p_RequestDateTime || p_mobile_nbr || p_cust_id || p_card_iden)

|| means "concatenation"

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

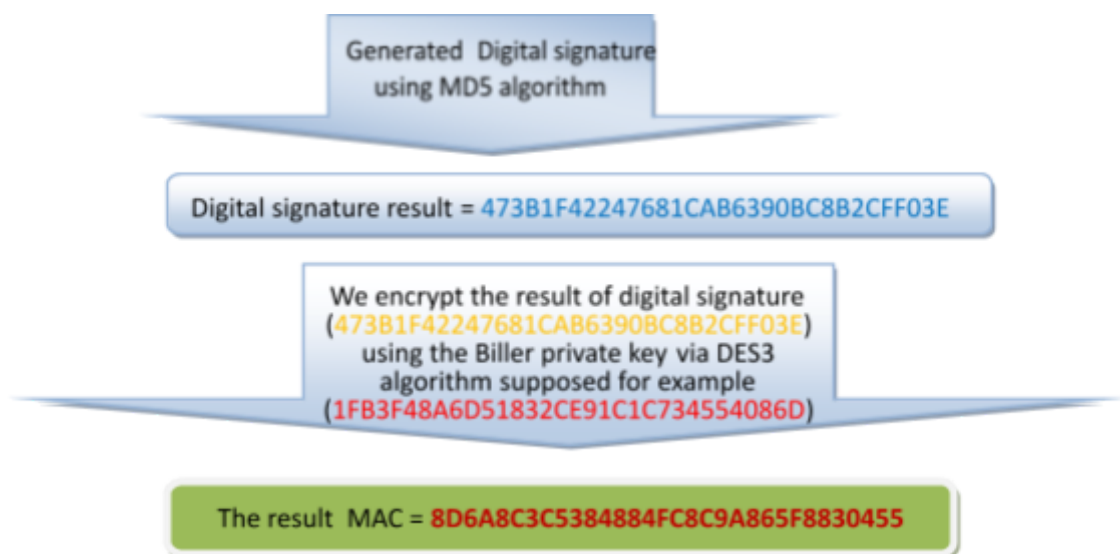

5.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = RequestDateTime ||mobile_nbr ||CUSTOMER_ID ||CARD_IDEN;

5.2.4 ANNEX 2: CURRENCY

Currency ID	Currency Label
704	Viet Nam Dong
705	Slovenia Tolar
706	Somali Shilling
710	South Africa RandS
716	Zimbabwe Dollar
724	Spanish PesetaS
736	Sudanese Dinar
737	Sudan Airline Rate
740	Surinam Guild
748	Swaziland Lilangeni
752	Swedish KroneS
756	Swiss FrancS
760	Syrian Pound
762	Tajik Ruble
764	Thailand Baht
776	Pa?anga
780	Trinidad and Tobago Dollar
784	U.A.E. Dirham
788	Tunisian Dinar
949	Turkish Lira
795	Turkmenistan Manat
800	Uganda Shilling
807	Macedonia Denar
810	Russian Ruble
818	Egyptian Pound
826	Pound SterlingS
834	Tanzanian Shilling
840	U.S. Dollars
858	Peso Uruguayo
860	Uzbekistan Sum
862	Venezuela Bolivar
882	Samoa Tala
886	Yemeni Rial
891	Yugoslavian New Dinar
894	Zambian Kwacha
901	New Taiwan Dollar

950	CFA Franc BEAC
951	E. Caribbean Dollar
952	CFA Franc BCEAO
953	CFP Franc
954	European Currency Unit (E.C.U.)
974	Belarussian Ruble
975	Lev
976	Franc Congolais
977	Bosnian Convertible Mark
978	euroS

980	Ukrainian Hryvnia
981	Georgian Lari
985	Polish New Zloty
986	Brazilian Real
4	Afghani Lek
8	Lek
12	Algerian Dinar
24	New Kwanza
31	Azerbaijan Manat
32	Argentine Peso
36	Australian DollarS
40	Austrian SchillingS
44	Bahamian Dollar
48	Bahraini Dinar
50	Taka
51	Armenian Dram
52	Barbados Dollar
56	Belgian FrancS
60	Bermudian Dollar
68	Boliviano
70	Bosnian Dinar
72	Pula
84	Belize Dollar
90	Solomon Is. Dollar
96	Brunei Dollar
104	Myanmar Kyat
108	Burundi Franc
116	Riel

124	Canadian DollarS
132	Cape Verde Escudo
136	Cayman Is. Dollar
144	Sri Lanka Rupee
152	Chilean Peso
156	Yuan Renminbi
170	Colombian Peso
174	Comoro Franc
188	Costa Rican Colon
191	Croatian Kuna
192	Cuban Peso
196	Cyprus Pound
203	Czech Koruna
208	Danish KroneS
214	Dominican Peso
222	El Salvador Colon
230	Ethiopian Birr
232	Eritrean Nakfa
233	Estonia Kroon
238	Falkland Is. Pound

242	Fiji Dollar
246	Finland MarkkaS
250	French FrancS
262	Djibouti Franc
270	Dalasi
280	Deutsche MarkS
288	Ghana Cedi
292	Gibraltar Pound
300	Greece Drachma
320	Guatemala Quetzal
324	Guinea Franc
328	Guyana Dollar
332	Haiti Gourde
340	Honduras Lempira
344	Hong Kong DollarS
348	Hungary Forint
352	Iceland Krona
356	Indian RupeeS

360	Rupiah
364	Iranian Rial
365	Iranian Airline Rate
368	Iraqi Dinar
372	Irish PoundS
376	New Israeli Shekel
380	Italian LiraS
388	Jamaican Dollar
392	Japan YenS
398	Tenge
400	Jordanian Dinar
404	Kenyan Shilling
408	North Korean Won
414	Kuwaiti Dinar
417	Kyrgyzstan Som
418	Lao People?s Democratic Republic Kip
422	Lebanese Pound
428	Latvian Lats
430	Liberian Dollar
434	Libyan Dinar
440	Lithuanian Litas
442	Luxembourg Franc
446	Macao Pataca
450	Malagasy Franc
454	Malawi Kwacha
458	Malaysian RinggitS
462	Maldives Rufiyaa
470	Maltese Lira
478	Mauritania Ouguiya
480	Mauritius Rupee
484	Mexican Peso
496	Tugrik
498	Moldovan Leu
504	Moroccan Dirham
508	Mozambique Metical
512	Rial Omani
516	Namibia Dollar
524	Nepalese Rupee
528	Netherlands GuilderS
532	Nether. Antillian Guilder

533	Aruban Guilder
548	Vanuatu Vatu
554	New Zealand DollarS
558	Cordoba Oro
566	Nigeria Naira
578	Norwegian KroneS
586	Pakistan Rupee
590	Panama Balboa
598	Guinea Kina
600	Paraguay Guarani
604	Peru Nuevo Sol
608	Philippine Peso
620	Portuguese EscudoS
624	Guinea-Bissau Peso
626	Timor Escudo
634	Qatari Rial
642	Romania Leu
643	Russian Ruble
646	Rwanda Franc
654	St. Helena Pound
678	Sao Tome and Principe Dobra
682	Saudi Riyal
690	Seychelles Rupee
694	Sierra Leone Leone
702	Singapore DollarS
703	Slovak Koruna
410	Republic of Korea, Won
XXX	Lira Turkey
946	Romania Lei
943	Mozambique Metical
944	Azerbaijan
914	Republic of Serbia
937	VANZEWALA
934	Turkmenistan Manat New

City Iden	City Label
--------------	------------

100000	ALI AL GHARBI
100001	AMARA
100002	KAHLA
100003	MIAMONA
100004	MIJAR AL KABIR
100005	QALAT SALIH
100006	ANAH
100007	FULLJUAH
100008	HADITHA
100009	HIT
100010	RAMADI
100011	RUTBAH
100012	ABU GREEB-KARKH
100013	ADHAMIYA-RASAFA
100014	AMIN-RASAFA
100015	AMRIYA-KARKH
100016	BIAP-KARKH
100017	BAB ALMUADHEM-RASAFA
100018	BALDIYAT-RASAFA
100019	BAYAA-KARKH
100020	DORA-KARKH
100021	GZ-KARKH
100022	GAZALIYA-KARKH
100023	HARTHIYA-KARKH
100024	HAY AL JIHAD-KARKH
100025	HAY JAMIAA-KARKH
100026	JADRIYA-RASAFA
100027	KADMIYA-KARKH
100028	KAMALIYA-RASAFA
100029	MADAEEN-RASAFA
100030	MAHMODIYA-KARKH
100031	MANSOUR-KARKH
100032	MUSTANSRIYA-RASAFA
100033	NAHRAWAN-RASAFA
100034	NEW BAGHDAD-RASAFA
100035	RADHWANIYA-KARKH
100036	SADER-RASAFA
100037	SALEHIA-KARKH

100038	SAYDIYA-KARKH
100039	SHAAB-RASAFA
100040	SHOALA-KARKH
100041	SHORTA-KARKH
100042	TAJI-KARKH
100043	TAJI-RASAFA
100044	YARMUK-KARKH
100045	ZAFARANIYA-RASAFA
100046	ZAIYUNA-RASAFA

10004 7	KARADA-RASAFA
10004 8	ABO AL KHASEEB
10004 9	BASRA
10005 0	BRADHAIYIA
10005 1	FAW
10005 2	GARMAT ALI
10005 3	JAMHURAIYA
10005 4	MAAQEL
10005 5	MIDAINIA
10005 6	MUHANDESIN
10005 7	QURNA
10005 8	SHAT AL ARAB
10005 9	ZUBAIR
10006 0	AKRE
10006 1	AMEDI
10006 2	BARDARASH

10006 3	DAH_NORTH
10006 4	DAH_SOUTH
10006 5	DAH_WEST
10006 6	DAHOUK
10006 7	DOMEZ
10006 8	SIMELE
10006 9	ZAKHO
10007 0	AFAK
10007 1	DEWANIYA
10007 2	HAMZA
10007 3	SHAMIYA
10007 4	BALADRUZ
10007 5	BAQUBA NEW
10007 6	KHALIS
10007 7	KHANAQIN
10007 8	MIQDADIYAH
10007 9	AINKAWA
10008 0	CHOMAN
10008 1	DASHTI_HAWLER
10008 2	ERB_EAST
10008 3	ERB_WEST
10008 4	ERBIL

10008 5	KHABAT
10008 6	KOISNJAQ
10008 7	SHAQLAWA
10008 8	SORAN
10008 9	HASHIMIYAH
10009 0	HILLA
10009 1	MAHAWIL
10009 2	MISIAB
10009 3	AIN ALTAMUR
10009 4	JADWAL AL GHARBI

10009 5	KARBALA
10009 6	DAQUQ
10009 7	HAWEEJA
10009 8	KARKUK
10009 9	TOUZ HOURMATO
10010 0	AL HAY
10010 1	BADRAH
10010 2	NOAMANIA
10010 3	SUWAYRAH
10010 4	KUT
10010 5	BAAJ
10010 6	HAMDANIYAH

10010 7	HATRA
10010 8	MAKHMUR
10010 9	MOUSL
10011 0	SHIKHAN
10011 1	TALAFAR
10011 2	TILKEF
10011 3	MANATHERA
10011 4	NAJAF
10011 5	CHIBAYISH
10011 6	NASRIYA
10011 7	REFAI
10011 8	SHATRAH
10011 9	SUQ AL SHUYUKH
10012 0	BALAD
10012 1	BAYJI
10012 2	DOOR
10012 3	SAMARRA
10012 4	SHIRKAT
10012 5	TIKRIT
10012 6	KHITHIR
10012 7	RUMAITHA
10012 8	SALMAN

10012 9	SAMAWA
10013 0	CHAMCHAMAL
10013 1	DARBANDIKHAN
10013 2	DUKAN
10013 3	HALABJA
10013 4	KALAR
10013 5	KIFRI
10013 6	PENJWIN
10013 7	PSHDAR
10013 8	RANIA
10013 9	SUL_CENTER
10014 0	SUL_EAST
10014 1	SUL_NORTH
10014 2	SUL_SOUTH
10014 3	SUL_WEST
10014 4	SULEYMANIA
20010 5	BAGHDAD

6. VIEW PIN WEB SERVICES

6 INTERFACES SPECIFICATION

6.1 INTERFACE

6.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to get PIN encryption .

6..1.1 VIEW PIN

6.1.1.1.1 METHOD NAME

wsViewPin

6.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	
CUSTOMER_ID	String	O	Customer ID
CARD_Iden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2,3

6.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message ouput parameter (crypted using a private working key), Refer to Mac Specification Annex 2 ,3
pinBlock	String	PIN encryption

6.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

6.1.1.1.1.5 WSDL FILE

6.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsViewPin>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
      <customerId>10000178</customerId>
      <cardIden>234820</cardIden>
      <macin>B168C89FDAE96E23C066ADE88A98A334</macin>
      <addDataIn>?</addDataIn>
      <serverdatetime>?</serverdatetime>
      <responsecode>?</responsecode>
      <addrespcodedesc>?</addrespcodedesc>
      <pinBlock>?</pinBlock>
      <macout>?</macout>
      <addDataOut>?</addDataOut>
    </egat:wsViewPin>
  </soapenv:Body>
</soapenv:Envelope>
```

Output Response Success:

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsViewPinResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <serverdatetime>17072025111155</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS</addrespcodedesc>
      <pinBlock>0B4C947394ECC05A</pinBlock>
      <macout>895696471D12CCEF50D86F74AAC0B49F</macout>
      <addDataOut xsi:nil="true"/>
    </m:wsViewPinResponse>
  </env:Body>
</env:Envelope>
```

```
</m:wsViewPinResponse>
</env:Body>
</env:Envelope>
```

6.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MANDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

6.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

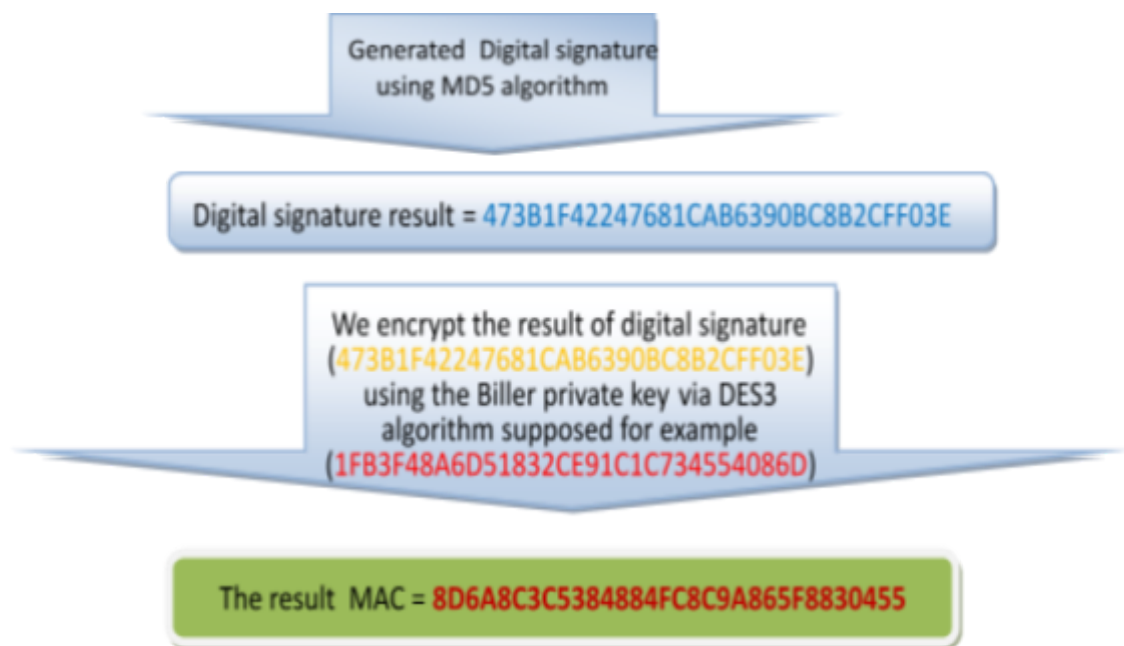

6.1.4 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN;

7. CREDIT ACCOUNT DETAILS WEB SERVICES

7. INTERFACES SPECIFICATION

7.1 INTERFACE

7.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to get Credit Account details.

7.1.1.1 CREDIT ACCOUNT DETAIL

7.1.1.1.1 METHOD NAME

wsCreditAccountDetail

7.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
EbankingUser	String	M	USERNAME
EbankingPassword	String	M	PASSWORD
customerId	String	M	Customer identity .
cardIden	String	M	Card iden
statementDate	String	O	MMYYYY OR NULL to get last cycle date
curId	String	M	Card Currency
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2 ,3

7.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
Response_Code	String	Refer to Annex 1 (Response code Annex)
Response_Label	String	More details about Error code
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3

7.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

7.1.1.1.1.5 WSDL FILE

7.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
<soapenv:Header/>
<soapenv:Body>
<egat:wsCreditAccountDetail>
<bankId>014</bankId>
<ebankingUser>AMB</ebankingUser>
<ebankingPassword>AMB_123$</ebankingPassword>
<customerId>0100101P004947923008</customerId>
<cardIden>230303</cardIden>
<statementDate>?</statementDate>
<macin>52099C2736D541B10F0482E47422B65C</macin>
<addDataIn>?</addDataIn>
<serverdatetime>?</serverdatetime>
<responsecode>?</responsecode>
<addrespcodedesc>?</addrespcodedesc>
<macout>?</macout>
<addDataOut>?</addDataOut>
<creditCardDataTypeP>
<typ:paymentInstructions>?</typ:paymentInstructions>
<typ:latePaymentStatus>?</typ:latePaymentStatus>
<typ:dueBalance>?</typ:dueBalance>
<typ:paymentNumber>?</typ:paymentNumber>
<typ:minDuePaymentStatus>?</typ:minDuePaymentStatus>
<typ:lastCycleDate>?</typ:lastCycleDate>
<typ:currency>?</typ:currency>
<typ:outstandingBalance>?</typ:outstandingBalance>
<typ:dueDate>?</typ:dueDate>
<typ:unpaidDate>?</typ:unpaidDate>
<typ:usedCumul>?</typ:usedCumul>
<typ:cycleDate>?</typ:cycleDate>
```

```

<typ:cmsAccountNumber>?</typ:cmsAccountNumber>
<typ:lastpaymentdate>?</typ:lastpaymentdate>
<typ:paymentCumul>?</typ:paymentCumul>
<typ:status>?</typ:status>
<typ:pastdueamount>?</typ:pastdueamount>
<typ:available>?</typ:available>
<typ:debitInterestRate>?</typ:debitInterestRate>
<typ:overLimitStatus>?</typ:overLimitStatus>
<typ:authorizedCumul>?</typ:authorizedCumul>
<typ:lateDate>?</typ:lateDate>
<typ:openingBalance>?</typ:openingBalance>
<typ:minimumDue>?</typ:minimumDue>
<typ:overLimitAmount>?</typ:overLimitAmount>
<typ:guarantee>?</typ:guarantee>
<typ:repaymentRate>?</typ:repaymentRate>
<typ:branch>?</typ:branch>
<typ:bankAccountNumber>?</typ:bankAccountNumber>
<typ:unpaidStatus>?</typ:unpaidStatus>
<typ:closingBalance>?</typ:closingBalance>
</creditCardDataTypeP>
</egat:wsCreditAccountDetail>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

  <env:Header/>

  <env:Body>

    <m:wsCreditAccountDetailResponse
xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">      <result>0</result>

      <serverdatetime>16072025112330</serverdatetime>

      <responsecode>000</responsecode>

      <addrespcodedesc>SUCCESS</addrespcodedesc>

      <macout>92280CEC66A821F4492C40AADB97756F</macout>

      <addDataOut xsi:nil="true"/>

      <creditCardDataTypeP>

        <typ:paymentinstructions xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

          <typ:latePaymentStatus
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">N</typ:latePaymentStatus>

```

```

    <typ:dueBalance
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">0</typ:dueBalance>

    <typ:paymentNumber xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:minDuePaymentStatus xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:lastCycleDate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:currency
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">840</typ:currency>

    <typ:outstandingBalance xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:dueDate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:unpaidDate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:usedCumul
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">-958.95</typ:usedCumul>

    <typ:cycleDate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:cmsAccountNumber
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">9647813367303</typ:cmsAccountNumber>

    <typ:lastpaymentdate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:paymentCumul xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:status
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">1</typ:status>

    <typ:pastdueamount xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:available
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">958.95</typ:available>

    <typ:debitInterestRate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>

    <typ:overLimitStatus
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">N</typ:overLimitStatus>

```

```

        <typ:authorizedCumul
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">0</typ:authorizedCumul>

        <typ:lateDate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

        <typ:openingBalance
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">0</typ:openingBalance>

        <typ:minimumDue
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">0</typ:minimumDue>

        <typ:overLimitAmount xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

        <typ:guarantee xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

        <typ:repaymentRate xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

        <typ:branch
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">101</typ:branch>

        <typ:bankAccountNumber
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">0100101P000004947923008<
/typ:bankAccountNumber>

        <typ:unpaidStatus
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">N</typ:unpaidStatus>

        <typ:closingBalance xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
</creditCardDataTypeP>

    </m:wsCreditAccountDetailResponse>

</env:Body>

</env:Envelope>

```

7.2 ANNEXS

7.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
00	Success
001	CARD NOT FOUND
002	System Error

30	FORMAT ERROR : DATA INPUT MONDATORY
89	SYSTEM ERROR : INCORRECT USER OR PASSWORD
31	SYSTEM ERROR : INCORRECT BANK ID
69	SYSTEM ERROR : BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR : MAC-IN ERROR
14	SYSTEM ERROR : card not found OR NOT LINKED TO BANK
96	SYSTEM ERROR : GLOBAL EXCEPTION

7.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input => 10800021781308190670

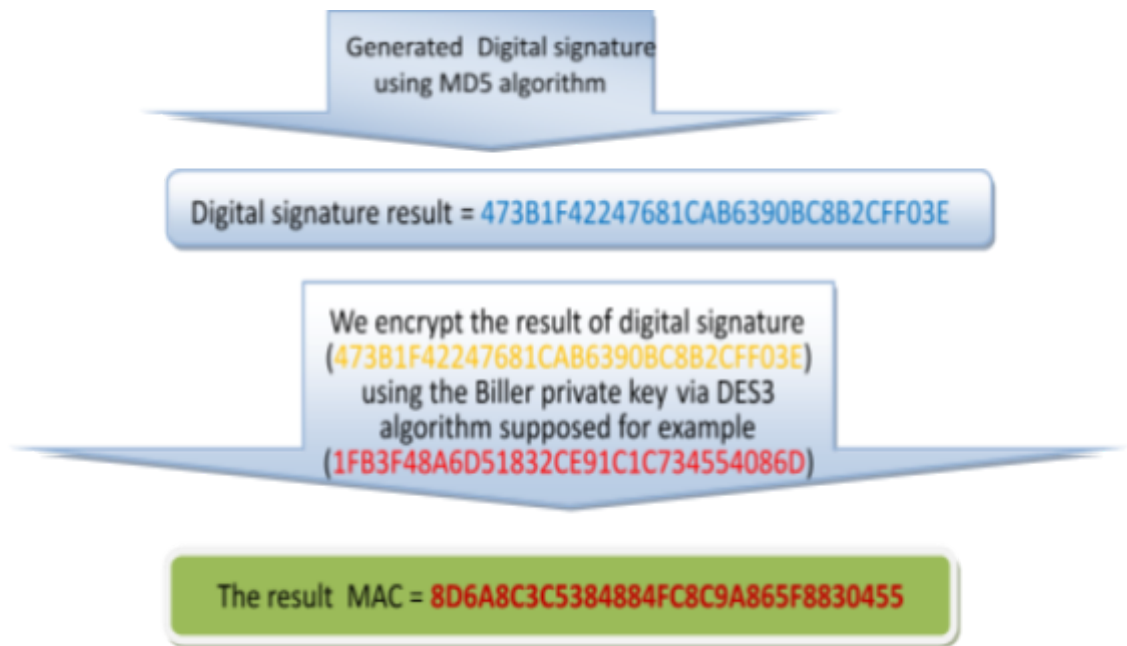

7.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CUSTOMER_ID || CARD_IDEN || STATEMENT_DATE;

8. DISABLE FOR INTERNET WEB SERVICES

8 INTERFACES SPECIFICATION

8.1 INTERFACE

8.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to DISABLE INTERNET TRANSACTION.

8.1.1.1 DISABLE FOR INTERNET

8.1.1.1.1 METHOD NAME

wsEnable4Internet

8.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
CUSTOMER_ID	String	M	Customer ID
CARD_Iden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3

8.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)

MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3
--------	--------	---

8.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

8.1.1.1.1.5 WSDL FILE

8.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
<soapenv:Header/>
<soapenv:Body>
<egat:wsDisable4Internet>
<bankId>014</bankId>
<ebankingUser>AMB</ebankingUser>
<ebankingPassword>AMB_123$</ebankingPassword>
<customerId>0100101P004947923008</customerId>
<cardIden>230303</cardIden>
<macin>A0DD1AE4C1D951408BF98036DF58AE8B</macin>
<addDataIn>?</addDataIn>
<serverdatetime>?</serverdatetime>
<responsecode>?</responsecode>
<addrespcodedesc>?</addrespcodedesc>
<macout>?</macout>
<addDataOut>?</addDataOut>
</egat:wsDisable4Internet>
</soapenv:Body>
</soapenv:Envelope>
```

Output Response Success:

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
<env:Header/>
```

```

<env:Body>
  <m:wsDisable4InternetResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
    <result>0</result>
    <serverdatetime>16072025101238</serverdatetime>
    <responsecode>000</responsecode>
    <addrespcodedesc>SUCCESS</addrespcodedesc>
    <macout>24A50AF56AC0141DEAA6BB84BB83533E</macout>
    <addDataOut xsi:nil="true"/>
  </m:wsDisable4InternetResponse>
</env:Body>
</env:Envelope>

```

8.2 ANNEXS

8.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MANDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

8.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.


Step 2: A digital signature is then generated using MD5 algorithm.

Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

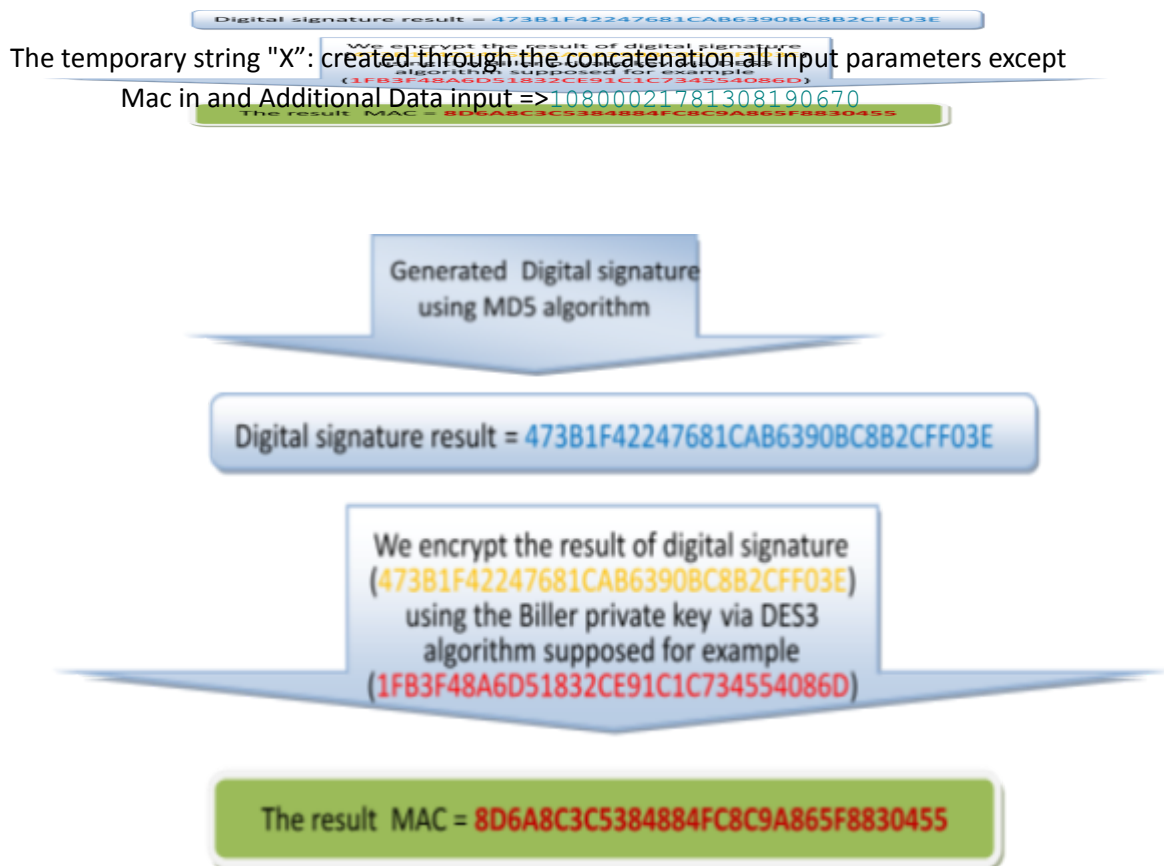

8.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN;

9. ENABLE FOR INTERNET WEB SERVICES

9. INTERFACES SPECIFICATION

9.1 INTERFACE

9.1.1 INTERFACE DESCRIPTION

this web service is invoked by the bank to Enable INTERNET TRANSACTION.

9.1.1.1 ENABLE FOR INTERNET

9.1.1.1.1 METHOD NAME

wsEnable4Internet

9.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	
Ebanking_Password	String	M	
CUSTOMER_ID	String	M	Customer ID
CARD_Iden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3

9.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)

Additional Response Code Description	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3

9.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

9.1.1.1.1.5 WSDL FILE

9.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsEnable4Internet>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
      <customerId>10000178</customerId>
      <cardIden>234820</cardIden>
      <macin>B168C89FDAE96E23C066ADE88A98A334</macin>
      <addDataIn>?</addDataIn>
      <serverdatetime>?</serverdatetime>
      <responsecode>?</responsecode>
      <addrespcodedesc>?</addrespcodedesc>
      <macout>?</macout>
      <addDataOut>?</addDataOut>
    </egat:wsEnable4Internet>
  </soapenv:Body>
</soapenv:Envelope>
```

Output Response Success:

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsEnable4InternetResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <serverdatetime>17072025112435</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS</addrespcodedesc>
      <macout>E60BB4F30828617FE58800B9B53AF9E8</macout>
      <addDataOut xsi:nil="true"/>
    </m:wsEnable4InternetResponse>
  </env:Body>
</env:Envelope>
```

9.2 ANNEXS

9.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MANDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

9.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.


Step 2: A digital signature is then generated using MD5 algorithm.

Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

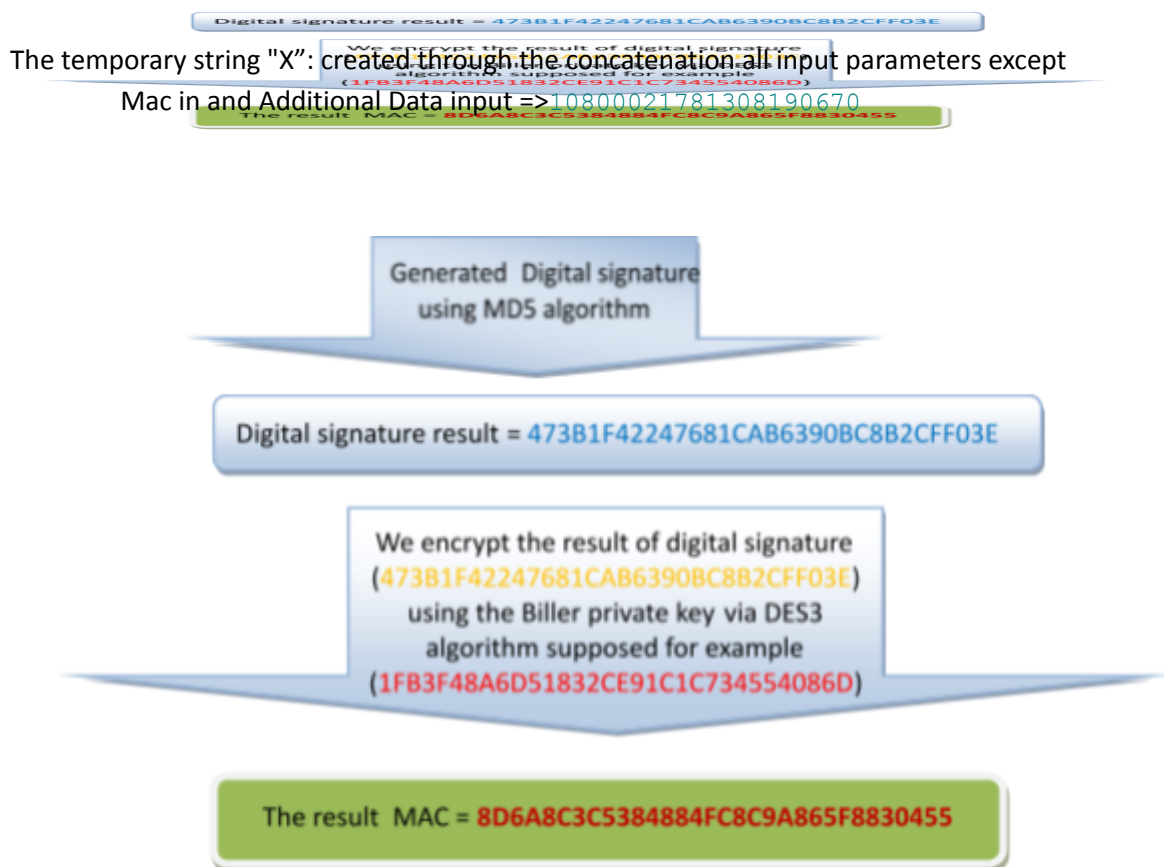

9.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN;

10.GET CARD RISK LIMIT WEB SERVICES

1 INTERFACES SPECIFICATION

10.1 INTERFACE

10.1.1 INTERFACE DESCRIPTION

This interface will be used to communicate the risk limit of the required card. This interface will be based on web service technology.

10.1.2 INTERFACE SPECIFICATION

10.1.2.1 WS_GET_CARD_RISK

10.1.2.1.1 METHOD NAME

wsGetCardLimitRisk

10.1.2.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
customerId	String	O	CUSTOMER iden

cardIden	String	M	Card iden
Mac In	String	M	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2,3

10.1.2.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message output parameter (encrypted by using a private working key), Refer to Mac Specification Annex 2,3
CARD_RISK_LIMIT_TAB	TAB	CARD_RISK_LIMIT_DAILY_BIS_TAB_P CARD_RISK_LIMIT_WEEK_BIS_TAB_P CARD_RISK_LIMIT_MONT_BIS_TAB
gloTranCumumax	String	Amount cumul max by period
riskLimitIndicator	String	P : POS , A : ATM , I : internet , C : contactless
riskAddData	String	
recTranCumumax	String	Number cumul max by period
gloTranMax	String	Internet (I) / Mail order (M)
recordCode	String	Record Code

Example:

Request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
<soapenv:Header/>
<soapenv:Body>
<egat:wsGetCardLimitRisk>
<bankId>014</bankId>
<ebankingUser>AMB</ebankingUser>
<ebankingPassword>AMB_123$</ebankingPassword>
<customerId>10000178</customerId>
<cardIden>234820</cardIden>
<macin> B168C89FDAE96E23C066ADE88A98A334 </macin>
<serverdatetime>?</serverdatetime>
<responsecode>?</responsecode>
<addrespcodedesc>?</addrespcodedesc>
<macout>?</macout>
<cardRiskLimitDailyBisTabP>
<!--Zero or more repetitions:-->
<typ:CardRiskLimitDailyBisTypeUser>
<typ:riskAddData>?</typ:riskAddData>
<typ:gloTranCumumax>?</typ:gloTranCumumax>
<typ:recTranCumumax>?</typ:recTranCumumax>
<typ:gloTranCumumax>?</typ:gloTranCumumax>
<typ:recordCode>?</typ:recordCode>
<typ:riskLimitIndicator>?</typ:riskLimitIndicator>
<typ:recTranCumumax>?</typ:recTranCumumax>
</typ:CardRiskLimitDailyBisTypeUser>
</cardRiskLimitDailyBisTabP>
<cardRiskLimitWeekBisTabP>
<!--Zero or more repetitions:-->
<typ:CardRiskLimitWeekBisTypeUser>
<typ:riskAddData>?</typ:riskAddData>
<typ:gloTranCumumax>?</typ:gloTranCumumax>
<typ:recTranCumumax>?</typ:recTranCumumax> <typ:gloTranCumumax>?</typ:gloTranCumumax>
<typ:recordCode>?</typ:recordCode>
<typ:riskLimitIndicator>?</typ:riskLimitIndicator>
<typ:recTranCumumax>?</typ:recTranCumumax>
</typ:CardRiskLimitWeekBisTypeUser>
</cardRiskLimitWeekBisTabP>
<cardRiskLimitMontBisTabP>
<!--Zero or more repetitions:-->
<typ:CardRiskLimitMontBisTypeUser>
<typ:riskAddData>?</typ:riskAddData>
<typ:gloTranCumumax>?</typ:gloTranCumumax>
<typ:recTranCumumax>?</typ:recTranCumumax> <typ:gloTranCumumax>?</typ:gloTranCumumax>
<typ:recordCode>?</typ:recordCode>
<typ:riskLimitIndicator>?</typ:riskLimitIndicator>
<typ:recTranCumumax>?</typ:recTranCumumax>
</typ:CardRiskLimitMontBisTypeUser>
```

```

</cardRiskLimitMontBisTabP>
<cardRiskLimitTrxBisTabP>
<!--Zero or more repetitions:-->
<typ:CardRiskLimitTrxBisTypeUser>
<typ:riskAddData>?</typ:riskAddData>
<typ:recTranMax>?</typ:recTranMax>
<typ:recordCode>?</typ:recordCode> <typ:recTranMin>?</typ:recTranMin>
<typ:riskLimitIndicator>?</typ:riskLimitIndicator>
<typ:gloTranMax>?</typ:gloTranMax>
<typ:gloTranMin>?</typ:gloTranMin>
</typ:CardRiskLimitTrxBisTypeUser>
</cardRiskLimitTrxBisTabP>
</egat:wsGetCardLimitRisk>
</soapenv:Body>
</soapenv:Envelope>

```

Response:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"> <env:Header/>

<env:Body>

<m:wsGetCardLimitRiskResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">

<result>0</result>

<serverdatetime>20072025155520</serverdatetime>

<responsecode>000</responsecode>

<addrespcodedesc>SUCCESS</addrespcodedesc>

<macout>6BECACBF15A4AA19DD1360F6E84F162E</macout>

<cardRiskLimitDailyBisTabP xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

<typ:CardRiskLimitDailyBisTypeUser>

<typ:riskAddData>RC0011</typ:riskAddData>

<typ:gloTranCumumax>1000000</typ:gloTranCumumax>

<typ:recTranCumumax>0</typ:recTranCumumax>

<typ:gloTranCumumax>0</typ:gloTranCumumax>

<typ:recordCode>110079261</typ:recordCode>

<typ:riskLimitIndicator>A</typ:riskLimitIndicator>

<typ:recTranCumumax>1000000</typ:recTranCumumax>

</typ:CardRiskLimitDailyBisTypeUser>

```

<typ:CardRiskLimitDailyBisTypeUser>

<typ:riskAddData>RC0019</typ:riskAddData>

<typ:gloTranCumumax>1000000</typ:gloTranCumumax>

<typ:recTranCumumax>0</typ:recTranCumumax>

<typ:gloTranCumumax>0</typ:gloTranCumumax>

<typ:recordCode>110079281</typ:recordCode>

<typ:riskLimitIndicator>A</typ:riskLimitIndicator>

<typ:recTranCumumax>1000000</typ:recTranCumumax>

</typ:CardRiskLimitDailyBisTypeUser>

<typ:CardRiskLimitDailyBisTypeUser>

<typ:riskAddData>RC0017</typ:riskAddData> <typ:gloTranCumumax>1000000</typ:gloTranCumumax>

<typ:recTranCumumax>0</typ:recTranCumumax>

<typ:gloTranCumumax>0</typ:gloTranCumumax>

<typ:recordCode>110079301</typ:recordCode>

<typ:riskLimitIndicator>A</typ:riskLimitIndicator>

<typ:recTranCumumax>1000000</typ:recTranCumumax>

</typ:CardRiskLimitDailyBisTypeUser>

<typ:CardRiskLimitDailyBisTypeUser>

<typ:riskAddData>RC</typ:riskAddData>

<typ:gloTranCumumax>6000000</typ:gloTranCumumax>

<typ:recTranCumumax>0</typ:recTranCumumax>

<typ:gloTranCumumax>0</typ:gloTranCumumax>

<typ:recordCode>110079401</typ:recordCode>

<typ:riskLimitIndicator>P</typ:riskLimitIndicator>

<typ:recTranCumumax>6000000</typ:recTranCumumax>

</typ:CardRiskLimitDailyBisTypeUser>

<typ:CardRiskLimitDailyBisTypeUser>

<typ:riskAddData>RC</typ:riskAddData>

<typ:gloTranCumumax>1200000</typ:gloTranCumumax>

```

        <typ:recTranCumumMin>0</typ:recTranCumumMin>

        <typ:gloTranCumumMin>0</typ:gloTranCumumMin>

        <typ:recordCode>110079421</typ:recordCode>

        <typ:riskLimitIndicator>I</typ:riskLimitIndicator>

        <typ:recTranCumumMax>1200000</typ:recTranCumumMax>

    </typ:CardRiskLimitDailyBisTypeUser>
</cardRiskLimitDailyBisTabP>

<cardRiskLimitWeekBisTabP/>

<cardRiskLimitMontBisTabP>

    <typ:CardRiskLimitMontBisTypeUser
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"> <typ:riskAddData xsi:nil="true"/>

        <typ:gloTranCumumMax>14400000</typ:gloTranCumumMax>

        <typ:recTranCumumMin>0</typ:recTranCumumMin>

        <typ:gloTranCumumMin>0</typ:gloTranCumumMin>

        <typ:recordCode>110079461</typ:recordCode>

        <typ:riskLimitIndicator>P</typ:riskLimitIndicator>

        <typ:recTranCumumMax>14400000</typ:recTranCumumMax>

    </typ:CardRiskLimitMontBisTypeUser>
</cardRiskLimitMontBisTabP>

<cardRiskLimitTrxBisTabP xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">

    <typ:CardRiskLimitTrxBisTypeUser>

        <typ:riskAddData>RC0011</typ:riskAddData>

        <typ:recTranMax>750000</typ:recTranMax>

        <typ:recordCode>110079261</typ:recordCode>

        <typ:recTranMin>0</typ:recTranMin>

        <typ:riskLimitIndicator>A</typ:riskLimitIndicator>

        <typ:gloTranMax>750000</typ:gloTranMax>

        <typ:gloTranMin>0</typ:gloTranMin>

    </typ:CardRiskLimitTrxBisTypeUser>

    <typ:CardRiskLimitTrxBisTypeUser>

```

<typ:riskAddData>RC0019</typ:riskAddData>
<typ:recTranMax>750000</typ:recTranMax>
<typ:recordCode>110079281</typ:recordCode>
<typ:recTranMin>0</typ:recTranMin>
<typ:riskLimitIndicator>A</typ:riskLimitIndicator>
<typ:gloTranMax>750000</typ:gloTranMax>
<typ:gloTranMin>0</typ:gloTranMin>
</typ:CardRiskLimitTrxBisTypeUser>
<typ:CardRiskLimitTrxBisTypeUser>
<typ:riskAddData>RC0017</typ:riskAddData>
<typ:recTranMax>750000</typ:recTranMax>
<typ:recordCode>110079301</typ:recordCode>
<typ:recTranMin>0</typ:recTranMin>
<typ:riskLimitIndicator>A</typ:riskLimitIndicator>
<typ:gloTranMax>750000</typ:gloTranMax>
<typ:gloTranMin>0</typ:gloTranMin>
</typ:CardRiskLimitTrxBisTypeUser>
<typ:CardRiskLimitTrxBisTypeUser>
<typ:riskAddData>RC</typ:riskAddData>
<typ:recTranMax>2400000</typ:recTranMax>
<typ:recordCode>110079401</typ:recordCode>
<typ:recTranMin>0</typ:recTranMin>
<typ:riskLimitIndicator>P</typ:riskLimitIndicator>
<typ:gloTranMax>2400000</typ:gloTranMax>
<typ:gloTranMin>0</typ:gloTranMin>
</typ:CardRiskLimitTrxBisTypeUser>
<typ:CardRiskLimitTrxBisTypeUser>
<typ:riskAddData>RC</typ:riskAddData>
<typ:recTranMax>600000</typ:recTranMax>
<typ:recordCode>110079421</typ:recordCode>

```

<typ:recTranMin>0</typ:recTranMin>

<typ:riskLimitIndicator>I</typ:riskLimitIndicator>

<typ:gloTranMax>600000</typ:gloTranMax>

<typ:gloTranMin>0</typ:gloTranMin>

</typ:CardRiskLimitTrxBisTypeUser>

</cardRiskLimitTrxBisTabP>

</m:wsGetCardLimitRiskResponse>

</env:Body>
</env:Envelope>

```

10.1.2.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

10.1.2.1.1.5 WSDL FILE

10.2 ANNEXS

10.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
00	Approved or completed successfully
01	Refer to card Issuer.
02	Refer to card Issuer, special Condition.
03	Invalid Merchant.
04	Pick up
05	Do Not Honor
06	Error
07	Pick Up Card Special Condition
08	Approval Special Condition
10	Token Not Found
11	Approval VIP
12	Invalid Transaction
13	Invalid Amount
14	Invalid Card Number (no such number)
15	No such issuer
17	Customer Cancellation
19	Re Enter Transaction

20	Wrong Response (Server Problem)
21	No Action Taken
24	Update File Not Supported
25	Unable to locate a record on file
26	Duplicate Record Found
27	File Update Edit Error
28	File Update, File Locked
29	File Update, Update Not Successful
30	Format Error (Missing Mandatory Data)
31	Bank / Host or Issuer Not Supported OR Unknown
32	Completed Partially
33	Expired Card
34	Suspected Fraud

35	Card Acceptor Has to contact Acquirer
36	Restricted Card
37	Card Acceptor Call Acquirer Security
38	Retry Pin Error Exceeded
39	No Credit Account
40	Requested Function Not Supported
41	Lost Card
42	No Universal Account
43	Stolen Card, Pick Up
44	No Investment Account
51	No Sufficient funds
52	No Checking Account
53	No saving Account
54	Expired Card
55	Incorrect PIN
56	No Card Record /No customer Record
57	Transaction Not Permitted to Cardholder
58	Transaction Not Permitted to Terminal
59	Suspected Fraud
60	Card Acceptor Contact Acquirer
61	Exceeds Withdrawal Amount Limit
62	Restricted Card
63	Security Violation, Cryptographic error
64	Original Amount Incorrect
65	Exceeds Withdrawal Counter Limit
66	Card Acceptor Contact Security Department
67	Card Capture
68	Response too late
69	Security Module Failure / KEY Data Elements Not Found/Mac Error
70	CVC2 ERROR

71	Message Out Of Cycle sequence
72	ATC Check Failure
73	CVR decline
74	TVR decline
75	Allowable PIN Tries exceeded
76	Unable To Locate the original Message (No match on RRN)
77	The Original Message Found for reversal but reversal data not consistent
78	Invalid Account (From/To)
79	Key Exchange Failed
80	Invalid Date
81	PIN Cryptographic error found
82	Invalid CVV
83	Unable to verify
84	Invalid Authorisation life cycle
85	No reason for decline (authorised!!)
86	Invalid Operation / File Update
87	Request Cryptogram Failure
88	Fallback Decline
89	Card Authentication Failed
90	Cutoff In process (switch ending the business date and starting another) / About To Stop The System.
91	Issuer Or Switch Inoperative
92	Financial Routing Can not be found
93	Transaction Can not be identified. Law violation.
94	Duplicate transaction.
96	System Malfunction
97	End Global Monitoring Temporization
98	Server Unavailable, Network Switch requested
99	Requester System Incident

10.2.2 ANNEX 2:MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in and Additional Data input.

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.


Step 2: A digital signature is then generated using MD5 algorithm.

Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

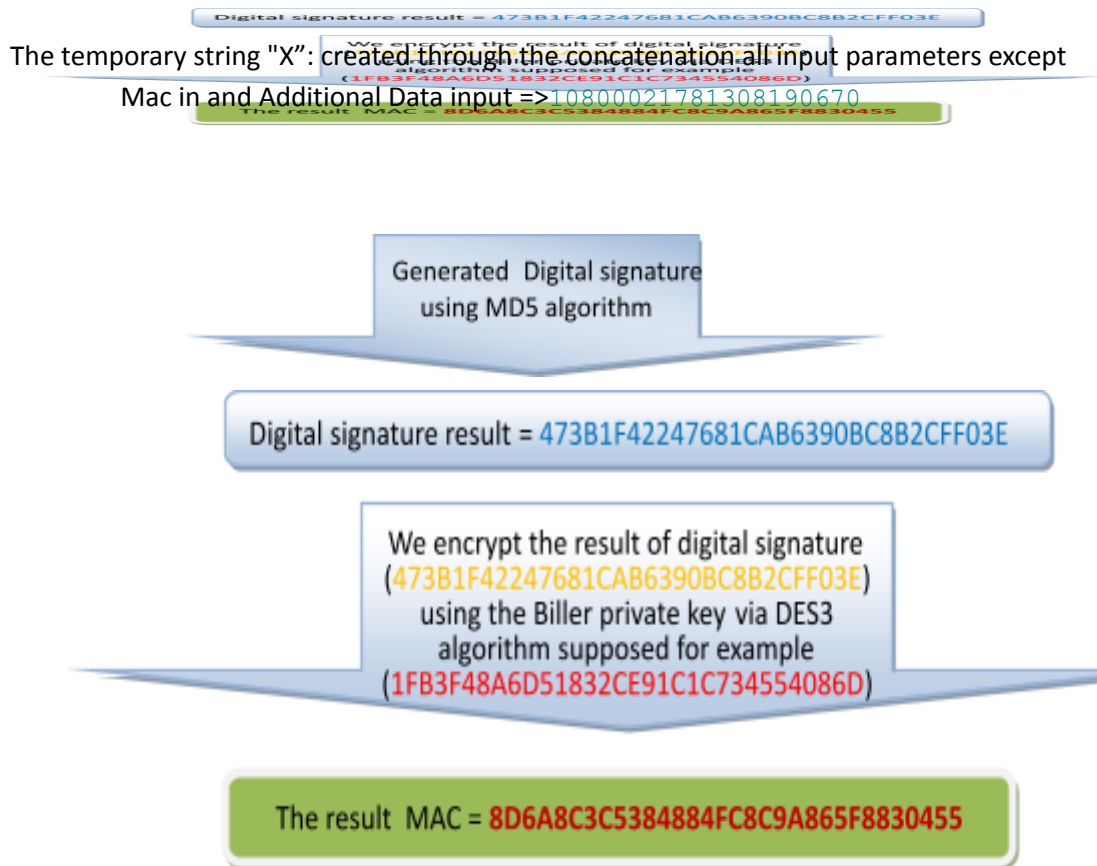

10.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN;

10.2.4 ANNEX 3: TRANSACTION CODE

Code	Label
10237	Fees Collection : Withdrawal commission
10002	Fees Collection : Bank Commission
10003	Debit Commission
10004	Fees Collection : Merchant Commission Debit

10020	Fees Collection : Credit Application Fee
10021	Fees Collection : Returned Check Fee
10022	Fees Collection : Adjustment Fee
10023	Fees Collection : Currency conversion Fee
13150	Credit Adjustment
13151	Cardholder Credit Sales Draft Chargeback
20001	Fees Disbursement : Center Commission
20002	Fees Disbursement : Bank Commission
20003	Fees Disbursement : Cardholder Commission
20004	Fees Disbursement : Merchant Commission

20020	Fees Disbursement : Credit Application Fee
20021	Fees Disbursement : Returned Check Fee
20022	Fees Disbursement : Adjustment Fee
20023	Fees Disbursement : Currency Conversion Fee
05001	Financial Transaction without Cash
07005	Funds Disbursement
12003	Fund's Wire
12004	Payment Return
14002	Quasi Cash Refund
21017	Check Verification
21018	Eurocheck
21019	Traveler's Check
21020	Letter of Credit
21021	Card Capture
21022	Certificate Transaction Request
21023	Alarm Transaction

21024	E-commerce Cardholder Certificate Request
21025	Unterminated transaction
10236	Fees Collection : New Design Fee
13101	Cardholder Debit Sales Draft Chargeback Reversal
13102	Cardholder Debit Credit Voucher Chargeback
13103	Cardholder Debit Cash Disbursements Chargeback Reversa
13104	Cardholder Debit Sales draft Representment
13105	Cardholder Debit Credit Voucher Representment Reversal
13106	Cardholder Debit Cash Disbursements Representment
13152	Cardholder Credit Credit Voucher Chargeback Reversal
13153	Cardholder Credit Cash Disbursements Chargeback

13154	Cardholder Credit Sales Draft Reversal
13155	Cardholder Credit Credit Voucher Representment
13156	Cardholder Credit Cash Disbursements Reversal
13100	Debit Adjustment
22000	Guarantee
22001	Check Guarantee
22002	Check Deposit Guarantee
10233	Fees Collection : Guarantee Check Fee
20233	Fees Disbursement : Guarantee Cheque Fee
11002	Credit Interest
10234	Fees Collection : Miscellaneous Periodical Fee
13007	Merchant Debit Credit Voucher Chargeback Reversal
13008	Merchant Debit Cash Disbursements Chargeback
13009	Merchant Debit Sales Draft Reversal
13010	Merchant Debit Credit Voucher Representment

13011	Merchant Debit Cash Disbursements Reversal
13030	Merchant Credit Transaction Adjustment
13031	Merchant Credit Sales Draft Chargeback Reversal
13032	Merchant Credit Credit Voucher Chargeback
13033	Merchant Credit Cash Disbursements Chargeback Reversal
13034	Merchant Credit Sales draft Representment
13035	Merchant Credit Credit Voucher Representment Reversal
13036	Merchant Credit Cash Disbursements Representment
10008	Fees Collection : Merchant Commission Credit
06001	Credit Voucher (ATM)
06002	Credit Voucher (Sale)
10009	Fees Collection : SMS Transaction

13157	Cardholder Cash Back Credit Adjustments
40036	Emi Reversal
13108	Installment
05002	Emi FC Normal trans
05003	Other Debit Transaction 1
05004	Other Debit Transaction 2
13003	Pre-Paid Miscellaneous Credit
13004	Pre-Paid Miscellaneous Debit
25002	Sales Draft Reversal 1
12006	Real Time Payment
10001	Fees Collection : Center Commission
05000	Sales Draft
06000	Credit Voucher
07000	Cash ATM

07001	Cash advance (POS)
07002	Cash Advance (Manual)
07003	Cash Back
07004	Quasi Cash
15000	Sales Draft Chargeback
16000	Credit Voucher Chargeback
17000	Cash Disbursements Chargeback
26000	Credit Voucher Reversal
27000	Cash Disbursements Reversal
35000	Sales Draft Chargeback Reversal
36000	Credit Voucher Chargeback Reversal
37000	Cash Disbursements Chargeback Reversal
10000	Fees Collection : General Purpose

10100	Card Person. Fee
10101	CRD Replacement Fee
10102	Pin Calculation Fee
10103	Fees Collection : Card Renew Fee
10104	Fees Collection : Card Insurance Fee
10105	Fees Collection : Card Miscellaneous Fee
10106	Membership Fee
10107	Fees Collection : Pre-Paid Card Initial Load Fee
10108	Fees Collection : Pre-Paid Card Reload Fee
10109	Fees Collection : Pre-Paid Card redemption Fee
10110	Fees Collection : Pre-Paid Card Overline Fee
10111	Fees Collection : Pre-Paid Card Inactivity Fee
10112	Fees Collection : Pre-Paid Card Returned Debit Fee

10120	Late Payment Fee
10121	Fees Collection : Unpaid Term Fee
10122	Overline Fee
10123	Fees Collection : Insurance Fee
10124	Fees Collection :Miscellaneous Fee
10125	Fees Collection : Miscellaneous Transaction Fee
10126	Fees Collection : Administrative Status Fee
10127	Fees Collection : Document Deposit Fee
10128	Fees Collection : Check Deposit Fee
10129	Fees Collection : Authentication Request Fee
10220	Fees Collection : Balance Inquiry Fee
10221	Fees Collection : Address Verification Fee
10222	Fees Collection : Telecode Verification Fee
10223	Fees Collection : RIB Request Fee

10224	Fees Collection : Account List Fee
10225	Fees Collection : ATM Statement Fee
10226	Fees Collection : Statement Request Fee
10227	Fees Collection : Short Statement Request Fee
10228	Fees Collection : Checkbook Request Fee
10229	Fees Collection : Account Transfer Fee
10230	Fees Collection : Account Verification (ePay) Fee
10231	Fees Collection : PIN Change Request Fee
10232	Fees Collection : Loan Request Fee
11000	Interest
19002	Pre-Paid Pos Reload
11001	Compound Interest

12000	Payment
12001	Deposit
12002	Bill Payment
13001	Miscellaneous Credit
13002	Miscellaneous Debit
14000	Refund
14001	Loan Refund
18000	Redemption
18001	Pre-Paid Redemption
20000	Fees Disbursement : General Purpose
20100	Fees Disbursement : Card Personalisation Fee
20101	Fees Disbursement : Card replacement Fee
20102	Fees Disbursement : Pin Calculation Fee
20103	Fees Disbursement : Card Renew Fee
20104	Fees Disbursement : Card Insurance Fee

20105	Fees Disbursement : Card Miscellaneous Fee
20106	Fees Disbursement : Card Membership Fee
20107	Fees Disbursement : Pre-Paid Card Initial Load Fee
20108	Fees Disbursement : Pre-Paid Card Reload Fee
20109	Fees Disbursement : Pre-Paid Card redemption Fee
20110	Fees Disbursement : Pre-Paid Card Overline Fee
20111	Fees Disbursement : Pre-Paid Card Inactivity Fee
20112	Fees Disbursement : Pre-Paid Card returned debit Fee
20120	Fees Disbursement : Credit late payment Fee
20121	Fees Disbursement : Credit Unpaid Term Fee
20122	Fees Disbursement : Credit Overline Fee

20123	Fees Disbursement : Credit Insurance Fee
20124	Fees Disbursement : Credit Miscellaneous Fee
20125	Fees Disbursement : Credit Miscellaneous Transaction Fee
20126	Fees Disbursement : Credit Administrative Status Fee
20127	Fees Disbursement : Document Deposit Fee
20128	Fees Disbursement : Check Deposit Fee
20219	Fees Disbursement : Authentication Request Fee
20220	Fees Disbursement : Balance Inquiry Fee
20221	Fees Disbursement : Address Verification Fee
20222	Fees Disbursement : Telecode Verification Fee
20223	Fees Disbursement : RIB Request Fee
20224	Fees Disbursement : Account List Fee
20225	Fees Disbursement : ATM Statement Fee
20226	Fees Disbursement : Statement Request Fee
20227	Fees Disbursement : Short Statement Request Fee
20228	Fees Disbursement : Checkbook Request Fee

20229	Fees Disbursement : Account Transfer Fee
20230	Fees Disbursement : Account Verification (ePay) Fee
20231	Fees Disbursement : PIN Change Request Fee
20232	Fees Disbursement : Loan Request Fee
19000	Pre-paid Initial Load
19001	Pre-Paid Reload
21000	Non-Financial Transaction
21001	Document Deposit
21002	Check Deposit
21003	Authentication Request

21004	Balance Inquiry
21005	Address Verification
21006	Telecode Verification
21007	RIB Request
21008	Account List
21009	ATM Statement
21010	Statement Request
21011	Short Statement Request
21012	Checkbook Request
21013	Account Transfer (Debit)
21014	Account Verification (ePay)
21015	PIN Change Request
21016	Loan Request
10007	Fees Collection : Cardholder Commission Credit
20235	Fees Disbursement : Express Delivery Fee
10235	Fees Collection : Express Delivery Fee
20236	Fees Collection : New Design Fee

10005	Fees Collection : Interchange Fees Acquirer to Issuer
10006	Fees Collection : Interchange Fees Issuer To Acquirer
13005	Merchant : Debit Transaction Adjustment
13006	Merchant Debit Sales Draft Chargeback
25000	Sales Draft Reversal
12005	Closing Account Payment
27001	Cash Advance (POS) Reversal
12010	Cash Back Rewards
19003	Prepaid Transfer Credit

19004	Prepaid Transfer Debit
12007	Card Transfer Debit
12008	Card Transfer Credit
13111	Priority Pass Fees
13158	Cardholder Cash Back Credit Transactions
32005	Agent Cash-In (Credit)
86000	Update Phone Inquiry
31006	PSP-Teller Cash-Out (Credit)
30007	Government Operation (Credit)
30006	Transportation Operation (Credit)
30005	Utility Operation (Credit)
33001	Merchant Payment (Debit)
23013	Account Transfer (Credit)
05005	Utility Operation (Debit)
05006	Transportation Operation (Debit)
05007	Government Operation (Debit)
07006	Agent Cash-Out (Debit)
07007	PSP-Teller Cash-Out (Debit)
19005	Agent Cash-In (Debit)
19006	PSP-Teller Cash-In (Debit)
32006	PSP-Teller Cash-In (Credit)
33002	Merchant Payment (Credit)
87000	Update Phone Confirm
31007	Agent Cash-Out (Credit)
95000	Online Pin Verification
10114	Membership Fee Reversal

19008	Virtual card Ini.Load
10115	Cardholder Dormancy Fees
10238	VC CHLD COMMISSION
10116	Cardholder Preferred Increase Fees
10117	Cardholder Preferred Skip Fees
10118	Cardholder Preferred Membership Exemp Fees
10119	Cardholder Preferred Skip reversal Fees
28000	Money Send
10241	E-banking Payment Fee
12011	Card e-com payment Debit
10237	Fees Collection : Withdrawal commission

10.2.5 ANNEX 4: COUNTRY CODE

Code (ISO 3166-1)	Country name
4	Afghanistan
8	Albania
10	Antarctica
12	Algeria
16	American Samoa
20	Andorra
24	Angola

28	Antigua and Barbuda
31	Azerbaijan
32	Argentina
36	Australia
40	Austria
44	Bahamas
48	Bahrain
50	Bangladesh
51	Armenia
52	Barbados

56	Belgium
60	Bermuda
64	Bhutan
68	Bolivia, Plurinational State of
70	Bosnia and Herzegovina
72	Botswana
74	Bouvet Island
76	Brazil
84	Belize
86	British Indian Ocean Territory
90	Solomon Islands
92	Virgin Islands, British
96	Brunei Darussalam
100	Bulgaria
104	Myanmar
108	Burundi
112	Belarus
116	Cambodia
120	Cameroon
124	Canada
132	Cabo Verde
136	Cayman Islands
140	Central African Republic
144	Sri Lanka
148	Chad
152	Chile
156	China
158	Taiwan, Province of China
162	Christmas Island
166	Cocos (Keeling) Islands
170	Colombia
174	Comoros
175	Mayotte
178	Congo

180	Congo, the Democratic Republic of the
184	Cook Islands
188	Costa Rica
191	Croatia
192	Cuba
196	Cyprus
203	Czechia

204	Benin
208	Denmark
212	Dominica
214	Dominican Republic
218	Ecuador
222	El Salvador
226	Equatorial Guinea
231	Ethiopia
232	Eritrea
233	Estonia
234	Faroe Islands
238	Falkland Islands (Malvinas)
239	South Georgia and the South Sandwich Islands
242	Fiji
246	Finland
248	Åland Islands
250	France
254	French Guiana
258	French Polynesia
260	French Southern Territories
262	Djibouti
266	Gabon
268	Georgia
270	Gambia
275	Palestine, State of
276	Germany
288	Ghana
292	Gibraltar
296	Kiribati
300	Greece
304	Greenland
308	Grenada
312	Guadeloupe
316	Guam
320	Guatemala
324	Guinea
328	Guyana

332	Haiti
334	Heard Island and McDonald Islands
336	Holy See
340	Honduras

344	Hong Kong
348	Hungary
352	Iceland
356	India
360	Indonesia
364	Iran, Islamic Republic of
368	Iraq
372	Ireland
376	Israel
380	Italy
384	Côte d'Ivoire
388	Jamaica
392	Japan
398	Kazakhstan
400	Jordan
404	Kenya
408	Korea, Democratic People's Republic of
410	Korea, Republic of
414	Kuwait
417	Kyrgyzstan
418	Lao People's Democratic Republic
422	Lebanon
426	Lesotho
428	Latvia
430	Liberia
434	Libya
438	Liechtenstein
440	Lithuania
442	Luxembourg
446	Macao
450	Madagascar
454	Malawi
458	Malaysia
462	Maldives
466	Mali
470	Malta
474	Martinique
478	Mauritania
480	Mauritius
484	Mexico

492	Monaco
-----	--------

496	Mongolia
498	Moldova, Republic of
499	Montenegro
500	Montserrat
504	Morocco
508	Mozambique
512	Oman
516	Namibia
520	Nauru
524	Nepal
528	Netherlands
531	Curaçao
533	Aruba
534	Sint Maarten (Dutch part)
535	Bonaire, Sint Eustatius and Saba
540	New Caledonia
548	Vanuatu
554	New Zealand
558	Nicaragua
562	Niger
566	Nigeria
570	Niue
574	Norfolk Island
578	Norway
580	Northern Mariana Islands
581	United States Minor Outlying Islands
583	Micronesia, Federated States of
584	Marshall Islands
585	Palau
586	Pakistan
591	Panama
598	Papua New Guinea
600	Paraguay
604	Peru
608	Philippines
612	Pitcairn
616	Poland
620	Portugal
624	Guinea-Bissau
626	Timor-Leste
630	Puerto Rico
634	Qatar

638	Réunion
-----	---------

642	Romania
643	Russian Federation
646	Rwanda
652	Saint Barthélemy
654	Saint Helena, Ascension and Tristan da Cunha
659	Saint Kitts and Nevis
660	Anguilla
662	Saint Lucia
663	Saint Martin (French part)
666	Saint Pierre and Miquelon
670	Saint Vincent and the Grenadines
674	San Marino
678	Sao Tome and Principe
682	Saudi Arabia
686	Senegal
688	Serbia
690	Seychelles
694	Sierra Leone
702	Singapore
703	Slovakia
704	Viet Nam
705	Slovenia
706	Somalia
710	South Africa
716	Zimbabwe
724	Spain
728	South Sudan
729	Sudan
732	Western Sahara
740	Suriname
744	Svalbard and Jan Mayen
748	Swaziland
752	Sweden
756	Switzerland
760	Syrian Arab Republic
762	Tajikistan
764	Thailand
768	Togo
772	Tokelau
776	Tonga

780	Trinidad and Tobago
784	United Arab Emirates
788	Tunisia
792	Turkey
795	Turkmenistan
796	Turks and Caicos Islands
798	Tuvalu
800	Uganda
804	Ukraine
807	Macedonia, the former Yugoslav Republic of
818	Egypt
826	United Kingdom
831	Guernsey
832	Jersey
833	Isle of Man
834	Tanzania, United Republic of
840	United States of America
850	Virgin Islands, U.S.
854	Burkina Faso
858	Uruguay
860	Uzbekistan
862	Venezuela, Bolivarian Republic of
876	Wallis and Futuna
882	Samoa
887	Yemen
894	Zambia

11. GETCARD STATUS WEB SERVICES

11 INTERFACES SPECIFICATION

11.1 INTERFACE

11.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank either to activate or cancel a card, or to hot list a card. The card can be credit, prepaid, or debit.

11.1.1.1 GET_CARD_STATUS

11.1.1.1.1 METHOD NAME

wsGetCardStatus

11.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
customerId	String	M	Customer identity .
cardIden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2 ,3

11.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Status	String	1 In Instance 2 Active 3 Blocked 4 Hold
		5 Inactive 6 Cancelled 7 Replaced 8 Ready For Personalization 9 KYC Pending 10 Verification 11 Blocked without Activation
Response_Code	String	Refer to Annex 1 (Response code Annex)
Response_Label	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3

11.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

11.1.1.1.1.5 WSDL FILE

11.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsGetCardStatus>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
      <customerId>10000178</customerId>
      <cardIden>234820</cardIden>
      <macin>B168C89FDAE96E23C066ADE88A98A334</macin>
      <addDataIn>?</addDataIn>
      <status>?</status>
      <serverdatetime>?</serverdatetime>
      <responsecode>?</responsecode>
      <addrespcodedesc>?</addrespcodedesc>
      <macout>?</macout>
      <addDataOut>?</addDataOut>
    </egat:wsGetCardStatus>
  </soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsGetCardStatusResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <status>2</status>
      <serverdatetime>17072025112207</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS</addrespcodedesc>
      <macout>759DA4DACDF4D79B85959E7F5BDC4658</macout>
      <addDataOut xsi:nil="true"/>
    </m:wsGetCardStatusResponse>
  </env:Body>
</env:Envelope>

```

11.2 ANNEXS

11.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
00	Success
001	CARD NOT FOUND

002	System Error
30	FORMAT ERROR : DATA INPUT MONDATORY
89	SYSTEM ERROR : INCORRECT USER OR PASSWORD
31	SYSTEM ERROR : INCORRECT BANK ID
69	SYSTEM ERROR : BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR : MAC-IN ERROR
14	SYSTEM ERROR : card not found OR NOT LINKED TO BANK
96	SYSTEM ERROR : GLOBAL EXCEPTION

11.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

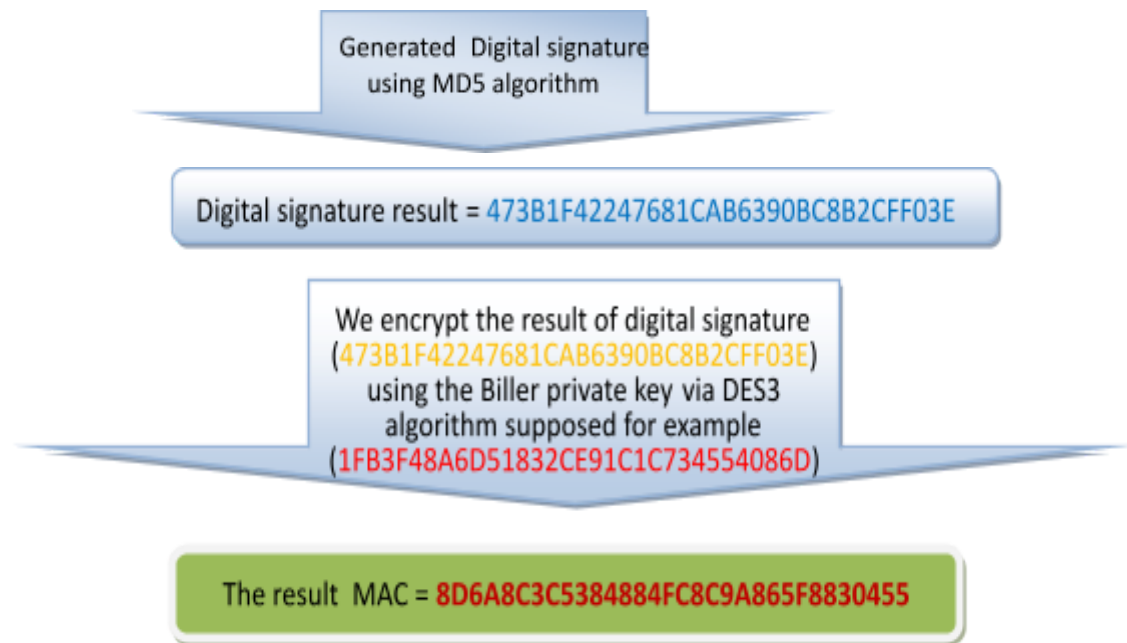

11.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN;

12 INTERFACES SPECIFICATION

12.1 INTERFACE

12.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank either to reload prepaid cards.

12.1.1.1 GET CASH IN COMMISSION

12.1.1.1.1 METHOD NAME

wsCashIn

12.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	
Ebanking_Password	String	M	
cardIden	String	M	Card iden
cashInAmount	String	M	Amount
cashInCurr	String	M	Amount Currncy
MacIn	String	M	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2 ,3

12.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
-----------	------	-------

Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
Response_Code	String	Refer to Annex 1 (Response code Annex)
Response_Label	String	More details about Error code
cashInCommission	String	Cash in commission
cashInCurr	String	Cash in Currency
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3

12.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

12.1.1.1.1.5 WSDL FILE

12.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
<soapenv:Header/>
<soapenv:Body>
<egat:wsGetCashInCommission>
<bankId>014</bankId>
<ebankingUser>AMB</ebankingUser>
<ebankingPassword>AMB_123$</ebankingPassword>
<cardIden>230303</cardIden>
<cashInAmount>1000</cashInAmount>
<cashInCurr>368</cashInCurr>
<macin>MAC_OK</macin>
<addDataIn>?</addDataIn>
<serverdatetime>?</serverdatetime>
```

```

<responsecode>?</responsecode>
<addrespcodedesc>?</addrespcodedesc>
<cashInCommission>?</cashInCommission>
<cashInCommissionCurr>?</cashInCommissionCurr>
<macout>?</macout>
<addDataOut>?</addDataOut>
</egat:wsGetCashInCommission>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsGetCashInCommissionResponse
xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <serverdatetime>16072025151002</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS</addrespcodedesc>
      <cashInCommission>0</cashInCommission>
      <cashInCommissionCurr>368</cashInCommissionCurr>
      <macout>C56C5FE9E07E39BAC3E709E37B725384</macout>
      <addDataOut xsi:nil="true"/>
    </m:wsGetCashInCommissionResponse>
  </env:Body>
</env:Envelope>

```

12.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
00	Success
001	CARD NOT FOUND
002	System Error
30	FORMAT ERROR : DATA INPUT MONDATORY
89	SYSTEM ERROR : INCORRECT USER OR PASSWORD
31	SYSTEM ERROR : INCORRECT BANK ID
69	SYSTEM ERROR : BANK ENCRYPTION KEY NOT FOUND

69	FORMAT ERROR : MAC-IN ERROR
14	SYSTEM ERROR : card not found OR NOT LINKED TO BANK
96	SYSTEM ERROR : GLOBAL EXCEPTION

12.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

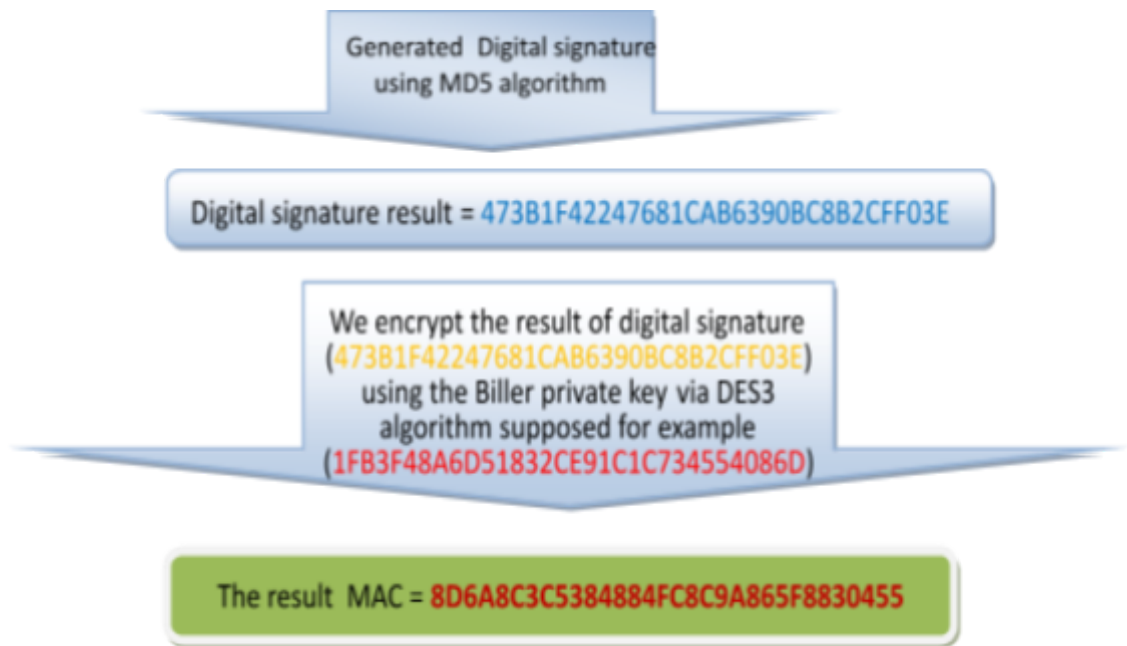

12.1.4 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN || CASH_IN_AMOUNT || CASH_IN_CURR;

12.1.5 ANNEX 4: GENERATE REFERENCE

YDDD + HH24 + Sequence and should be unique by each transaction.

Y=4

DDD= 002

HH=18

SEQUENCE 6 DIGIT = 000001

13. GET KYC INQUIRY WEB SERVICES

13 INTERFACES SPECIFICATION

13.1 INTERFACE

13.1.1 INTERFACE DESCRIPTION

13.1.1.1 WS_GET_KYC

13.1.1.1.1 METHOD NAME

WS_GET_KYC_INQUIRY

13.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandato ry/Optio nal	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.

Ebanking_User	String	M	
Ebanking_Password	String	M	
RequestDateTime	String	M	YYYYMMDDHHMISS
Cusden	String	M	Customer Identification
MacIn	String	M	Digital signature of the message parameter (encrypted by bank using a private working key), See Mac Specification Annex 2,3

13.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code

Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3
pCusIdentity1Nbr	String	Customer Identity Number 1
pCusIdentity1Type	String	Type of identification
pCusIdentity2Nbr		
pCusIdentity2Type	String	Type of identification
CusFirsName	String	First Name of the customer
CusMiddName	String	Middle Name of the customer
CusLastName	String	Last Name of the customer
pCusMotherName	String	Customer Mother Name
CusBirthDate	String	YYYYMMDD

CusTitle	String	1 Mr 2 Mrs 3 Miss 4 Dr 5 Lady 1661 Ms 1681 Sir 1701 Estate Of 1721 Rev
CusGender	String	Male => 'M', Female => 'F'
pCusSecondMobile	String	Secondary Phone Number
CusMobileNumb	String	Customer Phone Number
CusCouNatiCode	Numeric	Customer nationality => ISO 8385 , Example 368 for IRAQ
CusLanguge	String	ARB ENG KRD
Adresse	String Bool	'true', 'false'
Street	String	Address – street
Pobox	String	post box
City	String	Customer's City
pResidency	String	'Y', 'N'
pCusEmail	String	Customer Email
AdrCouCode	Numeric	Address Country => ISO 8385 , Example 368 for IRAQ
FileCusDocPath	String Bool	'true', 'false'
FilePassPath	String	Path of the file.

KycStatus	String	
Macout	String	Digital signature of the message output parameter (encrypted using a private working key)
pResidency		

13.1.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

13.1.1.1.1.5 WSDL FILE

13.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">
<soapenv:Header/>
<soapenv:Body>
<egat:wsGetLightKycCard>
<pBankId>014</pBankId>
<pEbankingUser>AMB</pEbankingUser>
<pEbankingPassword>AMB_123$</pEbankingPassword>
<pRequestdatetime>?</pRequestdatetime>
<pCusIden>0100101P004947923008</pCusIden>
<pMacin>MAC_OK</pMacin>
<pAddDataIn>?</pAddDataIn>
<pServerdatetime>?</pServerdatetime>
<pResponsecode>?</pResponsecode>
<pAddrespcodedesc>?</pAddrespcodedesc>
<pGetCardKycField>
<typ:PCusLanguage>?</typ:PCusLanguage>
<typ:PFilePassPath>?</typ:PFilePassPath>
<typ:PCusMotherName>?</typ:PCusMotherName>
<typ:PCusIdentity1Type>?</typ:PCusIdentity1Type>
<typ:PFileCusDocPath>?</typ:PFileCusDocPath>
<typ:PCusIdentity2Type>?</typ:PCusIdentity2Type>
```

```

<typ:PCusEmail>?</typ:PCusEmail>
<typ:PStreet>?</typ:PStreet>
<typ:PCusMobileNumb>?</typ:PCusMobileNumb>
<typ:PAdresse>?</typ:PAdresse>
<typ:PPobox>?</typ:PPobox>
<typ:PCusMiddName>?</typ:PCusMiddName>
<typ:PCusIdentity1Nbr>?</typ:PCusIdentity1Nbr>
<typ:PCusBirthDate>?</typ:PCusBirthDate>
<typ:PResidency>?</typ:PResidency>
<typ:PCusFirsName>?</typ:PCusFirsName>
<typ:PCity>?</typ:PCity>
<typ:PCusBirthPlace>?</typ:PCusBirthPlace>
<typ:PKycStatus>?</typ:PKycStatus>
<typ:PCusLastName>?</typ:PCusLastName>
<typ:PCusIdentity2Nbr>?</typ:PCusIdentity2Nbr>
<typ:PCusCouNatiCode>?</typ:PCusCouNatiCode>
<typ:PCusTitle>?</typ:PCusTitle>
<typ:PCusGennder>?</typ:PCusGennder>
<typ:PAdrCouCode>?</typ:PAdrCouCode>
<typ:PCusPep>?</typ:PCusPep>
<typ:PCusSecondMobile>?</typ:PCusSecondMobile>
</pGetCardKycField>
<pMacout>?</pMacout>
<pAddDataOut>?</pAddDataOut>
</egat:wsGetLightKycCard>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsGetLightKycCardResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <pServerdatetime>17072025105422</pServerdatetime>
      <pResponsecode>000</pResponsecode>
      <pAddrespcodedesc>SUCCESS</pAddrespcodedesc>
      <pGetCardKycField>
        <typ:PCusLanguage
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">E</typ:PCusLanguage>
        <typ:PFilePassPath xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>
        <typ:PCusMotherName xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/"/>
        <typ:PCusIdentity1Type
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">401</typ:PCusIdentity1Type>

```

```

        <typ:PFileCusDocPath xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        <typ:PCusIdentity2Type
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">1</typ:PCusIdentity2Type>
        <typ:PCusEmail xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        <typ:PStreet xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        <typ:PCusMobileNumb
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">+9647813367303</typ:PCus
MobileNumb>
        <typ:PAdresse
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">BAGHDAD</typ:PAdresse>
        <typ:PPobox xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        <typ:PCusMiddName
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">ABDULHAMEED</typ:PCusMi
ddName>
        <typ:PCusIdentity1Nbr
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">+9647813367303</typ:PCusId
entity1Nbr>
        <typ:PCusBirthDate
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">19881023</typ:PCusBirthDat
e>
        <typ:PResidency
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">N</typ:PResidency>
        <typ:PCusFirsName
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">ANAS</typ:PCusFirsName>
        <typ:PCity
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">JADRIYA-RASAFA</typ:PCity>
        <typ:PCusBirthPlace xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        <typ:PKycStatus
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">A</typ:PKycStatus>
        <typ:PCusLastName xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        <typ:PCusIdentity2Nbr
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">111111</typ:PCusIdentity2Nb
r>
        <typ:PCusCouNatiCode
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">368</typ:PCusCouNatiCode>
        <typ:PCusTitle
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">Mr</typ:PCusTitle>
        <typ:PCusGennder
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">M</typ:PCusGennder>
        <typ:PAdrCouCode
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/">368</typ:PAdrCouCode>
        <typ:PCusPep xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />

```

```

        <typ:PCusSecondMobile xsi:nil="true"
xmlns:typ="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl/types/" />
        </pGetCardKycField>
        <pMacout>99FFB517B7A557B077B005C9966085DE</pMacout>
        <pAddDataOut>AMB_001</pAddDataOut>
    </m:wsGetLightKycCardResponse>
</env:Body>
</env:Envelope>

```

13.2 ANNEXS

13.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MANDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

13.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function Get_Kyc Parameters (pRequestdatetime, pCusIden)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

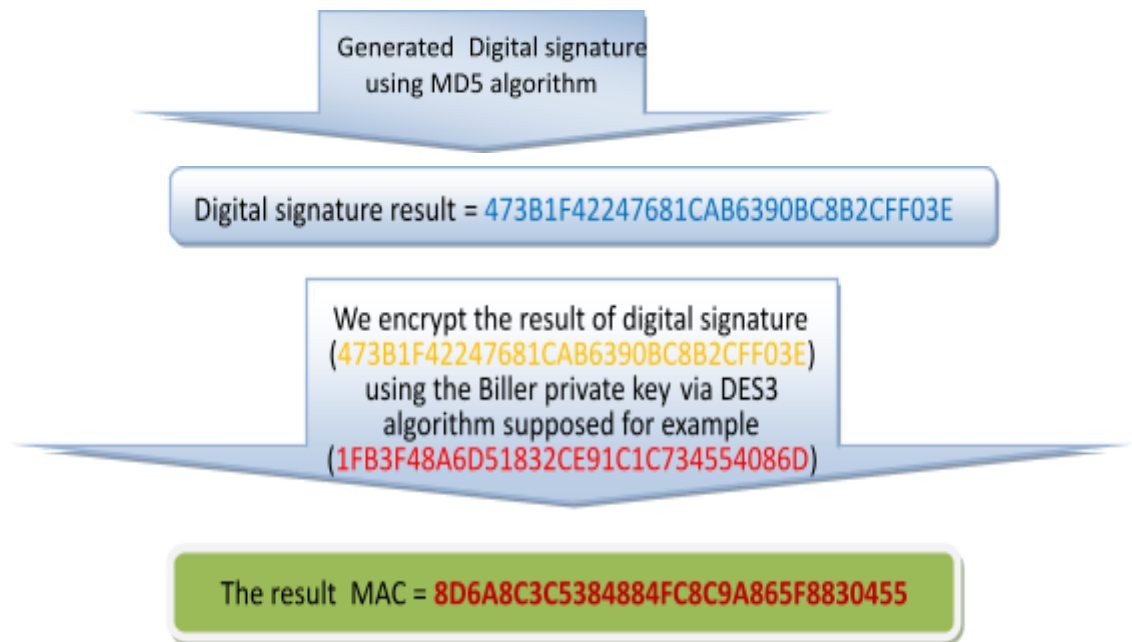

13.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = pRequestdatetime || pCusIden;

14. View Card Web Services

14 INTERFACES SPECIFICATION

14.1 INTERFACE

14.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to Set Card Default.

14.1.1.1 SET CARD AS DEFAULT

14.1.1.1.1 METHOD NAME

wsSetCardDefault

14.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	Username
Ebanking_Password	String	M	Password
CUSTOMER_ID	String	M	Customer ID
Request date time	String	M	Request DateTime: 'YYYYMMDDHHmm'

Phone Number	String	M	Customer phone number
CARD_Iden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2,3

14.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3

14.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

14.1.1.1.5 WSDL FILE

14.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsSetCardDefault>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
```

```

        <requestdatetime>2507171215</requestdatetime>
        <cardIden>234820</cardIden>
        <phoneNumb>+9647705079356</phoneNumb>
        <macin>F1F1BF13AFA6F8F15AFBF2C30B4638C5</macin>
        <addDataIn>?</addDataIn>
        <serverdatetime>?</serverdatetime>
        <responsecode>?</responsecode>
        <addrespcodedesc>?</addrespcodedesc>
        <macout>?</macout>
        <addDataOut>?</addDataOut>
    </egat:wsSetCardDefault>
</soapenv:Body>
</soapenv:Envelope>

```

Output Response Success:

```

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsSetCardDefaultResponse xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>-1</result>
      <serverdatetime>17072025110125</serverdatetime>
      <responsecode>396</responsecode>
      <addrespcodedesc>SET_CARD_DEFAULT_PROCESS EXCEPTION FAILED ERROR : [ORA-00001: unique
constraint (MXP.ID_WPC_USERS) violated]</addrespcodedesc>
      <macout>17EFB34D8134BAD3690B47863D9AFD82</macout>
      <addDataOut xsi:nil="true"/>
    </m:wsSetCardDefaultResponse>
  </env:Body>
</env:Envelope>

```

14.2 ANNEXS

14.2.1 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MONDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND

69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

14.2.2 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

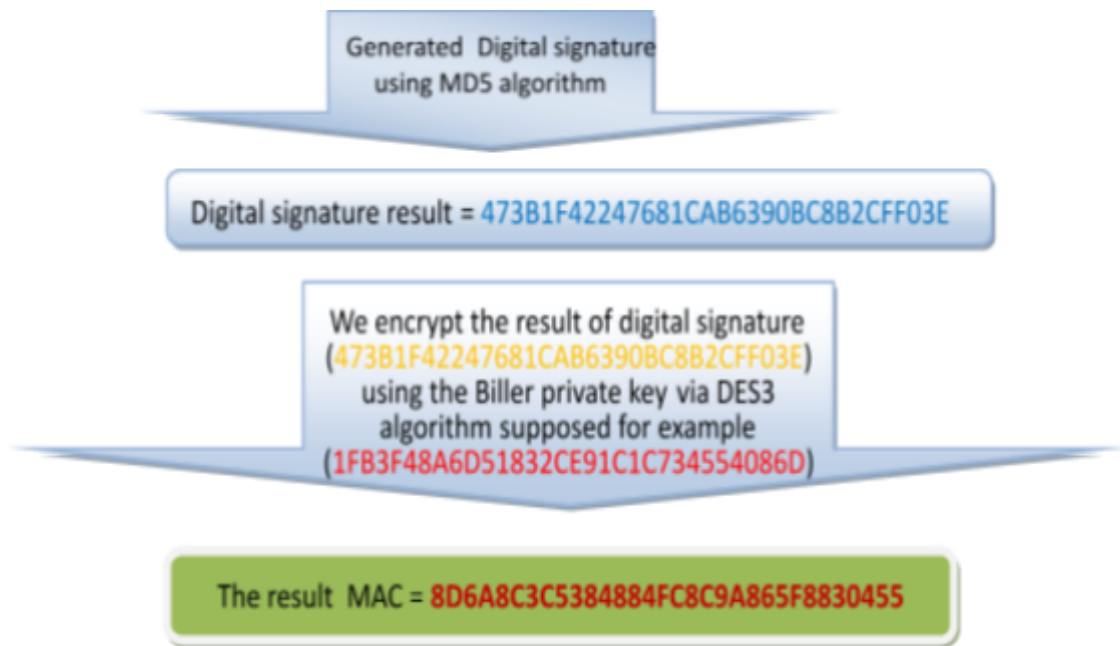

14.2.3 ANNEX 3: MAC-IN STRUCTURE

MAC-IN =RequestDateTime || CARD_IDEN || PHONE_NUMB ;

15. VIEW CARD WEB SERVICES

15 INTERFACES SPECIFICATION

15.1 INTERFACE

15.1.1 INTERFACE DESCRIPTION

This web service is invoked by the bank to get CVC encryption .

15.1.1.1 VIEW PIN

15.1.1.1.1 METHOD NAME

wsViewCard

15.1.1.1.2 INPUT PARAMETERS

Parameter	Type	Mandatory /Optional	Value
Bank_Id (Bank IDEN)	String	M	The bank ID as defined by the bank on CMS.
Ebanking_User	String	M	
Ebanking_Password	String	M	
CUSTOMER_ID	String	O	Customer ID
CARD_Iden	String	M	Card iden
MacIn	String	M	Digital signature of the message parameter (crypted by bank using a private working key), See Mac Specification Annex 2,3

15.1.1.1.3 OUTPUT PARAMETERS

Parameter	Type	Value
Response Code	String	Refer to Annex 1 (Response code Annex)
Additional Response Code Description	String	More details about Error code
Server Date Time	String	Server response time (Format : DDMMYYYYHH24MISS)
cvv2Enc	String	CVC encrypted
cardExpDate	String	Card expire date
panEnc	String	PAN encrypted , see Annex 4
cardHolderName	String	Cardholder name
MacOut	String	Digital signature of the message output parameter (encrypted using a private working key), Refer to Mac Specification Annex 2 ,3

15.1.1.1.4 WSDL SPECIFICATIONS

The web service exposed by the bank portal or application shall correspond to the below WSDL specifications:

15.1.1.1.1.5 WSDL FILE

15.1.1.1.1.6 SOAP SAMPLE

Input SOAP request:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:egat="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
  <soapenv:Header/>
  <soapenv:Body>
    <egat:wsViewCard>
      <bankId>014</bankId>
      <ebankingUser>AMB</ebankingUser>
      <ebankingPassword>AMB_123$</ebankingPassword>
      <customerId>10000178</customerId>
      <cardIden>234820</cardIden>
      <macin>B168C89FDAE96E23C066ADE88A98A334</macin>
      <addDataIn>?</addDataIn>
      <serverdatetime>?</serverdatetime>
      <responsecode>?</responsecode>
      <addrespcodedesc>?</addrespcodedesc>
      <cvv2Enc>?</cvv2Enc>
      <cardExpDate>?</cardExpDate>
      <panEnc>?</panEnc>
      <cardHolderName>?</cardHolderName>
      <macout>?</macout>
      <addDataOut>?</addDataOut>
    </egat:wsViewCard>
  </soapenv:Body>
</soapenv:Envelope>
```

Output Response Success:

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header/>
  <env:Body>
    <m:wsViewCardResponse
xmlns:m="http://egatebanking/Egate_Ebanking_AMB_WS.wsdl">
      <result>0</result>
      <serverdatetime>17072025111754</serverdatetime>
      <responsecode>000</responsecode>
      <addrespcodedesc>SUCCESS</addrespcodedesc>
      <cvv2Enc>E251700BDFC6E22B</cvv2Enc>
      <cardExpDate>26/06</cardExpDate>
```

```

<panEnc>CF58ED5462F4F178</panEnc>
<cardHolderName>ENAAM HUSSEIN ALI</cardHolderName>
<macout>3670AA30EFDE60ADE642202E14D2C7C2</macout>
<addDataOut xsi:nil="true"/>
</m:wsViewCardResponse>
</env:Body>
</env:Envelope>

```

15.1.2 ANNEX 1: RESPONSE CODE

Response Code	Description
000	Success
002	SYSTEM ERROR
003	INPUT DATA NOT VALID
007	SYSTEM ERROR : INCORRECT USER OR PASSWORD
30	FORMAT ERROR DATA INPUT MANDATORY
89	SYSTEM ERROR INCORRECT USER OR PASSWORD
69	SYSTEM ERROR BANK ENCRYPTION KEY NOT FOUND
69	FORMAT ERROR MAC-IN ERROR
69	FORMAT ERROR : CUSTOMER NOT FOUND

15.1.3 ANNEX 2: MAC SPECIFICATION

Note:

The Mac is a computed value that is generated through the below steps:

Step 1: For Mac Input verification: A temporary string "X" is created through the concatenation all input parameters except Mac in , bank_id, ebanking_user, ebanking_password

For Mac Output generation: A temporary string "X" is created through the concatenation Response code, Server Date Time output parameters.

Step 2: A digital signature is then generated using MD5 algorithm.


Step 3: Afterwards, We encrypt the result of digital signature using the Biller private key via DES3 algorithm (ECB Mode, no Padding)

NB: The procedure for generating the Biller private key will be communicated in a separate document.

Exemple Mac generation:

Taking, for example, the function GET_CARD_LIMIT_RISK Patameters (Token1: 10800021781308190670): (cusid = 108000217813, car expi date = 0819 last four digit of card 0670)

The temporary string "X": created through the concatenation all input parameters except Mac in and Additional Data input =>10800021781308190670

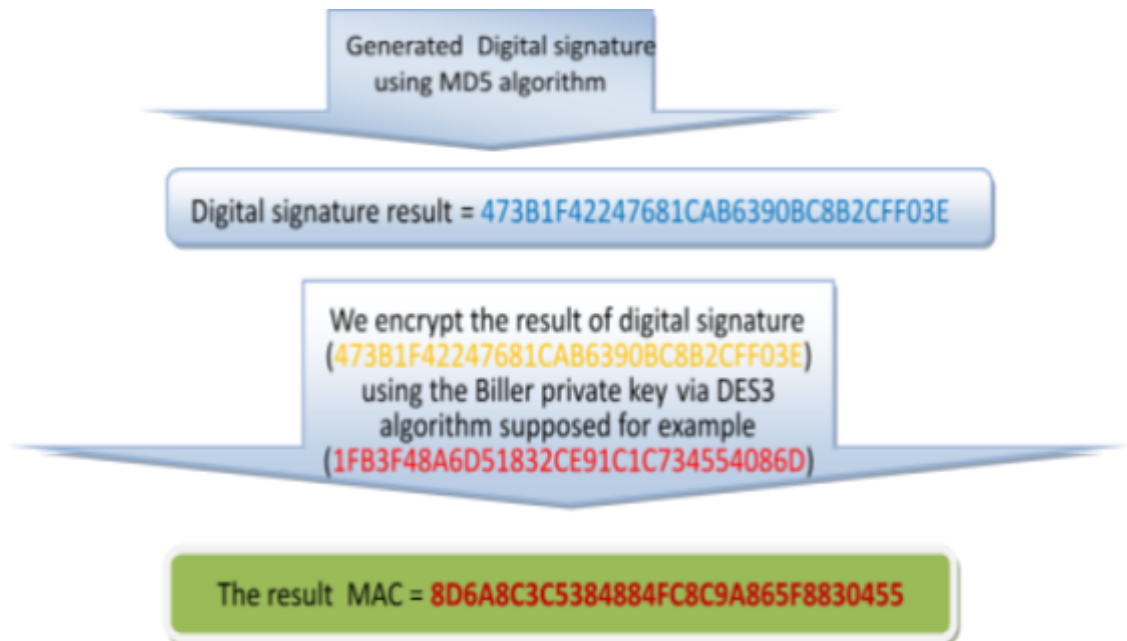

15.1.4 ANNEX 3: MAC-IN STRUCTURE

MAC-IN = CARD_IDEN;

15.1.5 ANNEX 4: PAN DECRYPT

3DES decrypt ('781A22007212876E, MAC KEY '1FB3F48A6D51832CE91C1C734554086D') => crypted => 52857*****1046.

Key (e.g. '0123456789ABCDEF')

1FB3F48A6D51832CE91C1C734554086D

IV (only used for CBC mode)

0000000000000000

Input Data

781A22007212876E

☒ ECB

☐ CBC

Encrypt

Decrypt

Output Data

5285780082311046