


数据说明

材 52 张布雨 2015011958

1 Data ERD

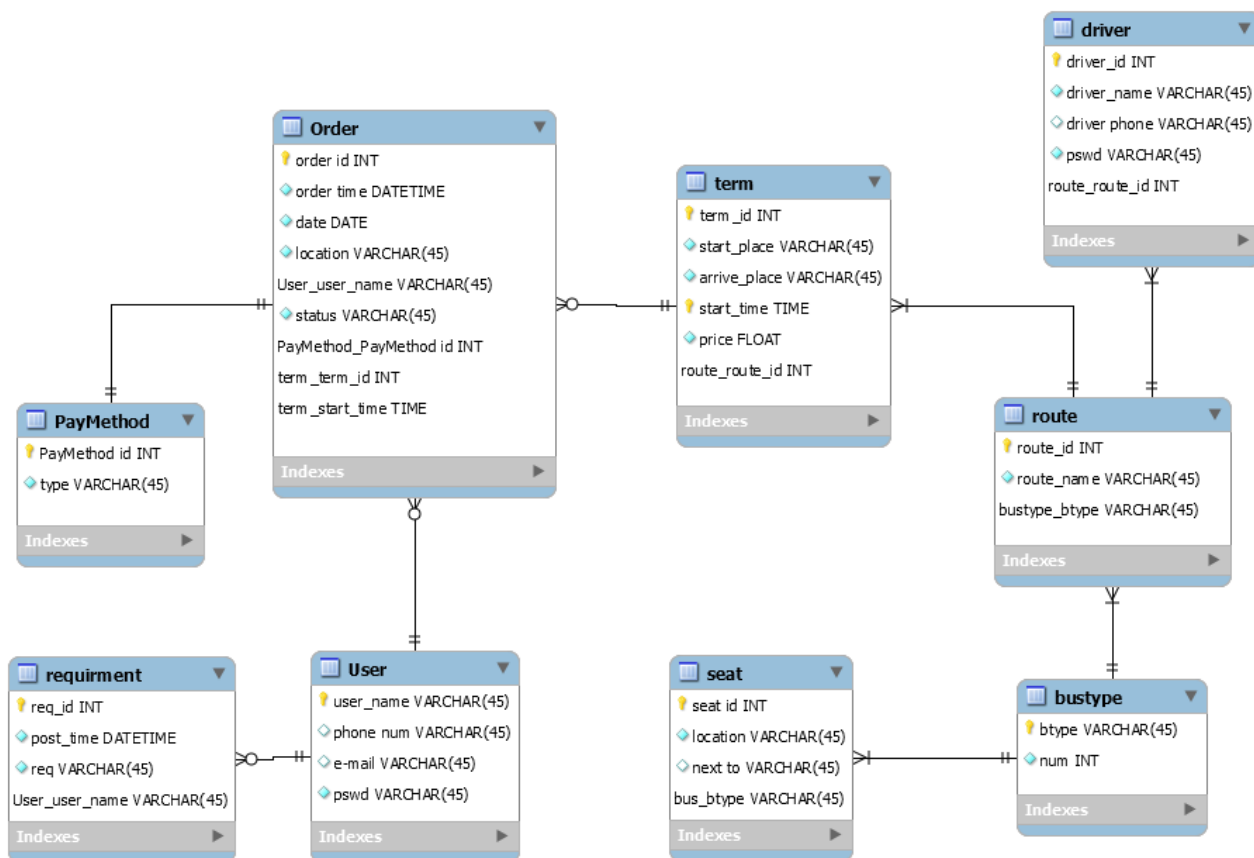

2 Data Tables

term

	term_id	start_place	arrive_place	route_id	price	start_time
▶	1	beijingnan	Cap_airport	2	20	08:00:00
	1	beijingnan	Cap_airport	2	20	12:00:00
	1	beijingnan	Cap_airport	2	20	16:00:00
	1	beijingnan	Cap_airport	2	20	20:00:00
	2	beijingzhan	Cap_airport	3	30	08:00:00
	2	beijingzhan	Cap_airport	3	30	12:00:00
	2	beijingzhan	Cap_airport	3	30	16:00:00
	2	beijingzhan	Cap_airport	3	30	20:00:00
	3	fangzhuang	Cap_airport	1	20	08:00:00
	3	fangzhuang	Cap_airport	1	20	12:00:00
	3	fangzhuang	Cap_airport	1	20	16:00:00
	3	fangzhuang	Cap_airport	1	20	20:00:00
	4	gongzhufen	Cap_airport	4	30	08:00:00
	4	gongzhufen	Cap_airport	4	30	12:00:00
	4	gongzhufen	Cap_airport	4	30	16:00:00
	4	gongzhufen	Cap_airport	4	30	20:00:00
	5	Cap_airport	fangzhuang	1	20	10:00:00
	5	Cap_airport	fangzhuang	1	20	14:00:00
	5	Cap_airport	fangzhuang	1	20	18:00:00

user

	user_name	pswd	tel	email
▶	azzy	111	11111	NULL
	bzzy	222	22222	NULL
	czzy	333	33333	NULL
	dzzy	444	44444	NULL
	ezzy	555	55555	NULL
	fzzy	666	66666	NULL
	gzzy	777	77777	NULL
	hzzy	888	88888	NULL
*	NULL	NULL	NULL	NULL

order

	order_id	user_name	term_id	location	date	start_time	status	order_time	paymethod_id
▶	1	azzy	1	1A	2019-01-15	08:00:00	yes	2019-01-15 23:...	1
	2	azzy	1	1A	2019-01-17	08:00:00	yes	2019-01-17 18:...	1
	3	azzy	1	1A	2019-01-18	12:00:00	no	2019-01-17 19:...	2
	4	bzzy	1	1B	2019-01-17	08:00:00	yes	2019-01-17 19:...	3
	5	azzy	1	1A	2019-01-18	08:00:00	yes	2019-01-18 18:...	1
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

requirement

	req_id	user_name	post_time	req
▶	1	azzy	2019-01-15 19:29:36	add more functions
	3	azzy	2019-01-15 23:15:06	please add more functions
*	NULL	NULL	NULL	NULL

paymethod

	paymethod_id	paymethod_name
▶	1	Paypal
	2	Alipay
	3	creditcard
*	NULL	NULL

seats

	s_id	location	next to	btype
	1	1A	NULL	1
	2	1B	NULL	1
	3	1C	NULL	1
	4	1D	NULL	1
	5	2A	NULL	1
	6	2B	NULL	1
	7	2C	NULL	1
	8	2D	NULL	1
	9	3A	NULL	1
	10	3B	NULL	1
	11	3C	NULL	1
▶	12	3D	NULL	1
*	NULL	NULL	NULL	NULL

bustype

	btype	num
▶	1	12
*	NULL	NULL

driver

	driver_id	driver_name	route_id	pswd	tel
▶	1	aq	1	aaa	1111
	2	sw	2	sss	2222
	3	de	3	ddd	3333
	4	fr	4	fff	4444
	5	gt	5	ggg	5555
	6	hy	6	hhh	6666
	7	ju	7	jjj	7777
	8	ki	8	kkk	8888
	9	lo	9	lll	9999
	10	za	10	zzz	0000
*	NULL	NULL	NULL	NULL	NULL

route

	route_id	route_name	btype
	1	fangzhuang-CA	1
	2	beijingnan-CA	1
	3	beijing-CA	1
	4	gongzhufen-CA	1
	5	CA-tianjin	1
	6	CA-baoding	1
	7	CA-tangshan	1
	8	CA-cangzhou	1
▶	9	CA-chifeng	1
	10	wangfujing-CA	1
*	NULL	NULL	NULL

admin

	admin_id	admin_name	tel	mail	pswd
▶	1	admin1	1234	163	admin1
	2	admin2	5678	126	admin2
*	NULL	NULL	NULL	NULL	NULL