pstk	input	`n+n` is an RSF:
$n	+n$	handle: $n \cdot +n$ ⟨1⟩ ⟨2⟩; use $E \to n$ ⟨3⟩ to reduce to next RSF $E+n$

NFA of items

Eg. 5.3

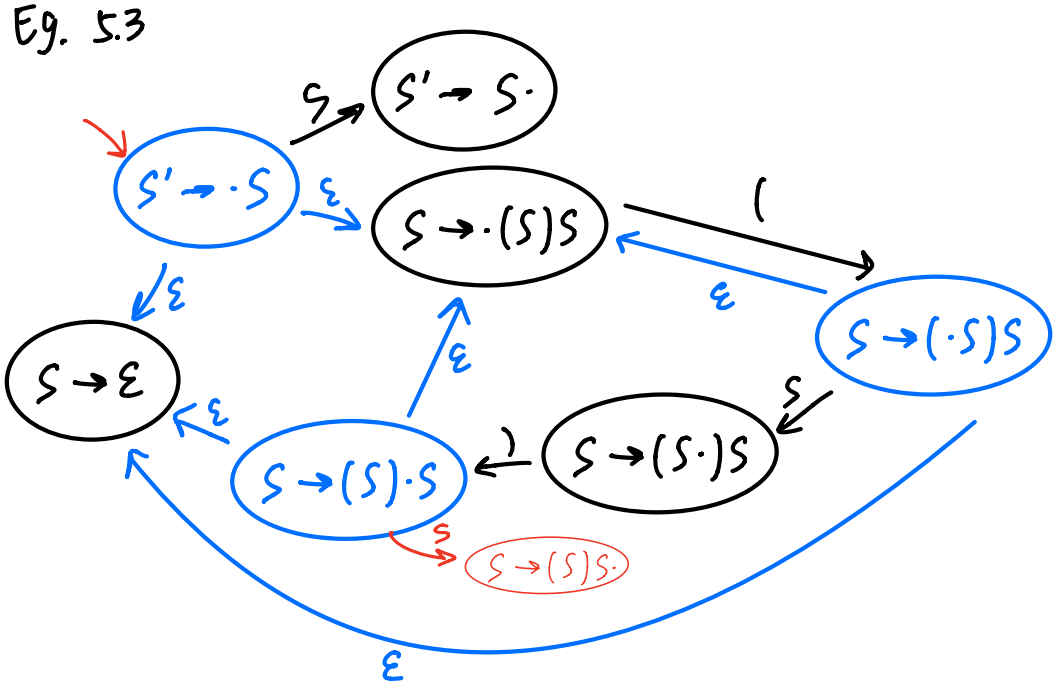

immediately lead to initial items of S

Eg. 5.4

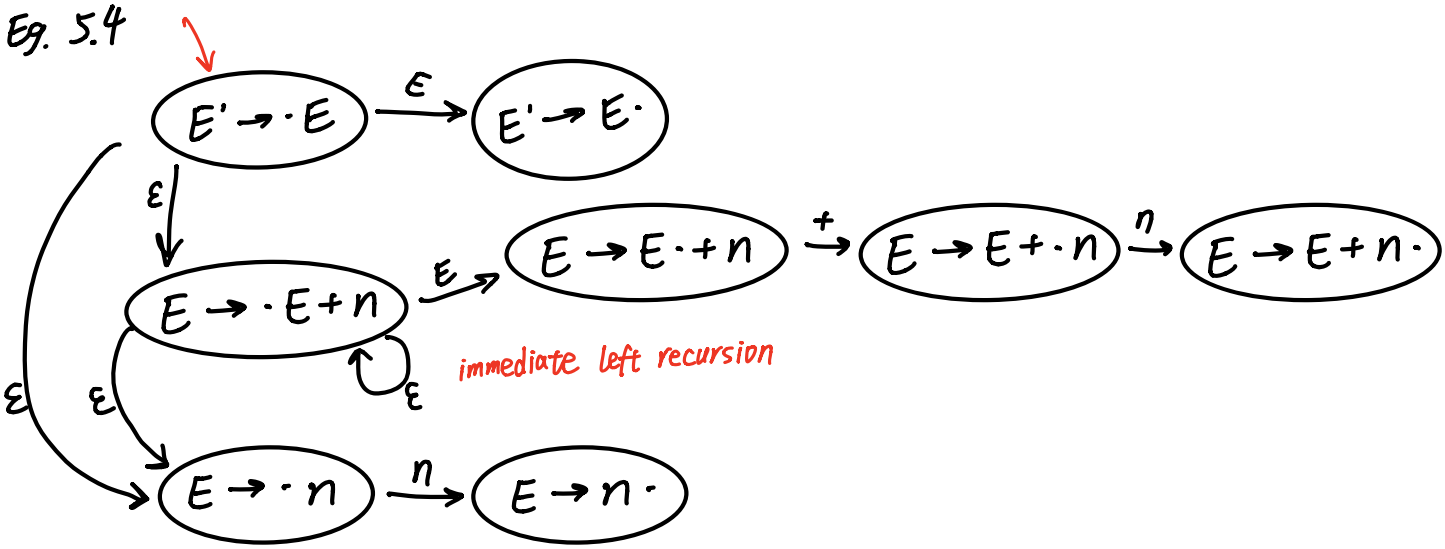

immediate left recursion

DFA of items

Eg. 5.3

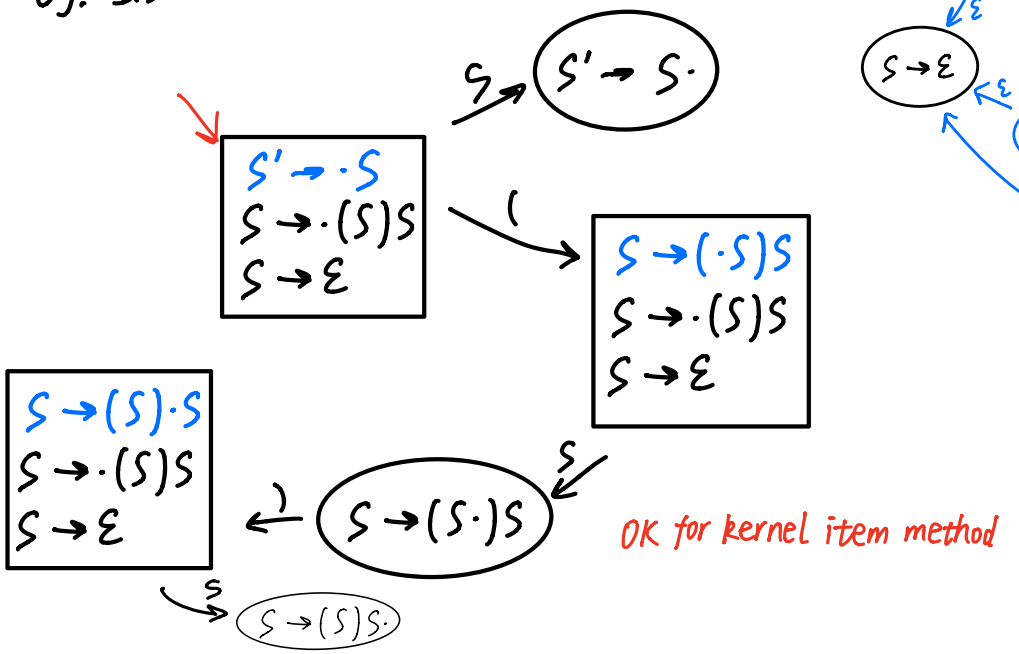

OK for kernel item method

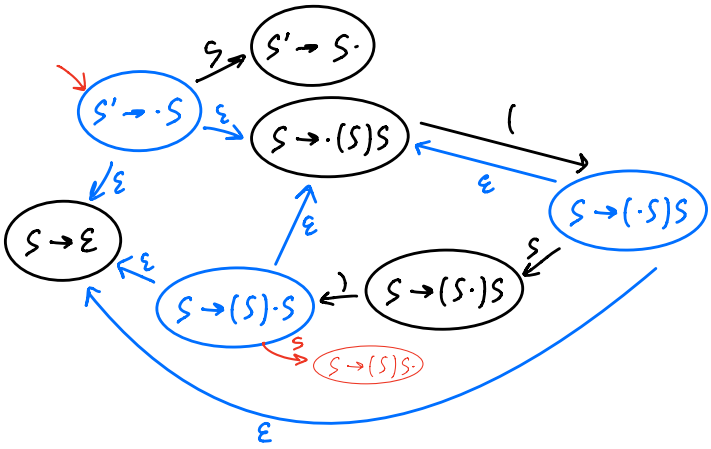

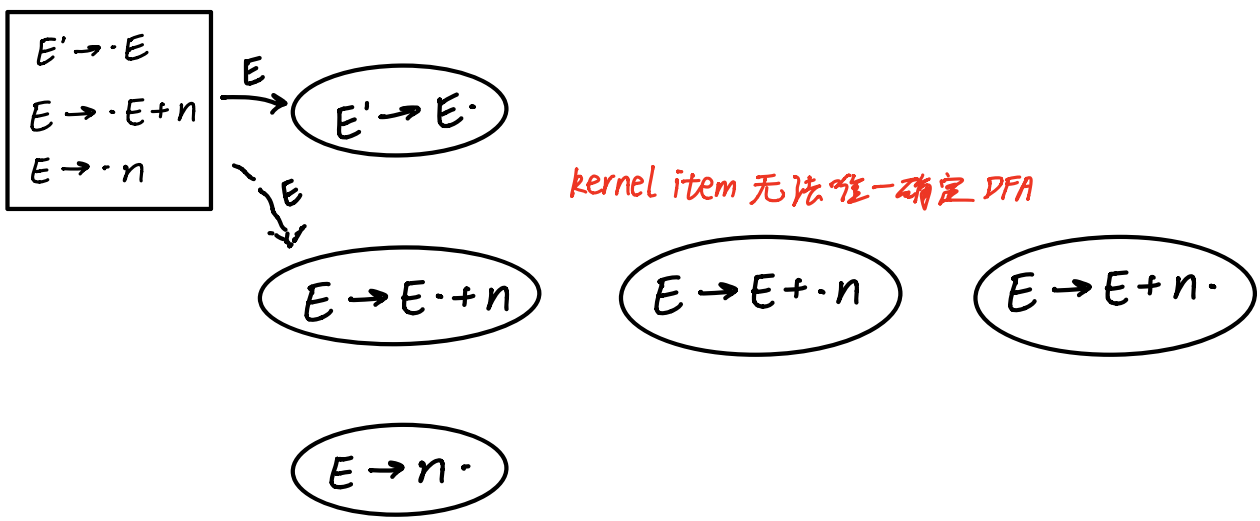

kernel item 无法唯一确定 DFA