General Instructions:

- You can refer to any offline resources already on your laptop, but you must disable all networking and Bluetooth connections during the test. You must not communicate with anyone via any means during the test.
- Just before the test, you will be given instructions by the invigilator as to how to obtain resource files required for the lab test and how to submit your solutions.
- No questions will be entertained during the test. If necessary, make your own assumptions.
- You are allowed to use only standard PHP classes and functions in your solutions do not use any third party libraries.
- Use meaningful names for classes, methods, functions and variables, as well as indent your code correctly.
 Use 4 spaces for indentation. Otherwise, you may attract penalty of up to 20% of your score for the corresponding question.
- You **MUST** include your name as author in the comments of all your submitted source files. Failure to do so WILL attract a penalty of up to **20%** of your score for the corresponding question.

For example, if your registered name is "KIM Jong Un" and email ID is kim.jongun.2018, include the following comment at the beginning of each source file you write.

```
<!--
Name: KIM Jong Un
Email: kim.jongun.2018
-->
```

• You may wish to comment out the parts in your code which cause errors. But commented code will not be marked.


DO NOT TURN OVER UNTIL YOU ARE TOLD TO DO SO

Given:

- q1-A.html
- q1-A.php
- q1-B.html
- q1-B.php

Part A (5 marks) - Difficulty Level (*)

1. Update q1-A.html to include a form. The page displays as follows:

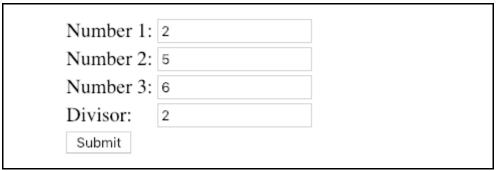

Note: "2", "5", "6" and "2" (divisor) are values entered by the user.


Upon clicking the SUBMIT button, it submits to q1-A.php via HTTP POST.

- 2. Implement a function called is_divisible_by (\$num, \$n) in q1-A.php. The function returns true if \$num is divisible by \$n, false otherwise.
- 3. Use the function is_divisible_by(\$num, \$n) to produce the following result when the user submits the values shown above through q1-A.html:
 - 2 is divisible by 2: YES
 - 5 is divisible by 2: NO
 - 6 is divisible by 2: YES

HINT: Explore the use of HTML unordered list

Part B (3 marks) - Difficulty Level (*)

1. Update q1-B.html to include a form. The page displays as shown below. This time, one or more numbers are input together in **ONE form input field** where the numbers are separated by a **comma**:



Note: "2,4,6,8,9" and "2" are values entered by the user.

Upon clicking the SUBMIT button, it submits to q1-B.php via HTTP GET.

- 2. q1-B.php uses the same function is_divisible_by (\$num, \$n) that you implemented in Part A. Copy and paste the function from q1-A.php to q1-B.php.
- 3. Use the function is_divisible_by (\$num, \$n) to produce the following result when the user submits the values shown above through q1-B.html:
 - 2 is divisible by 2: YES
 - 4 is divisible by 2: YES
 - 6 is divisible by 2: YES
 - 8 is divisible by 2: YES
 - 9 is divisible by 2: NO

HINT: Explore the use of PHP **explode** function

Given:

- q2.php
- q2-display.php
- q2-one.php
- (Image Files) apple.jpg, orange.jpg, pear.jpg

Part A (3 marks) - Difficulty Level (*)

- 1. Modify **q2.php** such that if the user clicks on the words ("Apple", "Orange" or "Pear"), the corresponding checkboxes will be selected/unselected.
- 2. Once the user selects the fruits and press on the SUBMIT button on page q2.php, the form submits to q2-display.php.
- 3. Modify **q2-display.php** such that appropriate images will be displayed in a tabular format (use border='1' for your table).
 - For example, if the user selects "Apple" in q2.php, then page q2-display.php must display the image file apple.jpg.


Sample Output

| Action Taken (q2.php) | Sample Output (q2-display.php) |
|--|--|
| ■ Apple ■ Orange ■ Pear Submit None selected | Please select a fruit (Note: Use HTML Heading-1) |
| ✓ Apple □ Orange □ Pear Submit "Apple" selected | |
| ✓ Apple ✓ Orange ☐ Pear Submit "Apple" and "Orange" selected | |
| Apple Orange Pear Submit "Apple", "Orange"and "Pear" selected | |

Part B (3 marks) - Difficulty Level (**)

- 1. In page **q2-one.php**, once the user selects the fruits and press on the SUBMIT button on page, the form submits back to itself (to **q2-one.php**).
- 2. Modify **q2-one.php** such that:
 - Appropriate images will be displayed in a tabular format (use border='1' for your table).
 - Appropriate message will be displayed at the top of the page.

Sample Output

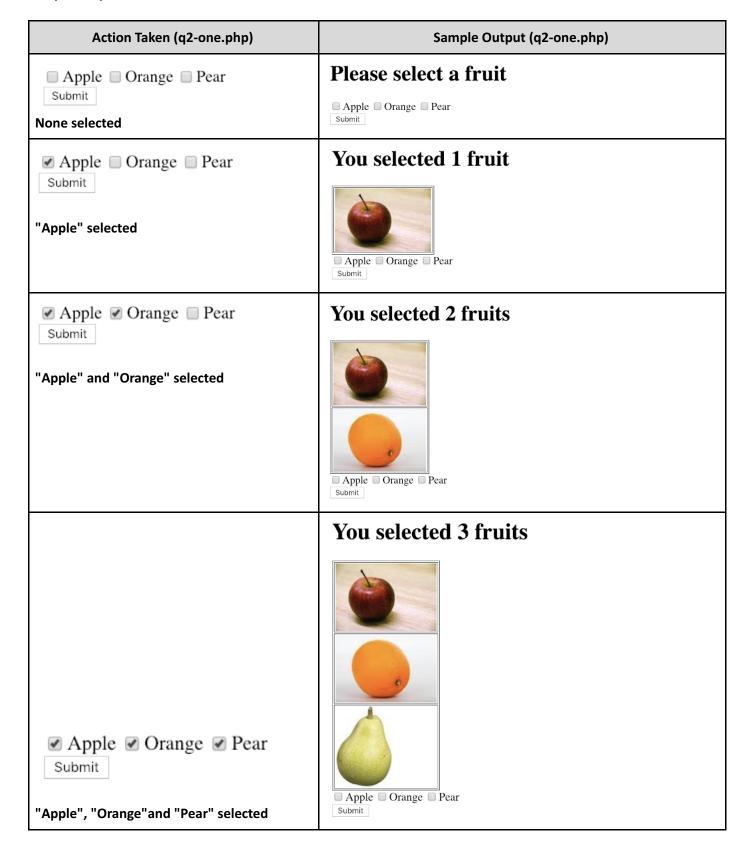

Given:

- q3.php
- 1. Page q3.php displays students' course timetable in a tabular format.
- 2. \$students is an (indexed) array of associative arrays where:
 - Each associative array represents a student. A student has a name and one or more courses.
 - Thus, each **associative array** contains TWO (2) key-value pairs where:

| Кеу | Value Type |
|---------|--|
| name | String (e.g. "Jong Un Kim") |
| courses | (Indexed) array of (indexed) arrays (e.g. see below) |

o A course is an (indexed) array containing FIVE (5) items.

['CS102', 'Discrete Mathematics', 'TUE', '0830', 2]

- i. 1st item is the Course Code
- ii. 2nd item is the Course Title
- iii. 3rd item is the Day on which the course is offered (e.g. MON, TUE, etc.)
- iv. 4th item is the **Time** at which the course starts
 - 0830 means class starts at 08:30am
 - 1330 means class start at 1:30pm
- v. 5th item is the Credit Units
 - The value 1 refers to 1.5-hour class, and
 - The value 2 refers to 3-hour class
- vi. Hence, the above course CS102:
 - Is offered on **TUE** and it is a **3-hour** class
 - Starts at 08:30am
 - Ends at 11:30am

Part A (2 marks) - Difficulty (**)

- 1. Complete q3.php such that the name drop-down menu will display the distinct names of students.
- 2. DO NOT HARD-CODE the names.
- 3. Your implementation should make use of the **getStudentNames** () function given in the **q3.php** file. This function is left incomplete. Please complete this function.

When the page loads:

Name: Jong Un Kim 💠 Show Timetable

When the user clicks on the drop-down menu:

Name Jong Un Kim
Donald Trump
Hugo Chavez

Part B (4 marks) - Difficulty (***)

- 1. Complete **q3.php** such that it displays the selected student's timetable showing all courses taken by the student.
- 2. When a student's name is selected in the drop-down menu and the "Show Timetable" SUBMIT button is clicked, the form submits to itself (to q3.php page). It then:
 - a. Displays the student's timetable in an HTML table; and
 - b. The student's name should be "**selected**" in the drop-down menu.
- 3. When the page loads for the first time, the timetable displayed will be for the first student in the drop-down menu (follow the order of student names as returned by the **getStudentNames** () function).
- 3. You can assume that \$students always contains at least one student.
- 4. Marks will be deducted for overly repetitive code that could have been simplified, e.g., by using a loop, or by writing a function.

HINT: Explore the use of align='center' attribute of

Example 1: The page loads for the first time

| Name: Jong Un Kim Show Timetable | | | | | | | |
|-----------------------------------|-------------------------------|----------------------------------|------------------|----------------------------|-----------------|--------------------------------------|--|
| | 08:30am - 10:00am | 10:00am - 11:30am | 12:00nn - 1:30pm | 1:30pm - 3:00pm | 3:00pm - 4:30pm | 4:30pm - 6:00pm | |
| MON | | IS111 Intro Programming | | | | | |
| TUE | CS102 Discrete Mathematics | | | EE200 Intro to Circuits | | | |
| WED | | WRIT100 Writing and Reasoning | | | | | |
| THU | | | | | | | |
| FRI | | | | | | LIT380 Intro to Korean Literature | |

Example 2: After 'Donald Trump' is selected and 'Show Timetable' is clicked

| Name: Donald Trump • Show Timetable | | | | | | | |
|-------------------------------------|--------------------------|----------------------------------|-------------------------------------|-----------------|-----------------------------------|-----------------|--|
| | 08:30am - 10:00am | 10:00am - 11:30am | 12:00nn - 1:30pm | 1:30pm - 3:00pm | 3:00pm - 4:30pm | 4:30pm - 6:00pm | |
| MON | | | | | | | |
| TUE | IS112 Data Management | | | | | | |
| WED | | WRIT100 Writing and Reasoning | OBHR101 Leadership Team Building | | | | |
| THU | | | | | IS113 Web Application Development | | |
| FRI | | STAT202 Bayesian Logics | | | | | |

Example 3: After 'Hugo Chavez' is selected and 'Show Timetable' is clicked

| Name: | Hugo Chavez 🕈 Show | Timetable | | | | |
|-------|--------------------------|----------------------------|-------------------------------------|----------------------------|----------------------------|-----------------|
| | 08:30am - 10:00am | 10:00am - 11:30am | 12:00nn - 1:30pm | 1:30pm - 3:00pm | 3:00pm - 4:30pm | 4:30pm - 6:00pm |
| MON | | IS111 Intro Programming | | | | |
| TUE | IS112 Data Management | | | EE200 Intro to Circuits | | |
| WED | | | OBHR101 Leadership Team Building | | | |
| THU | | | | | | |
| FRI | | | | | STAT202 Bayesian Logics | |