

bin — mysql -u root -p — 138x40

Last login: Wed Sep 2 11:59:27 on ttys001

The default interactive shell is now zsh.

To update your account to use zsh, please run `chsh -s /bin/zsh`.

For more details, please visit <https://support.apple.com/kb/HT208050>.

DAEDMAC1008:~ Adult\$ cd /usr/local/mysql/bin

DAEDMAC1008:bin Adult\$./mysql -u root -p

[Enter password:

Welcome to the MySQL monitor. Commands end with ; or \g.

Your MySQL connection id is 11

Server version: 8.0.46 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

[mysql> CREATE DATABASE SchoolDB;

ERROR 1007 (HY000): Can't create database 'SchoolDB'; database exists

[mysql> USE SchoolDB;

Reading table information for completion of table and column names

You can turn off this feature to get a quicker startup with -A

Database changed

[mysql> SHOW TABLES;

```
+-----+
| Tables_in_schooldb |
+-----+
| Classes             |
| Grades              |
| Students            |
| Teachers            |
+-----+
4 rows in set (0.00 sec)
```

[mysql> DROP DATABASE SchoolDB;

Query OK, 4 rows affected (0.02 sec)

bin — mysql -u root -p — 138x40

```
[mysql> DROP DATABASE SchoolDB;
Query OK, 4 rows affected (0.02 sec)
```

```
[mysql> CREATE DATABASE SchoolDB;
Query OK, 1 row affected (0.00 sec)
```

```
[mysql> USE SchoolDB;
Database changed
```

```
mysql> CREATE TABLE Students (
  ->     StudentID INT PRIMARY KEY,
  ->     StudentName VARCHAR(50)
  -> );
Query OK, 0 rows affected (0.01 sec)
```

```
mysql> CREATE TABLE Teachers (
  -> TeacherID INT PRIMARY KEY,
  -> TeacherName VARCHAR(50)
  -> );
Query OK, 0 rows affected (0.02 sec)
```

```
mysql> CREATE TABLE Classes (
  -> ClassID INT PRIMARY KEY,
  -> ClassName VARCHAR(50)
  -> );
Query OK, 0 rows affected (0.01 sec)
```

```
mysql> CREATE TABLE Grades (
  -> GradeID INT PRIMARY KEY,
  -> GradeLetter VARCHAR(2)
  -> );
Query OK, 0 rows affected (0.01 sec)
```

```
[mysql> SHOW TABLES;
+-----+
| Tables_in_schooldb |
+-----+
| Classes             |
| Grades              |
| Students            |
```


bin — mysql -u root -p — 138x40

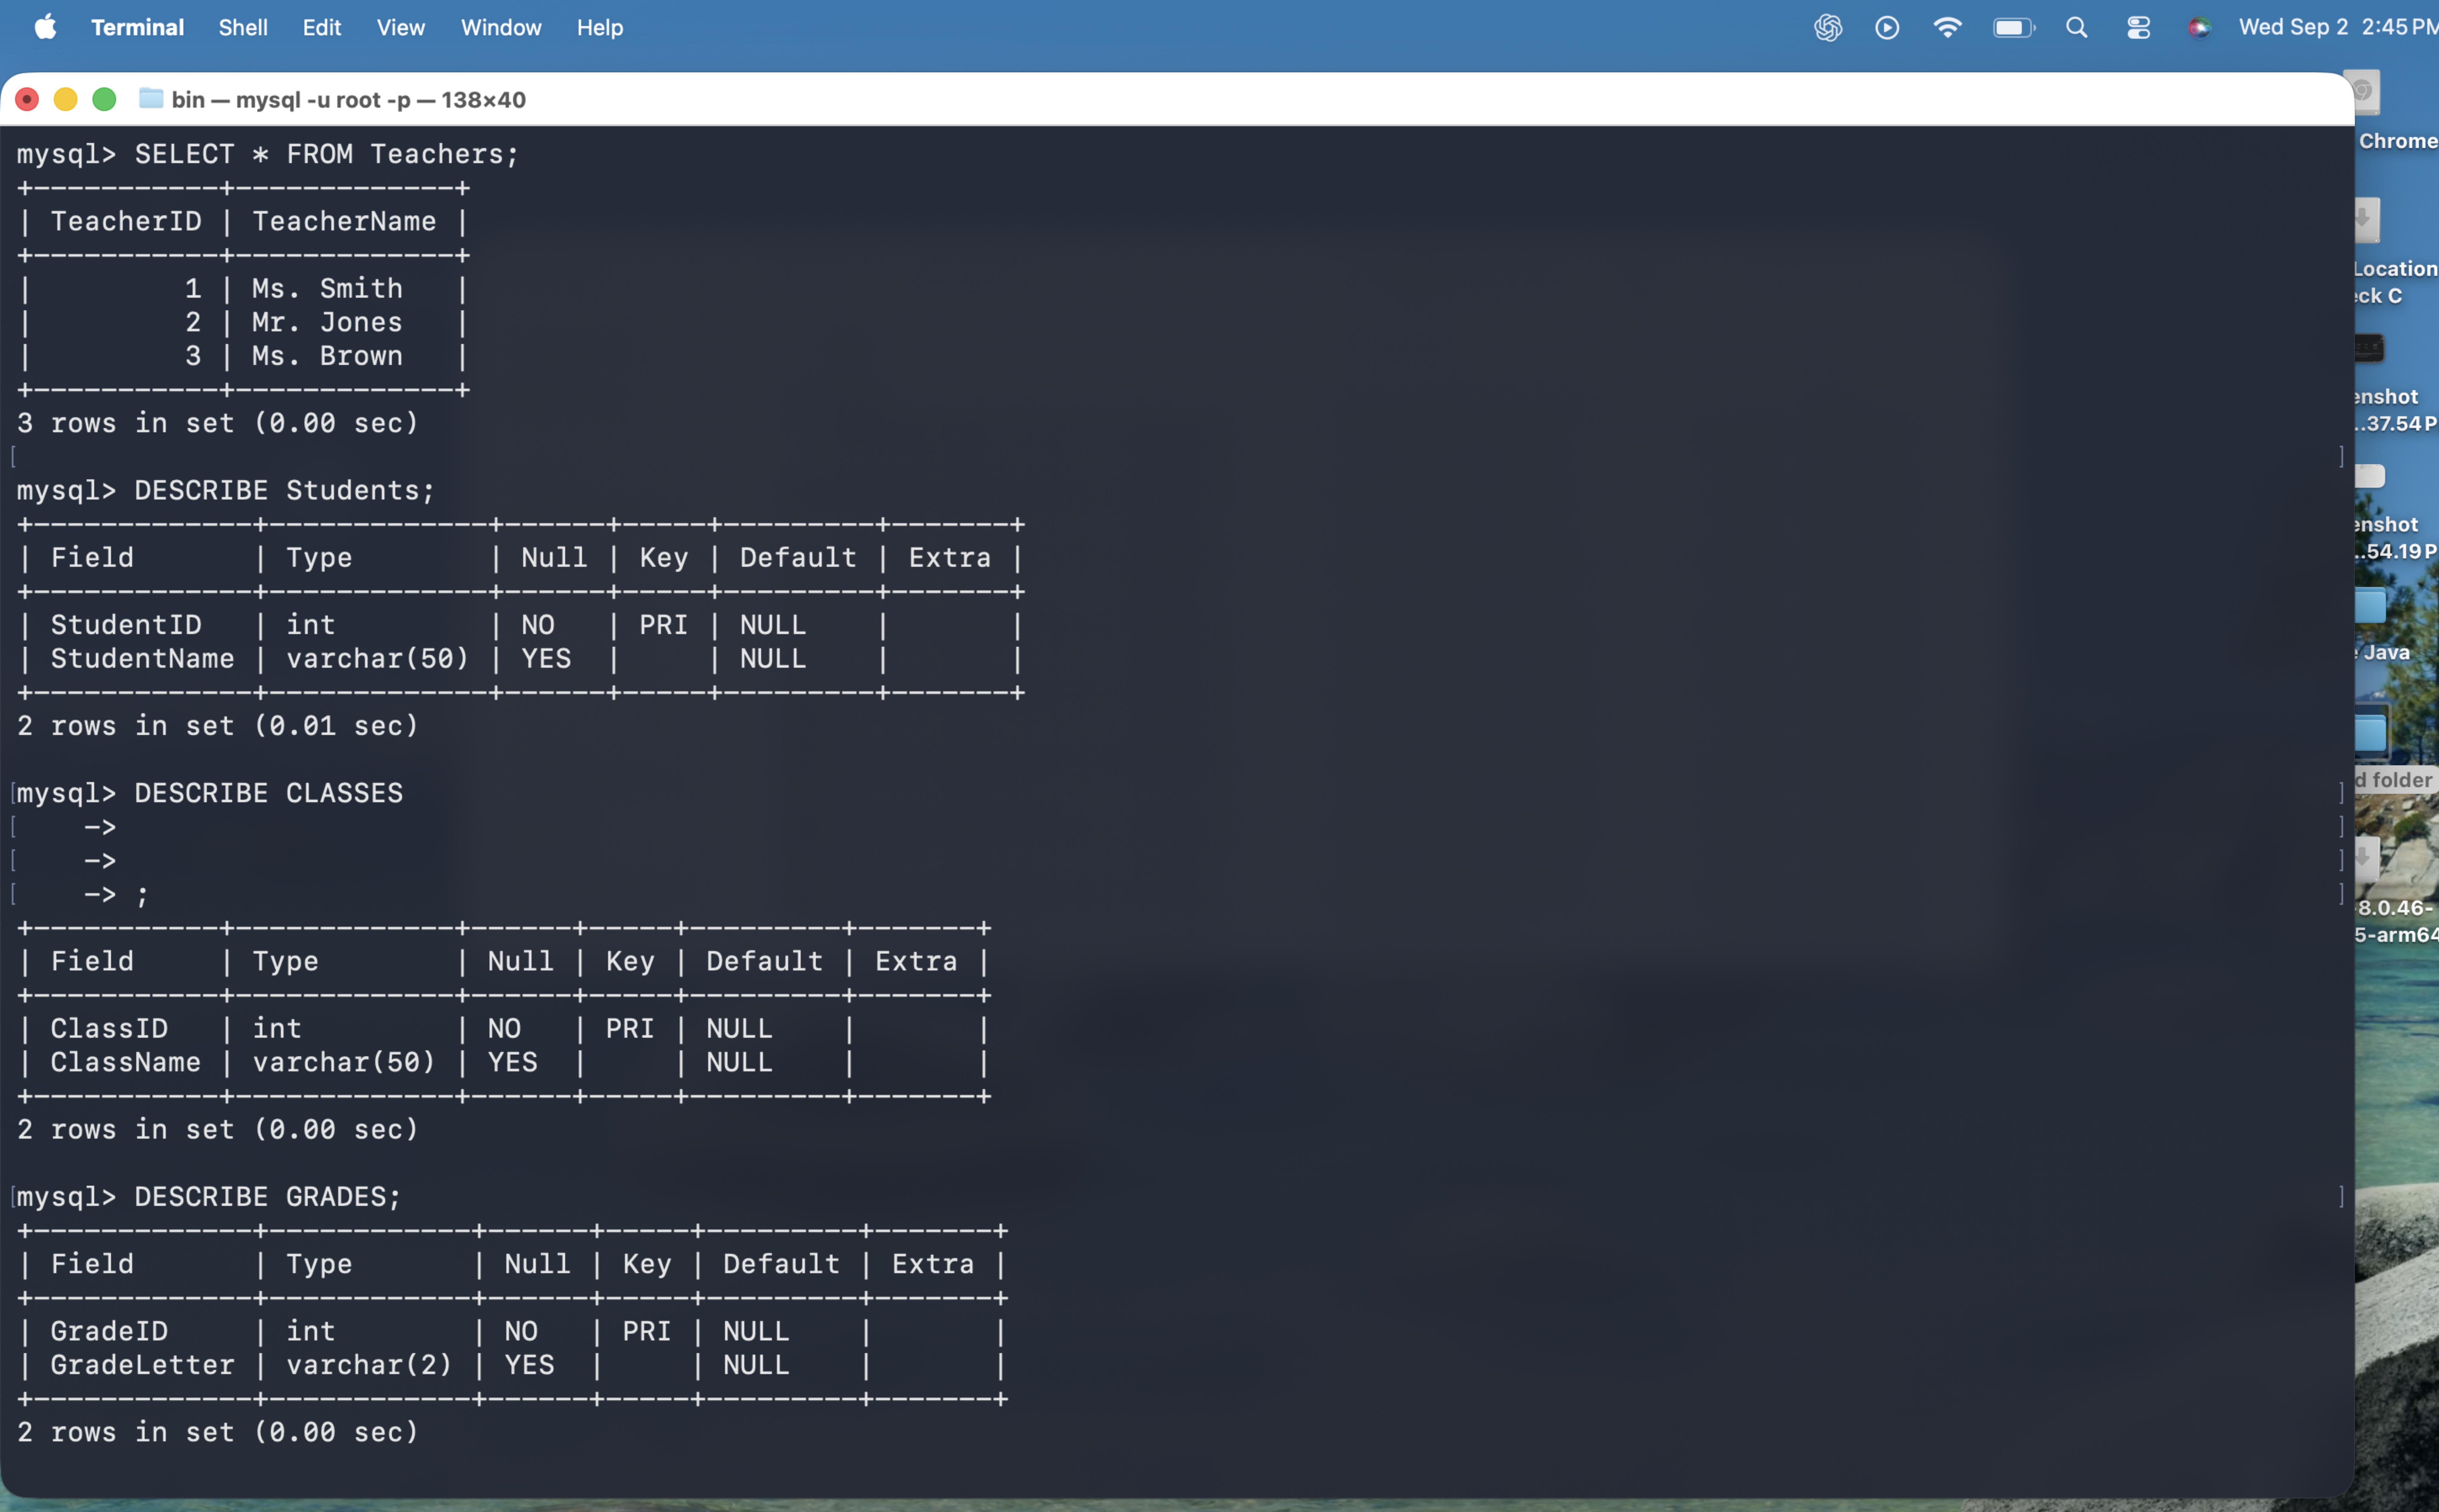
```
mysql> SHOW TABLES;
+-----+
| Tables_in_schooldb |
+-----+
| Classes             |
| Grades              |
| Students             |
| Teachers             |
+-----+
4 rows in set (0.01 sec)

mysql> INSERT INTO Students VALUES
    -> (1, 'Anna'),
    -> (2, 'Ben'),
    -> (3, 'Carlos');
Query OK, 3 rows affected (0.00 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> INSERT INTO Teachers VALUES
    -> (1, 'Ms. Smith'),
    -> (2, 'Mr. Jones'),
    -> (3, 'Ms. Brown');
Query OK, 3 rows affected (0.00 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> SELECT * FROM Students;
+-----+-----+
| StudentID | StudentName |
+-----+-----+
|          1 | Anna        |
|          2 | Ben         |
|          3 | Carlos      |
+-----+-----+
3 rows in set (0.00 sec)

mysql> SELECT * FROM Teachers;
+-----+-----+
| TeacherID | TeacherName |
+-----+-----+
|          1 | Ms. Smith   |
```

bin — mysql -u root -p — 138x40

mysql> SELECT * FROM Teachers;

TeacherID	TeacherName
1	Ms. Smith
2	Mr. Jones
3	Ms. Brown

3 rows in set (0.00 sec)

mysql> DESCRIBE Students;

Field	Type	Null	Key	Default	Extra
StudentID	int	NO	PRI	NULL	
StudentName	varchar(50)	YES		NULL	

2 rows in set (0.01 sec)

mysql> DESCRIBE CLASSES

->
->
-> ;

Field	Type	Null	Key	Default	Extra
ClassID	int	NO	PRI	NULL	
ClassName	varchar(50)	YES		NULL	

2 rows in set (0.00 sec)

mysql> DESCRIBE GRADES;

Field	Type	Null	Key	Default	Extra
GradeID	int	NO	PRI	NULL	
GradeLetter	varchar(2)	YES		NULL	

2 rows in set (0.00 sec)


```
| TeacherName | varchar(50) | YES | | NULL | |
+-----+-----+-----+-----+-----+
2 rows in set (0.00 sec)

mysql> DESCRIBE Classes
[ -> ;
+-----+-----+-----+-----+-----+
| Field | Type | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+
| ClassID | int | NO | PRI | NULL | |
| ClassName | varchar(50) | YES | | NULL | |
+-----+-----+-----+-----+-----+
2 rows in set (0.01 sec)
```

```
mysql> DESCRIBE Grades;
+-----+-----+-----+-----+-----+
| Field | Type | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+
| GradeID | int | NO | PRI | NULL | |
| GradeLetter | varchar(2) | YES | | NULL | |
+-----+-----+-----+-----+-----+
2 rows in set (0.00 sec)
```

```
mysql> INSERT INTO Classes (ClassID, ClassName)
-> VALUES
-> (1, 'Math'),
-> (2, 'Science'),
-> (3, 'Spanish');
[Query OK, 3 rows affected (0.01 sec)
Records: 3 Duplicates: 0 Warnings: 0
```

```
mysql> INSERT INTO Grades (GradeID, GradeLetter)
-> VALUES
-> (1, 'A'),
-> (2, 'B'),
-> (3, 'C');
[Query OK, 3 rows affected (0.01 sec)
Records: 3 Duplicates: 0 Warnings: 0
```

```
mysql> SELECT * FROM Classes;
+-----+-----+
| ClassID | ClassName |
+-----+-----+
| 1 | Math |
| 2 | Science |
| 3 | Spanish |
+-----+-----+
3 rows in set (0.01 sec)
```

```
mysql> SELECT * FROM Grades;
+-----+-----+
| GradeID | GradeLetter |
+-----+-----+
| 1 | A |
| 2 | B |
| 3 | C |
+-----+-----+
3 rows in set (0.00 sec)
```

```
mysql> █
```


TeacherName	varchar(50)	YES		NULL		
-------------	-------------	-----	--	------	--	--

2 rows in set (0.00 sec)

mysql> DESCRIBE Classes

-> ;

Field	Type	Null	Key	Default	Extra
ClassID	int	NO	PRI	NULL	
ClassName	varchar(50)	YES		NULL	

2 rows in set (0.01 sec)

mysql> DESCRIBE Grades;

Field	Type	Null	Key	Default	Extra
GradeID	int	NO	PRI	NULL	
GradeLetter	varchar(2)	YES		NULL	

2 rows in set (0.00 sec)

mysql> INSERT INTO Classes (ClassID, ClassName)

-> VALUES
-> (1, 'Math'),
-> (2, 'Science'),
-> (3, 'Spanish');

[Query OK, 3 rows affected (0.01 sec)

Records: 3 Duplicates: 0 Warnings: 0

mysql> INSERT INTO Grades (GradeID, GradeLetter)

-> VALUES
-> (1, 'A'),
-> (2, 'B'),
-> (3, 'C');

[Query OK, 3 rows affected (0.01 sec)

Records: 3 Duplicates: 0 Warnings: 0

mysql> SELECT * FROM Classes;

ClassID	ClassName
1	Math
2	Science
3	Spanish

3 rows in set (0.01 sec)