

ChatImage: Turning Long-Form LLM Answers into Interactive Visual Images

Author One^{1,*}, Author Two^{1,†}

¹Affiliation TBD

*Equal contribution., †Corresponding author.

Large Language Models (LLMs) answer complex questions with long, dense text that is slow to scan and hard to navigate. We introduce CHATIMAGE, a system that converts a long-form LLM answer into an *interactive visual image*: a generated image overlaid with transparent, clickable hotspots, each opening its own detail panel and an in-context follow-up thread. CHATIMAGE decomposes the answer into a structured visual specification, plans a normalized layout, synthesizes an image prompt, generates the image, and then performs *two-pass vision alignment*—a visual grounding model (LocateAnything) localizes where each structured region actually rendered, optionally refined by SAM3 masks—so that hotspots land on the correct content rather than a hard-coded grid. The result is an explorable image: instead of reading a wall of text, a user clicks regions to learn only what they care about and asks targeted follow-ups in the context of a single hotspot. To our knowledge, CHATIMAGE is the first system to turn an LLM answer into a navigable, region-interactive visual artifact. We build an open-source reference implementation, assemble a benchmark of 30 questions across infographic, map, and scene modes, and evaluate the real-provider pipeline with automatic completion checks, a strict visual-alignment gate, and a manual visible-hotspot audit. Code, demos, and a live project page are publicly available.

 **Date:** June 28, 2026

 **Correspondence:** TBD

 **Code:** <https://github.com/wencanjiang/ChatImage>

 **Project:** <https://wencanjiang.github.io/ChatImage/>



1 Introduction

Large Language Models (LLMs) have become a primary interface for answering complex questions [1, 25]. Yet the form of these answers has barely changed: a long block of text that the user must scan linearly. When a question such as “compare REST and GraphQL” or “explain the RAG retrieval pipeline” is answered with several hundred words, the user often wants only one part—a single comparison dimension, one pipeline stage—but must read or skim the whole block to find it. The text is information-dense but interaction-poor: it is not navigable by region, not visually structured, and offers no way to drill into a single sub-topic in context.

Parallel advances in text-to-image generation [26, 27, 30] and vision-language understanding [4, 17] suggest an alternative: *render the answer as an image*. A generated infographic, map, or scene can convey structure at a glance—modules, flow, hierarchy, layout—far more compactly than prose. However, a

plain generated image loses the answer’s detail: it shows *what* the regions are but not the full explanation behind each, and it offers no way to ask follow-ups about a specific region. Naively overlaying text on an image does not solve this either, because generative models do not reliably place content at specified coordinates [6, 8], so any fixed clickable region may not align with the actual rendered content.

We propose CHATIMAGE, a system that turns a long-form LLM answer into an **interactive visual image**—a generated image overlaid with transparent, clickable hotspots, each linked to its own detail panel and follow-up thread (Figure 1). The central technical problem is **alignment between the structured answer and the generated image**: the clickable regions must correspond to the actual visual content the user sees. CHATIMAGE addresses this with a **two-pass generation pipeline**. In the first pass, it normalizes the LLM answer into a structured visual specification (modules with titles, details, and region prompts), plans a normalized layout, synthe-

Current Task: Clear 10 weeds with the scythe

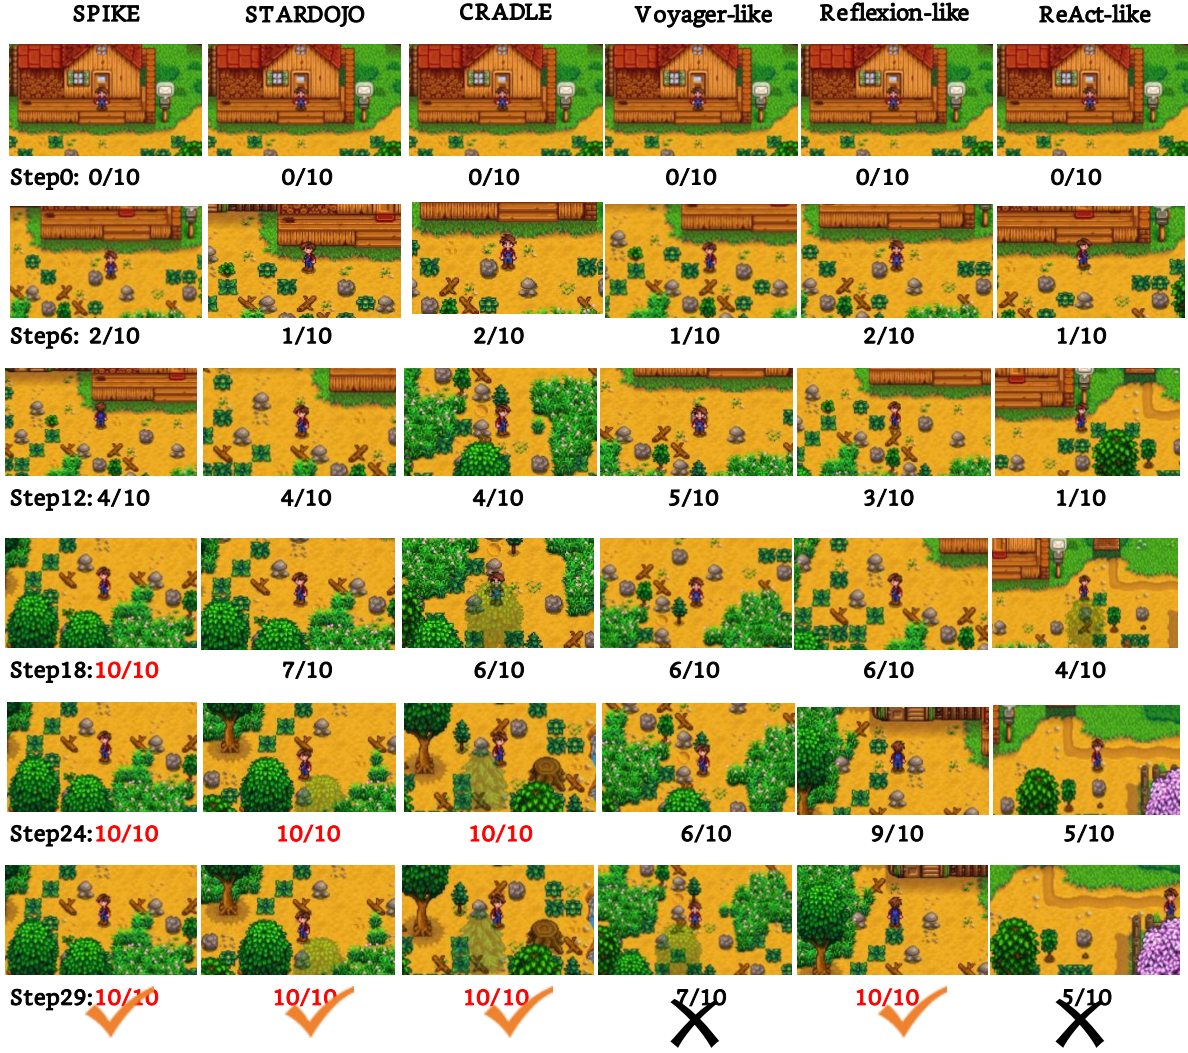


Figure 1 CHATIMAGE turns a long-form LLM answer into an interactive visual image. Given a user question, CHATIMAGE generates an image whose regions are clickable hotspots. Each hotspot opens a detail panel with the region’s explanation and an in-context follow-up thread, so the user explores only what they need.

sizes an image prompt, and generates the image. In the second pass, a visual grounding model localizes where each structured module actually rendered in the image, and the hotspots are placed at those grounded coordinates—rather than assuming the image generator followed the layout. This decouples *content structure* (decided by CHATIMAGE) from *visual placement* (discovered after generation), making hotspots robust to the layout imprecision of generative models. CHATIMAGE further makes each region *explorable*: clicking a hotspot opens a detail panel with the module’s explanation, a localized preview crop, and a follow-up thread scoped to that hotspot’s context. This turns a static answer into a navigable artifact—the user can jump to any re-

gion, read its detail, and ask a targeted question without re-explaining the whole context. The system is provider-agnostic: it runs in a no-key mock mode for development and demos, or proxies real text, image, and vision models through a local backend so API keys never reach the browser.

To our knowledge, CHATIMAGE is the **first** system to convert an LLM answer into a navigable, region-interactive visual image with vision-grounded hotspots. Our contributions are:

- **Interactive visual answers.** We introduce the task of rendering a long-form LLM answer as an explorable image with clickable hotspots, detail panels, and per-region follow-up threads.

- **Two-pass vision alignment.** We decouple structured content from visual placement via a generate-then-ground pipeline (referring-localization grounding with optional SAM-family mask refinement), so hotspots align with actual rendered content rather than a hard-coded grid.
- **Open-source reference system.** We release a complete, provider-agnostic implementation with a topic-specific structured-answer fallback library covering 13 content-grounded mock topics across infographic, map, and scene modes, a local SQLite store, and a calibration mode for hotspot correction.
- **Benchmark and grounding audit.** We assemble a 30-question benchmark spanning multiple content types and evaluate the real-provider pipeline with automatic completion checks, a strict visual-alignment gate, and a manual visible-hotspot alignment audit.

2 Related Work

CHATIMAGE sits at the intersection of text-to-image generation, visual grounding, interactive visualization, and LLM answer presentation. As the task of turning an LLM answer into a region-interactive visual image is, to our knowledge, new, we review the closest adjacent lines and the gap CHATIMAGE fills.

Text-to-image and controllable generation. Diffusion models [26, 27, 29, 30] produce high-fidelity images but do not follow spatial instructions precisely: “place module A top-left” yields no guarantee [6, 8]. Controllable methods—ControlNet [37], GLIGEN [16], training-free layout-to-image [3], InfographicNLP [19]—impose structure but target synthesis quality, not making generated regions *interactive* and *aligned with a structured answer*. CHATIMAGE uses text-to-image as a rendering backend but does not rely on its layout fidelity: it discovers region locations *after* generation via grounding.

Visual grounding and segmentation. Referring localization methods—MDETR [13], TransVG [7], UNINEXT [35], Grounding DINO [18], YOLO-World [5]—and grounding-oriented VLMs [4, 17, 23, 34] output boxes for descriptive prompts; SAM/SAM2 [14, 28] refine a box into a mask. CHATIMAGE repurposes this family for a new goal: not finding a pre-existing object, but *aligning a structured answer’s regions to their actual rendered positions* in a freshly generated image.

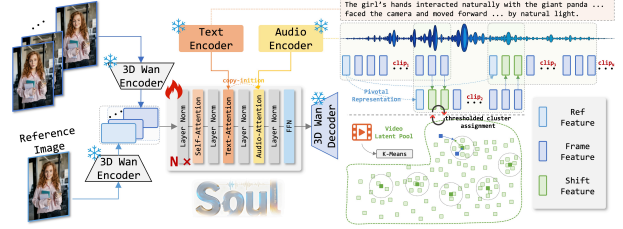


Figure 2 CHATIMAGE pipeline. A user question yields a raw LLM answer, which is normalized into a structured visual specification and a normalized layout. An image prompt is synthesized and the image is generated. In the second pass, a visual grounding model localizes where each structured module actually rendered; hotspots are placed at the grounded coordinates and become clickable regions with detail panels and follow-up threads.

Interactive visualization, VQA, and structured LLM output. Interactive image annotation [11, 22] and VQA [2, 10, 20, 21] explore *fixed* images rather than answer-generated ones, and VQA treats the image as input to be queried, not as an *answer* to be navigated. Structured-output work—chain-of-thought [33], ReAct [36], tool use [31], RAG [9, 15]—structures *reasoning*, not the output *modality*; the answer stays text. Mind-map and chart-generation methods [12, 24, 32, 38] visualize structure but as static outputs without image-level region interaction or grounding. CHATIMAGE combines these threads into a new task: an LLM answer rendered as a navigable, region-interactive visual image with vision-grounded hotspots, for which we provide an open-source system, benchmark, and evaluation.

3 Method

CHATIMAGE converts a user’s question into an interactive visual image through a pipeline that decouples *content structure* (decided deterministically by the system) from *visual placement* (discovered after image generation). This section describes the end-to-end pipeline (Section 3.1), the structured answer normalization and layout planning (Section 3.2), the two-pass vision alignment that grounds hotspots to real image content (Section 3.3), and the interactive hotspot layer and per-region follow-up threads (Section 3.4).

3.1 End-to-End Pipeline

Given a user question q , CHATIMAGE produces an interactive visual image $\mathcal{I}$ with a set of clickable hotspots $\mathcal{H}$. The pipeline proceeds in two passes (Figure 2):

Pass 1: Structure, layout, and image generation.

1. **Raw answer.** Obtain a long-form LLM answer a to q via a text model (or a deterministic mock for development).
2. **Normalization.** Normalize a into a structured visual specification $\mathcal{S}$ —a set of modules $\{m_i\}$ and auxiliary modules, each with a title, detail text, region prompt, and metadata (Section 3.2).
3. **Layout planning.** Plan a layout $\mathcal{L}$ that assigns each module a region r_i with normalized bounds in $[0, 1]^4$.
4. **Image prompt synthesis.** Derive an image prompt from $\mathcal{S}$ and $\mathcal{L}$, encoding the visual style and the intended region labels and positions.
5. **Image generation.** Generate the image via a text-to-image model, obtaining $\mathcal{I}$ and its real pixel dimensions (W, H) parsed from the image header (not the request, since generators do not guarantee exact sizes).

Pass 2: Vision alignment and hotspot derivation.

6. **Visual grounding.** Send $\mathcal{I}$, (W, H) , and the modules with their planned bounds to a visual grounding model, which returns a grounded box b_i for each module where it actually rendered (Section 3.3).
7. **Mask refinement (optional).** Optionally refine each b_i with a segmentation model (SAM3) to obtain a pixel mask for tighter previews.
8. **Hotspot derivation.** Copy the grounded bounds into hotspot geometry $h_i = (x_i, y_i, w_i, h_i)$ and render transparent, clickable hotspots over $\mathcal{I}$ (Section 3.4).

The key design principle is that CHATIMAGE **does not assume the image generator follows the planned layout**. Instead of requiring precise spatial control—which diffusion models do not reliably provide [8]—the system *generates first, then grounds*. This makes hotspot alignment robust to the layout imprecision of generative models.

3.2 Structured Answer Normalization and Layout

Visual specification. The raw answer a is parsed (via a structured-output LLM call) into a visual specification $\mathcal{S}$ with a visual mode (infographic, map, scene, or poster), a summary, and a list of modules. Each module m_i carries: *title* (the hotspot label),

detail (the explanation shown in the detail panel), *imageText* (short on-image caption), *regionPrompt* (a locator phrase for visual grounding), and metadata (*regionKind*, *iconHint*, *maskPolicy*, locator queries). Because LLMs sometimes echo instruction-style text into the user-facing *detail* field, we sanitize it: a cleaning function strips visual-system vocabulary and meta-instruction phrases clause-by-clause, falling back to *imageText*/*title* when nothing usable survives. When the LLM returns no valid structure, CHATIMAGE falls back to a library of content-grounded mock specifications (Section 4 lists the topics), ensuring the system always produces a valid visual answer.

Layout planning. A layout planner assigns each module a region r_i with normalized bounds $\in [0, 1]^4$ relative to the image canvas. Layouts are organized by family—grid, flow (swimlane), compare, hub, timeline, matrix, and freeform—selected by the visual mode and relation type. For maps, a semantic-slot catalog assigns regions by keyword matching (e.g., “entrance” $\rightarrow$ bottom-center, “core area” $\rightarrow$ center); for infographics, index-based templates place modules in flow or grid order. These *planned* bounds serve as priors for the grounding step and as a fallback when grounding fails, but they are *not* assumed to match the generated image exactly.

3.3 Two-Pass Vision Alignment

The core technical contribution is aligning the structured regions to the generated image. CHATIMAGE sends the image, its real dimensions, the modules, and their planned bounds to a vision backend that runs a grounding pipeline:

Grounding provider. The grounding step is provider-agnostic: CHATIMAGE ships a JSONL worker interface and any model that returns a normalized bounding box per locator phrase can be plugged in. Our reference implementation supports two interchangeable backends. The default is a dedicated referring-localization model (**LocateAnything-3B** [23]), launched through the `locateanything_worker.py` worker. As an alternative we also support a general vision-language model used in a structured-output grounding mode (**MiMo-Vision** [34]); this is the path actually used by several of our released demos (Section 4.1). For each module the backend is given the image and one or more locator phrases built from the module’s title, region prompt, and semantic hints. It outputs a bounding box per module in normalized coordinates, scored against the planned bounds to select the best

candidate (with optional crop-and-re-ground for low-confidence cases). This is a *referring localization* step: we are localizing “where the module labeled X actually rendered,” not detecting a predefined object class.

Fallbacks. When the grounding backend rejects a module or is unavailable, CHATIMAGE falls back along a graded chain: a general VLM-based grounding pass, then local OCR, and finally the planned bounds. Each module is tagged with its alignment source (e.g., *locateanything*, *mimo-vision*, *sam3-refined-planned*, *planned-fallback*, *vision-low-confidence*) so the system can report alignment quality per region rather than as a single aggregate score.

Robustness to partial failure. A single missing or low-confidence grounding must not corrupt the whole result. We reject groundings that look like header strips or cross-panel artifacts (falling back to planned bounds for those) while keeping far-from-planned groundings that still localize the correct region (tagged low-confidence). Modules entirely absent from the grounding response retain their planned bounds and are flagged, rather than discarding the alignments of all correctly-grounded modules. Each grounded box is repaired for clickability—enforcing a minimum area and safe margin—before becoming a hotspot.

SAM3 mask refinement (optional). For tighter visual previews, an interactive box-prompted segmentation model in the SAM family [14, 28]—we use the SAM3 image checkpoint released by Meta¹ through the `sam3_worker.py` worker—takes each grounded box as a prompt and predicts a pixel mask, from which a tightened box and polygon are derived. The mask is used only for preview rendering (cutout, organic feathering, soft fade); *click hit-testing always uses the rectangular box*, keeping interaction robust even when masks are imperfect.

3.4 Interactive Hotspot Layer and Follow-up Threads

Hotspot rendering. Each hotspot is a transparent, absolutely-positioned button over the image at its grounded coordinates. In normal use, hotspots are fully invisible so the generated image is the only thing the user sees; a hover state provides a soft visual hint without altering the image. A calibration mode toggles visible outlines and per-hotspot labels for inspecting and correcting bounds.

Detail panels and previews. Clicking a hotspot opens a centered detail panel showing the module’s title, sanitized detail text, a localized preview of the image region, and a follow-up input. The preview variant is chosen by a strategy module based on the hotspot shape and mask availability: cutout (checkerboard background), organic feathering, soft radial fade, or mask-based polygon crop.

Per-region follow-up threads. Each hotspot owns an isolated follow-up thread. A follow-up question is sent to the text model with a *local* context—the original question, the raw answer, the clicked hotspot’s detail, and that thread’s history—so the answer is scoped to the region without re-explaining the whole image. Threads are persisted alongside the ChatImage, enabling resumption across sessions.

3.5 Implementation

CHATIMAGE is a provider-agnostic system with a browser frontend, a local Node.js backend, and Python model workers. The frontend is vanilla JavaScript (no framework); the backend proxies text, image, and vision providers and persists results in SQLite. Vision alignment runs via persistent JSONL workers (`locateanything_worker.py`, `sam3_worker.py`) hosting the grounding and segmentation models. The system runs in a no-key *mock* mode (deterministic local providers and SVG output) for development and demos, or in *api* mode proxying real models. All code, demos, and a live project page are open-source.²

4 Experiments

We evaluate CHATIMAGE along two axes that matter for an interactive visual answer: **pipeline completion** (does the system produce a usable generated image and hotspot set for the question?) and **visual-alignment accuracy** (do the clickable hotspots land on the rendered content they claim to describe?). All reported numbers in this section come from a single real-provider run over the benchmark, followed by an additional manual audit of visible hotspot alignments. We distinguish three levels of success: a *generated* run completes the full text-to-image-to-hotspot pipeline; a *strict-gate* run also passes the automatic grounding and mask-quality checks used before promotion to the public demo page; and a *manual alignment* count records whether inspected visible hotspots are judged to land on the intended visual region.

¹<https://github.com/facebookresearch/sam3>

²<https://github.com/wencanjiang/ChatImage>

4.1 Benchmark

We assemble a benchmark of 30 questions designed to exercise different visual modes and content types, summarized in Table 1. The current public showcase contains selected outputs from the same CHATIMAGE workflow after strict visual-alignment screening: a hand-drawn West Lake tour map and daily-life illustrated scenes such as healthy breakfast options, boutique coffee shop, sunny reading nook, independent record-store corner, and indoor plant-care corner. Map questions test geographic region placement and route-like scenic areas, while scene questions test object localization in less rigidly structured images. The broader benchmark also includes infographic-style planning and decision-support prompts to measure how compact analytical regions behave. Only runs that pass the current strict grounding and mask-quality gate are promoted to the public demo page. Each question is run through the full CHATIMAGE pipeline with real text, image, and vision providers.

Because the grounding step is provider-agnostic (Section 3.3), individual benchmark items may be served by different grounding backends. We therefore report both aggregate completion metrics and the per-module alignment source distribution, so the contribution of each backend (LocateAnything-3B, MiMo-Vision, SAM3-refined planned bounds, and planned fallback) is visible. Representative qualitative results are shown in Figure 3.

4.2 Pipeline Results

Table 2 Overall real-provider evaluation. “Generated” counts runs that completed image generation and hotspot construction. “Strict-gate pass” counts cases that passed the automatic grounding and mask-quality gate used before demo promotion. “Manual aligned hotspots” reports the visible-hotspot audit.

Metric	Value
Benchmark questions	30
Generated completions ↑	15/30 (50.0%)
Strict-gate passes ↑	4/30 (13.3%)
Manual visible-hotspot audit ↑	17/24 (70.8%)

Out of 30 benchmark questions, 15 completed the full pipeline, yielding a generated-image completion

Table 1 Benchmark composition. Questions span infographic, map, and scene modes across technical, spatial, and descriptive content.

Mode	# Questions	#Hotspots (avg.)
Infographic	15	5.0
Map	5	6.0
Scene	10	6.0
Total	30	6.0

rate of 50.0%. The remaining 15 failed at the text-to-image step during the run, primarily because of upstream image API rate-limiting rather than downstream hotspot construction. The automatic strict visual-alignment gate accepted 4 of the 30 questions (13.3%). This gate is intentionally conservative: it requires all hotspots in a case to carry a real grounding source and a valid organic mask preview, so a single missing or weak region rejects the whole case.

Since case-level strict gating can understate partially useful alignments, we also perform a manual audit over visible hotspots in the generated outputs. In this audit, **17 of 24 inspected hotspots** are judged correctly aligned with their intended visual region, yielding a conditional manual alignment success rate of 70.8%. We use this number as the reported visible-hotspot alignment figure and keep it separate from the stricter case-level gate.

4.3 Alignment Source Analysis

Table 3 Alignment source distribution. Source assigned to the 90 hotspots generated by completed benchmark runs. Primary visual grounding combines MiMo-Vision and LocateAnything; planned-derived rows are retained by the robustness fallback when primary grounding is missing or rejected.

Alignment source	Hotspots	Share
MiMo-Vision primary grounding	50	55.6%
LocateAnything layout-guided grounding	9	10.0%
LocateAnything crop grounding	2	2.2%
SAM3-refined planned region	16	17.8%
Planned fallback	11	12.2%
Local OCR support	2	2.2%
Total	90	100.0%

Table 3 reports the grounding source distribution for the 90 hotspots produced by completed benchmark runs. Most generated hotspots are supplied by primary visual grounding: MiMo-Vision accounts for 50 hotspots (55.6%), while LocateAnything contributes another 11 hotspots when combining layout-guided and crop-based calls (12.2%). SAM3-refined planned regions account for 16 hotspots (17.8%), and planned fallback is used for 11 hotspots (12.2%). This distribution reflects the robustness design in Section 3.3: the system keeps modules that can be grounded by a vision backend, refines plausible planned regions when a mask is available, and falls back to planned bounds only when stronger signals are unavailable.

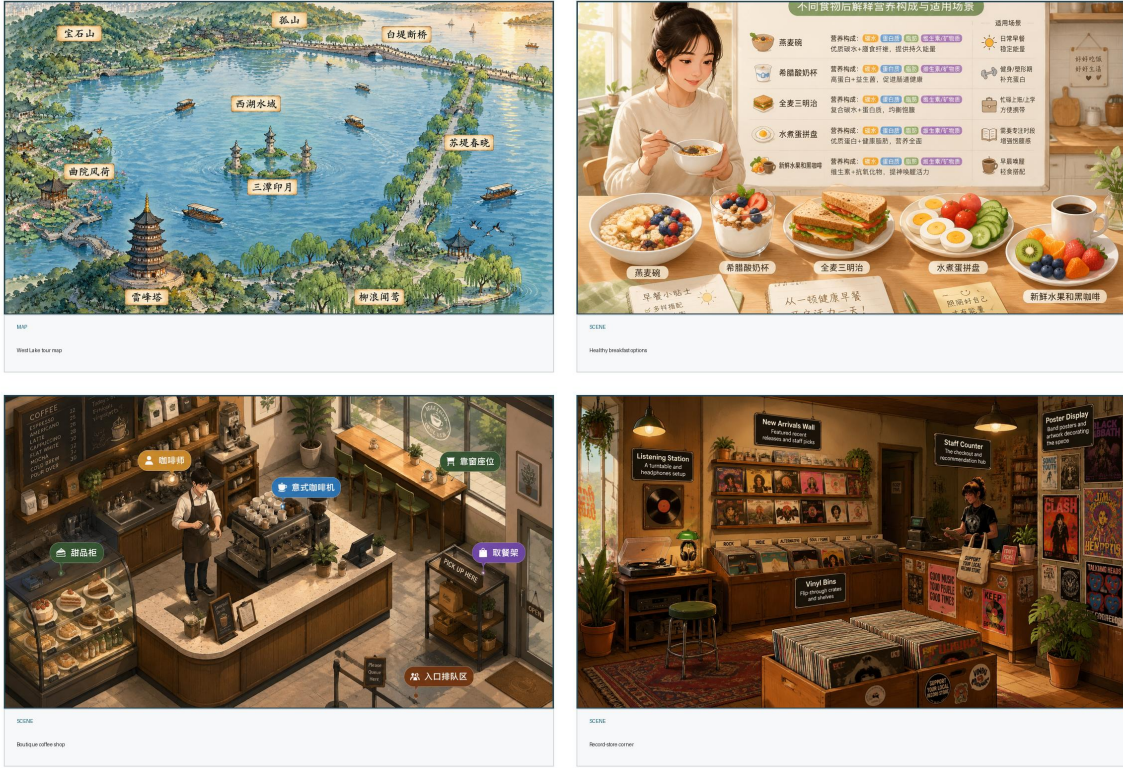


Figure 3 Qualitative results. Example CHATIMAGE outputs across map, infographic, and scene modes. Each generated image is paired with a structured hotspot layer whose regions open detail panels in the interactive demo.

4.4 Per-Mode Analysis

Table 4 Per-mode breakdown. Completion and strict-gate results for the 30-question benchmark. Hotspots counts are measured over generated runs only.

Mode	#Questions	Generated $\uparrow$	Strict-gate pass $\uparrow$	Generated hotspots
Infographic	15	6/15 (40.0%)	0/15 (0.0%)	30
Map	5	3/5 (60.0%)	1/5 (20.0%)	24
Scene	10	6/10 (60.0%)	3/10 (30.0%)	36
Overall	30	15/30 (50.0%)	4/30 (13.3%)	90

Table 4 breaks down completion and strict-gate results by visual mode. Scene questions complete most often in this run (6/10) and also produce most strict-gate passes (3/10), which matches the current strength of object-centric visual grounding models. Map questions complete at 3/5 and contribute one strict pass, while infographic questions complete at 6/15 but produce no strict-gate passes. Infographics remain challenging because their regions are often compact, text-heavy, and semantically close to one another; future work should add stronger OCR-aware grounding and polygon-level hit regions for these dense layouts.

5 Conclusion

We introduced CHATIMAGE, the first system—to our knowledge—that turns a long-form LLM answer into an interactive visual image: a generated image overlaid with clickable hotspots, each opening a detail panel and an in-context follow-up thread. The core technical idea is to decouple content structure from visual placement via a two-pass generate-then-ground pipeline, so that hotspots align with the actual rendered content rather than a hard-coded layout grid that generative models do not reliably follow. We presented an open-source, provider-agnostic reference implementation spanning infographic, map, and scene modes, assembled a benchmark across content types, and evaluated the real-provider pipeline with completion metrics, a strict visual-alignment gate, and a manual visible-hotspot alignment audit.

First work in this direction. Converting an LLM answer into a navigable, region-interactive visual artifact with vision-grounded hotspots is, as far as we know, a new task not addressed by prior work in text-to-image generation, visual grounding, interac-

tive visualization, or structured LLM output. By defining the task, releasing a complete system, and providing a benchmark and evaluation protocol, we aim to establish this as a research direction and a reference point for future work.

Application prospects. The interactive visual answer format has broad potential. In **education**, a student can explore a complex process (e.g., the HTTP rendering pipeline) by clicking the stage they care about rather than reading an entire explanation. In **technical documentation and knowledge management**, answers become navigable artifacts where each region supports targeted follow-up, reducing re-reading. In **tourism and spatial guidance**, hand-drawn maps with explorable landmarks and routes offer a more intuitive interface than text directions. In **data communication**, infographic answers make comparisons and funnels immediately scannable while preserving drill-down detail. As text-to-image and visual-grounding models continue to improve, the fidelity and alignment of such interactive visual answers will only get better, widening the range of questions that benefit from this format.

Limitations and future work. Current limitations include the accuracy ceiling imposed by upstream grounding models (complex maps and dense scenes remain challenging), the rectangular click hit-test (polygons would better fit irregular regions), and the text-only file context (richer document parsing is future work). Promising directions include exporting interactive ChatImages as shareable HTML packages, richer mask-based interaction, automated visual QA for hotspot accuracy, and cloud-synchronized history. We hope the open-source release and benchmark encourage the community to extend this direction.

Open source. Code, demos, a live project page, and a technical report are publicly available.³

References

- [1] Anthropic. The Claude model family. *Anthropic Technical Report*, 2024. 1
- [2] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. VQA: Visual question answering. In *IEEE/CVF International Conference on Computer Vision*, 2015. 3
- [3] Weixuan Chen, Bohan Liu, Daohan Zeng, Shitian Li, Liangli Huang, Chang Xu, and Chunjie Huang. Training-free layout-to-image generation with latent diffusion models. *arXiv preprint arXiv:2401.13391*, 2024. 3
- [4] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. InternVL: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 1, 3
- [5] Tianheng Cheng, Liming Song, Yixiao Ge, Wenhao Liu, Xinggang Wang, and Ying Shan. YOLO-World: Real-time open-vocabulary object detection. *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 3
- [6] Yifu Cheng, Peng Zhou, Jiafei Cai, Zhongjie Wei, Wei Sun, Robby T Tan, and Gang Hua. Intelligent IG: Instruction-driven visual infographic generation and editing. *arXiv preprint arXiv:2312.14390*, 2024. 1, 3
- [7] Zhengyuan Deng, Jun Wang, Zihang Zhang, Yufan He, and Jianhua Feng. TransVG: Visual grounding with transformers. In *IEEE/CVF International Conference on Computer Vision*, 2021. 3
- [8] Weixi Feng, Wanrong Zhu, Tsu-Jui Fu, Varun Jampani, Arjun Akula, Xuehai He, Sugato Basu, Xin Eric Wang, and Michael S Bernstein. LayoutGPT: Compositional visual planning and generation with large language models. In *Advances in Neural Information Processing Systems*, 2023. 1, 3, 4
- [9] Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2024. 3
- [10] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the V in VQA matter: Elevating the role of image understanding in Visual Question Answering. *arXiv preprint arXiv:1612.00837*, 2017. 3
- [11] Harry Hochheiser and Ben Shneiderman. Interactive poster visualization with PhD Online. *IEEE Computer Graphics and Applications*, 2004. 3
- [12] Yiyang Hu, Liang Pang, Yanyan Lan, Jiafeng Xu, and Xueqi Cheng. Can large language models generate visual mind maps from text? *arXiv preprint arXiv:2402.10988*, 2024. 3
- [13] Aishwarya Kamath, Mannat Singh, Yann LeCun, Gabriel Synnaeve, Ishan Misra, and Nicolas Caron. MDETR: Modulated detection for end-to-end multi-modal understanding. In *IEEE/CVF International Conference on Computer Vision*, 2021. 3
- [14] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whithead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. Segment anything. In *IEEE/CVF International Conference on Computer Vision*, 2023. 3, 5
- [15] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, 2020. 3
- [16] Yuheng Li, Haotian Liu, Qingyang Wu, Fangzhou Mu, Jianwei Yang, Jianfeng Gao, Chunyuan Li, and Yong Jae Lee. GLIGEN: Open-set grounded text-to-image generation. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023. 3
- [17] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *Advances in Neural Information Processing Systems*, 2023. 1, 3
- [18] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, and Lei Zhang. Grounding DINO: Marrying DINO with grounded pre-training for open-set object detection. In *European Conference on Computer Vision*, 2024. 3
- [19] Simeng Lu, Michele Mancini, Andrew Zisserman, and Mario Fritz. InfographicNLP: Expanding the scope of infographic analysis. *arXiv preprint arXiv:2310.13632*, 2023. 3
- [20] Ahmed Masry, Do Xuan Long, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In *Findings of the Association for Computational Linguistics: ACL 2022*, 2022. 3
- [21] Minesh Mathew, Dimosthenis Karatzas, and C.V. Jawahar. DocVQA: A dataset for VQA on document images. In *IEEE/CVF Winter Conference on Applications of Computer Vision*, 2021. 3
- [22] Tamara Munzner. *Visualization Analysis and Design*. CRC Press, 2014. 3
- [23] NVIDIA. LocateAnything-3B: A visual grounding model. Hugging Face model card, <https://huggingface.co/nvidia/>

³<https://github.com/wencanjiang/ChatImage>

- [LocateAnything-3B](#), 2025. Accessed 2026. [3](#), [4](#)
- [24] Hoque Obeid and Enamul Hoque. Chart-to-Text: Generating textual descriptions of charts. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, 2020. [3](#)
 - [25] OpenAI. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. [1](#)
 - [26] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. SDXL: Improving latent diffusion models for high-resolution image synthesis. In *International Conference on Learning Representations*, 2024. [1](#), [3](#)
 - [27] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with CLIP latents. *arXiv preprint arXiv:2204.06125*, 2022. [1](#), [3](#)
 - [28] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. SAM 2: Segment anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024. [3](#), [5](#)
 - [29] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022. [3](#)
 - [30] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Ghasemipour, Burcu Karagol Ayan, S Sara Mahdavi, R Konuk Sarrafpour, et al. Photorealistic text-to-image diffusion models with deep language understanding. In *Advances in Neural Information Processing Systems*, 2022. [1](#), [3](#)
 - [31] Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Advances in Neural Information Processing Systems*, 2023. [3](#)
 - [32] Yifan Tang, Ao Zhang, Hengzhu Wang, Juan Li, and Zhi-jiang Hu. ChartLlama: A multimodal LLM for chart understanding and generation. *arXiv preprint arXiv:2311.16483*, 2023. [3](#)
 - [33] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H Chi, Quoc V Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*, 2022. [3](#)
 - [34] Xiaomi LLM-Core Team. MiMo-VL: Xiaomi MiMo vision-language model. Model release, <https://github.com/XiaomiMiMo/MiMo-VL>, 2025. Used in this work via the `mimo-v2.5` chat-completion vision endpoint. [3](#), [4](#)
 - [35] Bin Yan, Yi Zhu, Jiangshan Wang, Zhihang Li, Yichao Zhang, Wu Liu, Erjin Zhang, and Jian Sun. UNINEXT: Universal instance perception as object-in-context prompting. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023. [3](#)
 - [36] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations*, 2023. [3](#)
 - [37] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *IEEE/CVF International Conference on Computer Vision*, 2023. [3](#)
 - [38] Yong Zhang. Mindmap: A creative visual thinking tool for education. *Journal of Educational Technology Systems*, 2014. [3](#)