

# ChatImage: Turning Long-Form LLM Answers into Interactive Visual Images

Author One<sup>1,\*</sup>, Author Two<sup>1,†</sup>

<sup>1</sup>Affiliation TBD

\*Equal contribution., †Corresponding author.

Large Language Models (LLMs) answer complex questions with long, dense text that is slow to scan and hard to navigate. We introduce CHATIMAGE, a system that converts a long-form LLM answer into an *interactive visual image*: a generated image overlaid with transparent, clickable hotspots, each opening its own detail panel and an in-context follow-up thread. CHATIMAGE decomposes the answer into a structured visual specification, plans a normalized layout, synthesizes an image prompt, generates the image, and then performs *two-pass vision alignment*—a visual grounding model (LocateAnything) localizes where each structured region actually rendered, optionally refined by SAM3 masks—so that hotspots land on the correct content rather than a hard-coded grid. The result is an explorable image: instead of reading a wall of text, a user clicks regions to learn only what they care about and asks targeted follow-ups in the context of a single hotspot. To our knowledge, CHATIMAGE is the first system to turn an LLM answer into a navigable, region-interactive visual artifact. We build an open-source reference implementation, assemble a benchmark of [N] questions across infographic, map, and scene modes, and conduct a human evaluation of image quality and visual-alignment accuracy. Code, demos, and a live project page are publicly available.

 **Date:** June 24, 2026

 **Correspondence:** TBD

 **Code:** <https://github.com/wencanjiang/ChatImage>

 **Project:** <https://wencanjiang.github.io/ChatImage/>




## 1 Introduction

Large Language Models (LLMs) have become a primary interface for answering complex questions [1, 26]. Yet the form of these answers has barely changed: a long block of text that the user must scan linearly. When a question such as “compare REST and GraphQL” or “explain the RAG retrieval pipeline” is answered with several hundred words, the user often wants only one part—a single comparison dimension, one pipeline stage—but must read or skim the whole block to find it. The text is information-dense but interaction-poor: it is not navigable by region, not visually structured, and offers no way to drill into a single sub-topic in context.

Parallel advances in text-to-image generation [27, 28, 31] and vision-language understanding [4, 19] suggest an alternative: *render the answer as an image*. A generated infographic, map, or scene can convey structure at a glance—modules, flow, hierarchy, layout—far more compactly than prose. However, a plain generated image loses the answer’s detail: it shows *what* the regions are but not the full explanation behind each, and it offers no way to ask follow-ups about a specific region. Naively overlaying text on an image does not solve this either, because generative models do not reliably place content at specified coordinates [6, 9], so any fixed clickable region may not align with the actual rendered content.

We propose CHATIMAGE, a system that turns a long-form LLM answer into an **interactive visual image**—a generated image overlaid with transparent, clickable hotspots, each linked to its own detail panel and follow-up thread (Figure 1). The central technical problem is **alignment between the structured answer and the generated image**: the clickable regions must correspond to the actual visual content the user sees. CHATIMAGE addresses this with a **two-pass generation pipeline**. In the first pass, it normalizes the LLM answer into a structured visual specification (modules with titles, details, and region prompts), plans

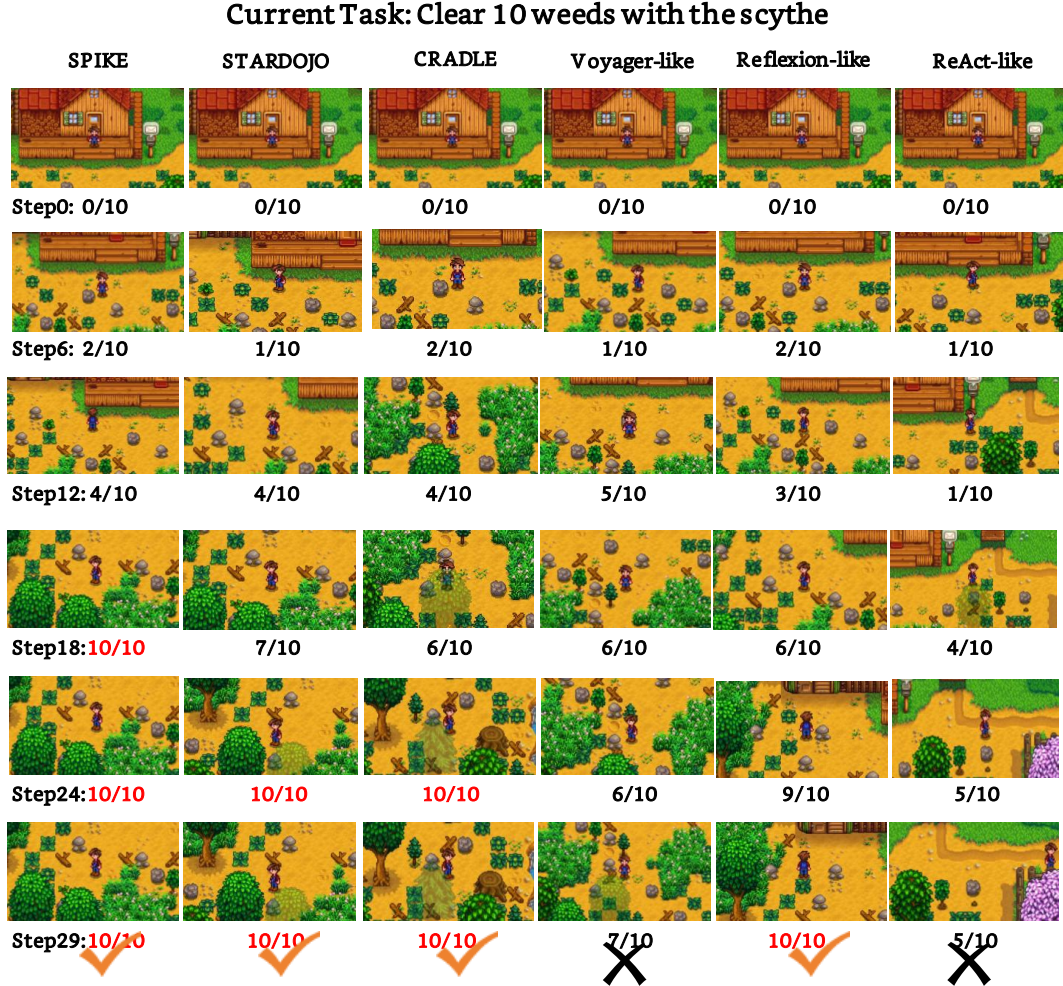

**Figure 1** CHATIMAGE turns a long-form LLM answer into an interactive visual image. Given a user question, CHATIMAGE generates an image whose regions are clickable hotspots. Each hotspot opens a detail panel with the region’s explanation and an in-context follow-up thread, so the user explores only what they need. [\[replace with ChatImage demo figure\]](#)

a normalized layout, synthesizes an image prompt, and generates the image. In the second pass, a visual grounding model localizes where each structured module actually rendered in the image, and the hotspots are placed at those grounded coordinates—rather than assuming the image generator followed the layout. This decouples *content structure* (decided by CHATIMAGE) from *visual placement* (discovered after generation), making hotspots robust to the layout imprecision of generative models.

CHATIMAGE further makes each region *explorable*: clicking a hotspot opens a detail panel with the module’s explanation, a localized preview crop, and a follow-up thread scoped to that hotspot’s context. This turns a static answer into a navigable artifact—the user can jump to any region, read its detail, and ask a targeted question without re-explaining the whole context. The system is provider-agnostic: it runs in a no-key mock mode for development and demos, or proxies real text, image, and vision models through a local backend so API keys never reach the browser.

To our knowledge, CHATIMAGE is the **first** system to convert an LLM answer into a navigable, region-interactive visual image with vision-grounded hotspots. Our contributions are:

- **Interactive visual answers.** We introduce the task of rendering a long-form LLM answer as an explorable image with clickable hotspots, detail panels, and per-region follow-up threads.
- **Two-pass vision alignment.** We decouple structured content from visual placement via a generate-

then-ground pipeline (LocateAnything grounding, optional SAM3 mask refinement), so hotspots align with actual rendered content rather than a hard-coded grid.

- **Open-source reference system.** We release a complete, provider-agnostic implementation with 13+ built-in demo topics across infographic, map, and scene modes, a local SQLite store, and a calibration mode for hotspot correction.
- **Benchmark and human evaluation.** We assemble a question benchmark spanning multiple content types and conduct a human evaluation of image quality and visual-alignment accuracy.

## 2 Related Work

CHATIMAGE sits at the intersection of text-to-image generation, visual grounding, interactive visualization, and LLM answer presentation. As the task of turning an LLM answer into a region-interactive visual image is, to our knowledge, new, we review the closest adjacent lines and the gap CHATIMAGE fills.

*Text-to-image and controllable generation.* Diffusion models [27, 28, 30, 31] produce high-fidelity images but do not follow spatial instructions precisely: “place module A top-left” yields no guarantee [6, 9]. Controllable methods—ControlNet [38], GLIGEN [18], training-free layout-to-image [3], InfographicNLP [21]—impose structure but target synthesis quality, not making generated regions *interactive* and *aligned with a structured answer*. CHATIMAGE uses text-to-image as a rendering backend but does not rely on its layout fidelity: it discovers region locations *after* generation via grounding.

*Visual grounding and segmentation.* Referring localization methods—MDETR [15], TransVG [7], UNINEXT [36], Grounding DINO [20], YOLO-World [5]—and grounding-oriented VLMs [4, 19, 34] output boxes for descriptive prompts; SAM/SAM2 [16, 29] refine a box into a mask. CHATIMAGE repurposes this family for a new goal: not finding a pre-existing object, but *aligning a structured answer’s regions to their actual rendered positions* in a freshly generated image.

*Interactive visualization, VQA, and structured LLM output.* Interactive image annotation [13, 24] and VQA [2, 11, 22, 23] explore *fixed* images rather than answer-generated ones, and VQA treats the image as input to be queried, not as an *answer* to be navigated. Structured-output work—chain-of-thought [35], ReAct [37], tool use [32], RAG [10, 17]—structures *reasoning*, not the output *modality*; the answer stays text. Mind-map and chart-generation methods [14, 25, 33, 39] visualize structure but as static outputs without image-level region interaction or grounding. CHATIMAGE combines these threads into a new task: an LLM answer rendered as a navigable, region-interactive visual image with vision-grounded hotspots, for which we provide an open-source system, benchmark, and evaluation.


## 3 Method

CHATIMAGE converts a user’s question into an interactive visual image through a pipeline that decouples *content structure* (decided deterministically by the system) from *visual placement* (discovered after image generation). This section describes the end-to-end pipeline (Section 3.1), the structured answer normalization and layout planning (Section 3.2), the two-pass vision alignment that grounds hotspots to real image content (Section 3.3), and the interactive hotspot layer and per-region follow-up threads (Section 3.4).

### 3.1 End-to-End Pipeline

Given a user question  $q$ , CHATIMAGE produces an interactive visual image  $\mathcal{I}$  with a set of clickable hotspots  $\mathcal{H}$ . The pipeline proceeds in two passes (Figure 2):

*Pass 1: Structure, layout, and image generation.*

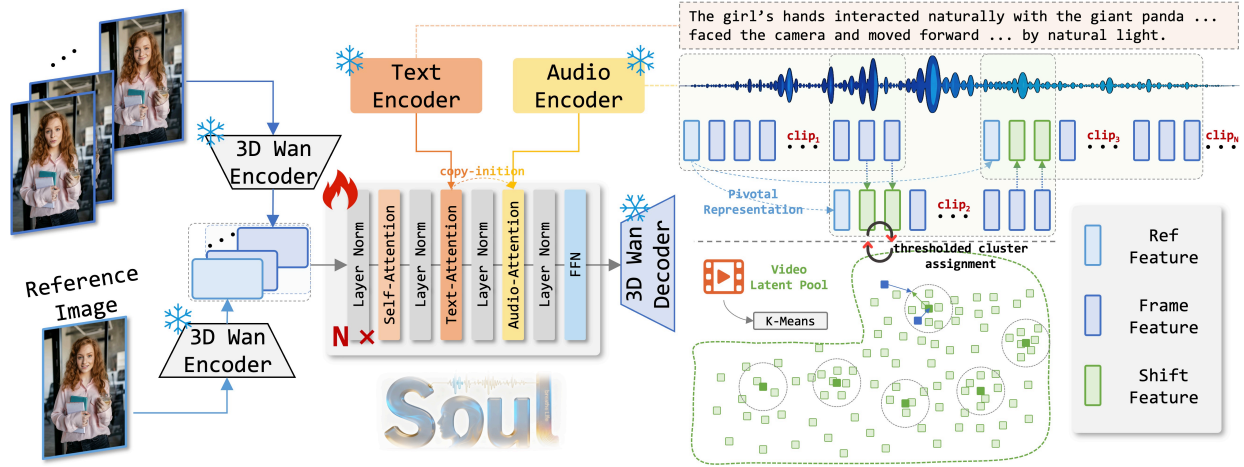

**Figure 2 CHATIMAGE pipeline.** A user question yields a raw LLM answer, which is normalized into a structured visual specification and a normalized layout. An image prompt is synthesized and the image is generated. In the second pass, a visual grounding model localizes where each structured module actually rendered; hotspots are placed at the grounded coordinates and become clickable regions with detail panels and follow-up threads. [\[replace with ChatImage architecture figure\]](#)

1. **Raw answer.** Obtain a long-form LLM answer  $a$  to  $q$  via a text model (or a deterministic mock for development).
2. **Normalization.** Normalize  $a$  into a structured visual specification  $\mathcal{S}$ —a set of modules  $\{m_i\}$  and auxiliary modules, each with a title, detail text, region prompt, and metadata (Section 3.2).
3. **Layout planning.** Plan a layout  $\mathcal{L}$  that assigns each module a region  $r_i$  with normalized bounds in  $[0, 1]^4$ .
4. **Image prompt synthesis.** Derive an image prompt from  $\mathcal{S}$  and  $\mathcal{L}$ , encoding the visual style and the intended region labels and positions.
5. **Image generation.** Generate the image via a text-to-image model, obtaining  $\mathcal{I}$  and its real pixel dimensions  $(W, H)$  parsed from the image header (not the request, since generators do not guarantee exact sizes).

*Pass 2: Vision alignment and hotspot derivation.*

6. **Visual grounding.** Send  $\mathcal{I}$ ,  $(W, H)$ , and the modules with their planned bounds to a visual grounding model, which returns a grounded box  $b_i$  for each module where it actually rendered (Section 3.3).
7. **Mask refinement (optional).** Optionally refine each  $b_i$  with a segmentation model (SAM3) to obtain a pixel mask for tighter previews.
8. **Hotspot derivation.** Copy the grounded bounds into hotspot geometry  $h_i = (x_i, y_i, w_i, h_i)$  and render transparent, clickable hotspots over  $\mathcal{I}$  (Section 3.4).

The key design principle is that CHATIMAGE **does not assume the image generator follows the planned layout**. Instead of requiring precise spatial control—which diffusion models do not reliably provide [9] — the system *generates first, then grounds*. This makes hotspot alignment robust to the layout imprecision of generative models.

## 3.2 Structured Answer Normalization and Layout

*Visual specification.* The raw answer  $a$  is parsed (via a structured-output LLM call) into a visual specification  $\mathcal{S}$  with a visual mode (infographic, map, scene, or poster), a summary, and a list of modules. Each module  $m_i$  carries: *title* (the hotspot label), *detail* (the explanation shown in the detail panel), *imageText* (short on-image caption), *regionPrompt* (a locator phrase for visual grounding), and metadata (*regionKind*, *iconHint*,

*maskPolicy*, locator queries). Because LLMs sometimes echo instruction-style text into the user-facing *detail* field, we sanitize it: a cleaning function strips visual-system vocabulary and meta-instruction phrases clause-by-clause, falling back to *imageText/title* when nothing usable survives. When the LLM returns no valid structure, CHATIMAGE falls back to a library of content-grounded mock specifications (Section 4 lists the topics), ensuring the system always produces a valid visual answer.

*Layout planning.* A layout planner assigns each module a region  $r_i$  with normalized bounds  $\in [0, 1]^4$  relative to the image canvas. Layouts are organized by family—grid, flow (swimlane), compare, hub, timeline, matrix, and freeform—selected by the visual mode and relation type. For maps, a semantic-slot catalog assigns regions by keyword matching (e.g., “entrance”  $\rightarrow$  bottom-center, “core area”  $\rightarrow$  center); for infographics, index-based templates place modules in flow or grid order. These *planned* bounds serve as priors for the grounding step and as a fallback when grounding fails, but they are *not* assumed to match the generated image exactly.

### 3.3 Two-Pass Vision Alignment

The core technical contribution is aligning the structured regions to the generated image. CHATIMAGE sends the image, its real dimensions, the modules, and their planned bounds to a vision backend that runs a grounding pipeline:

*LocateAnything grounding (primary).* A visual grounding model (LocateAnything [34]) takes the image and, for each module, one or more locator phrases built from the module’s title, region prompt, and semantic hints. It outputs a bounding box per module in normalized coordinates, scored against the planned bounds to select the best candidate (with optional crop-and-re-ground for low-confidence cases). This is a *referring localization* step: we are localizing “where did the module labeled  $X$  actually render,” not detecting a predefined object class.

*Fallbacks.* When LocateAnything is unavailable, CHATIMAGE falls back to a general vision-language model for grounding [4], then to local OCR, and finally to the planned bounds. Each module is tagged with its alignment source (e.g., *vision*, *planned-fallback*, *vision-low-confidence*) so the system can report alignment quality.

*Robustness to partial failure.* A single missing or low-confidence grounding must not corrupt the whole result. We reject groundings that look like header strips or cross-panel artifacts (falling back to planned bounds for those) while keeping far-from-planned groundings that still localize the correct region (tagged low-confidence). Modules entirely absent from the grounding response retain their planned bounds and are flagged, rather than discarding the alignments of all correctly-grounded modules. Each grounded box is repaired for clickability—enforcing a minimum area and safe margin—before becoming a hotspot.

*SAM3 mask refinement (optional).* For tighter visual previews, a segmentation model (SAM3, following the SAM family [16, 29]) takes each grounded box as a prompt and predicts a pixel mask, from which a tightened box and polygon are derived. The mask is used only for preview rendering (cutout, organic feathering, soft fade); *click hit-testing always uses the rectangular box*, keeping interaction robust even when masks are imperfect.

### 3.4 Interactive Hotspot Layer and Follow-up Threads

*Hotspot rendering.* Each hotspot is a transparent, absolutely-positioned button over the image at its grounded coordinates. In normal use, hotspots are fully invisible so the generated image is the only thing the user sees; a hover state provides a soft visual hint without altering the image. A calibration mode toggles visible outlines and per-hotspot labels for inspecting and correcting bounds.

*Detail panels and previews.* Clicking a hotspot opens a centered detail panel showing the module’s title, sanitized detail text, a localized preview of the image region, and a follow-up input. The preview variant

is chosen by a strategy module based on the hotspot shape and mask availability: cutout (checkerboard background), organic feathering, soft radial fade, or mask-based polygon crop.

*Per-region follow-up threads.* Each hotspot owns an isolated follow-up thread. A follow-up question is sent to the text model with a *local* context—the original question, the raw answer, the clicked hotspot’s detail, and that thread’s history—so the answer is scoped to the region without re-explaining the whole image. Threads are persisted alongside the ChatImage, enabling resumption across sessions.

### 3.5 Implementation

CHATIMAGE is a provider-agnostic system with a browser frontend, a local Node.js backend, and Python model workers. The frontend is vanilla JavaScript (no framework); the backend proxies text, image, and vision providers and persists results in SQLite. Vision alignment runs via persistent JSONL workers (`locateanything_worker.py`, `sam3_worker.py`) hosting the grounding and segmentation models. The system runs in a no-key *mock* mode (deterministic local providers and SVG output) for development and demos, or in *api* mode proxying real models. All code, demos, and a live project page are open-source.<sup>1</sup>

## 4 Experiments

We evaluate CHATIMAGE along two axes: **image quality** (does the generated visual answer faithfully and clearly convey the structured content?) and **visual-alignment accuracy** (do the clickable hotspots land on the correct regions of the generated image?). We assemble a benchmark spanning multiple content types and conduct a human evaluation, since both image quality and region alignment are inherently perceptual and not captured by a single automatic metric. Quantitative values are reported as mean $\pm$ std over multiple runs; entries marked [XX] are pending completion of the full evaluation and are left as placeholders in this version.

### 4.1 Benchmark

We assemble a benchmark of [N] questions designed to exercise different visual modes and content types, summarized in Table 1. Infographic questions cover technical processes and comparisons (e.g., “compare REST and GraphQL,” “explain the RAG retrieval pipeline,” “draw the OAuth2.0 authorization-code flow”), which test structured flow and layered layouts. Map questions cover spatial guidance (e.g., “draw a hand-drawn guide map of West Lake”), testing geographic region placement and route hotspots. Scene questions cover illustrated layouts (e.g., “illustrate a museum scene”), testing object localization in a less rigidly structured image. Each question is run through the full CHATIMAGE pipeline with real text, image, and vision providers. Representative qualitative results are shown in Figure 3.

**Table 1 Benchmark composition.** Questions span infographic, map, and scene modes across technical, spatial, and descriptive content.

| Mode        | #Questions | #Hotspots (avg.) |
|-------------|------------|------------------|
| Infographic | [XX]       | [XX]             |
| Map         | [XX]       | [XX]             |
| Scene       | [XX]       | [XX]             |
| Total       | [XX]       | [XX]             |

### 4.2 Human Evaluation

Because image quality and region alignment are perceptual, we conduct a human evaluation. Annotators are shown the generated interactive visual image (with hotspots) alongside the original question and raw answer, and rate two dimensions on a 1–5 Likert scale:

- **Image quality (IQ):** Does the image faithfully and clearly convey the structured content of the answer? (1=incoherent, 5=clear and faithful.)
- **Alignment accuracy (AA):** When clicking each hotspot, does the opened detail correspond to the visual region under the cursor? (1=completely misaligned, 5=perfectly aligned.)

<sup>1</sup><https://github.com/wencanjiang/ChatImage>





**Figure 3 Qualitative results.** Example CHATIMAGE outputs across infographic, map, and scene modes, with hotspots (outlined in calibration mode) shown to align with the actual rendered content. [\[replace with ChatImage qualitative figure\]](#)

Each question is evaluated by [K] annotators; we report the mean score and inter-annotator agreement (Krippendorff’s  $\alpha$ ). Table 2 reports the overall scores and per-mode breakdown. As baselines, we compare against (i) a **planned-only** variant that uses planned layout bounds without vision alignment (simulating the common assumption that the generator follows the layout), and (ii) a **text-only** condition where the annotator receives only the raw text answer and rates its navigability on the same scale, to contextualize the value of the visual interactive format.

**Table 2 Human evaluation of image quality (IQ) and alignment accuracy (AA) on the CHATIMAGE benchmark,** rated 1–5 (higher is better). “Planned-only” uses layout bounds without vision alignment; “Text-only” rates the raw text answer’s navigability on the same scale. Entries report mean $\pm$ std over annotators. [XX] marks pending values; blue shading marks our full method.

| Method                                         | Image Quality (IQ) $\uparrow$ | Alignment Accuracy (AA) $\uparrow$ | Navigability $\uparrow$ |
|------------------------------------------------|-------------------------------|------------------------------------|-------------------------|
| Text-only (raw answer)                         | –                             | –                                  | [XX $\pm$ x]            |
| CHATIMAGE (Planned-only, no grounding)         | [XX $\pm$ x]                  | [XX $\pm$ x]                       | [XX $\pm$ x]            |
| <b>CHATIMAGE (Full, LocateAnything + SAM3)</b> | [XX $\pm$ x]                  | [XX $\pm$ x]                       | [XX $\pm$ x]            |

### 4.3 Alignment Ablation

To isolate the contribution of the two-pass vision alignment, we ablate the grounding source while keeping the rest of the pipeline fixed. Table 3 compares: (a) planned bounds only (no grounding), (b) LocateAnything grounding without SAM3 refinement, (c) full pipeline with SAM3 mask refinement, and (d) the robustness design (keeping far-from-planned groundings, falling back only for header/cross-panel rejects and missing modules). We expect grounding to substantially improve alignment accuracy over planned-only bounds, since the latter assume layout fidelity that generative models do not provide. The robustness ablation tests whether preserving correctly-grounded modules when some fail (rather than discarding all alignments) improves overall alignment.

**Table 3 Alignment ablation.** Alignment accuracy (AA, 1–5) under different grounding configurations, holding the rest of the pipeline fixed. “Robustness” keeps correctly-grounded modules when some fail, rather than discarding all alignments. [XX] marks pending values.

| Configuration                            | Alignment Accuracy (AA) ↑ |
|------------------------------------------|---------------------------|
| Planned bounds only (no grounding)       | [XX±x]                    |
| LocateAnything grounding (no SAM3)       | [XX±x]                    |
| LocateAnything + SAM3 refinement         | [XX±x]                    |
| <b>Full pipeline + robustness design</b> | <b>[XX±x]</b>             |

#### 4.4 Per-Mode Analysis

**Table 4 Per-mode breakdown** of image quality (IQ) and alignment accuracy (AA), 1–5 scale. Alignment is expected to be easiest in infographic mode and hardest in scene mode. [XX] marks pending values.

| Mode        | #Questions | Image Quality (IQ) ↑ | Alignment Accuracy (AA) ↑ |
|-------------|------------|----------------------|---------------------------|
| Infographic | [XX]       | [XX±x]               | [XX±x]                    |
| Map         | [XX]       | [XX±x]               | [XX±x]                    |
| Scene       | [XX]       | [XX±x]               | [XX±x]                    |
| Overall     | [XX]       | [XX±x]               | [XX±x]                    |

Table 4 breaks down image quality and alignment accuracy by visual mode. We expect alignment to be easiest in infographic mode, where regions are grid/flow-structured and boundaries are clear, and hardest in scene mode, where objects are irregularly placed and grounding must distinguish overlapping elements. Map mode presents an intermediate case with route and landmark localization. This breakdown helps identify which content types the current grounding pipeline handles well and where future work (polygons, finer masks) is most needed.

## 5 Conclusion

We introduced CHATIMAGE, the first system—to our knowledge—that turns a long-form LLM answer into an interactive visual image: a generated image overlaid with clickable hotspots, each opening a detail panel and an in-context follow-up thread. The core technical idea is to decouple content structure from visual placement via a two-pass generate-then-ground pipeline, so that hotspots align with the actual rendered content rather than a hard-coded layout grid that generative models do not reliably follow. We presented an open-source, provider-agnostic reference implementation spanning infographic, map, and scene modes, assembled a benchmark across content types, and conducted a human evaluation of image quality and visual-alignment accuracy.

*First work in this direction.* Converting an LLM answer into a navigable, region-interactive visual artifact with vision-grounded hotspots is, as far as we know, a new task not addressed by prior work in text-to-image generation, visual grounding, interactive visualization, or structured LLM output. By defining the task, releasing a complete system, and providing a benchmark and evaluation protocol, we aim to establish this as a research direction and a reference point for future work.

*Application prospects.* The interactive visual answer format has broad potential. In **education**, a student can explore a complex process (e.g., the HTTP rendering pipeline) by clicking the stage they care about



rather than reading an entire explanation. In **technical documentation and knowledge management**, answers become navigable artifacts where each region supports targeted follow-up, reducing re-reading. In **tourism and spatial guidance**, hand-drawn maps with explorable landmarks and routes offer a more intuitive interface than text directions. In **data communication**, infographic answers make comparisons and funnels immediately scannable while preserving drill-down detail. As text-to-image and visual-grounding models continue to improve, the fidelity and alignment of such interactive visual answers will only get better, widening the range of questions that benefit from this format.

*Limitations and future work.* Current limitations include the accuracy ceiling imposed by upstream grounding models (complex maps and dense scenes remain challenging), the rectangular click hit-test (polygons would better fit irregular regions), and the text-only file context (richer document parsing is future work). Promising directions include exporting interactive ChatImages as shareable HTML packages, richer mask-based interaction, automated visual QA for hotspot accuracy, and cloud-synchronized history. We hope the open-source release and benchmark encourage the community to extend this direction.

*Open source.* Code, demos, a live project page, and a technical report are publicly available.<sup>2</sup>

## References

- [1] Anthropic. The Claude model family. *Anthropic Technical Report*, 2024. 1
- [2] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. VQA: Visual question answering. In *IEEE/CVF International Conference on Computer Vision*, 2015. 3
- [3] Weixuan Chen, Bohan Liu, Daohan Zeng, Shitian Li, Liangli Huang, Chang Xu, and Chunjie Huang. Training-free layout-to-image generation with latent diffusion models. *arXiv preprint arXiv:2401.13391*, 2024. 3
- [4] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. InternVL: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 1, 3, 5
- [5] Tianheng Cheng, Liming Song, Yixiao Ge, Wenhao Liu, Xinggang Wang, and Ying Shan. YOLO-World: Real-time open-vocabulary object detection. *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 3
- [6] Yifu Cheng, Peng Zhou, Jiafei Cai, Zhongjie Wei, Wei Sun, Robby T Tan, and Gang Hua. Intelligent IG: Instruction-driven visual infographic generation and editing. *arXiv preprint arXiv:2312.14390*, 2024. 1, 3
- [7] Zhengyuan Deng, Jun Wang, Zihang Zhang, Yufan He, and Jianhua Feng. TransVG: Visual grounding with transformers. In *IEEE/CVF International Conference on Computer Vision*, 2021. 3
- [8] Yifan Du, Zhiyuan Liu, Junyu Zhao, Ji-Rong Wen, and Maosong Sun. VLT5: A unified framework for vision-and-language tasks via prompt learning. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, 2022. 3
- [9] Weixi Feng, Nanyang Wan, Tsu-Jui Fu, Hammad Khan, Salar Hayder, Anni Liu, Yujie Wang, Mark Schmidt, Arjun Chandra, Bonan Majumder, et al. LayoutGPT: Compositional visual planning and generation with large language models. *Advances in Neural Information Processing Systems*, 2024. 1, 3, 4
- [10] Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2024. 3
- [11] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the VQA v2.0 dataset a balanced one. *arXiv preprint arXiv:1612.00837*, 2017. 3
- [12] Jing Gu, Shalini Ghosh, Licheng Yang, Saeed Sattarzadeh, Aditya Singh, and Mohit Bansal. V&l navigators: A survey of vision-and-language navigation. *arXiv preprint arXiv:2208.04055*, 2022. 3
- [13] Harry Hochheiser and Ben Shneiderman. Interactive poster visualization with PhD Online. *IEEE Computer Graphics and Applications*, 2004. 3

---

<sup>2</sup><https://github.com/wencanjiang/ChatImage>

- [14] Yiyang Hu, Liang Pang, Yanyan Lan, Jiafeng Xu, and Xueqi Cheng. Can large language models generate visual mind maps from text? *arXiv preprint arXiv:2402.10988*, 2024. 3
- [15] Aishwarya Kamath, Mannat Singh, Yann LeCun, Gabriel Synnaeve, Ishan Misra, and Nicolas Caron. MDETR: Modulated detection for end-to-end multi-modal understanding. In *IEEE/CVF International Conference on Computer Vision*, 2021. 3
- [16] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. Segment anything. In *IEEE/CVF International Conference on Computer Vision*, 2023. 3, 5
- [17] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, 2020. 3
- [18] Yuheng Li, Haotian Liu, Qingyang Wu, Fangzhou Mu, Jianwei Yang, Jianfeng Gao, Chunyuan Li, and Yong Jae Lee. GLIGEN: Open-set grounded text-to-image generation. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023. 3
- [19] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in Neural Information Processing Systems*, 2024. 1, 3
- [20] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, and Lei Zhang. Grounding DINO: Marrying DINO with grounded pre-training for open-set object detection. In *European Conference on Computer Vision*, 2024. 3
- [21] Simeng Lu, Michele Mancini, Andrew Zisserman, and Mario Fritz. InfographicNLP: Expanding the scope of infographic analysis. In *arXiv preprint arXiv:2310.13632*, 2023. 3
- [22] Ahmed Masry, Do Xuan Long, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In *Findings of the Association for Computational Linguistics: ACL 2022*, 2022. 3
- [23] Minesh Mathew, Dimosthenis Karatzas, and C.V. Jawahar. DocVQA: A dataset for VQA on document images. In *IEEE/CVF Winter Conference on Applications of Computer Vision*, 2021. 3
- [24] Tamara Munzner. *Visualization Analysis and Design*. CRC Press, 2014. 3
- [25] Hoque Obeid and Enamul Hoque. Chart-to-Text: Generating textual descriptions of charts. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, 2020. 3
- [26] OpenAI. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 1
- [27] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. SDXL: Improving latent diffusion models for high-resolution image synthesis. In *International Conference on Learning Representations*, 2024. 1, 3
- [28] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with CLIP latents. In *arXiv preprint arXiv:2204.06125*, 2022. 1, 3
- [29] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. SAM 2: Segment anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024. 3, 5
- [30] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022. 3
- [31] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Ghasemipour, Burcu Karagol Ayan, S Sara Mahdavi, R Konuk Sarrafpour, et al. Photorealistic text-to-image diffusion models with deep language understanding. In *Advances in Neural Information Processing Systems*, 2022. 1, 3
- [32] Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Advances in Neural Information Processing Systems*, 2024. 3

- [33] Yifan Tang, Ao Zhang, Hengzhu Wang, Juan Li, and Zhijiang Hu. ChartLlama: A multimodal LLM for chart understanding and generation. *arXiv preprint arXiv:2311.16483*, 2023. 3
- [34] Liangtai Wang et al. LocateAnything: Object navigation with large vision-language models. *arXiv preprint*, 2025. 3, 5
- [35] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H Chi, Quoc V Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*, 2022. 3
- [36] Bin Yan, Yi Zhu, Jiangshan Wang, Zhihang Li, Yichao Zhang, Wu Liu, Erjin Zhang, and Jian Sun. UNINEXT: Universal instance perception as object-in-context prompting. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023. 3
- [37] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations*, 2023. 3
- [38] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *IEEE/CVF International Conference on Computer Vision*, 2023. 3
- [39] Yong Zhang. Mindmap: A creative visual thinking tool for education. *Journal of Educational Technology Systems*, 2014. 3