

SPIKE: An Adaptive Dual Controller Framework for Cost-Efficient Long-Horizon Game Agents

Wencan Jiang^{1,*}, Jiangning Zhang^{1,*}, Jianbiao Mei¹, Jinzhuo Liu¹, Yu Yang¹, Xiaobin Hu², Zhucun Xue¹, Yong Liu¹, Dacheng Tao³

¹Zhejiang University, ²National University of Singapore, ³Nanyang Technological University

*Equal contribution., [†]Corresponding author: Jiangning Zhang.

Long-horizon multimodal agents in open-world games must stay goal-directed across many low-level interactions under tight token and latency budgets. Existing approaches often trade off costly per-step reasoning against reactive execution that can drift, repeat failures, and recover poorly. Our key idea is to reuse strategic reasoning across locally stable segments and reinvoke it at event boundaries. We present SPIKE, an **adaptive dual controller framework** for cost-efficient long-horizon game control. Its Strategic Controller performs low-frequency global planning, failure analysis, and recovery, while its Reactive Controller handles fast local execution under a strict token budget. An **Event Trigger** monitors visual change, task progress, repeated actions, and failure signals to decide when control should stay reactive or escalate to strategic reasoning. **Hierarchical Memory** separates short-term experience reuse in the State-Action Memory Bank (SA-MB) from structured evidence in the State-Action Knowledge Graph (SA-KG), allowing each controller to retrieve the context it needs. This design reuses strategic proposals over multiple reactive steps, supports local override when plans become stale, and reserves expensive reasoning for moments where extra deliberation is useful. On the Lite-100 split of STARDJO, SPIKE improves Lite-100 success rate (SR) by **5.0 percentage points** (38.5% relative) over the strongest Lite-100 baseline and Budgeted SR by **9.3 points** (75.6% relative) over the strongest budgeted baseline. It also reduces token consumption by **54.9%** and latency by **40.8%**. Ablations show that **event triggering**, **reactive override**, and **heterogeneous memory** each contribute to success and recovery, supporting **selective reasoning** rather than reasoning at every step.

 **Date:** May 18, 2026

 **Correspondence:** 186368@zju.edu.cn

 **Code:** <https://github.com/wencanjiang/SPIKE>

 **Project:** <https://wencanjiang.github.io/projects/SPIKE/>



1 Introduction

Recent advances in Large Language Models (LLMs), Vision-Language Models (VLMs), and vision-action foundation models have enabled increasingly capable agents for open-world games [17, 29], web navigation [4, 38], and general computer control [16, 25]. Unlike single-step question answering, these environments require agents to act over long, changing interaction histories with delayed feedback. In tasks such as STARDJO [26], which spans 1,000 tasks and a Lite-100 subset, an agent may need dozens or hundreds of steps to coordinate tool use, navigate, handle menus, switch subgoals, and recover from failures without a privileged game-state API. The central challenge is therefore **closed-loop control under scarce deliberation**: reasoning should be spent on bottlenecks and recovery, while routine low-level actions must stay cheap. This creates a **planning-latency-memory trilemma**: deeper reasoning improves deliberation but raises inference cost, lightweight reactive execution is fast but short-sighted, and naive memory reuse introduces retrieval noise.

Current agents address only parts of this control problem. As illustrated in Figure 1-(a), planning-intensive frameworks such as CRADLE can reason effectively, but repeated calls to large models make high-frequency

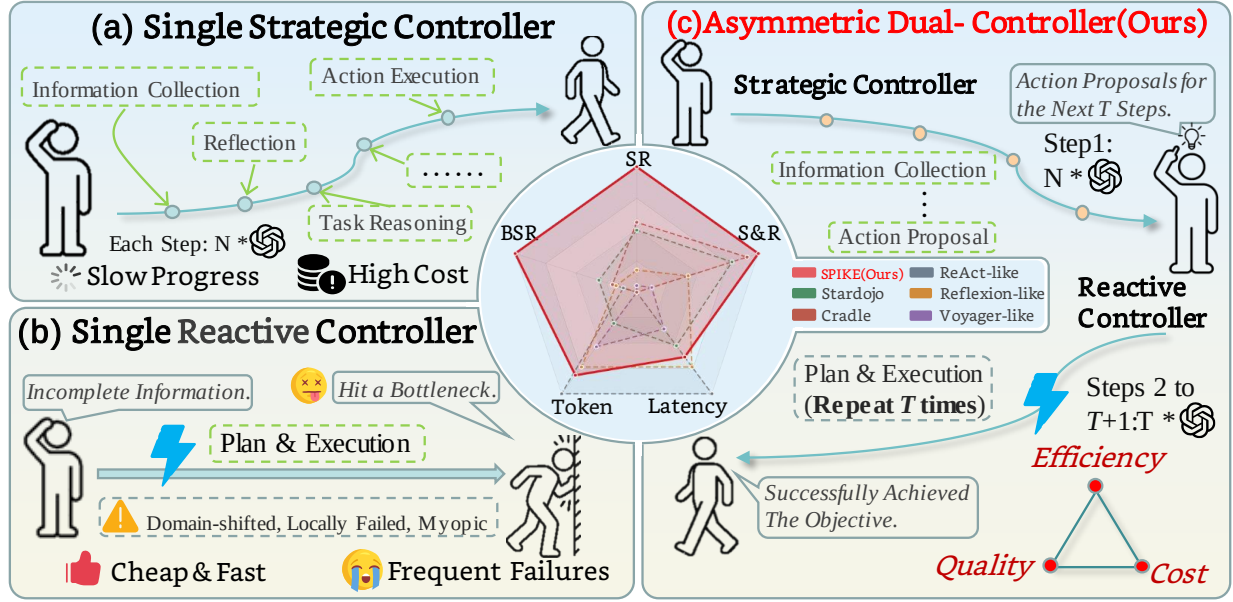


Figure 1 Motivation for event-triggered deliberation. Single-Strategic (a) control reasons carefully but is expensive, while Single- Reactive (b) control is cheap but brittle under drift and bottlenecks. (c) SPIKE allocates strategic reasoning only at likely bottlenecks, aiming for higher success and recovery with lower per-step cost.

control expensive in tokens and latency [25]. Conversely, Figure 1-(b) captures reactive agents such as ReAct: they execute cheaply but become unreliable under drift, execution failure, repetition, and multi-stage transitions [34]. The desired behavior, shown in Figure 1-(c), reuses strategic guidance across routine reactive steps while retaining the ability to replan when the local state changes. Fast-slow and hierarchical agents, including SayCan, Inner Monologue, and SwiftSage [2, 9, 15], as well as ADaPT and Optimus-3 [14, 21], move toward selective reasoning. However, multimodal open worlds leave three gaps: triggering is often rigid, sudden visual changes are hard to detect from text-only cues, and the fast layer is frequently treated as a passive executor. Meanwhile, long-horizon memory is often a flat prompt buffer or single retrieval pool, weakening cross-episode reuse and increasing retrieval noise [19, 20].

Motivated by these observations, we propose SPIKE, an **event-triggered deliberation framework** for cost-efficient long-horizon game agents. Our core insight is that strategic reasoning should be amortized across locally stable segments and re-invoked only at event boundaries. Long-horizon game control is temporally uneven: most steps lie in stable local execution, while a few boundaries dominate recoverable failures. This turns reasoning into a resource allocation problem. SPIKE therefore couples three mechanisms: the Event Trigger decides *when* expensive reasoning is worth invoking; the bounded Reactive Controller decides *how* to act safely between deliberations rather than serving as a passive executor; and controller-specific Hierarchical Memory decides *what evidence* supports local action reuse versus strategic replanning. As detailed in Section 3, the memory separates the State-Action Memory Bank (SA-MB) from the State-Action Knowledge Graph (SA-KG), preventing routine execution and replanning from sharing one noisy retrieval context.

Overall, our main contributions are:

- **Event-triggered amortized deliberation.** We formulate long-horizon multimodal control as budgeted allocation of strategic reasoning over event boundaries.
- **Adaptive dual-controller execution.** SPIKE uses strategic planning at escalation points and bounded reactive override during stable local execution.
- **Controller-specific hierarchical memory.** SPIKE separates SA-MB for local state-action reuse from SA-KG for structured strategic evidence.
- **Cost-aware evidence.** On STARDJOJO Lite-100 and RDR2, SPIKE improves success-cost trade-offs, with ablations isolating trigger timing, override, and memory structure.

2 Related Work

2.1 Computer Control and Game Environments

Benchmarks for agents built on foundation models mainly come from two lines. The first studies software and general computer control, including web, mobile, desktop, and real computer tasks [16, 25, 38]. Recent benchmarks such as ScenDroid and GameWorld/V-MAGE further sharpen this line [18, 32, 36]. These settings are useful for tool use and interface grounding, but they only partly capture the navigation, scene changes, and recovery pressure of dynamic open-world games. ALFWorld aligns text interaction with embodied household environments, while MineDojo provides an open-ended Minecraft benchmark with internet-scale knowledge [6, 23]. Voyager shows that large models can support long-running exploration in Minecraft-like worlds [29]. TextAtari extends this direction to 100K-frame decision-making and makes the trade-off between expensive reasoning and reactive execution explicit [13]. STARDOJO [26] lies between these traditions: it keeps open-world dynamics but requires control without a privileged game-state API, using screen-derived observations and a shared executable action interface, making low-level reliability and control scheduling central.

2.2 LLM/VLM Agents for Computer Tasks and Games

LLM and VLM agents have made strong progress on multi-step computer interaction. ReAct established the observe-reason-act loop [34]. Later agents extended this idea to web navigation, app use, and general computer control [4, 25, 38]. In games, Voyager demonstrates strong large-model planning, while TextAtari shows how long-horizon tasks expose the tension between costly reasoning and reactive execution [13, 29]. DEPS, Lumine, and SIMA extend this line with open-world control [1, 27, 30], while JARVIS-1 adds memory-augmented multimodal control [31].

Scope of comparison. Recent open-world game-agent systems and benchmarks are important context but are not always direct same-table baselines for SPIKE. NitroGen trains a vision-action foundation model via large-scale behavior cloning on 40,000 hours of gameplay across more than 1,000 games [17], whereas SPIKE studies test-time controller allocation without additional agent training. Lumine targets real-time 3D open-world control with an end-to-end VLM agent [27], while STARDOJO Lite-100 uses benchmark tasks, shared runner feedback, and a fixed executable action interface. GameWorld standardizes verifiable evaluation across 34 browser games and 170 tasks, and V-MAGE provides a vision-centric protocol [18, 36]. Because these works differ in training, environments, action interfaces, and verification signals, we discuss them as related positioning rather than direct baselines.

However, many game agents still rely on privileged observations, task scaffolding, or in-environment training. SPIKE instead focuses on a setting with no training and no privileged game-state API: the Reactive Controller must remain responsive under screen-grounded interaction, while strategic reasoning, used only when needed, handles drift, recovery, and task-level redirection.

2.3 Dual Controller Frameworks and Memory for Long-Horizon Agents

Fast-slow and hierarchical control manage the trade-off between costly reasoning and real-time execution. SayCan combines language planning with affordances, Inner Monologue uses closed-loop language feedback, and SwiftSage explores fast-slow cooperation [2, 9, 15]. ADaPT and AdaPlanner further study on-demand decomposition and feedback-adaptive planning [21, 24]. Search methods, including Tree of Thoughts, RAP, and LATS, show the value of deliberate exploration [7, 33, 37]. Reflexion further highlights feedback and retry for recovery [22]. Many prior agents remain planning-intensive or rely on fixed triggering. In contrast, SPIKE uses multimodal event triggering, local autonomous override, and graded recovery so that strategic reasoning is called only when needed.

Memory is equally important for long-horizon behavior. Generative Agents, Reflexion, and MemGPT show that retrieval and reflection can help agents go beyond a single prompt window [19, 20, 22]. HiAgent and Mem0 further study hierarchical working memory and scalable long-term memory [3, 8]. Retrieval-Augmented Generation (RAG), GraphRAG, and HippoRAG show how external stores and graph retrieval can extend

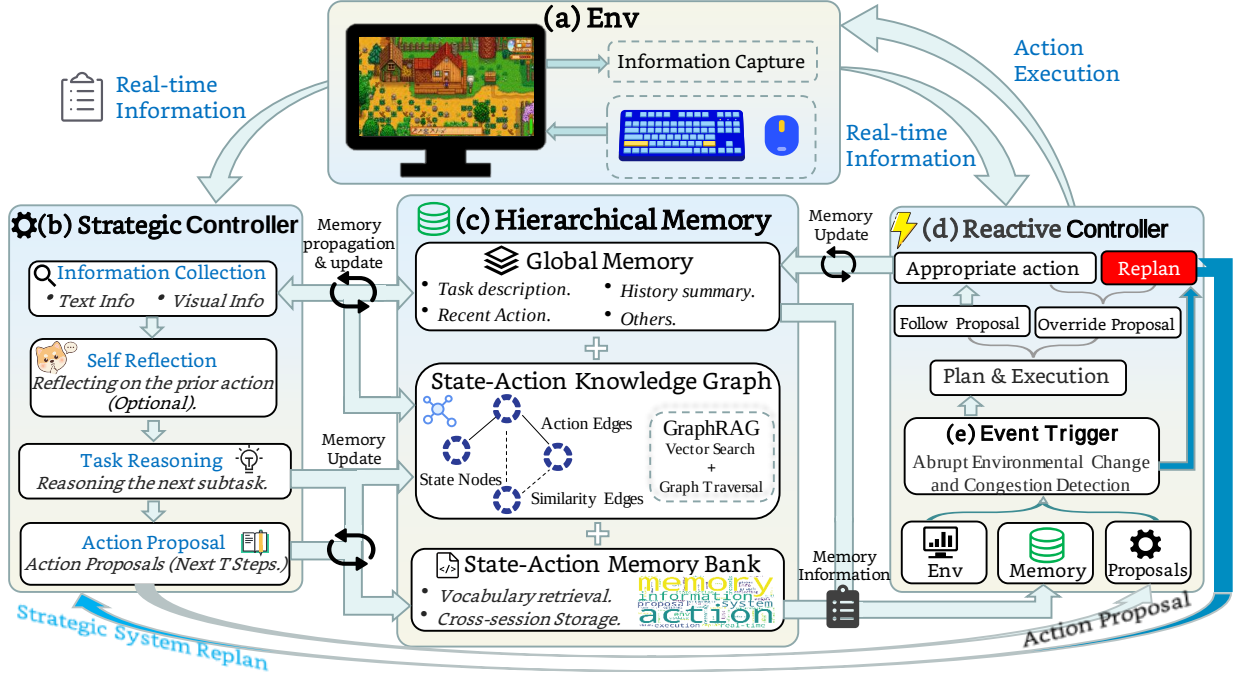


Figure 2 Closed-loop event-triggered deliberation in SPIKE. The Strategic Controller performs information collection, optional Self Reflection, task reasoning, and short-horizon action proposal; the Reactive Controller uses real-time signals and retrieved memory to follow, override, or trigger replanning. The Hierarchical Memory module combines Global Memory, the State-Action Memory Bank (SA-MB), and the State-Action Knowledge Graph (SA-KG) through vector search and graph traversal, then propagates updates after action execution.

model context [5, 10, 12]. Recent agents without privileged environment APIs also use state-action graphs for exploration and delayed reward planning [28]. AgentOdyssey studies open-ended text games with test-time continual learning, highlighting exploration, episodic memory, and planning cost [35]. Our memory design follows this direction but separates roles: SA-MB supports fast local reuse, whereas SA-KG provides evidence for strategic checking and replanning.

3 The SPIKE Framework

We model long-horizon open-world control as sequential decision making with multimodal observations, layered memory, recovery, and token-latency budgets: the Event Trigger decides when to deliberate, the Reactive Controller acts between deliberations, and Hierarchical Memory retrieves evidence at routine and escalation boundaries.

Open-world control has a cost-value mismatch: routine steps need fast execution, whereas rare scene changes, stalls, and failures require expensive reasoning. Always-strategic agents spend large-model calls on routine motion; purely reactive agents lack reliable triggers for stale plans. SPIKE treats strategic reasoning as event-triggered, amortizes proposals over stable segments, and retrieves different evidence for local and escalated steps.

3.1 Event-Triggered Dual Controller Framework

For an episode with horizon H , let $o_t = (v_t, u_t, f_t)$ denote the observation at step t , where v_t is the visual screenshot, u_t is textual or user interface (UI) context, and f_t is runner feedback such as progress, position, inventory, or dialogue changes. The agent chooses an executable game action $a_t \in \mathcal{A}$ from history $h_t = (o_1, a_1, \dots, o_t)$. An event-trigger decision $g_t \in \{0, 1\}$ selects the Strategic Controller ($g_t = 1$) or Reactive Controller ($g_t = 0$). For trajectory $\tau = (o_1, a_1, \dots, o_H)$, success is $S(\tau) \in \{0, 1\}$ and the deliberation budget

is B . Let $C_t(g_t, h_t)$ denote the history-dependent model-call, token, or latency cost. The target is

$$\max_{\pi_R, \pi_S, g} \mathbb{E}[S(\tau)] \quad \text{s.t.} \quad \mathbb{E} \left[\sum_{t=1}^H C_t(g_t, h_t) \right] \leq B. \quad (1)$$

Inspired by dual-process theories of cognition [11], SPIKE separates slow, high-cost planning from fast local execution. The Strategic Controller handles planning, failure analysis, and task redirection; the Reactive Controller executes local actions under a strict token budget; the Event Trigger and Hierarchical Memory allocate deliberation and evidence. This differs from always-deliberate agents, which call the expensive planner at nearly every step, from fixed fast-slow pipelines, which switch controllers by a static schedule, and from memory-augmented agents with a single retrieval pool. In SPIKE, controller allocation, local override, and memory retrieval are all conditioned on detected event boundaries, so the framework changes both *when* reasoning is invoked and *what* evidence each controller sees.

As illustrated in Figure 2, SPIKE consists of Env and Information Capture, Strategic Controller, Hierarchical Memory, Reactive Controller, and Event Trigger. Together they form a closed loop: capture produces o_t and updates h_t ; the Event Trigger scores whether the current history marks an event boundary; the selected controller retrieves controller-specific memory and emits a_t ; execution feedback updates SA-MB, SA-KG, and h_{t+1} ; the next step repeats this trigger-act-update cycle.

Controller roles. The Strategic Controller is activated when periodic refresh, stuck-state, or recovery signals require deliberate reasoning. It integrates the current observation, task summary, recent failure traces, and structured long-term memory, then follows the workflow

Information Collection -> Self Reflection -> Task Reasoning -> Action Proposal.

Figure 3 expands the Strategic Controller workflow. The optional Self Reflection stage handles unclear evidence, contradiction, or repeated failure. The output is a short-horizon proposal for the next T steps, long enough to guide local execution and compact enough to revise after a scene change.

The Reactive Controller handles routine steps under a strict token budget. It uses the latest strategic proposal, current observation, and Memory Information from SA-MB to emit local actions. When new evidence invalidates the proposal, it may only apply bounded local corrections such as avoidance, repositioning, or tool reselection; it cannot change the active subgoal, and failed corrections return control to the Event Trigger.

3.2 Event Trigger as an Online Surrogate for Budgeted Deliberation

The Event Trigger operationalizes the budgeted objective as a practical online event-boundary decision. Ideally, each step would choose whether the expected utility of strategic deliberation justifies its extra cost:

$$g_t^* = \arg \max_{g \in \{0,1\}} \widehat{U}(g | h_t) - \lambda C_t(g, h_t), \quad (2)$$

where $\widehat{U}(g | h_t)$ estimates progress and recovery value from history and λ controls the cost penalty. Because the true value of deliberation is not observable online from sparse task success, SPIKE uses a reproducible surrogate event detector. Eq. 3 uses fixed thresholds over visual discontinuity, progress stagnation, behavioral repetition, and execution failure; these signals identify stale strategic proposals or unreliable local execution rather than estimating task success. Appendix Sec. E gives the trigger-act-update loop.

The trigger variable $g_t \in \{0,1\}$ indicates whether step t escalates:

$$g_t = \mathbb{I}[(c_t \geq T) \vee (d_t > \tau_v) \vee (z_t \geq \tau_z) \vee (r_t \geq \tau_r \wedge z_t \geq \tau_{rz}) \vee (\ell_t \geq \tau_\ell)]. \quad (3)$$

where c_t counts Reactive steps since the last Strategic call and resets after it, T is the refresh interval, and $\tau_v, \tau_z, \tau_r, \tau_{rz}, \tau_\ell$ are fixed triggering thresholds. The detector maps signals to observable failure modes: $d_t = 1 - \cos(\phi(v_t), \phi(v_{t-1}))$ catches stale plans after visual discontinuities, z_t catches stalled routines, r_t catches behavior loops within the last W actions, and $\ell_t \in \{0,1,2,3\}$ catches execution failure. We set $\Delta_t = q_t - q_{t-1}$, where q_t is a deterministic progress counter derived from the shared STARDOJO runner feedback, not a privileged game-state API; $z_t = 0$ when $\Delta_t > 0$ and $z_t = z_{t-1} + 1$ otherwise. All baselines



Figure 3 Strategic Controller workflow in one escalated planning cycle. The example shows how SPIKE collects scene evidence, checks progress, reasons over the task, and emits a short plan for Reactive Controller execution.

receive the same raw observation, action schema, execution feedback, and history fields; SPIKE only adds Event Trigger bookkeeping.

The fixed thresholds instantiate the event detector rather than a per-task policy; Table 4 reports their local sensitivity, and Appendix Sec. E details their computation. These thresholds are tied to event types rather than individual tasks: within the same game family, where camera motion, action granularity, and progress feedback have similar scales, the same settings can be reused without task-by-task replacement. When moving to a different game type, the Event Trigger should be recalibrated according to the new event statistics, such as visual dynamics, interaction pace, stall duration, and failure-message density. Failure levels scope recovery: F1 keeps bounded retry local, while F2/F3 escalate invalid actions, stalls, or repeated compound failures when local context becomes unreliable.

3.3 Hierarchical Memory

Long-horizon tasks risk context overflow, hallucination, and forgetting. Figure 2(c) organizes Hierarchical Memory around controller-specific roles: Global Memory preserves task continuity, the State-Action Memory Bank (SA-MB) is a low-latency local action prior for Reactive execution, and the State-Action Knowledge Graph (SA-KG) is a strategic evidence graph for checking and replanning rather than a flat retrieval store.

Global Memory keeps a fixed-size window of recent observations and actions, together with the active subgoal, progress indicators, and failure summaries. When the Event Trigger keeps execution local, the Reactive Controller retrieves nearby state-action traces from SA-MB as local hints, with the risk of stale habits reduced by recency, reward, and success terms. Given the current query x_t , SA-MB ranks item i by

$$S_{MB}(i | x_t) = \rho_i(\alpha_C C_i + \alpha_L L_i + \alpha_R R_i + \alpha_P P_i). \quad (4)$$

All terms are normalized before weighting: L_i is the Jaccard overlap between lowercased query and memory token sets, C_i is token-frequency cosine similarity, $R_i = (\text{clip}(\text{rewardEMA}_i, -1, 1) + 1)/2$ uses an exponential moving average (EMA) of observed rewards, P_i is successes over attempts, $\rho_i = \exp(-\text{ageHours}_i/24)$, and $\alpha_C, \alpha_L, \alpha_R, \alpha_P$ are fixed retrieval weights. The Reactive Controller uses the top retrieved summaries as hints rather than executable commands.

When the Event Trigger escalates control, the Strategic Controller consults SA-KG for plan checking rather than local traces alone. SA-KG stores validated transitions as state nodes, action edges, and similarity edges, inspired by state-action-result graphs in experience-driven agents without privileged environment APIs [28] but using retrieved graph fragments as evidence rather than directly executing retrieved actions. Starting from the nearest state nodes for the current subgoal, SA-KG retrieves graph fragments by vector search, keeps matches above τ_{KG} , and ranks fragment j by

$$S_{KG}(j | x_t) = \beta_C C_j + \beta_P P_j, \quad (5)$$

where $C_j = 1 - \text{dist}(x_t, s_j)$ is vector similarity and P_j is the success rate of the best outgoing action, with execution count used to break ties. Fusion first min-max normalizes S_{MB} and S_{KG} within the current candidate sets, then uses $S_{\text{fuse}} = \lambda_{MB} \tilde{S}_{MB} + \lambda_{KG} \tilde{S}_{KG}$; unmatched graph actions receive zero normalized SA-KG score. After execution, SPIKE writes only successful execution, interpretable recovery, or planner-validated progress, preventing transient errors from becoming long-term evidence. Appendix Sec. F gives the storage fields, fusion score, fixed weights, and promotion rules.

4 Experiments

This section evaluates SPIKE in long-horizon game control. The main Lite-100 study, derived from STAR-DOJO [26], measures success, LLM-call efficiency, latency, and recovery, then uses task breakdowns, Pareto analysis, ablations, and qualitative traces to explain the gains. We also test the same adaptive dual controller on Red Dead Redemption 2 (RDR2) to assess transfer across visual domains, action spaces, and task languages.

4.1 Experimental Setup

Our main evaluation uses Lite-100 in STARDOJO [26], which contains 100 tasks across farming, crafting, exploration, combat, and social interaction. Table 1 shows the category and difficulty split. We compare against ReAct-like [34], Reflexion-like [22], Voyager-like [29], CRADLE [25], and the benchmark-native STARDOJO baseline. Unless otherwise specified, all baselines and the default SPIKE use the same Qwen3.5-397B-A17B backend, environment interface, action space, prompt upper bound, decoding settings, and, when applicable, the same frozen visual-change encoder/descriptor. Appendix Sec. B specifies the baseline prompt fields, history truncation, memory isolation, retry handling, and adaptation rules.

Table 1 Lite-100 task statistics.

Category	Total	Easy	Medium	Hard
Farming	21	14	3	4
Crafting	14	7	4	3
Exploration	28	15	8	5
Combat	12	3	6	3
Social	25	17	6	2
Total	100	56	23	21

Table 2 Main comparison on STARDOJO. “Recovery/Stuck Ratio” is Recovery Rate divided by Stuck Rate. Entries report mean $\pm$ standard deviation over three repeated runs. Table 6 reports the raw stuck and recovery statistics behind this ratio. Bold and underlined entries denote the best and second-best results within each method group; blue shading marks results from our method.

Method	Lite-100 SR $\uparrow$	Budgeted SR $\uparrow$	Tokens / Task (k) $\downarrow$	Latency / Step (s) $\downarrow$	Recovery/Stuck Ratio $\uparrow$
ReAct-like [34]	6.7 $\pm$ 0.6%	9.6 $\pm$ 0.6%	102.6$\pm$5.4	24.5$\pm$3.2	1.61 $\pm$ 0.11
Reflexion-like [22]	8.7 $\pm$ 1.0%	10.4 $\pm$ 0.6%	178.5 $\pm$ 6.6	<u>35.9$\pm$3.8</u>	2.02 $\pm$ 0.14
Voyager-like [29]	7.3 $\pm$ 0.6%	8.1 $\pm$ 1.0%	238.3 $\pm$ 6.7	56.5 $\pm$ 6.0	1.73 $\pm$ 0.15
CRADLE [25]	<u>13.0$\pm$1.7%</u>	10.7 $\pm$ 0.6%	372.5 $\pm$ 8.8	73.5 $\pm$ 8.2	<u>2.49$\pm$0.18</u>
STARDOJO [26]	12.3 $\pm$ 1.4%	12.3 $\pm$ 1.4%	295.9 $\pm$ 8.4	48.7 $\pm$ 4.5	2.37 $\pm$ 0.18
SPIKE (Default Qwen3.5-397B)	18.0$\pm$1.7%	21.6$\pm$1.7%	<u>168.1$\pm$5.7</u>	<u>43.5$\pm$4.7</u>	2.75$\pm$0.12
SPIKE (GPT-5.4)	20.3$\pm$1.7%	23.7$\pm$1.4%	107.8$\pm$2.1	27.9$\pm$4.3	3.50$\pm$0.29
SPIKE (Gemini-3.1-pro)	<u>17.7$\pm$1.4%</u>	20.3 $\pm$ 1.4%	134.3 $\pm$ 3.2	<u>33.8$\pm$3.3</u>	<u>2.66$\pm$0.19</u>

We report Lite-100 success rate (SR), Budgeted SR, tokens per task, latency per step, and Recovery/Stuck Ratio. Lite-100 SR follows the benchmark step-cap protocol, whereas Budgeted SR uses equal difficulty-dependent LLM-call budgets (120/200/600 calls for easy/medium/hard tasks), where one call denotes one

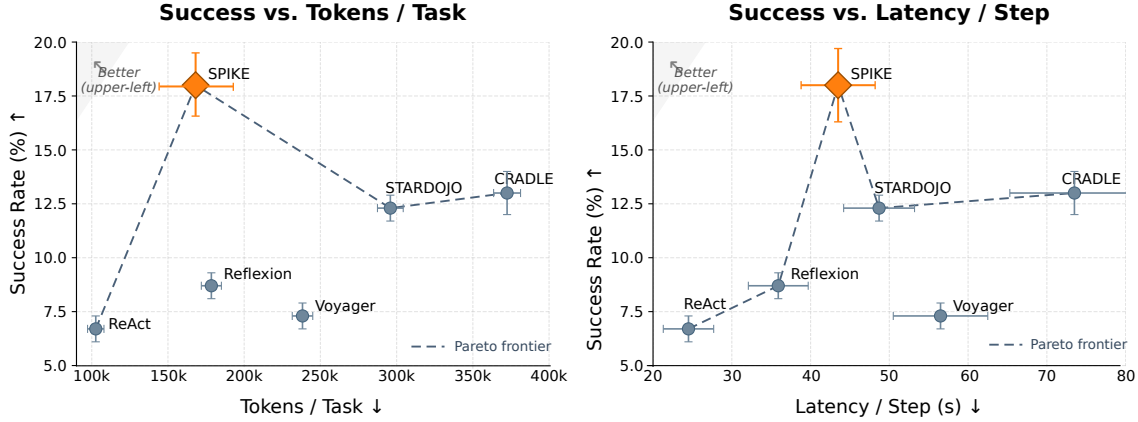


Figure 4 Effectiveness-efficiency trade-off on Lite-100. The two panels compare success against token use and latency; upper-left is better. SPIKE stays on the Pareto frontier, improving success without simply spending more compute.

large-model invocation. Because this protocol constrains LLM calls rather than environment steps, Budgeted SR should be read as an efficiency metric rather than a stricter subset of Lite-100 SR. Unless otherwise specified, all quantitative results report mean and standard deviation over three repeated runs. Appendix Sec. A defines call counting, and Table 6 reports the raw events behind the Recovery/Stuck Ratio.

4.2 Mechanistic and Qualitative Analysis

4.3 Main Results on Lite-100

Under the same backend and environment interface, Table 2 shows that SPIKE reaches the **highest Lite-100 SR** at 18.0% and the **highest Budgeted SR** at 21.6%. Compared with CRADLE, the strongest Lite-100 baseline, SPIKE improves success by 5.0 points while reducing tokens from 372.5k to 168.1k and latency from 73.5s to 43.5s. It also improves Budgeted SR by 9.3 points over STARDOJO, the strongest budgeted baseline, showing a better success-cost trade-off rather than a solved benchmark. This matters because Lite-100 rewards sustained progress under fixed interaction budgets, so reducing unnecessary large-model calls can improve both efficiency and budgeted completion.

Figure 4 and Table 3 show that this gain **does not come from uniformly spending more compute** or from one task family: SPIKE stays on the Pareto frontier and has the highest mean success rate across all task families. Combat and Social remain hardest due to moving enemies and long inter-house routes; Appendix Sec. G details these failures. The GPT-5.4/Gemini-3.1-pro rows are controlled auxiliary backend runs rather than isolated model-quality comparisons (Appendix Sec. A). This consistency makes the ablations focus on where the gains arise, rather than whether they are task-specific.

Table 3 Task-type success breakdown on Lite-100. Each column reports the success rate for one task family. Entries report mean $\pm$ standard deviation over three repeated runs.

Model	Farming $\uparrow$	Crafting $\uparrow$	Exploration $\uparrow$	Combat $\uparrow$	Social $\uparrow$	Total $\uparrow$
ReAct-like [34]	14.3 $\pm$ 0.0%	9.5 $\pm$ 4.1%	4.8 $\pm$ 2.1%	0.0 $\pm$ 0.0%	4.0 $\pm$ 0.0%	6.7 $\pm$ 0.6%
Reflexion-like [22]	17.5 $\pm$ 2.7%	11.9 $\pm$ 4.1%	4.8 $\pm$ 2.1%	2.8 $\pm$ 2.8%	6.7 $\pm$ 2.3%	8.7 $\pm$ 0.6%
Voyager-like [29]	14.3 $\pm$ 0.0%	9.5 $\pm$ 4.1%	6.0 $\pm$ 2.1%	2.8 $\pm$ 2.8%	4.0 $\pm$ 0.0%	7.3 $\pm$ 0.6%
CRADLE [25]	25.4 $\pm$ 2.7%	16.7 $\pm$ 4.1%	10.7 $\pm$ 3.6%	2.8 $\pm$ 2.8%	8.0 $\pm$ 4.0%	13.0 $\pm$ 1.0%
STARDOJO [26]	20.6 $\pm$ 2.7%	19.0 $\pm$ 4.1%	9.5 $\pm$ 2.1%	5.6 $\pm$ 4.8%	8.0 $\pm$ 0.0%	12.3 $\pm$ 0.6%
SPIKE (Ours)	34.9$\pm$2.7%	23.8$\pm$4.1%	13.1$\pm$2.1%	8.3$\pm$8.3%	10.7$\pm$2.3%	18.0$\pm$1.7%

4.4 Ablation Study

The ablation study separates controller allocation from memory design. In Table 5, *Single Strategic Controller* variants retain deliberate reasoning but pay high cost, reaching at best 16.3% SR with 305.4k tokens per task. *Single Reactive Controller* variants are cheaper but reach only 10.3% SR even with Hierarchical Memory. The

Table 4 Event Trigger threshold sensitivity on Lite-100.

Setting	T	τ_v	Stall trigger	Lite-100 SR	Budgeted SR	Tokens / Task (k)	Strategic calls / step
More strategic	3	0.30	$z_t \geq 3$ or $(r_t \geq 4 \wedge z_t \geq 2)$	17.0%	20.4%	163.3	2.355
Default	4	0.35	$z_t \geq 4$ or $(r_t \geq 5 \wedge z_t \geq 2)$	18.0%	21.6%	168.1	2.273
More reactive	6	0.40	$z_t \geq 5$ or $(r_t \geq 5 \wedge z_t \geq 3)$	15.4%	19.4%	172.5	2.189
No periodic refresh	∞	0.35	$z_t \geq 4$ or $(r_t \geq 5 \wedge z_t \geq 2)$	11.6%	13.8%	173.8	2.024

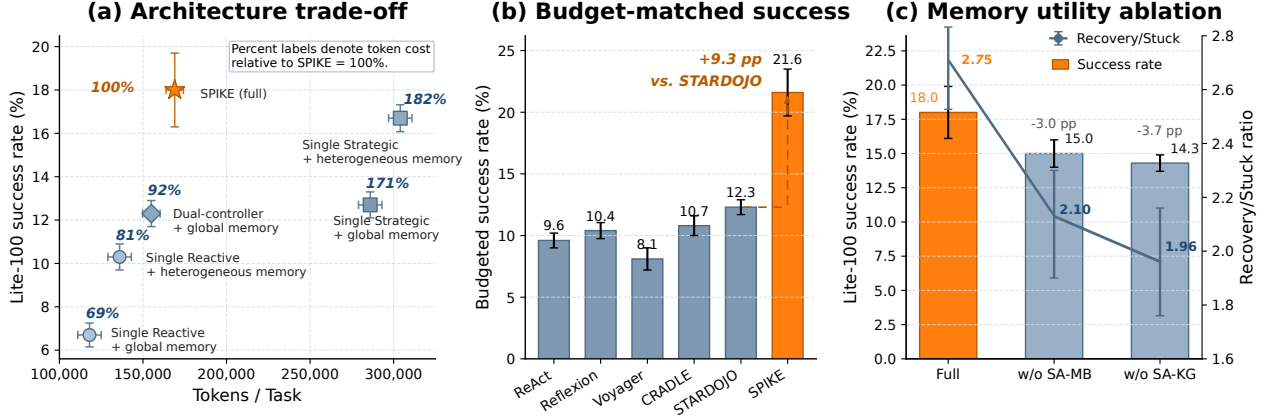


Figure 5 Mechanistic analysis of SPIKE. **(a)** compares controller variants by SR and tokens, showing dual control improves success at lower cost. **(b)** reports Budgeted SR under difficulty-dependent LLM-call budgets, testing whether event triggering delays budget exhaustion. **(c)** removes the two memory tracks and reports success and Recovery/Stuck Ratio.

full SPIKE gains from assigning deliberate reasoning to discontinuities and cheap execution to stable local progress. This pattern indicates that the benefit is not merely having two controllers available, but routing control to the one whose latency and reasoning depth match the current segment.

The component removals show that this is not just a two-controller ensemble. Removing the *Event Trigger* or *reactive override* drops SR to 15.7%, so both escalation timing and local correction matter. Memory ablations show the other half of the mechanism: replacing Hierarchical Memory with *Global Memory* lowers SR from 18.0% to 12.3%, while removing *SA-MB* or *SA-KG* weakens recent-experience reuse or structured evidence. The gain therefore comes from coupling Event Trigger decisions with controller-specific memory, not from adding more prompt context.

Table 4 tests Event Trigger sensitivity. The default setting gives the best success–cost balance; earlier escalation adds Strategic Controller calls but lowers SR, while delayed escalation and removing periodic refresh cause larger drops. Appendix Sec. E gives threshold details.

Table 5 Framework-level and component ablations of SPIKE on Lite-100. “ Δ SR” is the absolute change in Lite-100 SR in percentage points relative to the full SPIKE. Entries report mean $\pm$ standard deviation over three repeated runs.

Variant	Lite-100 SR	Tokens / Task (k)	Latency / Step	Recovery/Stuck Ratio	Δ SR
<i>Framework-level ladder</i>					
SPIKE (Full)	18.0$\pm$1.7%	168.1 $\pm$ 5.7	43.5 $\pm$ 4.7	2.75$\pm$0.12	0.0
Single Strategic Controller + Global Memory	12.7 $\pm$ 1.0%	286.8 $\pm$ 7.3	57.8 $\pm$ 5.4	2.18 $\pm$ 0.09	-5.3
Single Strategic Controller + Hierarchical Memory	16.3 $\pm$ 0.6%	305.4 $\pm$ 6.9	61.1 $\pm$ 5.0	2.32 $\pm$ 0.14	-1.9
Single Reactive Controller + Global Memory	6.7 $\pm$ 0.6%	116.8$\pm$7.3	28.8$\pm$3.4	1.84 $\pm$ 0.05	-11.3
Single Reactive Controller + Hierarchical Memory	10.3 $\pm$ 0.6%	135.4 $\pm$ 6.9	33.1 $\pm$ 3.9	2.05 $\pm$ 0.08	-7.7
Dual Controller + Global Memory	12.3 $\pm$ 1.0%	154.5 $\pm$ 4.9	39.8 $\pm$ 4.1	1.98 $\pm$ 0.12	-5.7
<i>Component removals</i>					
w/o Event Trigger	15.7 $\pm$ 0.6%	198.5 $\pm$ 8.3	39.4 $\pm$ 5.8	2.01 $\pm$ 0.12	-2.3
w/o reactive override	15.7 $\pm$ 0.6%	184.7 $\pm$ 6.5	49.4 $\pm$ 4.8	1.97 $\pm$ 0.08	-2.3
w/o SA-MB	15.0 $\pm$ 1.0%	160.3 $\pm$ 6.1	42.1 $\pm$ 4.6	2.10 $\pm$ 0.12	-3.0
w/o SA-KG	14.3 $\pm$ 0.6%	158.9 $\pm$ 5.2	40.8 $\pm$ 4.4	1.96 $\pm$ 0.12	-3.7

Table 6 Raw stuck and recovery statistics on Lite-100. “Stuck Events” counts move-blocked and empty-action events from the execution logs. “Recovered Events” counts stuck events after which the agent returns to a normal task-execution state within the next three environment steps. Raw fields are populated from the same runs used for Table 2; auxiliary model rows follow Appendix Sec. A.

Method	Total Steps	Stuck Events	Recovered Events	Stuck Rate ↓	Recovery Rate ↑	Recovery/Stuck Ratio ↑
ReAct-like [34]	5875±31	2115±16	1227±9	36.0%	58.0%	1.61±0.11
Reflexion-like [22]	5820±22	1804±13	1129±8	31.0%	62.6%	2.02±0.14
Voyager-like [29]	5842±46	1957±22	1135±10	33.5%	58.0%	1.73±0.15
CRADLE [25]	5445±64	1497±27	1026±15	27.5%	68.5%	2.49±0.18
STARDOJO [26]	5536±40	1550±15	1029±8	28.0%	66.4%	2.37±0.18
SPIKE (Ours)	5195±43	1434±22	1089±12	27.6%	75.9%	2.75±0.12
SPIKE (GPT-5.4)	4630±25	912±11	629±6	19.7%	69.0%	3.50±0.29
SPIKE (Gemini-3.1-pro)	5215±38	1413±20	1022±14	27.1%	72.3%	2.66±0.19

Figure 5 links success and cost gains to controller allocation: (a) shows that SPIKE avoids both low-success purely reactive execution and high-cost always-strategic execution. (b) shows that the Event Trigger reserves Strategic Controller calls for refresh, stuck, and recovery events while routine steps stay reactive. (c) connects recovery to memory: SA-MB supports fast local reuse, while SA-KG supplies structured evidence for checking and re-planning.



Figure 6 Qualitative goal-reaching comparison. SPIKE escalates and returns to low-cost local execution once the plan is stable.

Figure 6 illustrates the same mechanism during execution. ReAct-like control keeps issuing low-cost but unproductive actions after the visual state changes, while an always-strategic controller recovers but continues expensive reasoning after the route pattern is understood. SPIKE separates recovery from routine execution: the Event Trigger escalates, the Strategic Controller revises the plan with current observation and memory, and the Reactive Controller handles local clearing.

4.5 Cross-Benchmark Generalization

We further evaluate transfer on Red Dead Redemption 2 (RDR2), which changes the visual domain, action space, interaction pace, and task language relative to Lite-100. This setting is a stress test for event-triggered deliberation rather than a benchmark-specific tuning exercise: the tasks include navigation, following, search, protection, and combat-like objectives, while photorealistic views and moving characters produce different visual-change and failure statistics. The experiment follows the CRADLE benchmark setup, using the same environment configuration, task interface, action space, and evaluation protocol for all methods. The evaluation contains 13 selected long-horizon tasks, each run three times; Appendix Table A1 lists the full task set. We keep the same adaptive dual controller framework, Event Trigger signal

Table 7 Cross-game generalization on Red Dead Redemption 2 (RDR2). SR is reported as mean ± standard deviation over three repeated runs on 13 tasks.

Method	SR	Tokens / Step	Latency / Step (s)
ReAct-like [34]	15.4±2.6%	2.1k±0.2k	28.2±2.7
Reflexion-like [22]	17.9±5.1%	3.5k±0.2k	41.4±3.6
Voyager-like [29]	7.7±2.6%	4.8k±0.3k	72.4±3.9
CRADLE [25]	43.6±7.7%	6.6k±0.8k	102.2±8.4
STARDOJO [26]	33.3±5.1%	5.7k±0.5k	67.5±4.1
SPIKE (Ours)	56.4±7.7%	3.4k±0.7k	54.1±4.6

design, and reporting setup, replacing only the game adapter and task set.

Table 7 shows that SPIKE reaches 56.4% success (22/39), compared with 43.6% for CRADLE and 33.3% for the STARDOJO baseline. This is a 12.8 percentage point gain over CRADLE, with 48.5% fewer tokens per step and 47.1% lower latency. The result suggests that the benefit is not limited to Lite-100’s visual style: allocating high-cost reasoning to event boundaries and supporting those calls with Hierarchical Memory also transfers to a more visually dynamic game.

5 Conclusion

This paper shows that long-horizon game agents benefit from coupling structured control with structured memory. **SPIKE** uses adaptive dual control to reserve expensive strategic reasoning for planning and recovery, while leaving routine execution to a lightweight reactive controller. Together with Hierarchical Memory, this design improves success, cost, and recovery on Lite-100 and also transfers to RDR2 under different visual-domain and action-interface assumptions. Ablations further show that **event triggering**, **reactive override**, and **controller-specific memory** are complementary rather than interchangeable parts of the framework.

Limitations and future work. SPIKE can still misroute control when progress is visually subtle, failure signals are noisy, when a game state changes without large screen differences, or when retrieved memory becomes stale. Its evidence is strongest on Lite-100 and selected RDR2 tasks, so broader game styles, lower-level interfaces, and longer deployments remain important future tests. The current system uses visual observations and action history, while audio cues and richer multimodal feedback are not modeled. Although SPIKE reduces unnecessary large-model calls, recovery and replanning still depend on explicit model invocations, leaving cost and latency as practical constraints for deployment. Future work should learn event-triggering and memory-writing policies from interaction data, add uncertainty-aware retrieval, incorporate additional task signals, and study whether training or demonstrations can improve the lightweight controller without sacrificing adaptability.

References

- [1] Maria Abi Raad, Arun Ahuja, Catarina Barros, Frederic Besse, Andrew Bolt, Adrian Bolton, Bethanie Brownfield, Gavin Buttimore, Max Cant, Sarah Chakera, et al. Scaling instructable agents across many simulated worlds. *arXiv preprint arXiv:2404.10179*, 2024. 3
- [2] Michael Ahn, Anthony Brohan, Noah Brown, et al. Do as I can, not as I say: Grounding language in robotic affordances. *arXiv preprint arXiv:2204.01691*, 2022. 2, 3
- [3] Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. Mem0: Building production-ready AI agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*, 2025. 3
- [4] Xiang Deng, Yu Gu, Boyuan Zheng, et al. Mind2Web: Towards a generalist agent for the web. *arXiv preprint arXiv:2306.06070*, 2023. 1, 3
- [5] Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt, Dasha Metropolitan, Robert Osazuwa Ness, and Jonathan Larson. From local to global: A Graph RAG approach to query-focused summarization. *arXiv preprint arXiv:2404.16130*, 2024. 4
- [6] Linxi Fan, Guanzhi Wang, Yunfan Jiang, Ajay Mandlekar, Yuncong Yang, Haoyi Zhu, Andrew Tang, De-An Huang, Yuke Zhu, and Anima Anandkumar. MineDojo: Building open-ended embodied agents with internet-scale knowledge. In *Advances in Neural Information Processing Systems*, 2022. 3
- [7] Shibo Hao, Yi Gu, Haodi Ma, Joshua Jiahua Hong, Zhen Wang, Daisy Zhe Wang, and Zhiting Hu. Reasoning with language model is planning with world model. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 2023. 3
- [8] Mengkang Hu, Tianxing Chen, Qiguang Chen, Yao Mu, Wenqi Shao, and Ping Luo. HiAgent: Hierarchical working memory management for solving long-horizon agent tasks with large language model. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics*, pages 32779–32798, 2025. doi: 10.18653/v1/2025.acl-long.1575. 3

- [9] Wenlong Huang, Fei Xia, Ted Xiao, Harris Chan, Jacky Liang, Pete Florence, Andy Zeng, Jonathan Tompson, Igor Mordatch, Yevgen Chebotar, Pierre Sermanet, Noah Brown, Tomas Jackson, Linda Luu, Sergey Levine, Karol Hausman, and Brian Ichter. Inner monologue: Embodied reasoning through planning with language models. *arXiv preprint arXiv:2207.05608*, 2022. 2, 3
- [10] Bernal Jimenez Gutierrez, Yiheng Shu, Yu Gu, Michihiro Yasunaga, and Yu Su. HippoRAG: Neurobiologically inspired long-term memory for large language models. In *Advances in Neural Information Processing Systems*, 2024. 4
- [11] Daniel Kahneman. *Thinking, Fast and Slow*. Farrar, Straus and Giroux, 2011. 5
- [12] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Kuttler, Mike Lewis, Wen-tau Yih, Tim Rocktaschel, et al. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, 2020. 4
- [13] Wenhao Li, Wenwu Li, Chuyun Shen, Junjie Sheng, Zixiao Huang, Di Wu, Yun Hua, Wei Yin, Xiangfeng Wang, Hongyuan Zha, and Bo Jin. TextAtari: 100K frames game playing with language agents. *arXiv preprint arXiv:2506.04098*, 2025. 3
- [14] Zaijing Li, Yuquan Xie, Rui Shao, Gongwei Chen, Weili Guan, Dongmei Jiang, Yaowei Wang, and Liqiang Nie. Optimus-3: Dual-router aligned mixture-of-experts agent with dual-granularity reasoning-aware policy optimization. *arXiv preprint arXiv:2506.10357*, 2025. 2
- [15] Bill Yuchen Lin, Yicheng Fu, Karina Yang, Faeze Brahman, Shiyu Huang, Chandra Bhagavatula, Prithviraj Ammanabrolu, Yejin Choi, and Xiang Ren. SwiftSage: A generative agent with fast and slow thinking for complex interactive tasks. In *Advances in Neural Information Processing Systems*, 2023. 2, 3
- [16] Xiao Liu, Hao Yu, Hanchen Zhang, Yifan Xu, Xuanyu Lei, Hanyu Lai, Yu Gu, Hangliang Ding, Kaiwen Men, Kejuan Yang, Shudan Zhang, Xiang Deng, Aohan Zeng, Zhengxiao Du, Chenhui Zhang, Sheng Shen, Tianjun Zhang, Yu Su, Huan Sun, Minlie Huang, Yuxiao Dong, and Jie Tang. AgentBench: Evaluating LLMs as agents. In *International Conference on Learning Representations*, 2024. 1, 3
- [17] Loic Magne, Anas Awadalla, Guanzhi Wang, Yinzen Xu, Joshua Belofsky, Fengyuan Hu, Joohwan Kim, Ludwig Schmidt, Georgia Gkioxari, Jan Kautz, Yisong Yue, Yejin Choi, Yuke Zhu, and Linxi Fan. NitroGen: An open foundation model for generalist gaming agents. *arXiv preprint arXiv:2601.02427*, 2026. 1, 3
- [18] Mingyu Ouyang, Siyuan Hu, Kevin Qinghong Lin, Hwee Tou Ng, and Mike Zheng Shou. GameWorld: Towards standardized and verifiable evaluation of multimodal game agents. *arXiv preprint arXiv:2604.07429*, 2026. 3
- [19] Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. MemGPT: Towards LLMs as operating systems. *arXiv preprint arXiv:2310.08560*, 2023. 2, 3
- [20] Joon Sung Park, Joseph C. O'Brien, Carrie J. Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. Generative agents: Interactive simulacra of human behavior. In *ACM Symposium on User Interface Software and Technology*, 2023. 2, 3
- [21] Archiki Prasad, Alexander Koller, Mareike Hartmann, Peter Clark, Ashish Sabharwal, Mohit Bansal, and Tushar Khot. ADaPT: As-needed decomposition and planning with language models. In *Findings of ACL: NAACL 2024*, pages 4226–4252. Association for Computational Linguistics, 2024. doi: 10.18653/v1/2024.findings-naacl.264. URL <https://aclanthology.org/2024.findings-naacl.264/>. 2, 3
- [22] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik R. Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. In *Advances in Neural Information Processing Systems*, 2023. 3, 7, 8, 10
- [23] Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Cote, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. ALFWorld: Aligning text and embodied environments for interactive learning. In *International Conference on Learning Representations*, 2021. 3
- [24] Haotian Sun, Yuchen Zhuang, Ling kai Kong, Bo Dai, and Chao Zhang. AdaPlanner: Adaptive planning from feedback with language models. *arXiv preprint arXiv:2305.16653*, 2023. 3
- [25] Weihao Tan, Wentao Zhang, Xinrun Xu, Haochong Xia, et al. CRADLE: Empowering foundation agents towards general computer control. *arXiv preprint arXiv:2403.03186*, 2024. 1, 2, 3, 7, 8, 10

- [26] Weihao Tan, Changjiu Jiang, Yu Duan, Mingcong Lei, Jiageng Li, Yitian Hong, Xinrun Wang, and Bo An. StarDojo: Benchmarking open-ended behaviors of agentic multimodal LLMs in production-living simulations with Stardew Valley. *arXiv preprint arXiv:2507.07445*, 2025. 1, 3, 7, 8, 10
- [27] Weihao Tan, Xiangyang Li, Yunhao Fang, Heyuan Yao, Shi Yan, Hao Luo, Tenglong Ao, Huihui Li, Hongbin Ren, Bairen Yi, Yujia Qin, Bo An, Libin Liu, and Guang Shi. Lumine: An open recipe for building generalist agents in 3D open worlds. *arXiv preprint arXiv:2511.08892*, 2025. 3
- [28] Chenwei Tang, Lin Long, Xinyu Liu, Jingyu Xing, Zizhou Wang, Joey Tianyi Zhou, Jiawei Du, Liangli Zhen, and Jiancheng Lv. SAG-Agent: Enabling long-horizon reasoning in strategy games via dynamic knowledge graphs. *arXiv preprint arXiv:2510.15259*, 2025. Earlier versions circulated as “Experience-Driven Exploration for Efficient API-Free AI Agents”. 4, 7
- [29] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *Transactions on Machine Learning Research*, 2024. 1, 3, 7, 8, 10
- [30] Zihao Wang, Shaofei Cai, Guanzhou Chen, Anji Liu, Xiaojian Ma, and Yitao Liang. Describe, explain, plan and select: Interactive planning with large language models enables open-world multi-task agents. In *Advances in Neural Information Processing Systems*, 2023. 3
- [31] Zihao Wang, Shaofei Cai, Anji Liu, Yonggang Jin, Jinbing Hou, Bowei Zhang, Haowei Lin, Zhaofeng He, Zilong Zheng, Yaodong Yang, Xiaojian Ma, and Yitao Liang. JARVIS-1: Open-world multi-task agents with memory-augmented multimodal language models. *arXiv preprint arXiv:2311.05997*, 2023. 3
- [32] Zhe Wu, Yongxin Kang, Dabin Sheng, Junliang Xing, Guokun Wu, Derek Yuen, Donglin Mo, Yuheng Jing, Kai Li, Weilin Luo, Kun Shao, and Yuanchun Shi. ScenDroid: A scenario-level benchmark for long-horizon, time-evolving GUI agents, 2026. URL <https://openreview.net/forum?id=hBTsLjjw48>. OpenReview LLA 2026 poster. 3
- [33] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. In *Advances in Neural Information Processing Systems*, 2023. 3
- [34] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations*, 2023. 2, 3, 7, 8, 10
- [35] Zheyuan Zhang, Zehao Wen, Alvin Zhang, Andrew Wang, Jianwen Xie, Daniel Khashabi, and Tianmin Shu. AgentOdyssey: Open-ended long-horizon text game generation for test-time continual learning agents, 2026. URL <https://agentodyssey.github.io/>. Project page. 4
- [36] Xiangxi Zheng, Linjie Li, Zhengyuan Yang, Ping Yu, Alex Jinpeng Wang, Rui Yan, Yuan Yao, and Lijuan Wang. V-MAGE: A game evaluation framework for assessing vision-centric capabilities in multimodal large language models. *arXiv preprint arXiv:2504.06148*, 2025. 3
- [37] Andy Zhou, Kai Yan, Michal Shlapentokh-Rothman, Haohan Wang, and Yu-Xiong Wang. Language agent tree search unifies reasoning, acting, and planning in language models. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 62138–62160, 2024. 3
- [38] Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, et al. WebArena: A realistic web environment for building autonomous agents. *arXiv preprint arXiv:2307.13854*, 2023. 1, 3

Appendix

Contents

A	Metric and Reproducibility Details in STARDOJO	15
A.1	Step-budget SR versus Budgeted SR	15
A.2	Compute Resources	15
A.3	Additional Reproducibility Settings	15
A.4	Auxiliary Model Rows	16
B	Baseline and Protocol Details	16
B.1	Baseline Adaptation	16
B.2	LLM-call Accounting	17
B.3	Recovery-event Counting	17
B.4	RDR2 Protocol and Task List	17
B.5	Demo Visualizations	17
C	Controller Prompt Skeletons	19
C.1	Condensed Prompt Skeletons	20
C.2	Concrete Prompt Excerpts	20
D	Hyperparameter Summary	21
D.1	Hyperparameter Table	21
E	Event Trigger Implementation Details	21
E.1	Signal Definitions	22
E.2	Component-ablation Interpretation	22
F	Hierarchical Memory Implementation Details	23
F.1	Memory Ranking and Fusion	23
F.2	Assets and Licenses	23
G	Additional Limitations	24
G.1	Task-family Disparities	24
G.2	Representative Combat Failure Case	24
H	Responsible Use and LLM Disclosure	24
H.1	Ethics Statement	24
H.2	Reproducibility Statement	25
H.3	Broader Social Impact	25
H.4	LLM Disclosure	25

A Metric and Reproducibility Details in STARDOJO

For reproducibility, this appendix fixes the task split, evaluation budgets, model backend, LLM-call accounting rule, visual encoder access, and the run-level logging needed to reconstruct each reported metric. All quantitative results in the main paper report mean and standard deviation over three repeated runs. Both Lite-100 SR and Budgeted SR are evaluated on the STARDOJO Lite-100 benchmark split, which contains 100 tasks covering farming, crafting, exploration, combat, and social interaction, with a difficulty split of 56 easy, 23 medium, and 21 hard tasks. Lite-100 SR is the original STARDOJO success rate under the benchmark step caps. Budgeted SR keeps the same tasks and difficulty split, but replaces the step cap with the equivalent large-model call budget derived from the benchmark-native STARDOJO protocol.

Specifically, the STARDOJO baseline invokes the large model four times per environment step, and Lite-100 uses step caps of 30, 50, and 150 for easy, medium, and hard tasks. Multiplying these step caps by four gives the Budgeted SR call budgets of 120, 200, and 600 calls for the three difficulty levels. One LLM call means one invocation of the Qwen3.5-397B-A17B backend that returns one model completion, whether it is made by the Strategic Controller or the Reactive Controller. Calls used for reflection, reasoning, action proposal, reactive action selection, memory querying, retrieval-query summarization, retry, or replanning are all counted separately. Visual encoding, deterministic vector or index lookup, Event Trigger rules, and environment stepping are not counted as LLM calls because they do not return a model completion. Token usage is reported separately as tokens per task.

Unless otherwise stated, both controllers in SPIKE use the same base model, Qwen3.5-397B-A17B. The Strategic Controller uses a careful long-context configuration, whereas the Reactive Controller uses a token-constrained direct-action configuration. All compared agents use the same LLM backend, Qwen3.5-397B-A17B, and share the same environment interface, action space, prompt upper bound, and decoding settings. The same frozen visual encoder is available to methods that include a visual change or visual retrieval component; methods without such a component do not call it. Because Budgeted SR changes the stopping rule from a fixed environment step cap to a fixed large-model call budget, methods that use fewer large-model calls per step can execute more environment actions before exhausting the budget. Budgeted SR can therefore be either higher or lower than standard Lite-100 SR, and should be read as an efficiency metric under equal LLM call budgets rather than a stricter subset of the standard evaluation.

Step-budget SR versus Budgeted SR. The two SR metrics answer different questions. Lite-100 SR follows the original STARDOJO step budget and measures completion under fixed interaction opportunities, but it does not penalize agents that spend more LLM calls inside each step and can favor high-call-per-step methods. Budgeted SR fixes the large-model call budget instead, making LLM-call efficiency visible, but it has the opposite bias: low-call methods may receive more environment steps before their budget is exhausted. We therefore report both metrics together with token usage and latency. A baseline’s lower Budgeted SR can reflect early exhaustion of the artificial call budget rather than an inherent inability to solve the task.

Compute resources. The shared Qwen3.5-397B-A17B backend is served on two eight-GPU MI308X nodes, while CPU workers handle environment execution, logging, memory indexing, and result aggregation. Local environment execution, artifact checks, and aggregation were run on a workstation with 64 GB system memory and an NVIDIA RTX 4060 Ti GPU with 16 GB memory. Experiments are run with eight concurrent rollouts. Each reported number is calculated from three repeated Lite-100 runs. We report end-to-end wall-clock latency per step in the main tables because this metric includes event triggering, memory retrieval, model inference, action-return overhead, and possible communication delay between environment workers and the model-serving nodes. Such transmission delay may affect the measured latency, although all methods use the same serving and concurrency setup. The final reported runs will be accompanied by the corresponding worker configuration, memory budget, and run-time logs.

Additional reproducibility settings. The Lite-100 runner uses eight parallel workers by default and sets `FIXED_SEED=true` and `PYTHONHASHSEED=42`; the framework default fixed seed is 42. Unless overridden by an environment variable, the default decoding temperature is 1.0; fixed-seed Strategic Controller runs use temperature 0.0, and the Reactive Controller’s direct-action request uses temperature 0.1 with thinking

disabled. Stage-specific output limits are 1024 tokens for image or state description, 800 for task inference, 512 for self-reflection, and 2048 for action planning; the Reactive Controller uses a 1024-token maximum. LLM-side image inputs are capped at 960-pixel resolution. The recent-history window is five steps. The local image-change encoder is `local-image-embedding-v1` with 1024 dimensions. The State-Action Memory Bank (SA-MB) quick-path retrieval threshold is 0.85, the execution threshold is 0.92, and the returned SA-MB hint count is one. The State-Action Knowledge Graph (SA-KG) uses BAAI/bge-base-en-v1.5 embeddings with 768 dimensions, ChromaDB storage, a maximum of 10,000 entries, $\text{top-}k = 5$, a similarity threshold of 0.85, and write filtering that requires reflection success with confidence at least 0.7.

The local image-change encoder is a deterministic visual descriptor rather than a pretrained external checkpoint. Each observation is EXIF-normalized, converted to grayscale, resized to 32×32 with bilinear interpolation, flattened to 1024 dimensions, scaled to $[0, 1]$, mean-centered, and L2-normalized before cosine distance is computed. This encoder is used only for visual change detection; it is separate from the SA-KG text embedding model BAAI/bge-base-en-v1.5.

Auxiliary model rows. The GPT-5.4 and Gemini-3.1-pro rows in Table 2 are reported as controlled auxiliary backend runs: they use the same Lite-100 split, call budgets, SPIKE configuration, and evaluation protocol while swapping the large-model backend. Tokens per task still depend on model verbosity, retry behavior, recovery frequency, and Event Trigger calls, so the gap between GPT-5.4 and Gemini-3.1-pro reflects the full execution trace rather than model quality alone. Their latency is further affected by serving infrastructure: these closed-source backends are accessed through commercial model-serving APIs, whereas Qwen3.5-397B-A17B is self-hosted on our MI308X nodes, so faster calls can partly reflect provider-side serving optimization.

B Baseline and Protocol Details

This section spells out the shared evaluation interface used for all compared agents. The goal is to isolate controller allocation and memory design rather than differences in backend access, action parsing, retry policy, or hidden environment state. All methods therefore receive the same task text, screenshot or image-derived observations, executable action schema, recent execution feedback, and bounded history summary. Method-specific additions such as reflection, memory, or skill reuse are allowed only when they are part of that method’s intended decision pattern, and they are built from the method’s own rollout history.

Baseline adaptation. All baselines are evaluated through the same STARDOJO runner, action space, task success evaluator, maximum prompt budget, decoding settings, and Qwen3.5-397B-A17B backend used by SPIKE. We keep each baseline’s core decision pattern while standardizing only the input/output interface needed for Lite-100 execution. Their prompts are filled from the same runtime fields whenever applicable: task description, current observation or image-derived facts, executable action schema, skill library, previous action and execution feedback, and the current history summary. The current task, observation, action schema, and latest feedback are kept as required fields; older history and method-specific memory fields are bounded by the same recent-history window of five steps and the same maximum prompt budget.

ReAct-like keeps a reason-act loop over the shared action API and uses only the rolling interaction history. Reflexion-like adds verbal failure reflection and feeds the reflection back into later prompts from its own rollout history. Voyager-like keeps a memory/skill reuse interface, but stores only skills or summaries produced in the STARDOJO runs and executes the same primitive actions as other methods. CRADLE keeps its perception-planning-execution workflow under the shared backend and environment interface. The benchmark-native STARDOJO row uses the original four-call-per-step protocol from STARDOJO under the same runner and evaluation script. LLM transport retries, short-response retries, and parser or format retries use the shared runner configuration; any repeated large-model invocation is counted by the Budgeted SR call counter. Method-specific memories or reflections are isolated and are built only from each method’s own rollout history.

The shared runner validates every proposed action against the same executable schema before dispatch. Invalid or unparsable outputs trigger the same retry path across methods and are still counted as large-model completions when they require another model request. Episode termination is also shared: a rollout

ends when the benchmark success evaluator accepts the task, the task reaches its configured step or call budget, or the runner encounters a terminal environment failure. These rules prevent a baseline from gaining extra interaction time through parser differences or uncounted recovery calls.

LLM-call accounting. Budgeted SR counts every large-model completion request made by an agent, including first-pass calls, transport retries, short-response retries, parser or format retries, reflection calls, task-reasoning calls, action-proposal calls, reactive action-selection calls, memory-query calls, retrieval-query summarization calls, retry calls, and replanning calls. Any LLM completion invoked for summarization, reflection, reasoning, memory querying, or action selection is counted. Visual encoding, deterministic vector or index lookup, Event Trigger rules, and environment stepping remain outside the LLM-call counter because they do not return a model completion.

Recovery-event counting. Let N_{step} be the number of environment steps, N_{stuck} the number of move-blocked or empty-action events recorded in the execution log, and N_{rec} the number of such events followed by a return to normal task execution within the next three environment steps. We report

$$\text{StuckRate} = N_{\text{stuck}}/N_{\text{step}}, \quad \text{RecoveryRate} = N_{\text{rec}}/\max(1, N_{\text{stuck}}), \quad (\text{A1})$$

and the Recovery/Stuck Ratio is $\text{RecoveryRate}/\max(\text{StuckRate}, \epsilon)$ with a small ϵ only to avoid division by zero. Table 6 reports the raw fields behind this metric. Rates and ratios are computed for each run and then averaged across the three repeated runs; the reported uncertainty is the sample standard deviation across those runs. To keep the raw event table internally consistent with the reported mean rates and mean total steps, event-count means are rounded from the corresponding mean rate and mean step values, while the event-count standard deviations are empirical across runs. The ratio is intended to diagnose recovery behavior conditional on stuck events. If $N_{\text{stuck}} = 0$, the run has no recovery opportunity and should be reported as “No stuck events” rather than interpreted as a zero Recovery/Stuck Ratio.

RDR2 protocol. The RDR2 generalization experiment follows the CRADLE benchmark setup: all methods use the same environment configuration, task interface, action space, and success-evaluation protocol. The experiment uses 13 tasks, each run three times, for 39 total rollouts. We keep the same controller allocation and Event Trigger signal design as in the Lite-100 evaluation while replacing only the game environment adapter and task set. For each repeated run, we compute the aggregate success rate over the 13 tasks, then report the mean and sample standard deviation across the three repeated runs; the standard deviation is not computed over the pooled 39 task-level rollouts.

RDR2 task list. Table A1 lists the 13 tasks used in the RDR2 generalization experiment. Each task is run three times, yielding 39 total rollouts.

Table A1 RDR2 task list for cross-benchmark generalization.

#	Task	#	Task
1	Follow Dutch	8	Lead Horse
2	Go to Town	9	Follow Javier
3	Hitch Horse	10	Search John
4	Protect Dutch	11	Keep Wolves Away
5	Search for Supplies	12	Kill Wolves
6	Go to Barn	13	Return to Camp
7	Search Barn		

Demo visualizations. Figures A1 and A2 provide qualitative examples from the STARDOJO and RDR2 settings, respectively. Figure A2 shows transfer to a visually different 3D setting, where search is decomposed into room entry, object inspection, and local interaction rather than relying on STARDOJO-specific screen patterns. Figure A1 shows the complementary STARDOJO behavior: SPIKE keeps progress stable on a tool-use task while reserving Strategic Controller calls for stalls or scene changes.

Current Task: Clear 10 weeds with the scythe

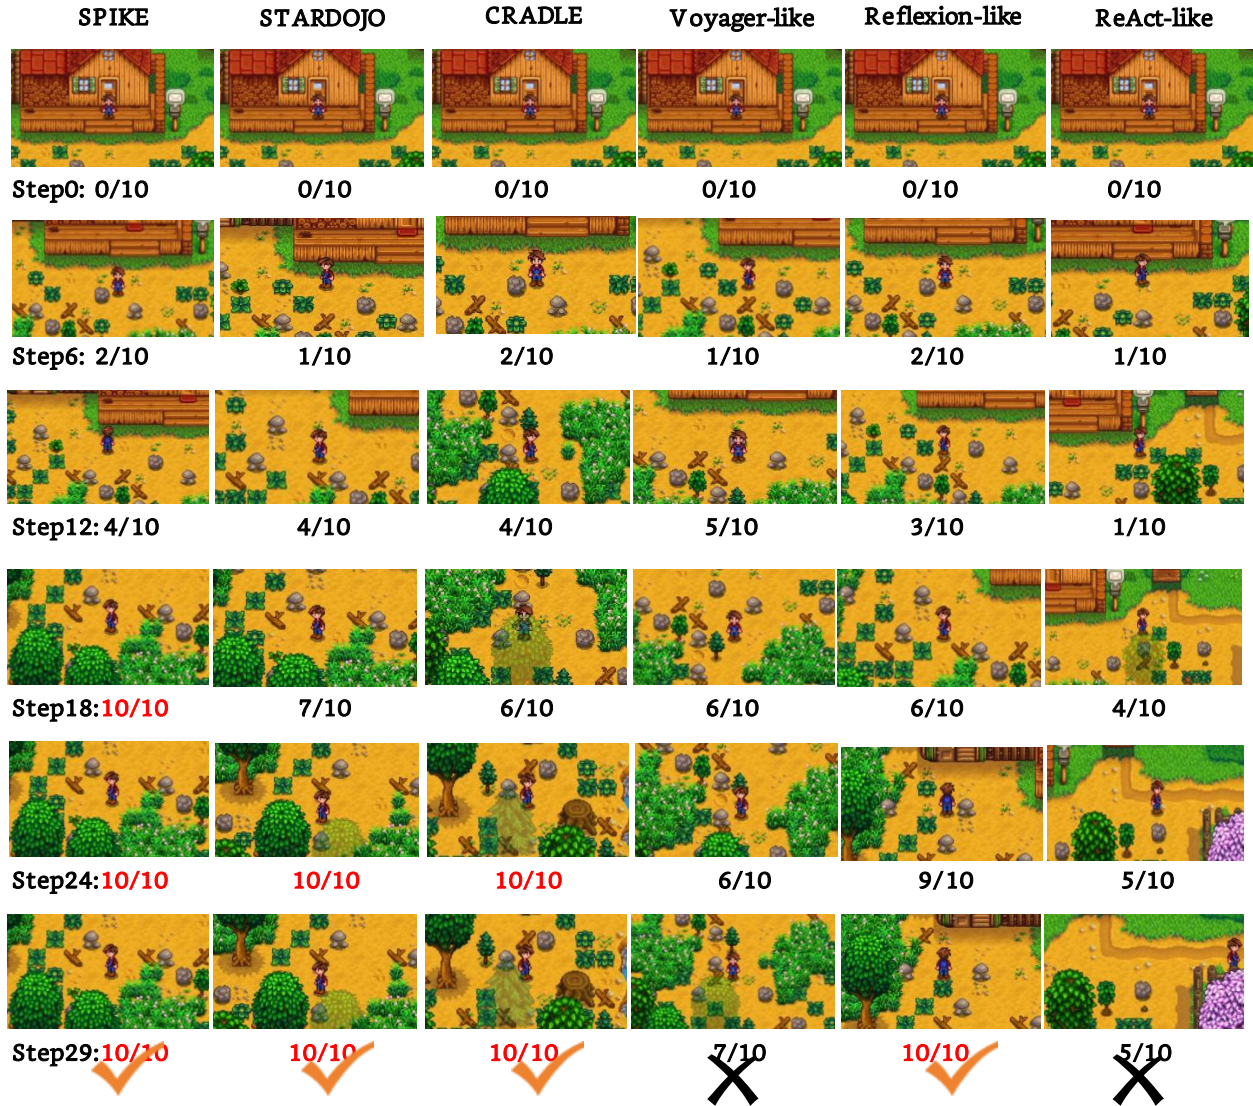


Figure A1 STARDOJO demonstration example. The task is to clear 10 weeds with the scythe. The annotated progress counters show how each agent advances over time; SPIKE reaches the target earlier and maintains stable progress under the same visual-control interface.

Current Task: Search for Supplies



Enter the door and observe the surroundings.



Search the cabinet on the left after entering the door.



Keep moving to observe the surroundings and search the closet.



Search the nightstand for supplies.

Figure A2 RDR2 demonstration example. The task is to search for supplies. The annotations mark the high-level plan sequence: enter the building, inspect the room, search the cabinet and closet, and check the nightstand, illustrating transfer to a visually different navigation and search setting.

C Controller Prompt Skeletons

Table A2 summarizes the prompt skeletons used by the main controller stages; task-specific templates use the same fields with domain-specific constraints such as shopping, cultivation, combat, or navigation. The table is a condensed excerpt rather than a full prompt dump: runtime fields such as observations, SA-MB hints, SA-KG evidence, controller state, and output schemas are filled by the runner, and the complete templates will be released with the implementation.

Table A2 Condensed prompt skeletons for the controller stages.

Stage	Main inputs	Required output
Information collection	Screenshot description, on-screen text, UI state, item status, location, dialogue, and environment facts.	Categorized state summary used by both controllers.
Self Reflection	Current task/subtask, previous action and reasoning, current and previous toolbar state, recent history, visual context, and environment facts.	Action-effect judgment, likely failure cause, next-step suggestion, and subtask/task completion status.
Strategic Controller	Task, subtask, acquisition target or route hint, game/UI state, surroundings, blocker summaries, recent feedback, memory evidence, and valid action set.	Short reasoning plus a bounded next-action proposal for the Reactive Controller.
Reactive Controller	Latest Strategic Controller proposal, current observation, SA-MB memory hints, execution feedback, recent action log, and valid action set.	One grounded executable action in the shared action API, or escalation only when no grounded action is available.

Concrete prompt excerpts. The following boxes show shortened excerpts from the actual prompt templates; placeholders are filled at runtime from the current game state, retrieved memory, and execution logs. They are organized to preserve the closed-loop contract used by SPIKE: the Strategic Controller proposes a bounded local intent, the Reactive Controller grounds that intent in the latest observation and may only make local corrections, and Self Reflection converts execution feedback into progress or failure signals for the next Event Trigger decision.

SPIKE Strategic Controller Prompt Template

You are a helpful AI assistant integrated with 'Stardew Valley' on the PC, equipped to handle various tasks in the game. Here is some helpful information to help you make the decision.

Current task: <\$task_description\$>
Current subtask: <\$subtask_description\$>
Current acquisition target item: <\$target_item\$>
Location / time / season / health / energy / money: <\$location\$>, <\$time\$>, <\$season\$>, <\$health\$>, <\$energy\$>, <\$money\$>.
Current position and facing: <\$current_position\$>, <\$facing_direction\$>.
Surroundings, front-tile summary, blocker signature, nearest grounded target, inventory, toolbar, buildings, NPCs, exits, recent feedback, and valid action set are then provided.
Event Trigger state: <\$trigger_reason\$>, <\$zero_progress_streak\$>, <\$repeat_tail\$>, <\$failure_level\$>.
SA-KG evidence for plan checking: <\$retrieved_state_action_graph\$>.
Output format: brief situation assessment; next local subgoal;
candidate actions from the valid action set;
stop condition for returning control to the Event Trigger.

SPIKE Reactive Controller Prompt Template

You are a helpful AI assistant integrated with 'Stardew Valley' on the PC, serving as the execution brain. The planning brain has already suggested an action. Your job is to compare that suggestion with the latest actual game state and choose the single best action to execute right now.

Current task: <\$task_description\$>
Current subtask: <\$subtask_description\$>
Current observation: location / time / season / health / energy / money: <\$location\$>, <\$time\$>, <\$season\$>, <\$health\$>, <\$energy\$>, <\$money\$>.
Position, facing direction, menu state, inventory, selected item, surroundings, front-tile summary, toolbar, and latest visual context: <\$current_position\$>, <\$facing_direction\$>, <\$current_menu\$>, <\$inventory\$>, <\$chosen_item\$>, <\$surroundings\$>, <\$front_tile_summary\$>, <\$toolbar_information\$>, <\$image_introduction\$>.
SA-MB memory hints and recent state summary: <\$history_summary\$>
Execution feedback: <\$action_feedback\$>
Recent execution feedback: <\$recent_execution_feedback\$>
Planning brain's suggested action: <\$suggested_action\$>
Reason: <\$suggested_reason\$>
Execution history in current cycle: <\$execution_log\$>
Valid action set: <\$skill_library\$>
If the suggestion matches current facts, adopt it.
Otherwise choose a better grounded action, but only as a bounded local correction such as facing adjustment, obstacle avoidance, tool reselection, or one-step repositioning.
Do not change the current subgoal. If no grounded local action can advance the subgoal, request escalation instead of inventing a new plan.
Output exactly one executable action or an escalation request.

SPIKE Self Reflection Prompt Template

Assume you are a helpful AI assistant integrated with 'Stardew Valley' on the PC. Your task is to examine the inputs, interpret the in-game context, and determine whether the executed action took effect.

Current task: <\$task_description\$>
 Current subtask: <\$subtask_description\$>
 Last executed action: <\$previous_action\$>
 Previous reasoning: <\$previous_reasoning\$>
 History summary: <\$history_summary\$>
 Before/after observations, toolbar state, selected item, inventory delta, menu state, position/facing change, and execution message: <\$state_transition_summary\$>.

Answer whether the action succeeded.
 Identify the most probable failure cause.
 Suggest the next step.
 Decide whether the subtask or task is completed.
 Return a compact status record: success, progress evidence, failure level,
 and whether the Event Trigger should escalate.

D Hyperparameter Summary

Table A3 Fixed hyperparameters used in the reported experiments.

Component	Parameter	Value
STARDOJO protocol	Easy/medium/hard step caps	30 / 50 / 150
Budgeted SR	Easy/medium/hard LLM-call budgets	120 / 200 / 600
Evaluation	Repeated runs per task	3
Event Trigger	Periodic strategic refresh T	4
Event Trigger	Action-history window W	5
Event Trigger	Visual-change threshold τ_v	0.35
Event Trigger	Zero-progress threshold τ_z	4
Event Trigger	Repetition / repeated-stall thresholds τ_r/τ_{rz}	5 / 2
Event Trigger	Failure threshold τ_ℓ	2
SA-MB	Semantic weights α_C/α_L	0.55 / 0.45
SA-MB	Reward / success weights α_R/α_P	0.15 / 0.10
SA-MB	Reward exponential moving average (EMA) update η	0.3
SA-MB	Recency decay	24 hours
SA-KG	Embedding model	BAAI/bge-base-en-v1.5
SA-KG	Retrieval threshold / top- k τ_{KG}/k_{KG}	0.85 / 5
SA-KG	Graph weights β_C/β_P	0.6 / 0.4
Fusion retrieval	Weights $\lambda_{MB}/\lambda_{KG}$	0.75 / 0.25

E Event Trigger Implementation Details

Event-triggered amortized deliberation algorithm. Algorithm A3 summarizes the online loop used by SPIKE. It is written as a reproducibility skeleton: the concrete threshold values are listed in Table A3, and the signal definitions are expanded below.

Algorithm A1: Event-triggered amortized deliberation in SPIKE
Input: task x , thresholds Θ , SA-MB, SA-KG, budget B
Initialize: proposal $p \leftarrow \emptyset$, history $h_0 \leftarrow \emptyset$
for $t = 1, \dots, H$ **do**

 Observe $o_t = (v_t, u_t, f_t)$ and update history context.

 Compute visual change d_t , stall streak z_t , repetition tail r_t , and failure level ℓ_t .

 Set $g_t \leftarrow \text{EventTrigger}(d_t, z_t, r_t, \ell_t, c_t; \Theta)$.

if $g_t = 1$ **then** retrieve SA-KG/global evidence and update proposal p with the Strategic Controller.

else retrieve local hints from SA-MB.

 Emit a_t with the Reactive Controller using o_t , p , and retrieved hints.

 Execute a_t , receive feedback, and write memory only on success, interpretable recovery, or planner-validated progress.

end for
Figure A3 Reproducibility skeleton for the SPIKE control loop.

The fixed thresholds below are not tuned per task; they instantiate event-boundary detection under the shared STARDOJO interface and are held constant across Lite-100 runs unless explicitly varied in the sensitivity study. Signals instantiate the symbolic thresholds in Eq. 3 with the fixed settings in Table A3. The Event Trigger records the same-action tail length r_t , the zero-progress streak z_t , and the numeric progress $\Delta_t = q_t - q_{t-1}$. In Lite-100, the progress counter uses only shared runner feedback: task or subgoal completion, position or facing change, selected-item change, inventory delta, menu/dialogue transition, and confirmed productive execution. Invalid actions, execution errors, and repeated productive actions without observable state change do not increase q_t and instead contribute to z_t or ℓ_t . These are the same raw feedback fields exposed by the common wrapper to all methods; the derived Event Trigger variables are internal to SPIKE. The Failure Detector assigns ℓ_t from multimodal traces, with structured execution messages used as additional evidence.

For visual change detection, consecutive observations v_{t-1} and v_t are encoded by a frozen visual encoder $\phi(\cdot)$, and the Event Trigger uses cosine distance:

$$d_t = 1 - \frac{\phi(v_t)^\top \phi(v_{t-1})}{\|\phi(v_t)\| \|\phi(v_{t-1})\|}. \quad (\text{A2})$$

If $d_t > \tau_v$, the event is treated as a scene change, such as an unexpected enemy, menu pop-up, or map transition, and control is escalated before locally plausible but globally wrong actions accumulate. Near static visual state plus repetitive actions contributes to stuck detection, but escalation requires weak progress as well as repetition.

The failure levels are defined as follows. $\ell_t = 0$ denotes normal execution. $\ell_t = 1$ denotes an isolated local issue and triggers bounded local retry. $\ell_t = 2$ denotes hard execution errors, invalid actions, or low progress loops and escalates with the recent failure trace as negative evidence. $\ell_t = 3$ denotes repeated hard failures that invalidate the current plan, flush misleading short-term context, and force top-level replanning. These hyperparameters, together with the memory fusion settings, are fixed for all reported Lite-100 experiments and ablations.

Component-ablation interpretation. Table 5 exposes two coupled failure modes. Removing the Event Trigger spreads Strategic Controller calls across routine steps and weakens adaptation at state transitions; removing reactive override leaves local execution errors until the next escalation. The memory removals affect the evidence available at escalation points: SA-MB mainly supports fast reuse of recent interaction fragments, while SA-KG supplies structured state evidence for progress checking and replanning. These patterns support the main-text claim that scheduling and memory design are coupled rather than independent additions.

Threshold sensitivity. Table 4 in the main text tests whether the Event Trigger depends on a single hand-tuned threshold choice. The *More strategic* setting escalates earlier, the *More reactive* setting delays escalation, and *No periodic refresh* removes the periodic refresh trigger while leaving event-driven scene-change, stall, and failure triggers active. The sweep is intended to test the success–cost trend of adaptive allocation rather than to perform exhaustive hyperparameter search. The action-history window remains fixed at

$W = 5$ for all Event Trigger sensitivity settings; the more-reactive setting delays repeated-action escalation by requiring a longer zero-progress streak rather than by increasing W .

The sweep shows that the default Event Trigger is not merely an arbitrary midpoint. Making the Event Trigger more strategic increases Strategic Controller calls from 2.273 to 2.355 per step, but slightly lowers Lite-100 SR and Budgeted SR, suggesting that earlier escalation can interrupt otherwise stable local execution. Making it more reactive reduces strategic calls to 2.189 per step, but also lowers success, indicating that delayed escalation leaves stale plans and local failures active for longer. Removing periodic refresh still leaves 2.024 strategic calls per step under event-driven triggers, but causes the largest success drop, showing that event-driven triggers alone are insufficient for long-horizon recovery. Overall, Table 4 supports the default design: periodic refresh plus event-driven escalation gives the best success–cost balance among the tested settings. Because the non-default rows are lightweight one-run sensitivity checks, this table is used to inspect local trends rather than to estimate uncertainty.

All sweep settings use the same Lite-100 tasks, backend, prompts, environment interface, memory configuration, and aggregation scripts as the main runs. The default row corresponds to the fixed setting used throughout the main experiments, while each non-default setting is run once as a lightweight sensitivity check. The Strategic-calls-per-step metric counts large-model invocations made by Strategic Controller modules and divides them by the number of environment steps.

F Hierarchical Memory Implementation Details

Each SA-MB item stores a state summary, action or short action trace, reward EMA, empirical success rate, timestamp, and source tag. Repeated writes update reward EMA as $\text{rewardEMA}_i \leftarrow (1-\eta)\text{rewardEMA}_i + \eta r_i$ with $\eta = 0.3$. Before retrieval, query and state text are lowercased, punctuation is stripped, and whitespace is collapsed. The lexical term is $L_i = |\mathcal{T}(x_t) \cap \mathcal{T}(s_i)| / |\mathcal{T}(x_t) \cup \mathcal{T}(s_i)|$, and the cosine term C_i is computed from normalized token-frequency vectors. Reward, reliability, and recency use $R_i = (\text{clip}(\text{rewardEMA}_i, -1, 1) + 1)/2$, $P_i = \text{successes}_i / \max(1, \text{attempts}_i)$, and $\rho_i = \exp(-\text{ageHours}_i/24)$. Thus all retrieval terms are on comparable $[0, 1]$ scales before weighting. The Reactive Controller receives the top k_{MB} retrieved summaries as hints rather than executable commands.

SA-KG stores validated transitions (s_t, a_t, s_{t+1}) as state nodes and action edges. Repeated transitions update edge counts, reward EMA, and reliability. During escalation, the Strategic Controller queries the top five nearest state nodes with a Chroma vector index built from the BAAI/bge-base-en-v1.5 embedding model, keeps candidates with $C_j = 1 - \text{dist}(x_t, s_j) \geq \tau_{\text{KG}}$, and selects outgoing actions by success rate with execution count as a tie-breaker.

Fusion retrieval uses the SA-MB ranking as the primary list and injects the largest matched SA-KG action boost for each candidate action. For each retrieval call, source scores are normalized within their own candidate sets before fusion:

$$\tilde{S}_\star(c) = \frac{S_\star(c) - \min_{u \in \mathcal{C}_\star} S_\star(u)}{\max_{u \in \mathcal{C}_\star} S_\star(u) - \min_{u \in \mathcal{C}_\star} S_\star(u) + \epsilon}, \quad \star \in \{\text{MB}, \text{KG}\}. \quad (\text{A3})$$

The final fused score is

$$S_{\text{fuse}} = \lambda_{\text{MB}} \tilde{S}_{\text{MB}} + \lambda_{\text{KG}} \tilde{S}_{\text{KG}}, \quad (\text{A4})$$

where S_{KG} follows Eq. 5 and unmatched graph actions use $\tilde{S}_{\text{KG}} = 0$. After execution, successful actions update SA-MB statistics immediately. A trajectory is promoted to SA-KG only after successful completion, interpretable recovery, or Strategic Controller validation, which prevents transient errors from becoming long-term evidence.

Assets and licenses. The work uses existing research assets rather than introducing a new dataset or new foundation model. We cite the benchmark, prior agent methods, memory methods, and graph-memory work used for comparison or motivation in the main paper. The released materials will document external implementation assets, including benchmark assets, model interfaces, evaluation scripts, and figure-generation dependencies, together with corresponding license or usage terms when available.



Figure A4 Representative combat failure case. The triptych shows a rock-crab task in the mine: the agent begins with the correct combat tool and search objective, repeatedly navigates through cluttered rocks while the target remains hard to localize, and eventually exhausts the step budget without task progress.

G Additional Limitations

The proposed framework introduces more moving parts than a single-controller baseline, including Event Trigger thresholds, retrieval quality, and write filtering. These components create new failure modes: stale memory may be retrieved, local control may remain active too long, and escalation may happen either too late or too often. Strong performance on STARDOJO also does not automatically imply transfer to other games or embodied settings, especially when their action abstractions or observation formats differ greatly.

The recovery metric uses benchmark-provided execution logs to make stuck and recovery events comparable across methods. These logs are not required by the online Event Trigger, but deployment settings with only screenshots and low-level inputs would force F1–F3 detection to rely more on visual differencing, action-history patterns, and inferred progress. Such settings may make failure grading noisier, especially for subtle blocked movements or menu states that are visually unclear.

The remaining limitations separate category-specific bottlenecks from one representative failure trace, and then return to attribution limits for the multi-component design.

Task-family disparities. The lower Combat and Social success rates in Table 3 reflect category-specific bottlenecks rather than a uniform controller failure. Combat tasks require both finding the target enemy and reacting while monsters continue moving, so visual change and local navigation errors can invalidate a plan within a few steps. Social tasks often require traveling from the player’s home to another character’s home over long routes before the interaction can begin, placing heavier demands on navigation, route persistence, and subgoal planning than shorter farming or crafting tasks.

Representative combat failure case. A representative failure occurs in a rock-crab combat task (Figure A4). The agent selects the weapon and keeps the high-level objective of searching the mine floor, but then spends most of its budget on short local moves around obstacles while task progress remains zero. Replanning events still tend to produce local navigation commands rather than a reliable search-and-engage policy. This illustrates why Combat remains difficult: the agent must couple target localization, navigation through cluttered mine geometry, and attack timing against enemies that may move or remain visually ambiguous.

Another limitation concerns attribution. Once multiple memory layers are available, it becomes easy to attribute gains too broadly to memory alone. We therefore separate the effects of event triggering, summarization, and long-term retrieval through explicit ablations, but finer-grained causal analysis remains future work.

H Responsible Use and LLM Disclosure

Ethics statement. The proposed framework is evaluated only in benchmarked game environments and does not involve human subjects, crowdsourcing, personally identifiable information, or private user data. It does not introduce a new external dataset or a new foundation model. Existing benchmark assets, model interfaces,

and implementation dependencies are cited in the paper. The work does not require IRB approval because it does not involve human-subject research or interaction with private user data.

Reproducibility statement. To facilitate reproducibility, we will provide data, code, and instructions with the final paper, including the controller implementation, Event Trigger and memory configuration, prompt templates, task split metadata, evaluation scripts, aggregation scripts, and instructions for reproducing the reported Lite-100 and RDR2 experiments. The final release will also record the run configurations and logs used for the reported tables. We do not release a new foundation-model checkpoint; access to the LLM backend follows the corresponding model and provider terms.

Broader social impact. Potential positive impacts include more efficient long-horizon assistive agents for complex games and software-like environments, lower evaluation cost for research on token-latency-success trade-offs, and reusable tools for studying recovery behavior in interactive agents. Potential negative impacts include misuse for game botting, automation that violates platform rules, or transfer to software-control settings where incorrect actions could cause unintended effects. Long-term memory may also preserve stale or biased state descriptions if the underlying observations or model outputs are unreliable. We mitigate release risk by presenting SPIKE as benchmark-oriented evaluation work rather than a deployment-ready automation product, and recommend human oversight, domain restrictions, logging, rate limits, and platform-rule compliance for any downstream use.

LLM disclosure. LLMs are a core method component of the work rather than a writing aid: the Strategic Controller and Reactive Controller are both implemented with large-model calls, as described in the methodology and experimental setup sections.