



(1) Setup

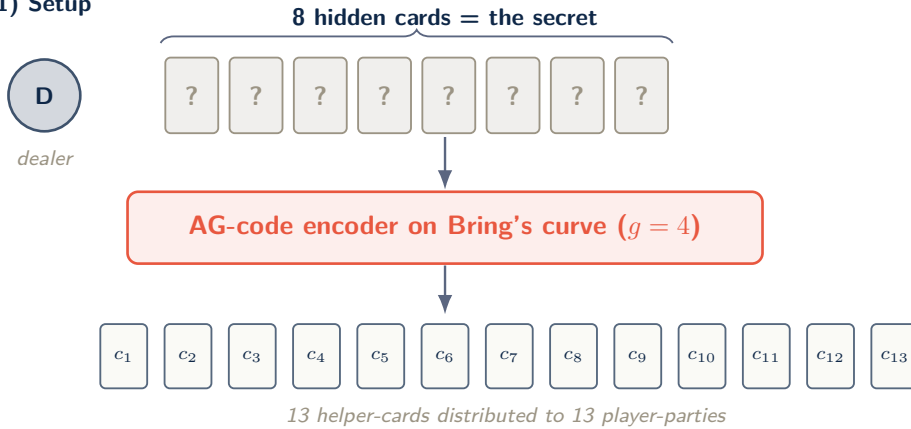

(2) Three coalition snapshots

(a) $|C| = 4$, below t_k



coalition view




0 of 8

hidden cards

revealed

(b) $|C| = 8$, inside the gap



coalition view



4 of 8


hidden cards

revealed

(c) $|C| = 12$, at t_T



coalition view



all 8 of 8

hidden cards

revealed

For $(t_k, t_T) = (4, 12)$, the gap is $t_T - t_k = 2g = 8$. Each helper-card past t_k reveals one more hidden card, linearly along the ramp. The mental-poker rendering is illustrative; the formal anchor is the AG-code quasi-threshold scheme of Chen-Cramer 2006. (t_k and t_T are the framework's privacy and recovery thresholds.)