

CS-171, Intro to A.I. — Final Exam — Winter Quarter, 2020

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

YOUR ID#: _____

The following Pledge was suggested to faculty by ICS Dean Marios Papaefthymiou:

The front page of your exam must be accompanied by the following (truthful) pledge written/typed out and signed by you:

“On my honor, I have neither given nor received any unauthorized aid on this examination.”

(Signature) _____

The Final Exam is take-home, open-book, open notes. Since you will not be able to ask for clarifications about any problems, if you have questions or confusions about any problem please write out your interpretation of the problem and we will take that statement into account when grading.

This page summarizes the points for each question, so you can plan your time.

1. (15 pts total, 5 pts each) Constraint Satisfaction Problems (CSPs).
2. (18 pts total, 3 pts each) First Order Logic (FOL, FOPC, FOPL).
3. (18 pts total, 3 pts each) Bayesian Networks.
4. (12 pts total, 3 pts each) Machine Learning, Decision Tree Classifier.
5. (12 pts total) Minimax Search and Alpha-Beta Pruning.
6. (15 pts total, 3 pts each) Probability.
7. (10 pts total, 2 pts each) State-Space Search.

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

1. (15 pts total, 5 pts each) Constraint Satisfaction Problems (CSPs)

You are a robot tasked to assign room locations to the Spring 2020 classes. Assume you must schedule 7 classes into 3 rooms. Obviously, you cannot assign the same room to two different classes that have a time-conflict.

The class times are given below (C means class):

C1: 7:30 – 9:50 am, Monday

C2: 8 – 8:50 am, Monday

C3: 9 - 10:20 am, Monday

C4: 7 - 10:20 am, Monday

C5: 10:15 – 10:50 am, Monday

C6: 11 - 11:20 am, Monday

C7: 10:25-11:20 am, Monday

The rooms are (R means room): R1, R2, R3

1.a. (5 pts total, -1 for each error, but not negative) Define this problem as a constraint satisfaction problem. Specify the variables, domains, and binary constraints.


1.a.i. (1 pt) The variables are: _____

1.a.ii. (1 pt) The domains are: _____

1.a.iii. (3 pts total, -1 for each error, but not negative) (Write a constraint as $C_i \neq C_j$, where C_i and C_j have a time-conflict.) The constraints are:

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

1.b. (5 pts total, -1 for each error, but not negative) Draw the constraint graph for this problem.

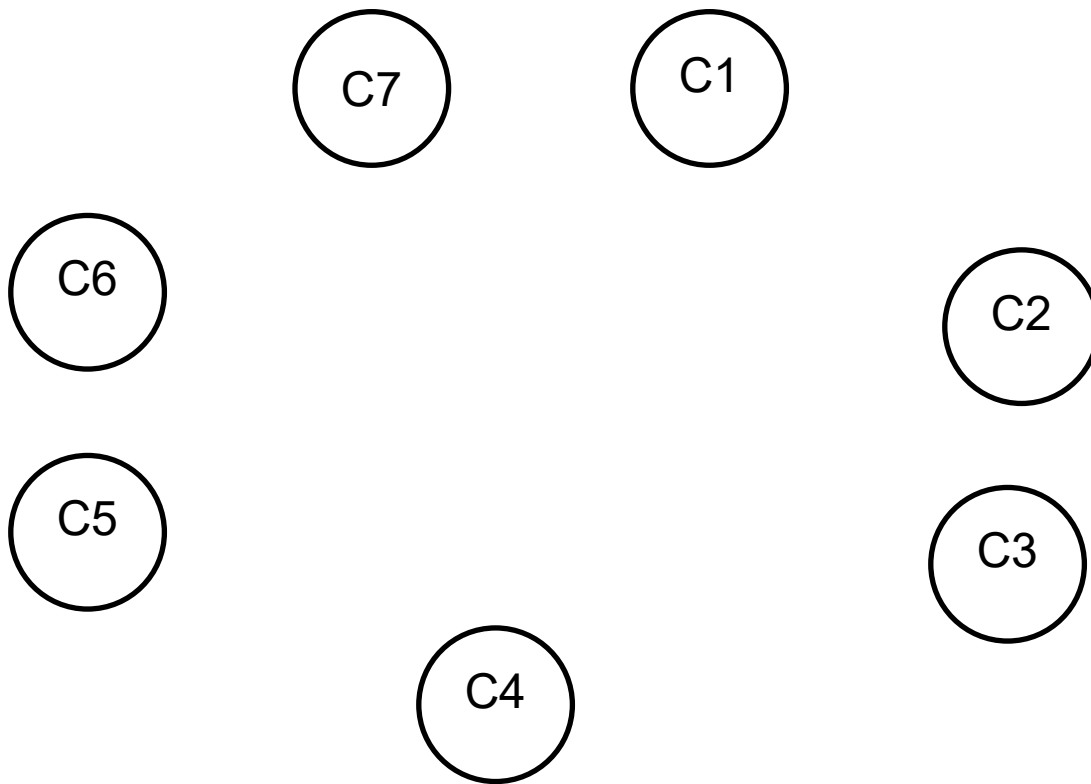

1.c. (5 pts total) Next, we need to assign **all the room locations of all UCI classroom buildings** to **all the classes of all UCI departments** in the Spring quarter, so we have a much bigger constraint graph with many more nodes and edges. Assume we want to assign D available rooms to N classes.

Sara decides to do backtracking search with no heuristic on the constrain graph to find an answer.

Anna decides to perform 2-consistency (arc consistency) preprocessing on the constraint graph.

Bob decides to perform 3-consistency (path-consistency) preprocessing on the graph.

1.c.i. (1 pt) What is the complexity of the arc-consistency (AC-3 in your textbook) approach?

(use $O(\dots)$ notation with only parameters N and D) _____

1.c.ii. (1 pt) Whose approach is the simplest in terms of implementation?

(write one of Sara, Anna, Bob) _____

1.c.iii. (1 pt) Whose approach is more likely to result in the smallest branching factors?

(write one of Sara, Anna, Bob) _____

1.c.iv. (2 pts) Order the three approaches by how much preprocessing time each will take, from least to most preprocessing time. (fill in each blank below with one of Sara, Anna, Bob)

_____ < _____ < _____

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

2. (18 pts total, 3 pts each) First Order Logic (FOL, FOPC, FOPL)

2.a. (6 pts total, 3 pts each) In the following two questions, you will be asked to choose a FOL sentence that is equivalent to the one provided to you. Please write your answers to the multiple-choice questions so they are centered on the line, to assist the Readers in automatic grading.

2.a.i. (3 pts) Which of the following is equivalent to $\neg \exists x \text{ Unicorn}(x)$? _____

- A. $\forall x \text{ Unicorn}(x)$
- B. $\neg \forall x \text{ Unicorn}(x)$
- C. $\neg \forall x \neg \text{Unicorn}(x)$
- D. $\forall x \neg \text{Unicorn}(x)$

2.a.ii. (3 pts) Which of the following is equivalent to $\forall x \text{ Student}(x) \Rightarrow \text{GetA}(x)$? _____

- A. $\neg \exists x \text{ Student}(x) \Rightarrow \text{GetA}(x)$
- B. $\neg \exists x \text{ Student}(x) \wedge \neg \text{GetA}(x)$
- C. $\neg \exists x \text{ Student}(x) \Rightarrow \neg \text{GetA}(x)$
- D. $\neg \forall x \text{ Student}(x) \wedge \neg \text{GetA}(x)$

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

2.b. (12 pts total, 3 pts each) For each English sentence below, write the FOL sentence that best expresses its intended meaning. Use the following symbols:

Use **Student(x)** to mean that x is a student.

Use **Course(x)** to mean that x is a course.

Use **IsMaliciousDemon(x)** to mean that x is a malicious demon.

Use **IsLazy(x)** to mean that x is lazy.

Use **Passed(x, c)** to mean that x passed c.

Translate the following English sentences into FOL sentences:

2.b.example. Some student passed CS171.

$\exists x \text{ Student}(x) \wedge \text{Passed}(x, \text{CS171})$

2.b.i. (3 pts) John is a lazy student

2.b.ii. (3 pts) If all the students passed CS171, then ProfLathrop is not a malicious demon.

2.b.iii. (3 pts) Not all lazy students failed CS171. (Note: Failed means Not Passed.)

2.b.iv. (3 pts) All the students passed CS171, as well as some other class.


3. (18 pts total, 3 pts each) Bayesian Networks

A patient goes to the doctor for a medical condition. The doctor suspects three diseases, D1, D2, and D3, as the cause of the condition. The three diseases D1, D2, and D3 are marginally independent of each other. There are four symptoms S1, S2, S3, and S4 that the doctor wants to check. The symptoms are conditionally dependent to the three diseases as follows:

- S1 depends only on D1
- S2 depends on both D1 and D2
- S3 depends on both D1 and D3
- S4 depends only on D3.

Assume all random variables are Boolean, i.e., they are either 'true' or 'false'.

3.a. (3 pts, -1 for each error, but not negative) Draw the graph structure of the Bayesian Network that corresponds to the assumptions above.

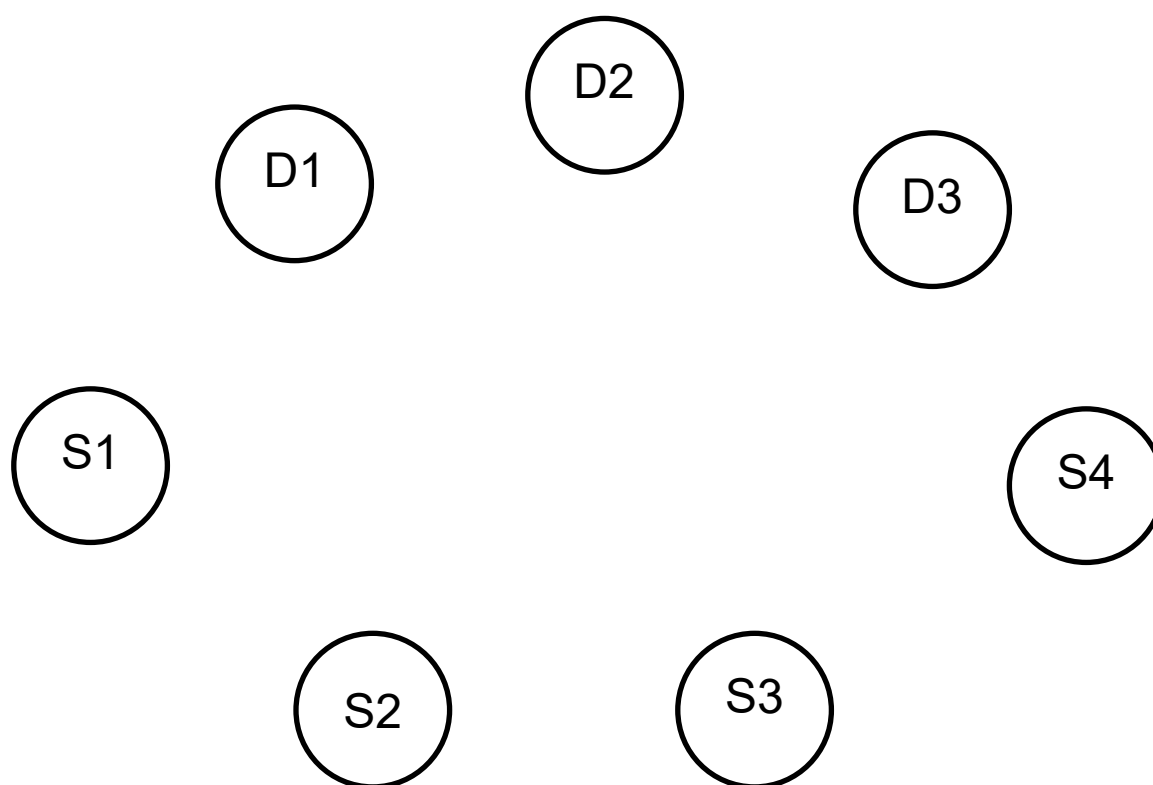

3.b. (3 pts) Write the fully factored form of the full joint distribution that corresponds to the assumptions above. Order the variables as S1, S2, S3, S4, D1, D2, D3, left-to-right. (This ordering is designed to simplify automatic grading. You won't be penalized if you use a different ordering and your answer is otherwise correct. However, the Readers would be grateful if you helped in this way.)

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

3.c. (3 pts total, -1 for each error, but not negative) Each of the nodes in the Bayesian Network of 3.a above has an associated probability table that holds some probabilities (numbers, parameters).. Fill in the table below with the number of probabilities needed at each node. The first one is done for you, as an example.

Node (Variable)	Number of Probabilities (Parameters)
S1	2
S2	
S3	
S4	
D1	
D2	
D3	
Total sum of above	

3.d. (3 pts) Assume there were no conditional independence at all between the variables. Then how many total independent probabilities (numbers, parameters) would be needed?


3.e. (3 pts total, -1 for each error, but not negative) List all variables that are part of the Markov Blanket of variable S2.

3.f. (3 pts total, -1 for each error, but not negative) Suppose we observe symptom S4 = true. List all disease variables (D1, D2, D3) for which their posterior probability would be different from their prior probability.

4. (12 pts total, 3 pts each) Machine Learning, Decision Tree Classifier.

The next two questions ask about Decision Trees (DTs) and Disjunctive Normal Form (DNF). A Decision Tree that has only Boolean features and a Boolean class (target) variable is equivalent to a Boolean formula expressed in Disjunctive Normal Form (they are dual representations).


4.a. (3 pts) DT to DNF Conversion. In the Decision Tree shown below, X_1 , X_2 , and X_3 are Boolean variables, and the truth labels at the leaf of the decision tree are represented by {True} and {False}. Write the DNF formula that corresponds to the tree shown.

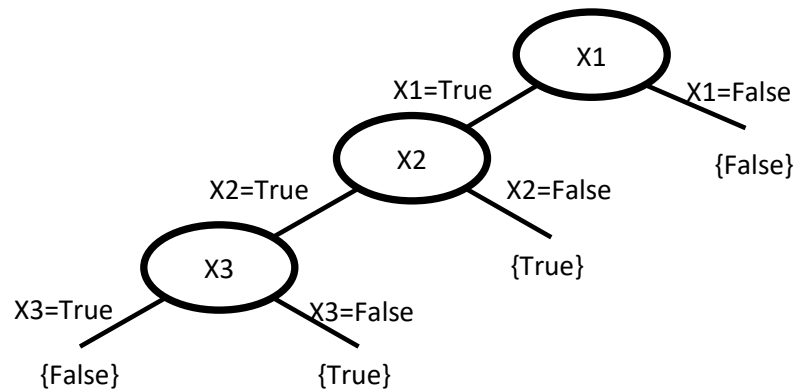

4.b. (3 pts) DNF to DT Conversion. The DNF formula shown below uses Boolean variables X_1 , X_2 , and X_3 . You are asked to convert it into a DT. Along each path from root to leaf, order the variables as X_1 (root), X_2 , X_3 (last branch node), as is done above in 4.a; omit any variables you do not need along that path. At each branch node X_i , draw the X_i =True branch to the left and the X_i =False branch to the right, as is done above in 4.a. Represent the truth labels at the leaves by {True} and {False}. Draw the DT that corresponds to the DNF formula shown.

$$(X_1 \text{ AND } (\text{NOT } X_3)) \text{ OR } ((\text{NOT } X_1) \text{ AND } (\text{NOT } X_2))$$

4.c. (3 pts) Information Gain. Consider the figure below. There are 4 black and 4 white balls, initially evenly mixed. At a branch node, a Boolean attribute X splits the balls into two subgroups with uneven distributions, as shown in the figure.

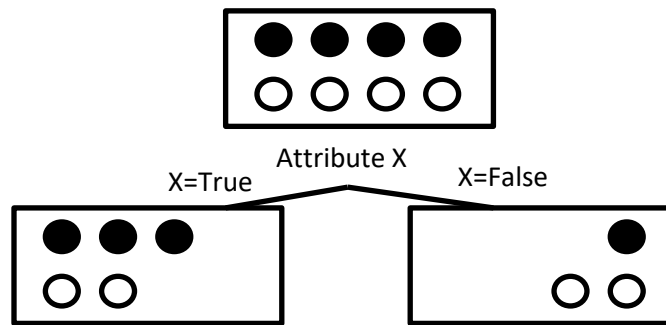

Compute the information gain for splitting on attribute X above. (Use the approximations that $\log 1 = 0$, $\log 2 = 1$, $\log 3 \approx 1.58$, $\log 4 = 2$, $\log 5 \approx 2.32$; this is a take-home exam, so you also may use a calculator or write a computer program to compute your answer.) Please write your answers to the multiple-choice questions so they are centered on the line, to assist the Readers in automatic grading.

Which number is closest to the correct answer? (Write A, B, C, or D) _____

- A. -0.05
- B. 0.0
- C. 0.05
- D. 0.1

4.d. (3 pts total, -1 for each error, but not negative) DT True/False. Fill in each blank below with T (= True) or F (= False). Please write your answers to the True/False questions so they are centered on the line, to assist the Readers in automatic grading.

- _____ There are 2^n decision trees with n Boolean attributes.
- _____ For any Boolean function, there is a compact decision tree.
- _____ Overfitting occurs when the model complexity is too high for the available data.
- _____ Information gain from an attribute test is the expected gain in entropy.


5. (12 pts total) Minimax Search and Alpha-Beta Pruning. Please write your answers to the multiple-choice questions so they are centered on the line, to assist the Readers in automatic grading.

5.a. (3 pts total, 1 pt each) Minimax Search The game tree below illustrates a position reached in the game. Process the tree left-to-right. It is **Max**'s turn to move. At each leaf node is the estimated score returned by the heuristic static evaluator.

5.a.i. (1 pt) Fill in each blank square with the proper mini-max search value.


5.a.ii. (1 pt) What is the best move for Max? (write A, B, or C) _____

5.a.iii. (1 pt) What score does Max expect to achieve? _____

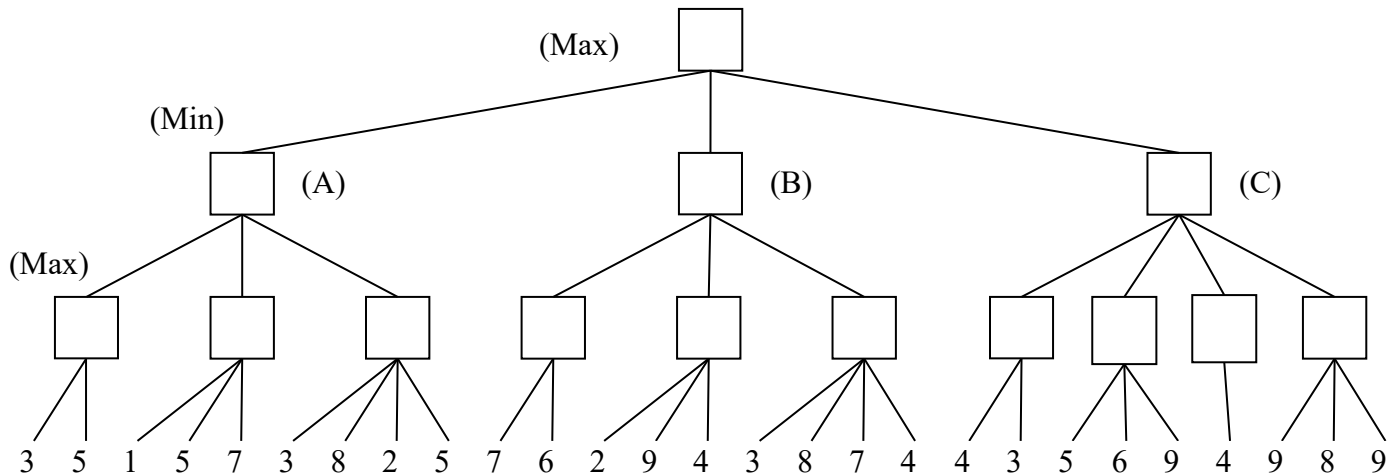

5.b. (5 pts total, -1 for each error, but not negative) ALPHA-BETA PRUNING. Process the tree left-to-right. This is the same tree as above (5.a). You do not need to indicate the branch node values again.

Cross out each leaf node that will be pruned by Alpha-Beta Pruning. Do not just draw pruning lines.

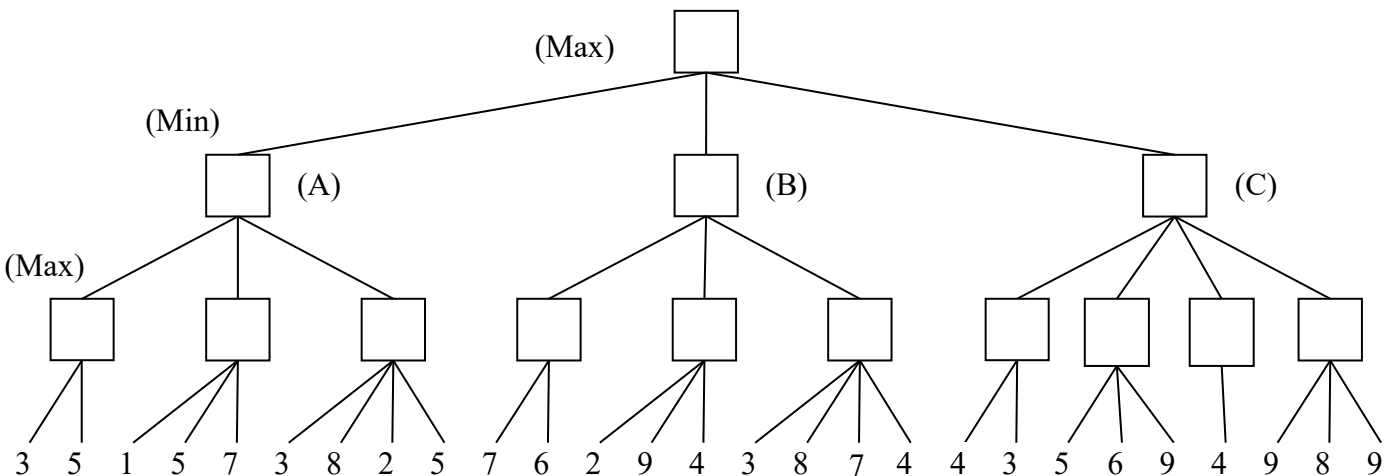

5.c. (4 pts total, 1 pt each)

5.c.i. (1 pt) Minimax Search

What is the time complexity of minimax search? _____

- A. $O(bm)$
- B. $O(m)$
- C. $O(b^m)$
- D. $O(m^b)$

5.c.ii. (1 pt) Basic Minimax Search

In the minimax search algorithm in its most basic form, which of the following is false? _____

- A. MAX assumes the opponent (MIN) will always choose the move that is worst for MAX
- B. It is usually infeasible to search the entire game tree each turn for realistic games
- C. The algorithm avoids all worst-case solutions for Max
- D. It prunes all branches/moves that are best for our opponent

5.c.iii. (1 pt) Alpha-Beta Pruning Condition

What is one pruning condition of alpha-beta pruning? _____

- A. $\alpha > \beta$
- B. $\alpha \geq \beta$
- C. $\beta > \alpha$
- D. $\beta \geq \alpha$

5.c.iv. (1 pt) Alpha-Beta Pruning Time Complexity

In the best case, alpha-beta pruning has a time complexity of approximately (use $O(\dots)$ notation)

6. (15 pts total, 3 pts each) Probability.

John is dismayed that 60% of the calls he receives are spam calls. As a result, John decides to make an intelligent call blocker. After weeks of development, John's program is ready to be tested. The results showed that the call blocker successfully blocked 70% of the spam calls. However, the call blocker also blocked 30% of calls from friends and family (= not spam). Use these random variables:

- S = the call is a spam call
- B = the call is blocked by John's program

Given the scenario provided above, calculate the following probabilities. **Show your work.**

6.a. (3 pts) What's the probability that the call blocker does not block calls made from friends and family?

$$P(\neg B \mid \neg S) =$$

6.b. (3 pts) What's the probability that the call blocker blocks a call and the call is a spam call?

$$P(B, S) =$$

6.c. (3 pts) What's the probability that the call blocker blocks a call?

$$P(B) =$$

6.d. (3 pts) What's the probability that the call is from friends and family given that the call has been blocked by the call blocker?

$$P(\neg S \mid B) =$$

6.e. (3 pts) Is the random variable B independent of the random variable S ?

(answer Y=Yes or N=No) _____


$$P(B, S) =$$

$$P(B) * P(S) =$$

NAME (Print Darkly & Clearly): _____ UCI NetID: _____

7. (10 pts total, 2 pts each) STATE-SPACE SEARCH. Execute Tree Search through this graph (do not remember visited nodes, so repeated nodes are possible). It is not a tree, but pretend you don't know that. Step costs are given next to each arc, and heuristic values are given next to each node (as $h=x$). The successors of each node are indicated by the arrows out of that node. (**Note: D is a successor of itself**). As usual, successor nodes are returned in left-to-right order. (The successor nodes of S are A,B; and the successor nodes of B are D,C; in those node orders).

The start node is S and there are two goal nodes, G1 and G2. For each search strategy below, indicate **(1) the order** in which nodes are expanded, and **(2) the path and cost** to the goal that was found, if any. Write "None" for the path and cost if the goal was not found. The first one is done for you, as an example.

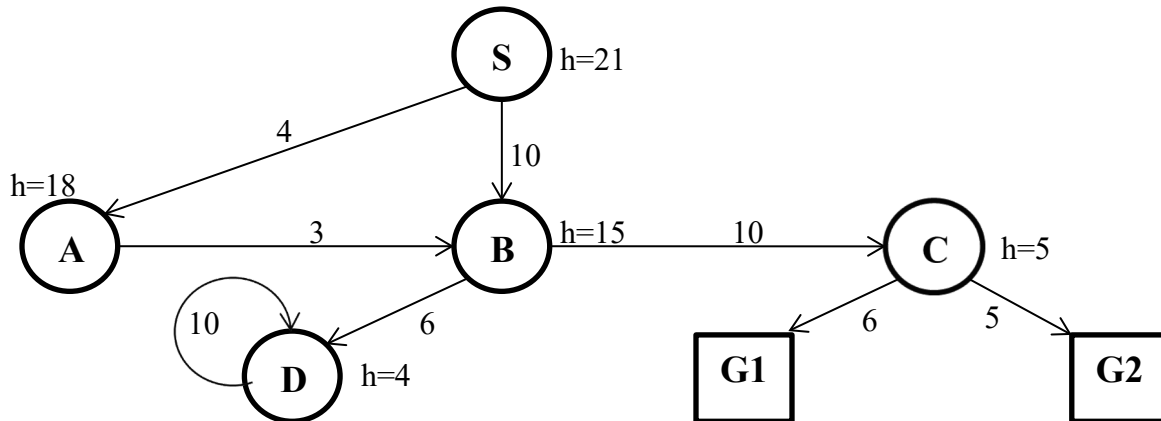

7.a. (example) DEPTH-FIRST SEARCH:

7.a.i Order of expansion: S A B D D D D ...

7.a.ii Path to goal found: None Cost of path found: None

7.b. (2 pts) BREADTH-FIRST SEARCH:

7.b.i Order of expansion: _____

7.b.ii Path to goal found: _____ Cost of path found: _____

7.c. (2 pts) ITERATIVE DEEPENING SEARCH:

7.c.i Order of expansion: _____

7.c.ii Path to goal found: _____ Cost of path found: _____

7.d. (2 pts) UNIFORM COST SEARCH:

7.d.i Order of expansion: _____

7.d.ii Path to goal found: _____ Cost of path found: _____

7.e. (2 pts) GREEDY BEST FIRST SEARCH:

7.e.i Order of expansion: _____

7.e.ii Path to goal found: _____ Cost of path found: _____

7.f. (2 pts) A* SEARCH:

7.f.i Order of expansion: _____

7.f.ii Path to goal found: _____ Cost of path found: _____

**** THIS IS THE END OF THE FINAL EXAM ****