


HW4

2020 Introduction to Computer Graphics

Geometry Shader

用 primitive 来做事

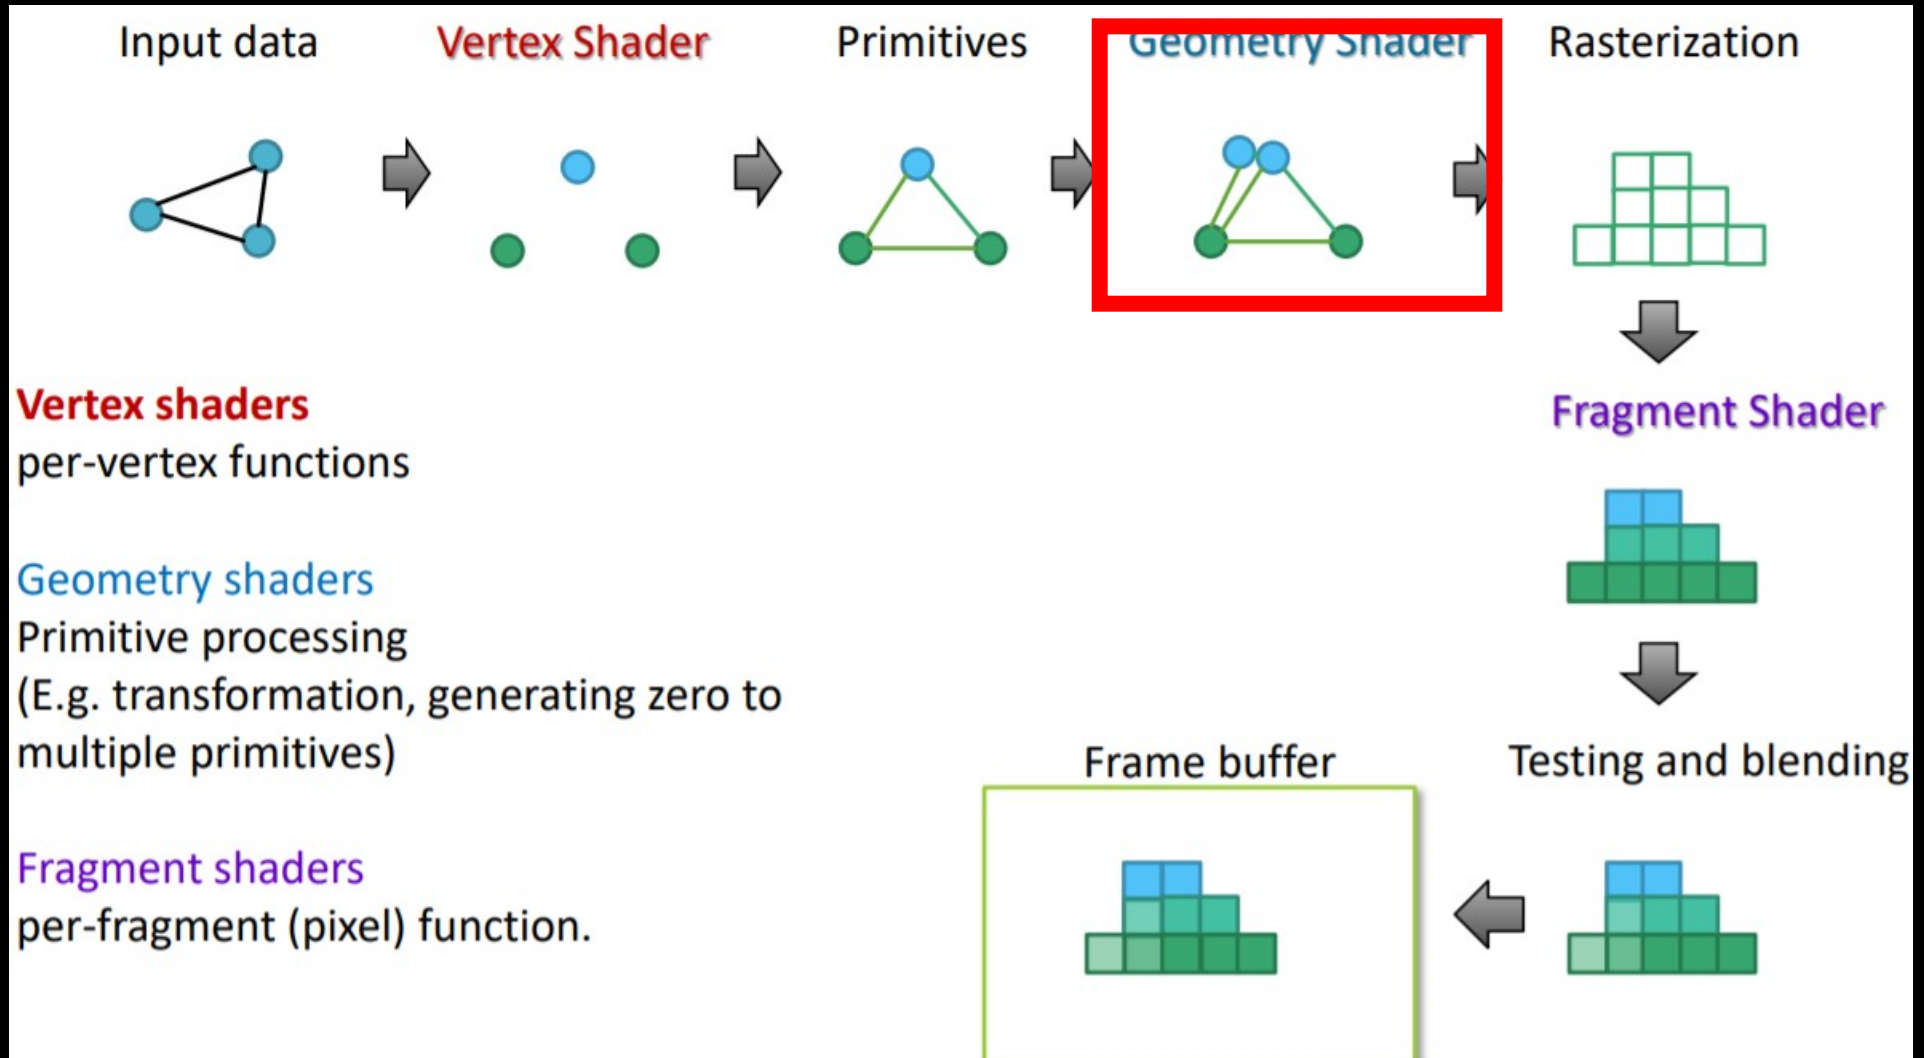

Geometry Shader

- Sample code demo (Normal Visualizer)



Geometry Shader

這次有 geometry shader
這要讀3個

- `GLuint createProgram(GLuint vert, GLuint geom, GLuint frag);`
If you don't need the geometry shader, you can put "0" at geom

```
void shaderInit() {  
    GLuint vert = createShader("Shaders/normal.vert", "vertex");  
    GLuint goem = createShader("Shaders/normal.geom", "geometry");  
    GLuint frag = createShader("Shaders/normal.frag", "fragment");  
    Normalprogram = createProgram(vert, goem, frag);  
  
    vert = createShader("Shaders/Umbreon.vert", "vertex");  
    frag = createShader("Shaders/Umbreon.frag", "fragment");  
    Umbreonprogram = createProgram(vert, 0, frag);  
}
```

Code in "main.cpp"

↓ 如果不用 geometry shader,
這裡放 0

Geometry Shader- declare the type of primitive input

- Declare the type of primitive input we're receiving from the vertex shader.

- Method : Declaring a layout specifier in front of the "in" keyword.

➤ layout(primitive values) in;

input 类型在 before 需要包含 primitive

parameter 需要对应 main 中 glDrawArrays 的 type

primitive values	Rendering primitives(glDrawArrays)	Points per primitive
points	GL_POINTS	1
lines	GL_LINES or GL_LINE_STRIP	2
lines_adjacency	GL_LINES_ADJACENCY or GL_LINE_STRIP_ADJACENCY	4
Triangles	GL_TRIANGLES, GL_TRIANGLE_STRIP or GL_TRIANGLE_FAN	3
triangles_adjacency	GL_TRIANGLES_ADJACENCY or GL_TRIANGLE_STRIP_ADJACENCY	6

Geometry Shader- declare the type of primitive output

- We also need to specify a primitive type that the geometry shader will output.
 - Method : Declaring a layout specifier in front of the "out" keyword.
- `layout(primitive values, max_vertices) out;` → 宣告输出顶点形状, 最多输出几个顶点
- primitive values : points, line_strip, triangle_strip
- max_vertices : If you exceed this number, OpenGL won't draw the extra vertices.

```
layout(triangles) in;
layout(line_strip, max_vertices = 6) out;
```

Code in "normal.geom"

Geometry Shader- update attributes to geometry shader

- We can update some attributes(color, normal) from vertex shader to the geometry shader.
- Method : Using an interface block.



Code in vertex shader <i>vertex</i>	Code in geometry shader
<pre>out VS_OUT { vec3 normal; //other attributes } vs_out;</pre>	<pre>in VS_OUT { vec3 normal; //other attributes } gs_in[];</pre>
<pre>vs_out.normal</pre>	<pre>gs_in[index].normal (index : index for input vertices)</pre>

↓ 在 geometry 裡面取資料 不是這樣取

Geometry Shader- `gl_in` variable

- GLSL gives us a built-in variable called `gl_in` that internally (probably) looks something like this:

```
in gl_Vertex
{
    vec4 gl_Position;
    float gl_PointSize;
    float gl_ClipDistance[];
} gl_in[];
```

```
gl_Position = gl_in[index].gl_Position;
```

Code in "normal.geom"

第 N 个顶点, 对应 draw array 中
第 N 个顶点的属性

Geometry Shader- EmitVertex /EndPrimitive function

- Each time we call EmitVertex(), the vector currently set to gl_Position is added to the output primitive.
- Whenever EndPrimitive() is called, all emitted vertices for this primitive are combined into the specified output render primitive.

```
gl_Position = gl_in[index].gl_Position;
```

```
EmitVertex();
```

```
gl_Position = gl_in[index].gl_Position + vec4(gs_in[index].normal, 0.0f) * 0.2;
```

```
EmitVertex();
```

```
EndPrimitive();
```

Code in "normal.geom"

Reference : <https://learnopengl.com/Advanced-OpenGL/Geometry-Shader>

Load Model

- In obj file : (about face information)
f vertex position/texture coordinate/normal
f 1/1/1 473/2/2 1370/3/3 (3 vertice/primitive)
f 1/1/1 473/2/2 1370/3/3 479/4/4 (4 vertice/primitive)
f 1//1 473//2 1370//3 (no texture coordinate)
- In Object.cpp file, the format of the face information must be f 1/2/3 or f 1//3. (f 1/3 cannot be read.)
You can modify Object.cpp or write another code for read obj file.
- In geometry shader, you cannot render the object with `glDrawArrays(GL_QUADS)`.
You can put the quad into two triangles with another code by yourself.

↓ geometry shader不会读方形
若读到有方形, 要拆成两个△

HW4 - Animation with Three Types of Shaders

Homework 4- Goal

20~45秒

1. Make a 20~45 seconds video.
First 10~30 seconds for playing the video.
Last 10~15 seconds for introducing the features of the video and technique you have used.
2. Theme : Animation with Three Types of Shaders
3. Must include :
 - (1) At least an object
 - (2) Geometry shader

* You can refer to the examples on the Internet, but you must mention it in the introduction part of the video and cite the original source.

Homework 4- Recording tools

1. Screen recording :
OBS : <https://obsproject.com/>
2. Introduce your video :
 - (1) PowerPoint
 - (2) Other video editing tools

Homework 4- Something you can do with Geometry shader

1. Explosion
2. Shrinking triangles
3. Silhouettes
4. Other creative ideas...

可用 geometry shader

几何的交叉

Homework 4- Score

1. Creativity/ Richness/technical difficulty (40%)
2. Your code is executable (30%)
3. Votes from classmates (30%)
(We will provide a Google sheet and let you choose 5 best videos)

*Requirements for geometry shader :

- (1) You should do a different effect from the example code we provided, or your score will be zero.
- (2) Developing a simple function with Geometry shader can meet the basic requirement.

Homework 4- Upload Format and Rules

交作業還要交連結

1. Upload your video to Youtube (must be anonymous).
2. Please hand in your video link and the whole **project file** as STUDENTID_Name.zip to e3 platform.
***If your uploading format doesn't match our requirement, there will be penalty to your score. (-5%)**
3. DeadLine: 2021/ 1 / 15 23: 59:59
4. If you submit your homework late, the score will be 0.
5. **Use geometry shader to do this homework, otherwise you'll get zero points.**