

PicoCALC uLISP

Ideas

4 HOURS !

- host side version for quick turnaround
- play with graphics, → primitives
- LMAccess to serial

Questions

- storage?
- pico2w and spcard and bootloader?
- ~~http / https~~ ?

- ~~PRESENTATION BASED UI ?~~
- WEBUI TO THE SERIAL

how does this change how that we have the custom kbd serial?

↳ make second input stream that is displayed in a different line if displayed.

⑥ get setup

① ~~done pico2w uLISP + compile it~~

② Read all docs

~~uLISP ARM, uLISP PATCH~~


③ ~~BUILD WASM PLAYGROUND + WEBSERIAL VERSION~~

④ ~~ANALYZE CODE FOR RETL GTX~~

⑤ ~~BUILD PICO2W VERSION~~ → TEST
↳ WIFI

1+-----11

WM PRIMITIVES



• write to a window stream → PRESENTATION BASED UP?

• widgets

• Text attributes DONE

• menus / status bar

callbacks

text
image

Theme

BOLD
INVERTED
color

dispatch renderer

Layout engine?

'(text () ...)


objects

SCROLL AREA

overlay for selection


DONE

special characters?



1(task () ...)

actions



in

Back Buffer
[(input) (output)]
buffer


Display(c)

pserial

ptl = fresh line

printobject(...) → dispatch on type

just one, not too, also the ">"

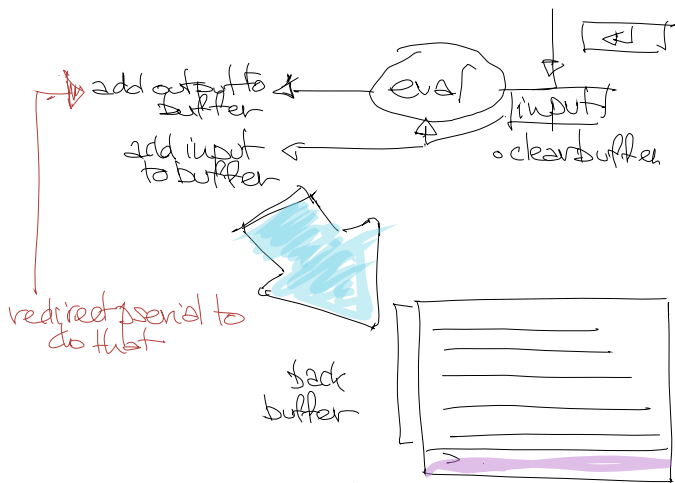

how does with-output-to-string work?

should we hijack print object

↳ esc codes in the string?

how much do i want to write in ui?sp?

- WM primitives in C and maybe like the key based widget pressing -
- should we experiment independently of ui?sp, in pure C++?

Files with custom GUI

- ✓ characters
 - ↳ special
 - ✓ lines
 - ✓ square → fill
 - button
 - bitmaps
- bold
~~color~~
invert
- no
- not yet

3 bit fg, 3 bit bg, bold, underline

→ SHOULD THE SCROLLBACK BUFFER
ACTUALLY BE IMPLEMENTED IN
LISP?

not sure

(WITH-OUTPUT-TO-WINDOW ... (...))

↳ how does with-output-to-string work,
and does it just redirect characters?

□ Navigation in edit buffer

□ Multiline edit buffer

□ Input history

□ split into CH files
and make proper

make project

Should we have

a proper Reader so
that we can mess with
the REPL in LISP?

→ honestly probably rather in
a new LISP

- recognize incomplete
expression
- paren matching

DO THIS
FIRST