


vMTmi example: Consider the argument whose first premise is 'If Mary was at the wedding, then Sue must have been at the wedding', whose second premise is 'Sue might not have been at the wedding', and whose conclusion is 'Mary was not at the wedding'. Is this form of argument logically valid?

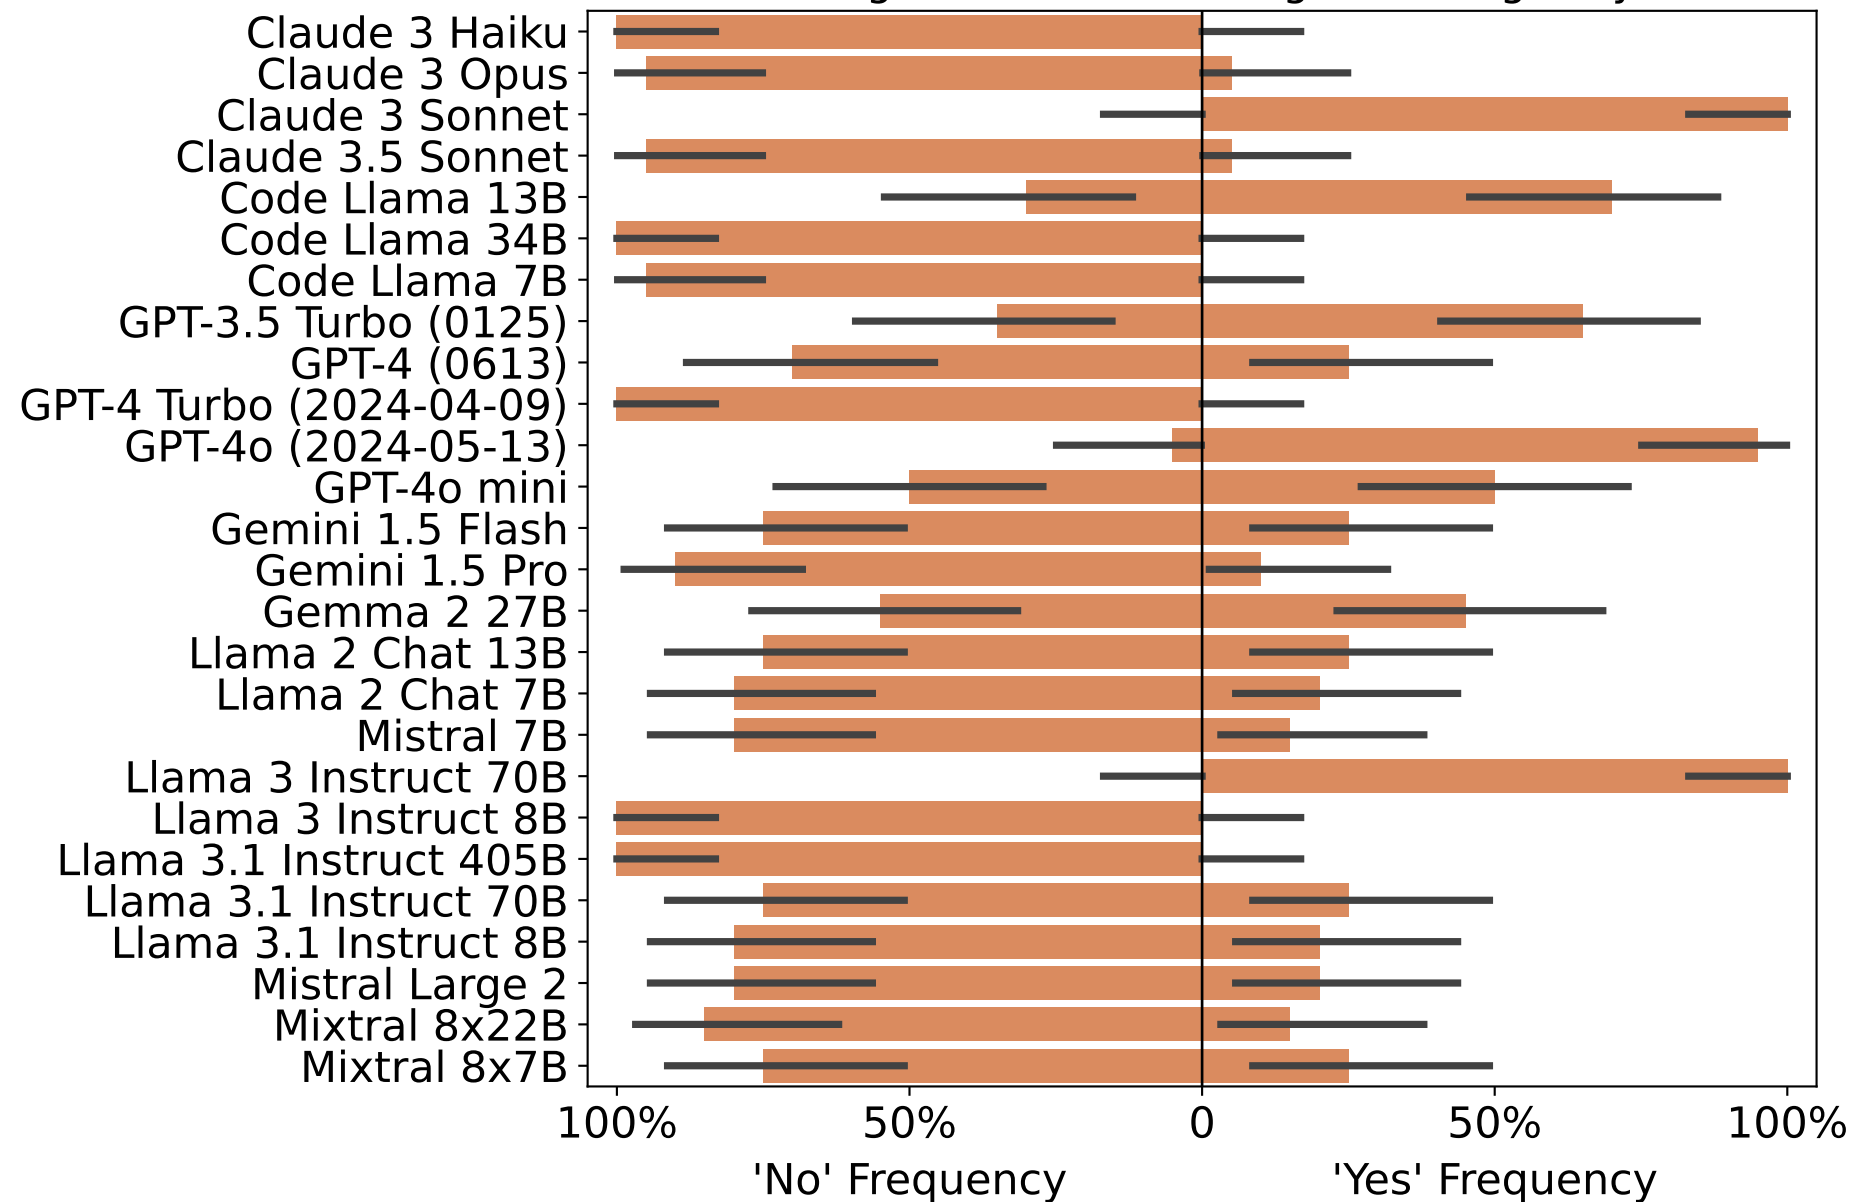

Temperature: 0, Condition: chain_of_thought