


vDSmi example: Consider the argument whose first premise is 'Either Fido is inside or Fido must be in the garden', whose second premise is 'Fido might not be in the garden', and whose conclusion is 'Fido is inside'. Is this form of argument logically valid?

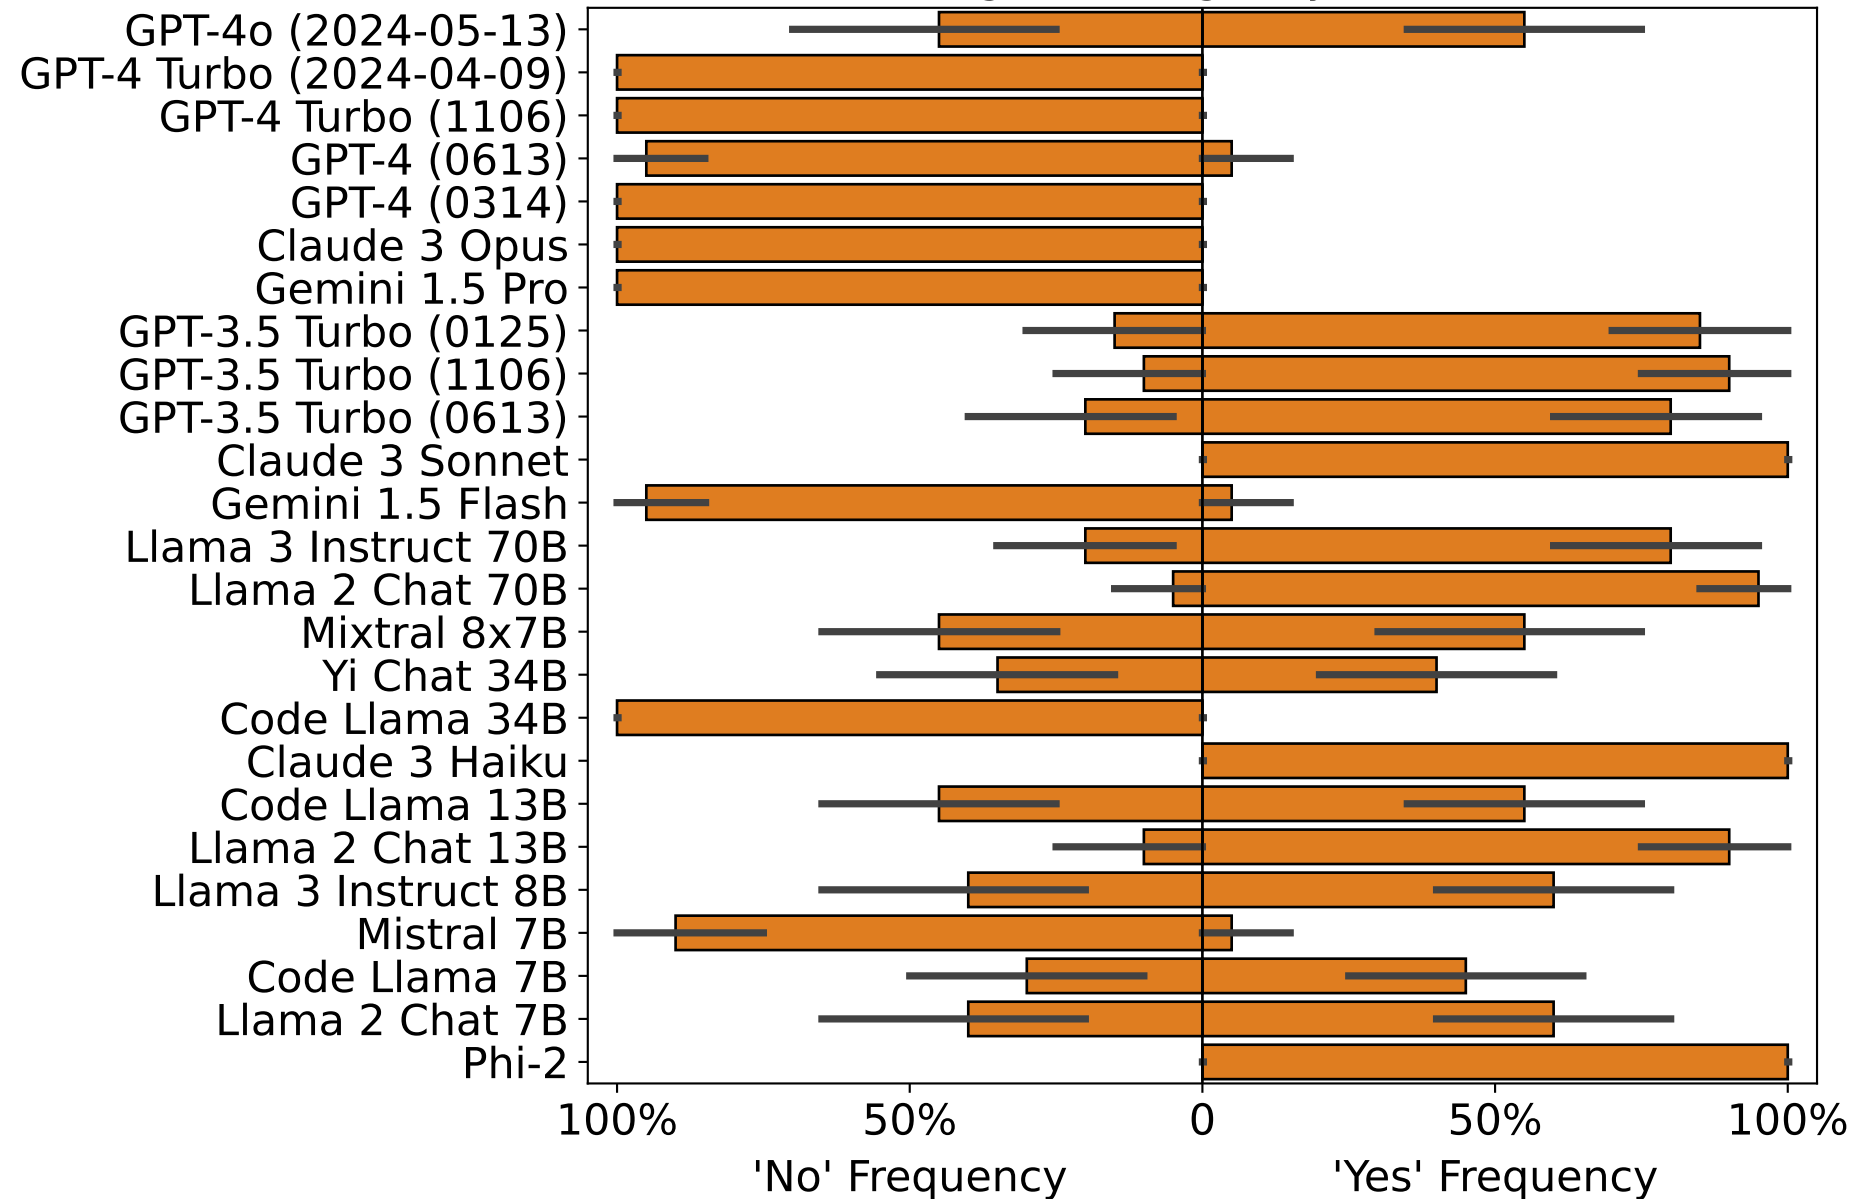

Temperature: 0, Condition: chain_of_thought