

SendSprint Implementation

A practical execution layer that reads Jira/Azure DevOps, plans the delivery, validates safety, implements, tests, and opens PRs.

- Preflight
- Dry-run
- Resume state
- Evidence-driven PRs



SendSprint delivery engine

Pain Before SendSprint

Sprint delivery often fails in the spaces between tools, not because engineers lack skill.

- Tasks sit in Jira/Azure while context is rediscovered manually.
- Branches, tests, evidence, and PR text are repeated by hand.
- Managers ask for status because the delivery flow is invisible.




Before/after productivity contrast

What Changed

We turned the workflow into a controlled, recoverable, auditable loop.

- Azure DevOps MCP installer and Jira/Azure core guide.
- Default branch convention: feature/{number}-{title}.
- Work-item hierarchy safety: invalid Issue -> Task becomes Related.
- Generated task descriptions no longer mention internal tooling.

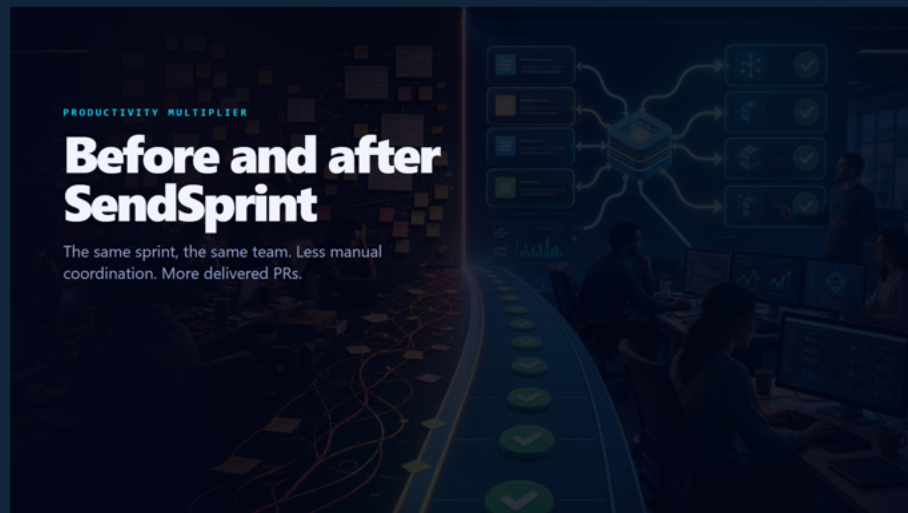

Before/after explainer poster

The New Delivery Flow

SendSprint converts sprint items into isolated delivery lanes that end in PRs.

- Read sprint through MCP -> API -> browser fallback.
- Map architecture and generate missing baseline docs.
- Create branch/worktree, install, build, lint, test, and scan.
- Commit, push, create PR, validate PR metadata, and review diff.

Preflight + Dry-Run

The team can see what will happen before branches, work items, files, or PRs change.

- Preflight validates transport, credentials, repo health, sprint read, and link safety.
- Dry-run shows item, repo, branch, PR target, confidence, and routing reason.
- Low-confidence routes are visible before execution.

Resume State + Idempotency

Interrupted runs can resume without recreating the same delivery work.

- Run state persists in `.sendsprint/runs/<run-id>.json`.
- Completed item/repo pairs are skipped on retry.
- Failed pairs keep the failure reason for investigation.

Governance Built In


The implementation captures hard-learned operational rules as code and documentation.

- No automatic assignee unless inherited or explicitly requested.
- Parent-child links are validated before and after planning.
- Jira/Azure stable rules live in `.specs/integrations`.
- MCP remains the source of truth for live tenant state.

Quality Gates

Every implementation change was tested before shipping.

- Python: ruff, mypy, and 175 pytest tests passing.
- Remotion: TypeScript typecheck and rendered MP4 outputs.
- README: images, posters, and video links included.
- Version bumped to 0.10.0 with changelog entry.

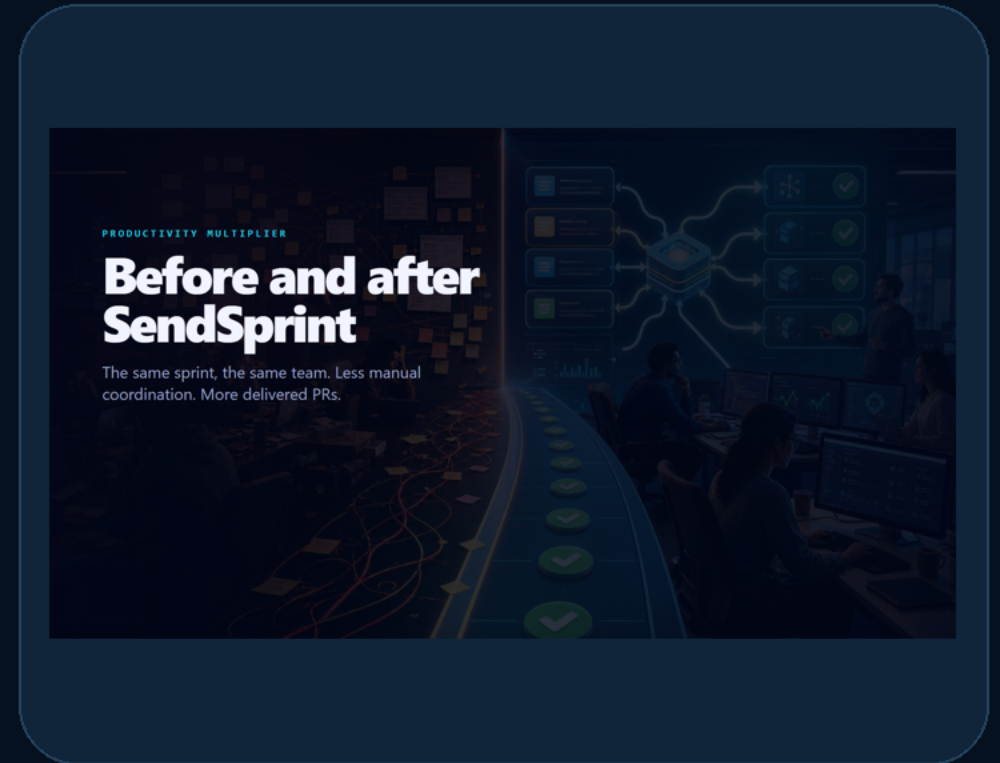

Rendered video poster

How a Company Uses It


Adoption becomes a simple, repeatable command sequence.

- `sendsprint preflight azuredevops "Team\\Sprint 12" --workspace workspace.yaml`
- `sendsprint run azuredevops "Team\\Sprint 12" --dry-run`
- `sendsprint run azuredevops "Team\\Sprint 12" --run-id sprint-12`
- Open PRs with evidence and review metadata.

Outcome

Less coordination debt, fewer backlog mistakes, safer automation, and a repeatable path from sprint to develop.

- Engineers spend more time solving problems.
- Managers get visible delivery state.
- PRs arrive with evidence by default.
- The same process scales across teams and repos.

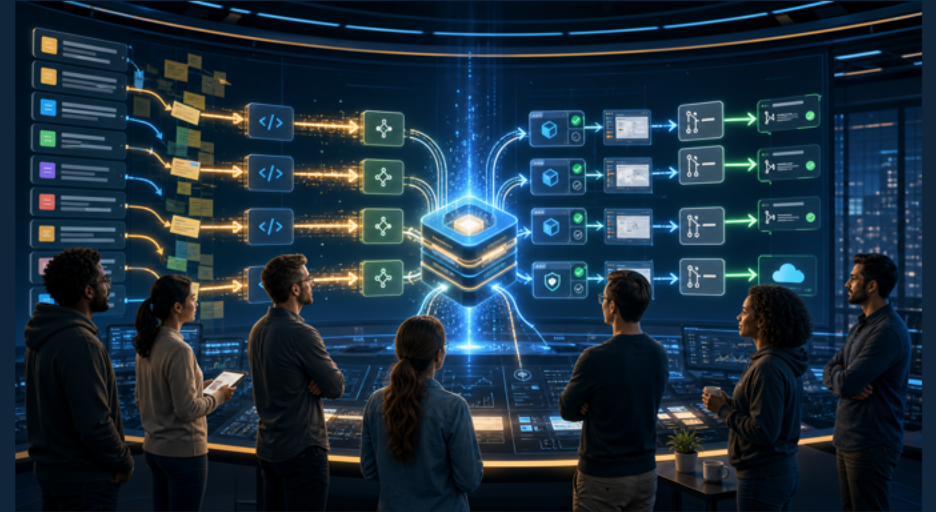

Productivity engine