When to use)

- preorder: serialize or deserialize a tree
- inorder: retrieve elements in sorted order (BSTs)
- postorder: process children before parent (bottom-up)
- BFS: Level by level scanning

What is it)

- for each method ___ use recursion (DFS). For level by level scan use BFS iteratively w/ a queue.

Example Diagrams)

[4, 2, 1, 3, 6, 5, 7]



Preorder

[1, 2, 3, 4, 5, 6, 7]



Inorder

[1, 3, 2, 5, 7, 6, 4]



Postorder

[4, 2, 6, 1, 3, 5, 7]

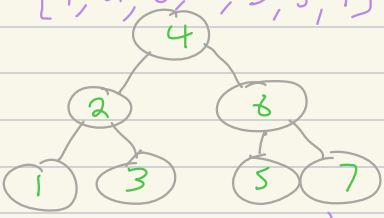

Level-order (BFS)