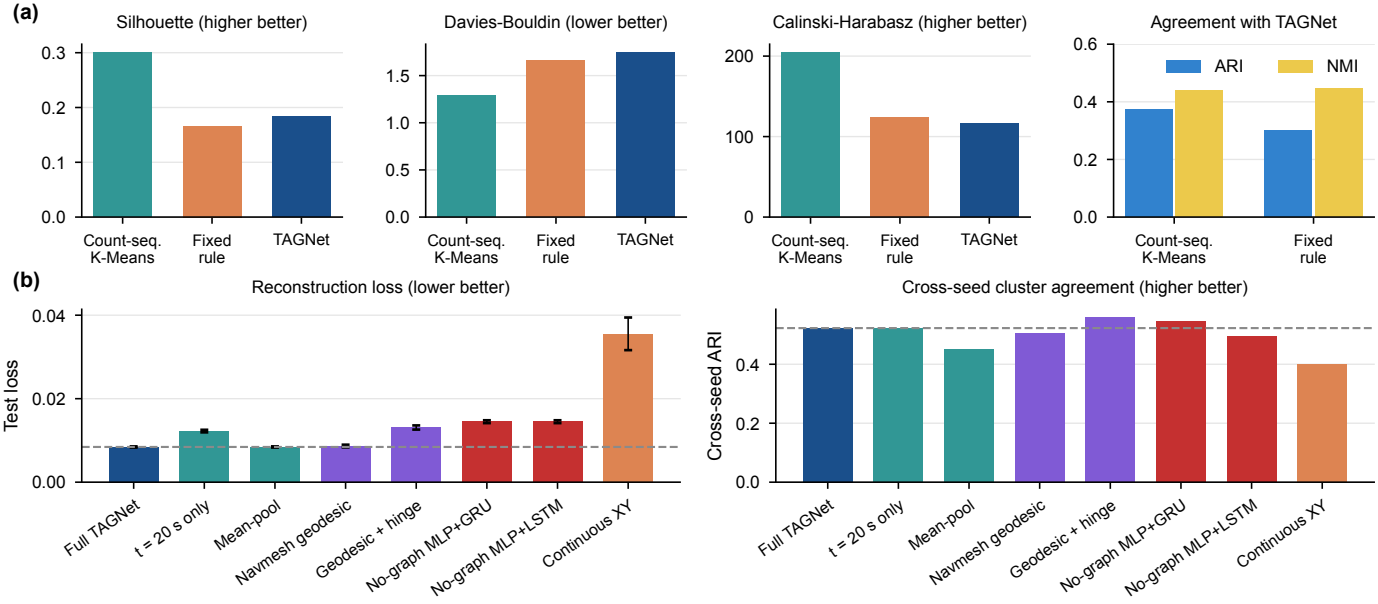
(a)
Silhouette (higher better)
0.3
0.2
0.1
0.0
Count-seq. K-Means
Fixed rule
TAGNet
Davies-Bouldin (lower better)
1.5
1.0
0.5
0.0
Count-seq. K-Means
Fixed rule
TAGNet
Calinski-Harabasz (higher better)
200
100
0
Count-seq. K-Means
Fixed rule
TAGNet
Agreement with TAGNet
ARI
NMI
0.6
0.4
0.2
0.0
Count-seq. K-Means
Fixed rule
(b)
Reconstruction loss (lower better)
Test loss
0.04
0.02
0.00
Full TAGNet
t = 20 s only
Mean-pool
Navmesh geodesic
Geodesic + hinge
No-graph MLP+GRU
No-graph MLP+LSTM
Continuous XY
Cross-seed cluster agreement (higher better)
Cross-seed ARI
0.4
0.2
0.0
Full TAGNet
t = 20 s only
Mean-pool
Navmesh geodesic
Geodesic + hinge
No-graph MLP+GRU
No-graph MLP+LSTM
Continuous XY