

Theory: What are streams

⌚ 6 minutes 0 / 3 problems solved

Skip this topic

Start practicing

4128 users solved this topic. Latest completion was about 7 hours ago.


Sometimes your program should process data located outside it or save results to an external destination. Java provides an abstraction called **stream** that unifies work with disks, files, network locations and other resources.

§1. Input and output streams

In some sense, a Java stream is similar to a real-world water stream which has a beginning (source) and an end (destination). Based on the same principles, IO streams can be categorized into two groups:

- **input stream** that reads data from a source;
- **output stream** that writes data to a specified destination.

The picture below demonstrates it.

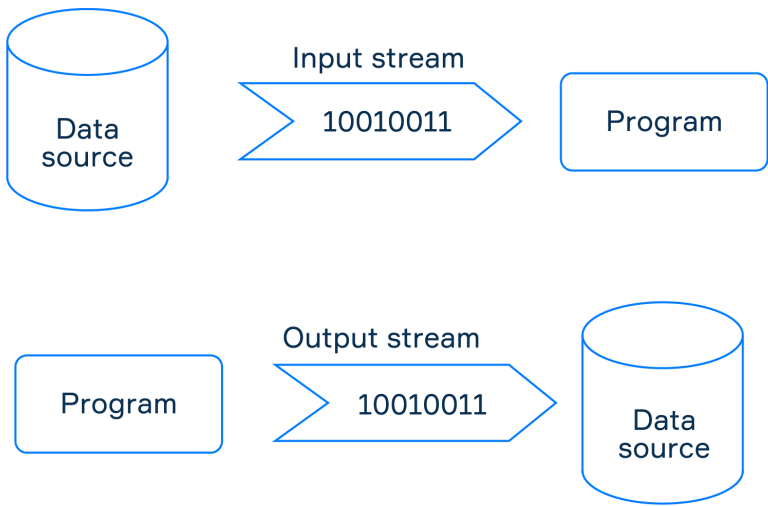

In fact, you’ve already known two specific examples of IO streams: **System.in** and **System.out**. We used them to read/write data from/to the console before.

§2. Byte and char streams

Streams can be further classified into two categories based on how they represent sequences of data:

- **byte streams** that are used to read and write data in bytes;
- **char streams** that are used to read and write data in characters according to the 16-bit Unicode format.

Char streams make processing text data much easier for programmers. In comparison with them, byte streams are quite low-level but can work with data of any type including multimedia.

§3. Buffered streams

Some streams use a temporary memory location. At first, such streams read or write data to a temporary location and then data is moved on to a source or destination from it. This temporary location is typically a byte or character array called **buffer**, and the whole process is called **buffering**. The reason why an intermediate memory location is introduced is that appealing to some sources or destinations takes substantial time interval. So buffering is a kind of optimization that minimizes the number of interactions with them.

Let’s see how buffering works in output streams. When you write data to the stream, it is first accumulated in a buffer. Once the buffer is full, the whole stored data is written to the destination.

Some input streams also have buffering feature. When a stream reads data for the first time, it reads as much as a buffer can hold. Even if only a few bytes or characters were requested, buffered input stream will read bytes until the buffer is full. The next reading first checks if there is any unread

Current topic:

[What are streams](#) ...

Topic depends on:

✓ [Scanning the input](#) ... Stage 1

Topic is required for:

[Output streams](#) ...

[Input streams](#) ...

Table of contents:

- 1 [What are streams](#)
- §1. [Input and output streams](#)
- §2. [Byte and char streams](#)
- §3. [Buffered streams](#)
- [Feedback & Comments](#)

data in the buffer. In case buffer contains some unread data, the stream takes it from the buffer and does not have to interact with the source. Otherwise, it requests data from the source like the first time.

Now let's do a few exercises and have a look at streams in detail.

 Report a typo

340 users liked this theory. 14 didn't like it. What about you?



Start practicing

[Comments \(9\)](#)[Hints \(0\)](#)[Useful links \(0\)](#)[Show discussion](#)