


SKILL – 2

- To Create Main Loop, Display Prompt, Read User Input, Handle Exit Conditions, Design Control Flow Diagram, Test Interactive Loop

To Capture Keyboard Input, Handle Backspace, Process Enter Key, Manage Input Buffer, Support Multi-Character Commands, Test User Interaction

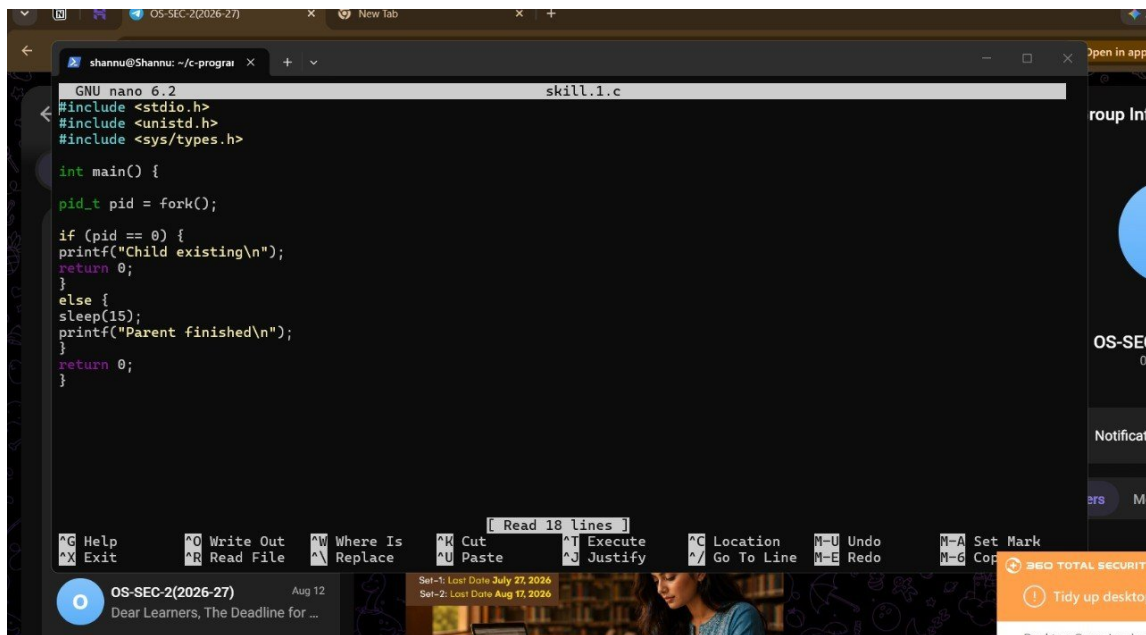

```
GNU nano 6.2 skill1.c
#include <stdio.h>
#include <unistd.h>
#include <sys/types.h>

int main() {
    pid_t pid = fork();
    if (pid == 0) {
        printf("Child existing\n");
        return 0;
    }
    else {
        sleep(15);
        printf("Parent finished\n");
    }
    return 0;
}
```

```
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ gcc skill1.c -o skill1
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ ./skill1
Child executing
Parent finished
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ |
```

```
shannu@Shannu: ~/c-prograi  ×  +  ∨
GNU nano 6.2 skill.2.c
#include <stdio.h>
#include <unistd.h>

int main() {
    pid_t pid = fork();

    if (pid > 0) {
        printf("Child existing\n");
        return 0;
    }
    else {
        sleep(5);
        printf("Child PID : %d\n", getpid());
        printf("Parent PID after parent exits : %d\n", getppid());
    }

    return 0;
}

[ Read 19 lines ]
^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location   M-U Undo      M-A S
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify    ^/ Go To Line  M-E Redo      M-6 C
```

```
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ nano skill2.c
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ gcc skill2.c -o skill2
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ ./skill2
Child existing
saiteja@LAPTOP-5BAATM70:~/TeacherFile-skill$ Child PID : 3129
Parent PID after parent exits : 2655
ls
skill1 skill1.c skill2 skill2.c
```