

Efficient Parallel Algorithms for Hypergraph Matching

Henrik Reinstädter¹, Christian Schulz¹, Nodari Sitchinava², and Fabian Walliser¹

¹ Heidelberg University, Heidelberg, Germany

`{henrik.reinstaedtler,christian.schulz,fabian.walliser}@informatik.uni-heidelberg.de`

² University of Hawaii at Manoa, Manoa, United States
`nodari@hawaii.edu`

Abstract. We present efficient parallel algorithms for computing maximal matchings in hypergraphs. Our algorithm finds locally maximal edges in the hypergraph and adds them in parallel to the matching. In the CRCW PRAM models our algorithms achieve $O(\log m)$ time with $O((\kappa+n) \log m)$ work w.h.p. where m is the number of hyperedges, and κ is the sum of all vertex degrees. The CREW PRAM model algorithm has a running time of $O((\log \Delta + \log d) \log m)$ and requires $O((\kappa+n) \log m)$ work w.h.p. It can be implemented work-optimal with $O(\kappa+n)$ work in $O((\log m + \log n) \log m)$ time. We prove a $1/d$ -approximation guarantee for our algorithms. We evaluate our algorithms experimentally by implementing and running the proposed algorithms on the GPU using CUDA and Kokkos. Our experimental evaluation demonstrates the practical efficiency of our approach on real-world hypergraph instances, yielding a speed up of up to 76 times compared to a single-core CPU algorithm.

Keywords: hypergraph matching · PRAM · GPU.

1 Introduction

We introduce an algorithm to compute hypergraph matchings on the GPU and test it on a wide variety of instances. A hypergraph is a natural extension where more than two vertices can be connected by a single hyperedge. A matching in a hypergraph is a vertex-disjoint edge set, which optimizes either the number or the total weight of edges in it. Its applications range from personnel scheduling [17] to combinatorial auctions [23]. It is known to be NP-complete [26], but can be approximated to a factor of $1/d$ by a simple greedy algorithm [7, 29], where d is the maximum edge size. The problem is well studied in the sequential [14], semi-streaming [40], and distributed setting [25].

There is limited work on solving NP-complete problems on GPUs, e.g. independent set problems by Burtscher et al. [9]. There are several algorithms for the related problem of matching in graphs on GPUs or in parallel [3, 8, 32]. Most notably, Birn et al. [8] introduced a parallel local max strategy, in which edges are added if their weight exceeds that of all their neighbors.

Our Contribution. We present an algorithm that finds locally maximal edges and computes matchings in hypergraphs on the GPU. The running time is $O(\log m)$ with $O((\kappa+n)\log m)$ work on the CRCW PRAM model and $O((\log \Delta + \log d)\log m)$ running time with $O((\kappa+n)\log m)$ work on the CREW PRAM model, where m is the number of hyperedges, plus n the number of vertices, Δ is the maximum degree, d is the maximum hyperedge size, and κ is the sum of all vertex degrees. Additionally, we provide a work-optimal CREW algorithm requiring $O(\kappa+n)$ work and $O((\log m + \log n)\log m)$ time w.h.p. Each algorithm has an approximation guarantee of $1/d$. The algorithms are implemented in CUDA and Kokkos [43], ensuring improved cross-architecture compatibility. We evaluate on a diverse set of instances using both GPU and CPU platforms, showing a speed-up of up to 76 times relative to a single-core CPU implementation. We show that the algorithm scales well on GPU and CPU when implemented with Kokkos. On graphs, our algorithm HLM:C (GPU) is faster than the multicore CPU implementation by Birn et al. [8] in half of the categories. Compared to the latest GPU matching by Mandulak et al. [31], our Kokkos-based implementation HLM:K (GPU) is up to 27.16 times faster and wins all categories, while producing a relative matching quality of 87.6 to 98.2 %.

The rest of the paper is structured as follows. Section 2 introduces basic concepts and notations, while Section 3 summarizes the related work in our field. The algorithms are presented in Section 4 and details of the implementation are discussed in Section 5. We experimentally evaluate our algorithms and discuss the results in Section 6. Finally, we conclude in Section 7.

2 Preliminaries

2.1 Basic Concepts

Hypergraphs. A weighted undirected hypergraph $H = (V, E, \omega)$ consists of a set V of n vertices and a set E of m hyperedges. Each hyperedge $e \subseteq V$ is a subset of vertices whose weight is defined by the weight function $\omega : E \rightarrow \mathbb{R}_{>0}$. The *size* of a hyperedge is the number of vertices it contains and is denoted by $|e|$. The maximum size of a hyperedge, also called the *rank*, is defined by $d := \max_{e \in E} |e|$. If all hyperedges have the same size d , the hypergraph is called d -uniform. Two edges are considered *disjoint* if they do not share any common vertices and are *neighbors* if they do share at least one vertex. An edge is considered *locally maximal* if it has a greater weight than all of its neighbors. The set of hyperedges that contain a vertex v is defined by $E[v]$. Thereby, $\deg(v) = |E[v]|$ denotes the number of hyperedges a vertex v is contained in and is called the *degree* of v . The maximum degree is denoted by $\Delta := \max_{v \in V} \deg(v)$. We assume that vertices with degree 0 have been removed during the preprocessing phase. Therefore, $\Delta > 0$ or else the hypergraph is empty. Furthermore, $\kappa = \sum_{v \in V} \deg(v) = \sum_{e \in E} |e|$ is defined as the sum over all vertex degrees, which is equal to the sum of all edge sizes. Note that $\kappa \leq \min\{\Delta n, dm\}$.

Matching. A subset of hyperedges $M \subseteq E$ is a *matching*, if all hyperedges are pairwise disjoint. The weight of a matching M is defined by $w(M) := \sum_{e \in M} w(e)$. A matching M is called *maximal* if no hyperedge can be added without violating the matching property. A *maximum* matching possesses the largest possible weight of all matchings. If the weight of each hyperedge is exactly the same, the problem is referred to as *maximum cardinality matching*, maximizing $|M|$. Finding a cardinality matching or the more general weighted hypergraph matching is NP-hard [26]. This is in contrast to ordinary graphs, for which the problem can be solved in polynomial time [15].

Line Graph. Given a hypergraph $H = (V, E)$, the line graph $L(H) = (V', E')$ is defined by $V' := E$, and $\{e_1, e_2\} \in E'$ if $e_1 \cap e_2 \neq \emptyset$, i.e. there is an edge in $L(H)$ if the two corresponding hyperedges share at least one vertex.

Random Number Generation. Since random number generation itself is a subject of ongoing research, we adopt the common assumption that generating a random number takes constant time, i.e., $O(1)$ complexity.

2.2 Computational Models

The PRAM model consists of processors (PE) with uniform access to shared global memory. Computation proceeds in synchronous steps, where in each cycle every processor can perform a single machine operation, each operation taking unit time. Since an operation of a synchronous PRAM model may involve concurrent memory access by several processors, different variants of the PRAM model are distinguished depending on whether such access is permitted or whether exclusive access is enforced. The *Concurrent Read Exclusive Write (CREW)* model allows for simultaneous read operations but restricts writes such that only one PE may write to a given memory location at any time. The *Concurrent Read Concurrent Write (CRCW)* model allows both simultaneous read and write operations performed to the same shared memory location. For write conflicts in CRCW, several submodels are available: writes are permitted only if all PEs attempt to write the same value (*Common CRCW*); an arbitrary value is chosen (*Arbitrary CRCW*); the value of the PE with the smallest ID is selected (*Priority CRCW*); or the written values are combined according to a predefined operation (*Combining CRCW*).

The MapReduce [12] framework is one of the dominant paradigms for processing large-scale data sets and works by defining two functions: *map* and *reduce*. The map function processes the input in parallel, and the intermediate results are combined and simplified during the reduce phase. When processing large instances, the external memory model [46] provides a two-level storage system, where secondary storage can be accessed randomly as well.

3 Related Work

In this section, we give an overview of the literature on matchings in graphs and hypergraphs as well as related problems.

Matching in Graphs. One of the most famous results in computer science is the polynomial complexity of the matching problem in graphs by Edmonds [15], which can be reduced to $O(mn)$ with the disjoint-set union data structure of Tarjan [19]. Based on the Edmonds algorithm, Schwing et al. [42] developed a parallel shared-memory algorithm for cardinality matching. The first $O(m)^{\frac{1}{2}}$ -approximation is due to Preis [39] and uses locally dominant edges. A simpler algorithm with the same approximation guarantee was developed by Drake and Hougardy [13] using path growing (PGA) in linear time. Pettie and Sanders [38] present a $\frac{2}{3} - \epsilon$ approximation with expected running time of $\mathcal{O}(m \log \frac{1}{\epsilon})$. Birn et al. [8] engineered a parallel algorithm with a $\frac{1}{2}$ -approximation guarantee and $O(\log^2 n)$ running time in the CREW PRAM model utilizing locally dominant edges. Manne and Halappanavar [32] propose the suitor algorithm, which computes the same matching as the greedy algorithm, but is easily parallelizable. Naim et al. [34] implement the suitor approach on GPUs. Mandulak et al. [31] compute locally dominant (pointer-based) matchings on multi-GPU systems and achieve a speedup between 2 and 45 compared to single-GPU implementations.

Matching in Hypergraphs. For d -uniform hypergraphs, Hazan et al. [26] show that the matching problem is not efficiently approximable within a factor of $\Omega(d/\ln(d))$ unless $P = NP$. In the unweighted setting, Fürer and Yu [18] developed a polynomial-time algorithm with an approximation ratio of $\frac{d+1}{3} + \epsilon$. In the weighted setting, Berman’s *SquareImp* algorithm [6] yields an approximation guarantee of $\frac{k+1}{2} + \epsilon$. This was recently improved by Neuwohner, reducing the approximation factor to $\frac{k+\epsilon_k}{2}$ [35] or $\frac{k+1}{2} - 2 \cdot 10^{-4}$ for $k \geq 4$ [36]. We are unaware of any practical implementations of these algorithms. Dufosse et al. [14] introduce reduction rules for special d -partite, d -uniform hypergraphs using Karp-Sipser rules and a scaling argument to select more hyperedges. Hangur and Stein [25] present three algorithms in the MPC (massively parallel computation) model with a trade-off between the approximation guarantee, memory requirement per machine and number of rounds of communication. Their best algorithm with respect to the approximation guarantee takes $O(\log n)$ rounds and $O(nd)$ space per machine. Balliu et al. [4] study the maximal matching and the related independent set problem in hypergraphs in the LOCAL model. They show that with unlimited message size, any deterministic algorithm requires at least $\Omega(\min\{\Delta d, \log_{\Delta d} n\})$ rounds of communication and $\Omega(\min\{\Delta d, \log_{\Delta d} \log n\})$ rounds if the algorithm is randomized. In the semi-streaming model, Reinstädter et al. [40] present two approximation algorithms with a guarantee of $1/d(1+\epsilon)$ in the semi-streaming model. Großmann et al. [24] introduced reductions and local search for the relaxed b -matching that are directly applicable to hypergraph matching and implement these sequentially.

Related Problems The maximum hypergraph matching problem is equivalent to the set packing problem, which involves finding a disjoint subset from a collection of sets such that the sum of its weights is maximized. These problems can also be reduced to the maximum independent set problem (MIS) in the line graph. One of the first parallel algorithms for computing maximal independent sets is due to Karp and Wigderson [28]. The best known is Luby’s algorithm [30] which runs in $O(\log^2 n)$ using $O(m)$ processors in the arbitrary CRCW PRAM model. It assigns random weights to the vertices of the graph and finds dominant vertices in parallel. More recently, the ECL algorithm was proposed by Burtcher et al. [9] for GPUs building upon Luby’s algorithm. Instead of random weights, the weights are inversely proportional to the degree of a vertex, with a deterministic tie-breaker.

4 Algorithms for Hypergraph Matching

We begin with a sequential greedy local maximum algorithm that identifies locally maximal edges in the hypergraph and adds them to the solution. We then develop parallel variants in the PRAM model. Our algorithms iteratively identify locally maximal edges based on weights and add them to the matching while removing conflicting edges. The parallel variants offer different trade-offs between running time and work complexity under varying memory access constraints, with the CRCW variant achieving better time bounds through concurrent writes, while the CREW variant requires additional coordination but maintains exclusive write access.

4.1 Sequential Algorithm

The sequential local-max algorithm works in two steps per round. In the first step we iterate over every active vertex and store the highest weight edge it is part of. Then we check for every edge if it was marked by all its vertices. If they agreed, we add the edge to the matching and remove its neighbors. This process is repeated over several rounds until every edge has either been matched or removed. Before every round, small random perturbations are added to the edge weights taking $O(1)$ time. This noise is essential to reduce the number of rounds and to prevent the algorithm from getting stuck when two edges have identical weights.

Instead of removing, we soft-delete the hyperedges being removed by marking them as inactive in order to reduce the number of times remaining edges would need to be repacked. The implementations in the several models differ only in details of these steps and are discussed in Section 5.

It is straightforward to see that this algorithm generates a maximal matching, since at most one edge per vertex is added to the matching, and this proceeds until each edge is either part of the matching or inactive.

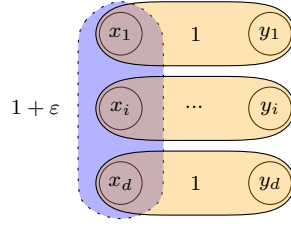


Fig. 1: Visualization for the proof of the tight lower bound in Lemma 2. There are edges that each contain a pair of nodes x_i and y_i for all $i \in \{1, \dots, d\}$ with weight 1. Additionally, all of the nodes x_1 to x_d are also connected by an edge with weight $1 + \epsilon$ (blue).

Approximation Guarantee. The following lemma gives an approximation guarantee for the resulting weight.

Lemma 1. *In a weighted hypergraph H , the weight of any maximal matching M produced by a local max algorithm is at least $1/d$ of the maximum matching, where d denotes the maximum edge size.*

Proof. Let $\mathcal{M}$ be a maximum matching and M the maximal matching of H found by our algorithm. Any edge in $\mathcal{M}$ is either in M or shares a vertex with an edge in M . Otherwise, M would not be maximal.

For every of its up to d vertices, an edge e in $M \setminus \mathcal{M}$ can be a neighbor of an edge f in the given maximum matching $\mathcal{M}$ that is not in M . However, f must not be locally maximal; otherwise, it would be in M . So $\omega(e) > \omega(f)$ (for at least one of its neighbors in M) and $d\omega(e) > \sum_{f \in \mathcal{M} \setminus M: f \cap e \neq \emptyset} \omega(f)$. We rewrite the sum of weights by splitting the sum of $\mathcal{M}$ into $\mathcal{M} \cap M$ and $\mathcal{M} \setminus M$ in $\mathcal{M}$ and bound the latter by scaling the weight of M d times.

$$\sum_{f \in \mathcal{M}} \omega(f) = \sum_{f \in \mathcal{M} \cap M} \omega(f) + \sum_{f \in \mathcal{M} \setminus M} \omega(f) \leq \sum_{e \in M \setminus \mathcal{M}} d\omega(e) + \sum_{e \in \mathcal{M} \cap M} \omega(e) \leq d \sum_{e \in M} \omega(e).$$

The subsequent lemma extends this proof by demonstrating that the bound is tight, which is further illustrated in Figure 1.

Lemma 2. *The approximation guarantee in Lemma 1 is a tight lower bound.*

Proof. Consider a hypergraph H with $n = 2d$ vertices shown in Figure 1. Each vertex is exactly connected to one other with weight 1, resulting in d edges. Add now an edge, which is connected to exactly one vertex of each pair and has weight $1 + \epsilon$ with $\epsilon > 0$. Applying the local max algorithm results in a weight of $1 + \epsilon$ for the matching, but the optimal value is $\frac{n}{2}$ when choosing all the edges with weight 1. Since d can be arbitrarily large and ϵ a small value, $\frac{1}{d}$ is a tight lower bound for the approximation guarantee.

4.2 Parallel Algorithms

Starting from the sequential algorithm, we derive a parallel algorithm for weighted hypergraph matching by applying the same strategy using a Combining CRCW

Algorithm 1 CRCW PRAM Algorithm for Hypergraph Matching

```

1: procedure CRCW-LOCALMAX( $H = (V, E)$ )
2:    $P \leftarrow [0] \times |E|$  {Top edge id count per edge}
3:   while not all edges marked inactive do
4:     for  $e \in E$  active in parallel do
5:        $w(e) \leftarrow \text{rnd}()$  {Initialize weights}
6:     reset  $P$ 
7:     for  $v \in V$  active in parallel do
8:       Find  $e := \text{argmax}_{e \in E(v), e \text{ active}} (w(e))$ .
9:       If  $T[v] \neq e$  then  $T[v] \leftarrow e$  and increase  $P[e]$  {concurrent write}
10:    for  $e \in E$  active in parallel do
11:      if  $P[e] = |e|$  then mark  $e$  as in Matching and all  $v \in e$  as newly completed
12:    for  $v \in V$  active in parallel do
13:      if  $v$  marked newly completed then
14:        for  $e \in E[v]$  active do in parallel mark  $e$  as inactive {concurrent write}
15:      mark  $v$  as inactive

```

model. In the following, we present two refined variants of the model using either concurrent or exclusive writes that solve the unweighted (cardinality) hypergraph matching problem by randomizing the edge weights in each round. This design choice enables a more accurate estimation of the number of rounds (see Claim 4.2). This is necessary since the analysis assumes a uniform distribution of weights for each round independently.

Sum-CRCW PRAM Algorithm. In Algorithm 1, we present a SUM-CRCW PRAM algorithm. In the SUM-CRCW model concurrent writes to the same variable are resolved as additions. Each round of the algorithm consists of four sub-phases. At the beginning of each round, the first phase (Line 4-5) reassigns random weights to the edges. In the second phase, each vertex identifies the heaviest incident edge. The third phase adds all locally maximal edges to the matching and marks their adjacent vertices as newly completed (Line 10-11). In the final phase, all newly completed vertices as well as their adjacent edges are marked as inactive (Line 12-15). An edge is marked inactive by writing an arbitrary positive value and active edges can be identified by having zero as value in the status array of the edges. These four sub-phases are repeated until all edges are either included in the matching or marked as inactive.

Running Time: We divide the analysis of the running time into two main parts. First, we examine the time complexity of a single round. Then, leveraging the properties of the line graph, we establish an upper bound on the total number of rounds required. This results in the following theorem.

Theorem 1. *Algorithm 1 runs in $O(\log m)$ time and $O((\kappa + n) \log m)$ work in combining CRCW PRAM w.h.p.*

Claim. The time per round is bounded by $O(1)$ with work $O(\kappa + n)$ on the Sum-CRCW PRAM model, where κ is the sum of (vertex) degrees in the hypergraph.

Proof. One round of Algorithm 1 consists of four sub-phases.

In the first subphase, using m PEs, randomization can be done in parallel in $O(1)$ time, incurring $O(m)$ work. In the second subphase, using up to $n \cdot (\Delta)^2$ PEs, the locally maximal edge for each vertex is found in $O(1)$ time by three steps. For each vertex we compute the Δ^2 possible comparisons between adjacent edges in parallel. Then we can reduce them using the SUM operator. Finally using Δ processors we can write maximum from the processor assigned to the maximum edge non-concurrently. The subsequent part of the loop performs a concurrent write by incrementing $P[e]$, where P is an array that stores the number of vertices for which an edge e is maximal. This loop requires $O(1)$ time while performing $O(\kappa + n)$ work. In the third subphase, using up to κ PEs, marking vertices as newly completed can be done in $O(1)$ while using $O(\kappa)$ work. A concurrent write here is not needed since there is only one locally maximal edge per vertex. In the fourth subphase, using up to $\kappa + n$ PEs, the deactivation of edges may lead to concurrent writes and results in $O(1)$ time, incurring $O(\kappa + n)$ work. This results in an overall parallel running time of $O(1)$ using up to $n \cdot \Delta^2$ PEs and a total amount of work that is bounded by $O(\kappa + n)$.

The following claim shows that the number of rounds is only dependent on the number of hyperedges, completing the proof.

Claim. Assume the edge weights are distributed uniformly w.h.p. and unique. For hypergraphs, the number of rounds required by the local max algorithm is bounded by $O(\log m)$ w.h.p.

Proof. Consider the line graph $L = (V_L, E_L)$, such that there is one vertex in V_L for every hyperedge in H and two vertices are connected if the represented hyperedges share at least one vertex in the hypergraph. Note that the number of vertices $|V_L|$ is m . Our algorithm is now equivalent to Luby's algorithm [30] on L . This algorithm identifies locally maximal vertices in the (line) graph and removes them and their neighbors. Luby's algorithm requires $\log |V_L|$ rounds w.h.p., assuming the edge weights are distinct. A hyperedge is selected if it has the highest weight out of all its neighbor edges in our algorithm, which also happens in Luby's algorithm, if a vertex has higher weight than its neighbors (aka conflicting hyperedges). Because $n' = m$, we can therefore conclude that there are $O(\log m)$ rounds w.h.p..

Memory Consumption. Our algorithm requires the hypergraph to be present in memory. The representation of this is in $O(\kappa)$, the sum over all vertex degrees. We additionally need to store the status per edge and node and P , which are all in $O(m)$ or $O(n)$, which are in $O(\kappa)$.

CREW PRAM Algorithm. The CRCW algorithm can be converted into a CREW algorithm by temporarily storing information about locally maximal edges and processing it in an additional step. The deactivation of hyperedges must also be carried out in further steps in order to avoid concurrent writes. They are implemented using prefix-sum reductions which take $\log$ time and linear work,

see Section 5.2. This results in the running time and work claimed in the following theorem. The proof can be found in Appendix A.

Theorem 2. *The CREW PRAM algorithm runs in $O((\log \Delta + \log d) \log m)$ time and $O((\kappa + n) \log m)$ work w.h.p.*

Work-Optimal CREW PRAM Algorithm. The algorithms presented in previous sections are designed to achieve a low theoretical running time with $O((\log \Delta + \log d) \log m)$, while resulting in a suboptimal work of $O((\kappa + n) \log m)$. This section describes a version of this algorithm with a running time of $O((\log m + \log n) \log m)$ which only incurs $O(\kappa + n)$ work. This demonstrates a trade-off between running time and the total work performed.

To achieve a work-optimal algorithm, in each round, all marked edges are removed from the hypergraph. Otherwise, the algorithm proceeds analogously to the CREW PRAM model from Section 4.2 until all edges to be removed are marked inactive and the round in the CREW PRAM model is finished. At the end of each such round, the hypergraph representation has to be updated to compute the input hypergraph for the next round, i.e., the respective hyperedges have to be removed. This can be done in $O(\log m + \log n)$ time, which is used by the following theorem.

Theorem 3. *The work-optimal CREW PRAM algorithm runs in $O((\log m + \log n) \log m)$ time and $O(\kappa + n)$ work w.h.p.*

Proof. We show that the compactification of a hypergraph can be done in $O(\log m + \log n)$ time with $O(\kappa + n)$ work after each round of the CREW algorithm: In order to remove marked vertices and edges, a parallel prefix sum is used. Therefore, using either n or m PEs, the prefix sums can be done in $O(\log n + \log m)$ time and with $O(n + m)$ work total. Also, using up to $\kappa + n$ PEs, the data structures (see Section 5.2) can be rebuilt in $O(\log \Delta + \log d)$ with $O(\kappa + n)$ work. In summary, this results in a running time of $O(\log m + \log n)$ for one round of the algorithm, while the work complexity remains at $O(\kappa + n)$. According to Claim 4.2, the number of rounds is w.h.p. bounded by $O(\log m)$, which implies a total running time of $O((\log m + \log n) \log m)$. The work and size of the hypergraph decrease geometrically following the proof of number of rounds (Theorem 4.2) using Luby's [30] algorithm, leading to an overall complexity of $O(\kappa + n)$ w.h.p.

Extension to MapReduce. Each round in our CRCW algorithm can be transformed into several map-reduce steps. Let M be the size of the memory of each compute node. Goodrich et al. [21] state that any Sum-CRCW algorithm, that runs with P processors and N memory cells in T time, can be simulated in $T \log_M P$ rounds with $T(N + P) \log_M(N + P)$ communication complexity. We use up to $N = P = n \cdot \Delta^2$ cells in the parallel arg-max operation, so we require $O(\log m \log_M(n \cdot \Delta^2))$ rounds and have $O(\log m(n \cdot \Delta^2) + \log_M(n \cdot \Delta^2))$ communication complexity.

Extension to External Memory. According to the geometrically decreasing input size, using the work-optimal CREW algorithm, the PRAM emulation techniques from Chiang et al. [10] allow for an implementation in the external memory [2] and cache-oblivious [16] models in $O((\log m + \log n)\text{sort}(\kappa + n))$ I/O operations, where $\text{sort}(N)$ is defined as the number of operations for sorting N elements using the parameters in the external memory model.

5 Implementation Details

This section discusses the implementation details of our algorithms.

5.1 Sequential Algorithm

As the foundation for this approach, we propose a specialized data structure for representing hypergraphs. Accordingly, we utilize two arrays, V_{id} and V_p , to store vertex-related information, and two arrays, E_{id} and E_p , to store edge-related information. The indices of V_{id} are interpreted as vertex identifiers. Moreover, the range $V_{id}[i]$ to $V_{id}[i + 1] - 1$ with $i \in \{0, \dots, n - 1\}$ indicates a consecutive block of indices in V_p , each corresponding to an adjacent edge of vertex i . Furthermore, the values in V_p contain the identifiers for these edges and refer to entries in E_{id} themselves. The same structure is also applied to E_{id} and E_p , where the range $E_{id}[j].first$ to $E_{id}[j + 1].first - 1$ with $j \in \{0, \dots, m - 1\}$ specifies a consecutive block of indices in E_p . Each of the corresponding values in E_p identifies a vertex contained in edge j , and refers to an index of V_{id} . A second tuple entry $E_{id}[i].second$ contains any additional edge-metadata such as weights and flags. Similarly, a second tuple entry $V_{id}[i].second$ also contains additional vertex-metadata such as flags. For simplification, we refer to the combined representation (V_{id}, V_p) as V , and the pair (E_{id}, E_p) as E . Using these data structures allows efficient traversal in both directions by either iterating over edges adjacent to a certain vertex or over all vertices contained in an edge.

Before the algorithm initiates its computation, the weights are reconfigured by adding small noise values. For integer weights, a suitable approach is to generate floating-point random values in the interval $(0, 1)$ which are mostly distinct w.h.p. In the unlikely event of conflicting equal weights, we use tie breakers by adding additional noise values.

Moreover, we allocate two arrays, which store the IDs of the edge with the highest weight per vertex and the number of vertices for which an edge is maximal. The remaining part of the algorithm is round-based and is performed until each edge is either part of the matching M or marked inactive. Therefore, only active edges are considered at any step in the algorithm, which is assumed in the following description of such a round. To start with, the edge with the locally maximal weight is identified for each vertex by a simple loop over all adjacent edges and the result is stored in an array T accordingly. This is necessary as we are using this information in the following rounds to determine whether a vertex found a new maximal edge. Because if exactly that is the case (which it

naturally is for the first round), we increase the pin counter $P[e]$ for an edge e by one. Therefore, to determine locally maximal edges, the algorithm compares the current pin count of an edge to its size. In this case, the edge is added to the matching and all of its adjacent edges, as well as contained vertices, are marked inactive.

5.2 Parallel Algorithms

In the following, we highlight the differences of Algorithm 1 to the sequential model. Specifically, we transformed the outer **for**-loops into parallel loops. For iterations over the set of edges, the algorithm assumes the use of m PEs. Similarly, iterations over the set of vertices are parallelized using n PEs.

CRCW PRAM Algorithm To resolve the necessary processor communication, the increment operation for counting the nodes for which an edge is maximal must be performed atomically to prevent race conditions. Conflicts may also arise during the process of marking edges as inactive. However, since all processors attempt to set the same flag, these conflicts are benign and do not affect correctness.

CREW PRAM Algorithm This section provides a more detailed description of the CREW algorithm which consists of six sub-phases per round of computation. In the first phase, random weights are assigned to the hyperedges, following the assumptions established in Section 4.1. In the second phase, every vertex identifies the adjacent edge with the biggest weight, which is temporarily stored in the array T . This information is then used in the third phase to determine the locally maximal edges, mark them as newly completed, and add them to the matching. In the fourth phase, vertices adjacent to matched edges are marked as newly completed, followed by the fifth phase, where we use a parallel OR-reduction to mark edges which contain newly completed vertices as inactive. In the final sixth phase, newly completed vertices are also marked as inactive. This write is non-concurrent, because every vertex can only be part of one newly completed edge. These phases are repeated until all edges are marked inactive or as in the matching.

Work-Optimal CREW PRAM Algorithm In the following, we describe in detail the compaction of a hypergraph, which is necessary for the work-optimal CREW algorithm.

When marked edges are removed, the information about matched edges has to be stored in an array M for collecting all selected edges before they are excluded from the data structure. Since edges are actually removed and not just marked inactive, the *active* constraint can be dropped for all loops. Otherwise, the algorithm proceeds analogously to the CREW PRAM model from Section 4.2 until all edges to be removed are marked inactive and the round in the CREW

PRAM model is finished. At the end of such a round, the compaction of the hypergraph representation is initialized to prepare for the next round.

This is done by removing all marked vertices and edges from V_{id} and E_{id} , respectively, and updating the pointers in V_p and E_p . To inquire the new position for each vertex $V[i]$, we compute the number of entries $V[j], j < i$, marked inactive. Like before, we can perform parallel (exclusive) prefix sums on the inactive flags in V_{id} , which are stored in P_V . Furthermore, we declare a temporary storage for the compacted graph V' and copy the new degree of each vertex to the new positions, which are calculated by running the same scheme as for parallel prefix sums with MAX as the associative operator on its neighbors. To now compute the new indices for V'_p in V'_{id} , we perform another parallel (exclusive) prefix sum on V'_{id} . Since our data structure for the hypergraph representation is symmetric, the same is applied to the edge set E . To adjust the pointing variables in V'_p to the new positions, the algorithm iterates in parallel over the active neighbors of all vertices by taking the indices from V_{id} and reading the old edge IDs from V_p . Since we already computed the new positions for active edge IDs with the prefix sum P_E , the value is taken from there and then written to the new index in V'_p , which is derived from the already finished array V'_{id} . Once again, we apply the same procedure in the case of the edges to E'_p . Moreover, we copy the compacted results in V' and E' to the old hypergraph representation $H = (V, E)$, which finalizes the preparation for the next round.

6 Experimental Evaluation

This section reports experimental results on computing maximal (cardinality and weighted) weighted hypergraph and unweighted graph matchings. We compare our algorithms with the state-of-the-art implementations for graphs on GPUs [31] and the CPU [8]. For hypergraph matching, there are only CPU implementations available for comparison. Therefore, we can only compare with the streaming algorithms by [40] using the CPU. The implementations are benchmarked across a diverse set of hypergraph and graph instances.

Section 6.2 covers experiments on randomly weighted hypergraphs, while Section 6.3 contains the experiments for maximal cardinality matchings on graphs.

6.1 Methodology

We used a machine equipped with a NVIDIA RTX 4090 and a 16-core Intel Xeon w5-3435X running at 3.10 Ghz having a L3 cache of 45 MB and 128 GB RAM.

Each algorithm was executed three times per instance, with the total set of executions randomly ordered. No experiment was scheduled in parallel. The performance metric for each instance is computed using the arithmetic mean, and the geometric mean is applied when averaging across instances, thereby ensuring that each instance contributes comparably to the final result. While theoretical models such as PRAM assume an unlimited number of processors, in practice,

a considerably smaller number of threads is launched and dynamically scheduled by the framework (Kokkos or CUDA) onto the limited physical processors available. Accordingly, the algorithms were configured to utilize the maximum number of cores available on the hardware. Since the hypergraph is assumed to be preloaded for a sequence of algorithm runs within a larger computation, the runtime for reading the hypergraph into the data structure, and transferring data to the GPU is excluded from the performance comparison. The generation of new random noise per round is included in the running times.

Instances. The set of hypergraphs was collated from a set of instances created by Gottesbüren et al. [22]. Specifically, we use 90 of 94 instances from the large-sized L_{HG} set. These originate from the *SAT competition 2014* [5], more general matrices from the *SuiteSparse collection* [11], and the *DAC challenge* [45]. Four instances were too big to fit onto the RTX 4090 memory. For weighted experiments, we assign random weights between 1 and 100 to the hyperedges. We add the weighted wiki instance from Reinstädter et al. [41]. A set of 42 graphs was obtained from *10th DIMACS Challenge* [1]. This collection includes *Delaunay instances* [27], generated by randomly selecting $n = 2^x$ points in the unit square and computing their Delaunay triangulation. In addition, *random geometric graphs* from the same source are considered, having $n = 2^x$ nodes and αn edges with $\alpha \in \{4, 16, 64\}$. The benchmark set further compromises real-world graphs such as street networks and *co-author and citation networks* [20], which represent social networks. Finally, graphs from the *Florida Sparse Matrix Collection* [11] are included.

Compared Algorithms. We implemented the algorithms in CREW and CRCW fashion in CUDA and Kokkos. They add random noise, sampled uniformly from the interval $[0, 100]$, to the edges between each round. In this section, we compare our CRCW implementations HLM:C (GPU) using an XORWOW generator [33] and the Kokkos implementations HLM:K (GPU) using GPU, one core (HLM:K (1C)) and 16 cores (HLM:K (16C)). On the Kokkos platform we use a XORSHIFT random generator [44]. The random number generator can be switched to a simpler Park-Miller [37] or any other generator.

We compare with the parallel LM (MPI) algorithm for graphs by Birn et al. [8], which is implemented with MPI and kindly provided by the authors. Moreover, we compare it with SUMAC by Mandulak et al. [31] which can run on multiple GPUs. We configured it to run on a single GPU and measured only the raw computation time, excluding initialization costs. For experiments on hypergraphs, a single-core CPU GREEDY implementation and a streaming STACK STREAMING by Reinstädter et al. [40] is used as a baseline. The streaming approach has a approximation guarantee of $1/(d + \varepsilon)$, we set $\varepsilon = 0$ to match the greedy bound. It has a better running time than GREEDY.

All GPU implementations were compiled with nvcc and CUDA 12.8. For the experiments with LM (MPI) we used OpenMPI 5.0.7 with gcc 13.0.3.

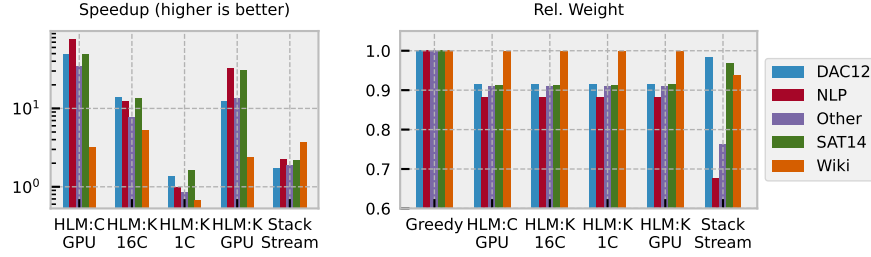


Fig. 2: Results on hypergraphs. Average speedup over GREEDY (left) and relative quality (to the best result) per hypergraph category for our algorithms and STACK STREAMING [40].

6.2 Experiments on Hypergraphs

In Figure 2 we show the results of our experiments on hypergraphs against the competitors from [40].

Speedup over GREEDY. On the left side we show the speedup over the GREEDY algorithm, that runs on the CPU on a single core and sorts all edges in-memory. The STACK STREAMING is between 1.74 and 3.70 times faster than this. Our one-core run HLM:K (1C) is slower on three of the categories (up to a factor of 1.5 times slower), but already on the DAC12 and SAT14 up to 1.61 times faster. When adding more cores (HLM:K (16C)) the speedup is 13 times. This shows how well our algorithm scales with respect to the number of cores. Our Kokkos based GPU implementation is up to 32 times faster than the baseline. However, in the Wiki instance it only has a speed up of 2.38, which is lower than the speed up of the 16 core CPU implementation. The weights of the Wiki instance are not uniformly distributed. Thus, all of our algorithms require 16 rounds to complete this instance instead of 5-7 on the other instances explaining the relative low speed up. The best results with respect to running time, yielding a speedup between 3.20 and 76.6 times, are returned by our CUDA based implementation (HLM:C (GPU)). The main difference between the two implementations is the random number generator used.

Quality. Our algorithms reach between 88.13 and 99.72 % of the weight of the GREEDY matchings. The difference, caused by different random generators, are negligible. The streaming algorithm (STACK STREAMING) returns only 67.51 % on the NLP and 76.14 % on the Other instances. The solution quality on the Wiki instance is also worse than of our algorithm, even though it is the only category where the streaming algorithm was faster.

6.3 Experiments on Graphs

We conduct experiments on graphs to show that our approach is also feasible and efficient on graphs.

Figure 3 shows the speedup over LM (MPI) by Birn et al. [8] and relative size of SUMAC by Mandulak et al. [31] and our algorithms. LM (MPI) uses

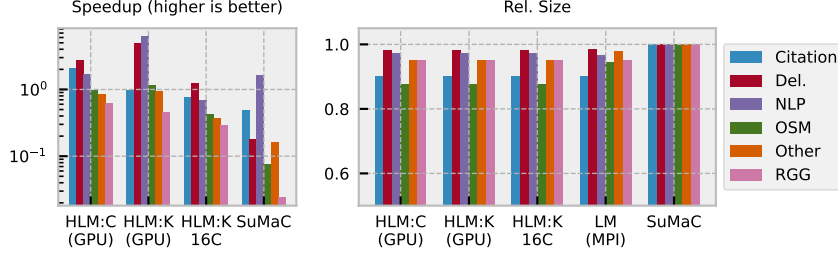


Fig. 3: Experimental results on graphs. Speedup over LM (MPI) by [8] (left) and relative matching size per graph category.

all 16 physical cores of the host via OpenMPI. Our CPU implementation using Kokkos is done via OpenMP. SuMaC is a GPU implementation of a local-dominant algorithm using a suitor technique. It uses the vertex id as tie breaker, while we use uniform edge weight and added random noise in the interval $[0, 100]$. LM (MPI) also uses random weights.

Speedup. Even though the data structure for accessing hypergraphs is more complex, our parallel CPU implementation (HLM:K (16C)) performs 1.24 times faster on the Delaunay instances. On the worst-case (RGG) graphs our implementation is 3.42 slower on the CPU.

When looking at GPU implementations, we can see that our CUDA variant (HLM:C (GPU)) and Kokkos (HLM:K (GPU)) perform better. HLM:C (GPU) is faster on Citation (2.06 times), Delaunay (2.75) and NLP (1.70) than LM (MPI), which runs on 16 cores on the CPU. On OSM, Other and RGG HLM:C (GPU) is between 1.08 and 1.61 times slower than LM (MPI). Again caused by the different random generators, the results to HLM:K (GPU) differ and HLM:K (GPU) is more than twice as fast on NLP graphs. On RGG, Citation networks it is considerably slower than HLM:C (GPU).

When only comparing GPU algorithms, HLM:C (GPU) is up to 15.28 and HLM:K (GPU) up to 27.16 times faster than SuMaC on Delaunay graphs. Only for HLM:C (GPU) the NLP instances from numerics are challenging, here our algorithm is only 1.04 times faster. These graphs are derived from matrices with 3 distinct bands of non-zeros, making them ideal for SuMaC using the edge ids.

Quality. Our algorithms reach 87.6 to 98.2 % of the solution size of SuMaC on unweighted graphs, while the CPU-algorithm by Birn et al. [8] reaches 90 to 97.8 %. The order strictly given by the ids, used in SuMaC, seems to produce better matches. However, we could trade running time for a better solution quality, by making our noise interval smaller.

7 Conclusion

In this paper, we presented a novel family of algorithms to compute matchings in hypergraphs in a efficient parallel fashion.

The algorithms find locally maximal hyperedges in parallel until all edges are matched or removed. We show a running time of $O(\log m)$ with $O((\kappa + n) \log m)$

work in the CRCW model and provide extensions to CREW, a work optimal version, MapReduce and external memory.

In experiments, our algorithms outperform CPU single-core implementations w.r.t. running time up to a factor of 76.6 and reaching a quality of 88.13 % on weighted hypergraphs. In the graph cardinality case, our algorithm HLM:C (GPU) is faster than SUMAC on all and compared to LM (MPI) [8] on half of six graph categories.

Our algorithm can be easily extended to multi-GPU setups, by partitioning, running it on the interior edges in parallel and handling cross-edges on a single GPU. Other future avenues of work include devising, a parallel local search or expanding to the relaxed b -matching problem, where multiple edges can be matched per vertex.

Acknowledgments. We acknowledge support by DFG grant SCHU 2567/8-1, National Science Foundation grant CCF-2432018.

Disclosure of Interests. The authors have no competing interests to declare that are relevant to the content of this article.

References

1. Graph Partitioning and Graph Clustering, 10th DIMACS Implementation Challenge Workshop (2013). 10.1090/conm/588
2. Aggarwal, A., Vitter, J.S.: The input/output complexity of sorting and related problems. *Commun. ACM* (9) (1988). 10.1145/48529.48535
3. Auer, B.F., Bisseling, R.H.: A gpu algorithm for greedy graph matching (2012). 10.1007/978-3-642-30397-5_10
4. Balliu, A., Brandt, S., Kuhn, F., Olivetti, D.: Distributed maximal matching and maximal independent set on hypergraphs. In: *SODA 2023*. SIAM (2023). 10.1137/1.9781611977554.ch100
5. Belov, A., Diepold, D., Heule, M., Jarvisalo, M.: The SAT competition 2014. <http://www.satcompetition.org/2014/index.shtml> (2014)
6. Berman, P.: A $d/2$ approximation for maximum weight independent set in d -claw free graphs. In: *SWAT 2000*. Berlin, Heidelberg (2000). 10.1007/3-540-44985-X_19
7. Besser, B., Poloczek, M.: Greedy matching: Guarantees and limitations. *Algorithmica* (2017). 10.1007/s00453-015-0062-2
8. Birn, M., Osipov, V., Sanders, P., Schulz, C., Sitchinava, N.: Efficient parallel and external matching. In: *Euro-Par 2013* (2013). 10.1007/978-3-642-40047-6_66
9. Burtscher, M., Devale, S., Azimi, S., Jaiganesh, J., Powers, E.: A high-quality and fast maximal independent set implementation for gpus. *ACM Trans. Parallel Comput.* (2) (2018). 10.1145/3291525
10. Chiang, Y., Goodrich, M.T., Grove, E.F., Tamassia, R., Vengroff, D.E., Vitter, J.S.: External-memory graph algorithms. In: *SODA 1995* (1995)
11. Davis, T.A., Hu, Y.: The university of florida sparse matrix collection. *ACM Trans. on Math. Software* (1) (2011). 10.1145/2049662.2049663
12. Dean, J., Ghemawat, S.: Mapreduce: simplified data processing on large clusters. *Communications of the ACM* (1) (2008). 10.1145/1327452.1327492
13. Drake, D., Hougardy, S.: A Simple Approximation Algorithm for the Weighted Matching Problem. *Information Processing Letters* (2003). 10.1016/S0020-0190(02)00393-9
14. Dufossé, F., Kaya, K., Panagiotas, I., Uçar, B.: Effective heuristics for matchings in hypergraphs. In: *SEA 2019* (2019). 10.1007/978-3-030-34029-2_17

15. Edmonds, J.: Paths, trees, and flowers. *Canadian Journal of Mathematics* (1965). 10.4153/CJM-1965-045-4
16. Frigo, M., Leiserson, C.E., Prokop, H., Ramachandran, S.: Cache-oblivious algorithms. In: FOCS 1999 (1999). 10.1109/SFFCS.1999.814600
17. Froger, A., Guyon, O., Pinson, E.: A set packing approach for scheduling passenger train drivers: the French experience. In: RailTokyo2015 (2015)
18. Fürer, M., Yu, H.: Approximating the k -set packing problem by local improvements. In: Comb. Opt. Cham (2014). 10.1007/978-3-319-09174-7_35
19. Gabow, H.N., Tarjan, R.E.: A linear-time algorithm for a special case of disjoint set union. *J. Comput. Syst. Sci.* (2) (1985). 10.1016/0022-0000(85)90014-5
20. Geisberger, R., Sanders, P., Schultes, D.: Better approximation of betweenness centrality. In: ALENEX 2008 (2008). 10.1137/1.9781611972887.9
21. Goodrich, M.T., Sitchinava, N., Zhang, Q.: Sorting, searching, and simulation in the mapreduce framework (2011). 10.1007/978-3-642-25591-5_39
22. Gottesbüren, L., Heuer, T., Maas, N., Sanders, P., Schlag, S.: Scalable high-quality hypergraph partitioning. *CoRR* (2023). 10.48550/arXiv.2303.17679
23. Gottlob, G., Greco, G.: Decomposing combinatorial auctions and set packing problems. *J. ACM* (4) (2013). 10.1145/2508028.2505987
24. Großmann, E., Joos, F., Reinstädler, H., Schulz, C.: Engineering hypergraph b -matching algorithms. *JGAA* **30**(1), 1–24 (Jan 2026). 10.7155/jgaa.v30i1.3166
25. Hanguir, O., Stein, C.: Distributed algorithms for matching in hypergraphs. In: 18th WAOA (2020). 10.1007/978-3-030-80879-2_3
26. Hazan, E., Safra, S., Schwartz, O.: On the complexity of approximating k -set packing. *Comput. Complex.* (1) (2006). 10.1007/s00037-006-0205-6
27. Holtgrewe, M., Sanders, P., Schulz, C.: Engineering a scalable high quality graph partitioner. In: IPDPS 2010 (2010). 10.1109/IPDPS.2010.5470485
28. Karp, R.M., Wigderson, A.: A fast parallel algorithm for the maximal independent set problem. In: 16th Annual ACM Symposium on Theory of Computing. New York, NY, USA (1984). 10.1145/800057.808690
29. Korte, B., Hausmann, D.: An analysis of the greedy algorithm for independence systems. *Annals of Discrete Mathematics* (1978). 10.1007/BF01917662
30. Luby, M.: A simple parallel algorithm for the maximal independent set problem. In: 17th ACM symposium on Theory of computing (1985). 10.1145/22145.22146
31. Mandulak, M., Ghosh, S., Ferdous, S., Halappanavar, M., Slota, G.: Efficient weighted graph matching on gpus. In: SC24. IEEE (2024). 10.1109/SC41406.2024.00024
32. Manne, F., Halappanavar, M.: New effective multithreaded matching algorithms. In: IPDPS 2014. IEEE (2014). 10.1109/IPDPS.2014.61
33. Marsaglia, G.: Xorshift rngs. *Journal of Statistical Software* (01 2003). 10.18637/jss.v008.i14
34. Naim, M., Manne, F., Halappanavar, M., Tumeo, A., Langguth, J.: Optimizing approximate weighted matching on nvidia kepler k40. In: (HiPC 2015). IEEE (2015). 10.1109/HiPC.2015.15
35. Neuwohner, M.: The limits of local search for the maximum weight independent set problem in d -claw free graphs. *CoRR* (2021). 10.48550/arXiv.2106.03555
36. Neuwohner, M.: Passing the limits of pure local search for weighted k -set packing. In: SODA 2023. SIAM (2023). 10.1137/1.9781611977554.ch41
37. Park, S.K., Miller, K.W.: Random number generators: Good ones are hard to find. *Commun. ACM* (10) (1988). 10.1145/63039.63042

38. Pettie, S., Sanders, P.: A simpler linear time $2/3-\varepsilon$ approximation for maximum weight matching. *Information Processing Letters* (6) (2004). <https://doi.org/10.1016/j.ipl.2004.05.007>
39. Preis, R.: Linear time $1/2$ -approximation algorithm for maximum weighted matching in general graphs. In: STACS 99 (1999). 10.1007/3-540-49116-3_24
40. Reinstädter, H., Ferdous, S.M., Pothen, A., Uçar, B., Schulz, C.: Semi-Streaming Algorithms for Hypergraph Matching. In: ESA 2025 (2025). 10.4230/LIPIcs.ESA.2025.79
41. Reinstädter, H., Ferdous, S., Pothen, A., Uçar, B., Schulz, C.: Wiki hypergraphs for the paper "semi-streaming algorithms for hypergraph matching" (2025). 10.5281/zenodo.15778413
42. Schwing, G., Grosu, D., Schwiebert, L.: Shared-memory parallel edmonds blossom algorithm for maximum cardinality matching in general graphs. In: IEEE IPDPS 2024 (2024). 10.1109/IPDPSW63119.2024.00107
43. Trott, C., Berger-Vergiat, L., Poliakoff, D., Rajamanickam, S., Lebrun-Grandie, D., Madsen, J., Al Awar, N., Gligoric, M., Shipman, G., Womeldorff, G.: The kokkos ecosystem: Comprehensive performance portability for high performance computing. *Computing in Science Engineering* (5) (2021). 10.1109/MCSE.2021.3098509
44. Vigna, S.: An experimental exploration of marsaglia's xorshift generators, scrambled (2016), arxiv.org/abs/1402.6246
45. Viswanathan, N., Alpert, C.J., Sze, C.C.N., Li, Z., Wei, Y.: The DAC 2012 routability-driven placement contest and benchmark suite. In: DAC '12. San Francisco, CA, USA (2012). 10.1145/2228360.2228500
46. Vitter, J.S., Shriver, E.A.M.: Algorithms for parallel memory, i: Two-level memories. *Algorithmica* (2) (1994). 10.1007/BF01185207

A Work per Round on the CREW model

Theorem 4. *The CREW PRAM algorithm runs in $O((\log \Delta + \log d) \log m)$ time and $O((\kappa + n) \log m)$ work w.h.p.*

Proof. One round of Algorithm 2 consists of six sub-phases.

In the first subphase, using m PEs, randomization can be done in parallel in $O(1)$ time, incurring $O(m)$ work.

In the second subphase, using up to $\kappa + n$ PEs, the locally maximal edge for each vertex is found using the same technique as for parallel prefix sums with MAX as the associative operator on each subset of edges that all contain a single vertex. Since V has size $O(\kappa + n)$, this step takes $O(\log \Delta)$ time and $O(\kappa + n)$ work.

In the third subphase, using up to κ PEs, counting all vertices for which an edge is maximal in line 11 can be performed using prefix sums with SUM as the associative operator. Since E has size $O(\kappa)$, this step takes $O(\log d)$ while using $O(\kappa)$ work.

In the fourth subphase, using up to $\kappa + n$ PEs, marking vertices as newly completed takes $O(1)$ time and $O(\kappa + n)$ work. Since for every vertex, at most one edge this vertex is contained in can be marked newly completed, this step involves only exclusive writes.

In the fifth subphase, using up to κ PEs, marking edges as inactive in parallel requires a logarithmic OR-reduction to prevent concurrent writes. This is achieved by using parallel prefix sums with OR as the associative operator on each subset of vertices that are contained in a single edge. This step takes $O(\log d)$ time and $O(\kappa)$ work. In the sixth subphase, using up to n PEs, marking vertices as inactive takes $O(1)$ time and $O(n)$ work. This results in an overall parallel running time of $O(\log \Delta + \log d)$ while the total amount of work is limited by $O(\kappa + n)$.

Algorithm 2 CREW PRAM Algorithm for Hypergraph Matching

```

1: procedure CREW-LOCALMAX( $H = (V, E)$ )
2:    $T \leftarrow [\perp] \times |V|$  {Top edge id for every vertex}
3:   while not all edges marked inactive do
4:     for  $e \in E$  active in parallel do
5:        $w(e) \leftarrow \text{rnd}()$  {Initialize weights}
6:     for  $v \in V$  active in parallel do
7:        $e := \text{argmax}_{e \in E(v), e \text{ active}}(w(e))$ 
8:       if  $T[v] \neq e$  then
9:          $T[v] \leftarrow e$ 
10:    for  $e \in E$  active in parallel do
11:       $P_e = \sum_{v \in e} \begin{cases} 1 & \text{if } T[v] = e \\ 0 & \text{else} \end{cases}$ 
12:      if  $P_e = |e|$  then
13:        mark  $e$  as in Matching
14:        mark  $e$  as newly completed
15:      for  $v \in V$  active in parallel do
16:        for  $e \in E[v]$  in parallel do
17:          if  $e$  is newly completed then
18:            mark  $v$  as newly completed
19:      for  $e \in E$  active in parallel do
20:        any_marked =  $\bigvee_{e \in E(v)} \text{active}(e)$ 
21:        if any_marked then
22:          mark  $e$  as inactive
23:      for  $v \in V$  active in parallel do
24:        if  $v$  is newly completed then
25:          mark  $v$  as inactive

```

B Instance Statistics

Hypergraph instances

Table 1: Benchmark set of hypergraphs with $|V|$ representing the number of vertices and $|E|$ the number of hyperedges.

Hypergraph	$ V $	$ E $
Bump_2911	2 911 419	2 911 419
CurlCurl_4	2 380 515	2 380 515
Emilia_923	923 136	923 136
Flan_1565	1 564 794	1 564 794
Freescape1	3 428 755	3 428 755
FullChip	2 987 012	2 987 012
Ga41As41H72	268 096	268 096
Geo_1438	1 437 960	1 437 960
HV15R	2 017 169	2 017 169
RM07R	381 689	381 689
StocF-1465	1 465 137	1 465 137
af_shell10	1 508 065	1 508 065
af_shell6	504 855	504 855
boneS10	914 898	914 898
circuit5M	5 558 326	5 558 326
dac2012_superblue11	952 507	935 731
dac2012_superblue12	1 291 931	1 293 436
dac2012_superblue14	630 802	619 815
dac2012_superblue16	698 339	697 458
dac2012_superblue19	522 482	511 685
dac2012_superblue2	1 010 321	990 899
dac2012_superblue3	917 944	898 001
dac2012_superblue6	1 011 662	1 006 629
dac2012_superblue7	1 360 217	1 340 418
dac2012_superblue9	844 332	833 808
dgreen	1 200 611	1 200 611
dielFilterV2clx	607 232	607 232
dielFilterV2real	1 157 456	1 157 456
dielFilterV3clx	420 408	420 408
dielFilterV3real	1 102 824	1 102 824
fem_hifreq_circuit	491 100	491 100
gsm_106857	589 446	589 446
hugebubbles-00010	19 458 087	19 458 087
inline_1	503 712	503 712
kmer_P1a	139 353 211	139 353 211
ldoor	952 203	952 203

Continuation on the next page

Table 1: (Continuation)

msdoor	415 863	415 863
nlpkkt160	8 345 600	8 345 600
nlpkkt200	16 240 000	16 240 000
nlpkkt80	1 062 400	1 062 400
rajat31	4 690 002	4 690 002
sat14_11pipe_k.cnf.dual	5 584 003	89 315
sat14_11pipe_k.cnf	178 630	5 584 003
sat14_11pipe_k.cnf.primal	89 315	5 584 003
sat14_9vliw_m_9stages_iq3_C1_bug8.cnf.dual	13 378 617	521 179
sat14_9vliw_m_9stages_iq3_C1_bug8.cnf	1 042 358	13 378 617
sat14_9vliw_m_9stages_iq3_C1_bug8.cnf.primal	521 179	13 378 617
sat14_SAT_dat.k100-24_1_rule_1.cnf.dual	6 356 704	1 621 762
sat14_SAT_dat.k100-24_1_rule_1.cnf	3 195 850	6 356 704
sat14_SAT_dat.k100-24_1_rule_1.cnf.primal	1 621 762	6 356 704
sat14_SAT_dat.k100-24_1_rule_2.cnf.dual	6 356 692	1 621 756
sat14_SAT_dat.k100-24_1_rule_2.cnf	3 195 838	6 356 692
sat14_SAT_dat.k100-24_1_rule_2.cnf.primal	1 621 756	6 356 692
sat14_SAT_dat.k95-24_1_rule_3.cnf.dual	6 036 162	1 540 071
sat14_SAT_dat.k95-24_1_rule_3.cnf	3 034 828	6 036 162
sat14_SAT_dat.k95-24_1_rule_3.cnf.primal	1 540 071	6 036 162
sat14_atco_enc3_opt1_04_50.cnf.dual	6 429 816	1 613 160
sat14_atco_enc3_opt1_04_50.cnf	3 226 318	6 429 816
sat14_atco_enc3_opt1_04_50.cnf.primal	1 613 160	6 429 816
sat14_atco_enc3_opt2_05_21.cnf.dual	5 933 456	1 484 061
sat14_atco_enc3_opt2_05_21.cnf	2 968 120	5 933 456
sat14_atco_enc3_opt2_05_21.cnf.primal	1 484 061	5 933 456
sat14_blocks-blocks-37-1.130-N'.dual	10 223 027	559 571
sat14_blocks-blocks-37-1.130-N'	1 119 142	10 223 027
sat14_blocks-blocks-37-1.130-N'.primal	559 571	10 223 027
sat14_esawn_uw3.debugged.cnf.dual	53 616 734	13 829 558
sat14_esawn_uw3.debugged.cnf	27 659 037	53 616 734
sat14_esawn_uw3.debugged.cnf.primal	13 829 558	53 616 734
sat14_sin.c.75.smt2-cvc4-sc2016.cnf.dual	32 591 905	7 916 927
sat14_sin.c.75.smt2-cvc4-sc2016.cnf	15 833 854	32 591 905
sat14_sin.c.75.smt2-cvc4-sc2016.cnf.primal	7 916 927	32 591 905
sat14_sv-comp19_p'.barrier_3t'.cnf.dual	46 604 325	9 580 427
sat14_sv-comp19_p'.barrier_3t'.cnf	19 160 854	46 604 325
sat14_sv-comp19_p'.barrier_3t'.cnf.primal	9 580 427	46 604 325
sat14_sv-comp19_p'.queue_longer'.cnf.dual	39 379 566	8 043 315
sat14_sv-comp19_p'.queue_longer'.cnf	16 086 630	39 379 566
sat14_sv-comp19_p'.queue_longer'.cnf.primal	8 043 315	39 379 566
sat14_velev-npe-1.0-9dlx-b71.cnf.dual	14 582 074	889 302
sat14_velev-npe-1.0-9dlx-b71.cnf	1 778 604	14 582 074

Continuation on the next page

Table 1: (Continuation)

sat14_velev-npe-1.0-9dlx-b71.cnf.primal	889 302	14 582 074
sat14_zfcp-2.8-u2-nh.cnf.dual	32 697 150	10 950 109
sat14_zfcp-2.8-u2-nh.cnf	21 899 848	32 697 150
sat14_zfcp-2.8-u2-nh.cnf.primal	10 950 109	32 697 150
ss	1 652 680	1 652 680
stokes	11 449 533	11 449 533
uk-2002	18 520 486	15 759 370
vas_stokes_1M	1 090 664	1 090 664
vas_stokes_2M	2 146 677	2 146 677
vas_stokes_4M	4 382 246	4 382 246
wb-edu	9 845 725	6 920 306
en_wiki_latest_dec2024_access	293 177	7 847 749

Graph instances

Table 2: Benchmark set of graphs with $|V|$ representing the amount of nodes and $|E|$ the number of edges.

Graph	$ V $	$ E $
af_shell10	1 508 065	25 582 130
af_shell9	504 855	8 542 010
asia.osm	11 950 757	12 711 603
audikw1	943 695	38 354 076
belgium.osm	1 441 295	1 549 970
cage15	5 154 859	47 022 346
citationCiteseer	268 495	1 156 647
coAuthorsCiteseer	227 320	814 134
coAuthorsDBLP	299 067	977 676
coPapersCiteseer	434 102	16 036 720
coPapersDBLP	540 486	15 245 729
delaunay_n19	524 288	1 572 823
delaunay_n20	1 048 576	3 145 686
delaunay_n21	2 097 152	6 291 408
delaunay_n22	4 194 304	12 582 869
delaunay_n23	8 388 608	25 165 784
delaunay_n24	16 777 216	50 331 601
ecology1	1 000 000	1 998 000
ecology2	999 999	1 997 996
G3_circuit	1 585 478	3 037 674
germany.osm	11 548 845	12 369 181
great-britain.osm	7 733 822	8 156 517

Continuation on the next page

Table 2: (Continuation)

italy.osm	6 686 493	7 013 978
kkt_power	2 063 494	6 482 320
ldoor	952 203	22 785 136
luxembourg.osm	114 599	119 666
netherlands.osm	2 216 688	2 441 238
nlpkkt120	3 542 400	46 651 696
nlpkkt160	8 345 600	110 586 256
nlpkkt200	16 240 000	215 992 816
nlpkkt240	27 993 600	373 239 376
rgg_n_2_15_s0	32 768	160 240
rgg_n_2_16_s0	65 536	342 127
rgg_n_2_17_s0	131 072	728 753
rgg_n_2_18_s0	262 144	1 547 283
rgg_n_2_19_s0	524 288	3 269 766
rgg_n_2_20_s0	1 048 576	6 891 620
rgg_n_2_21_s0	2 097 152	14 487 995
rgg_n_2_22_s0	4 194 304	30 359 198
rgg_n_2_23_s0	8 388 608	63 501 393
rgg_n_2_24_s0	16 777 216	132 557 200
thermal2	1 227 087	3 676 134