

HOST/INTERCHANGE CONFIGURATION ACQUIRER/ISSUER

Host/Interchange Acquirer

- Host/Interchange acquiring involves:
 - acquiring transactions from host/interchange processors
 - creating TDEs from the external transaction message and certain configuration data
 - determining the issuer of the payment instrument
 - determining whether the transaction is allowed by the acquirer




Host/Interchange Acquirer

- Host/Interchange acquiring involves:
 - invoking routing
 - processing the response based on the value of the Action Code
 - journaling the transaction
 - mapping the internal action code to an external action code
 - formatting an external response message from TDEs and configuration data



Component Interactions

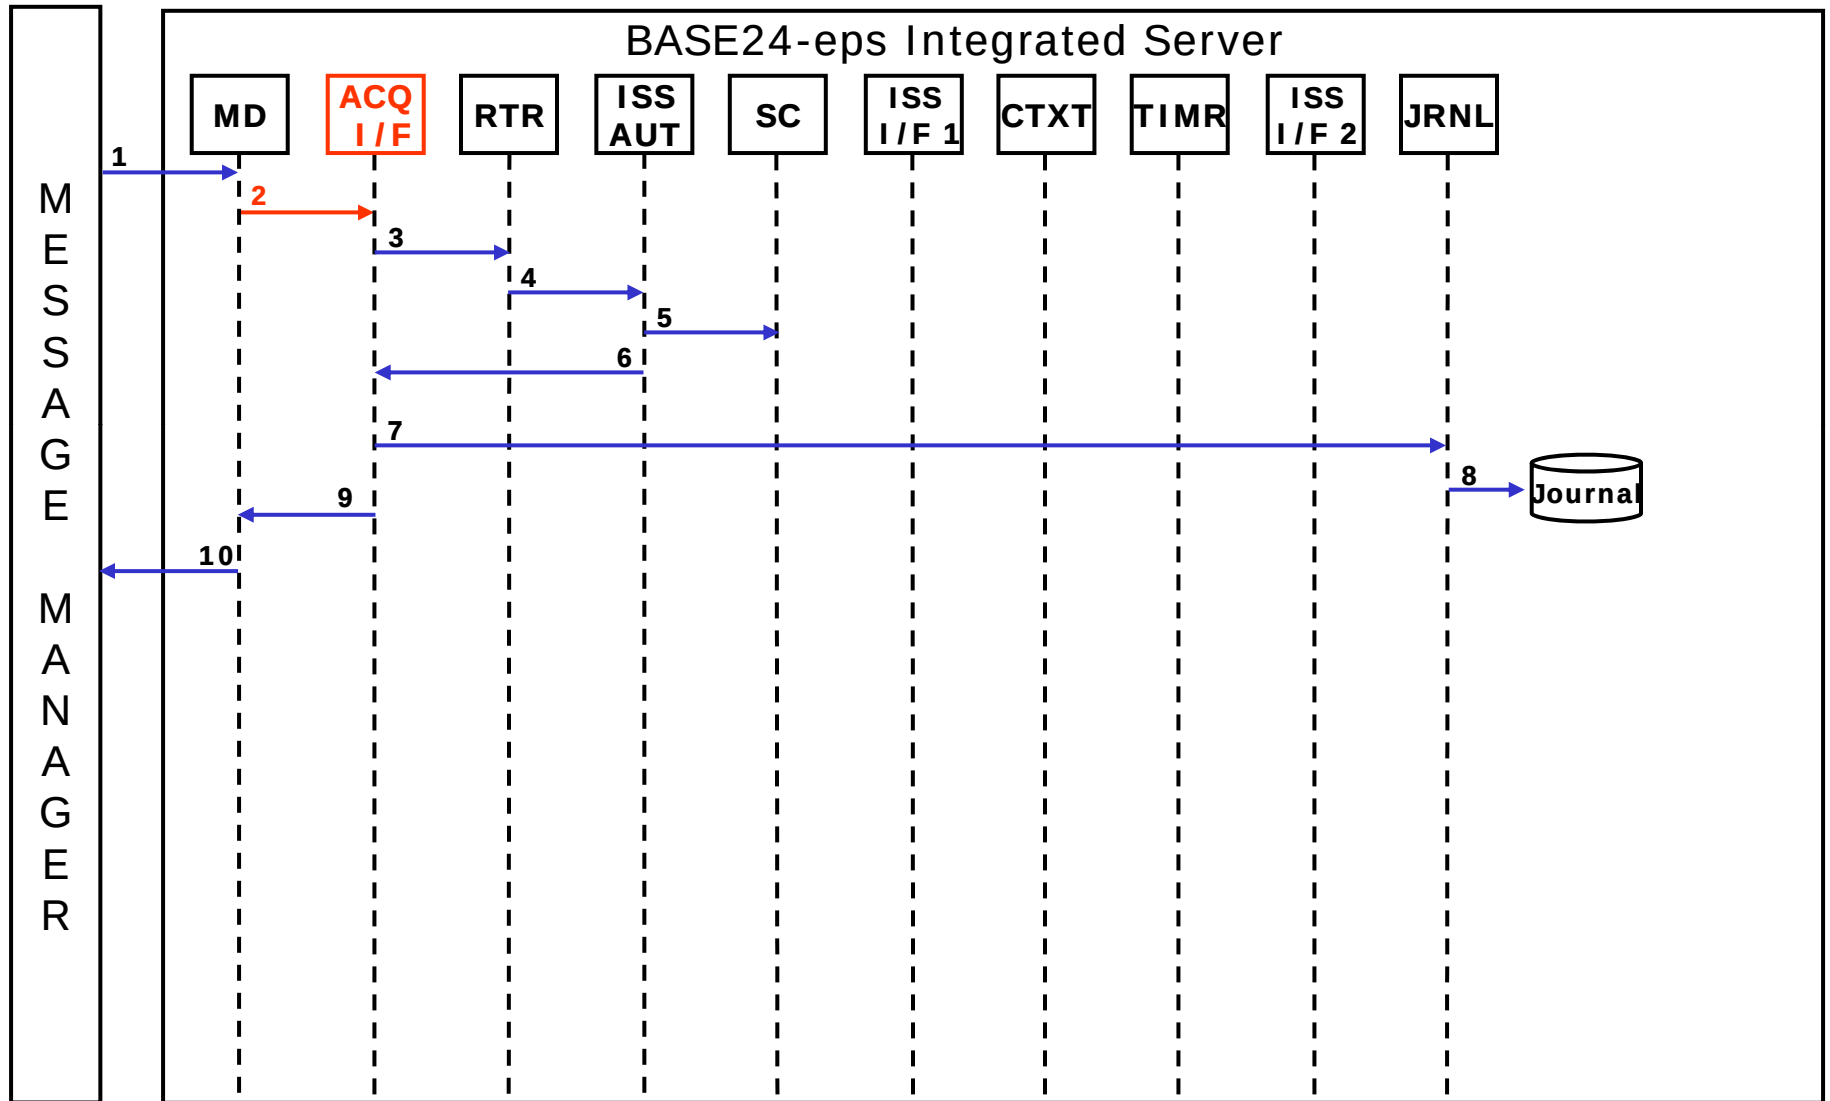

Internal Authorization – Request/Response

Host/Interchange Issuer

- Host/Interchange issuing involves:
 - determining whether the transaction is allowed to the issuer
 - creating the external transaction message from TDEs and certain configuration data
 - requesting an expiration timer
 - saving context




Host/Interchange Issuer

- Host/Interchange issuing involves:
 - sending transactions to host/interchange processors
 - updating/creating TDEs from the external transaction message, transaction context, and certain configuration data
 - mapping the external action code to an internal action code
 - invoking the acquirer component




Component Interactions

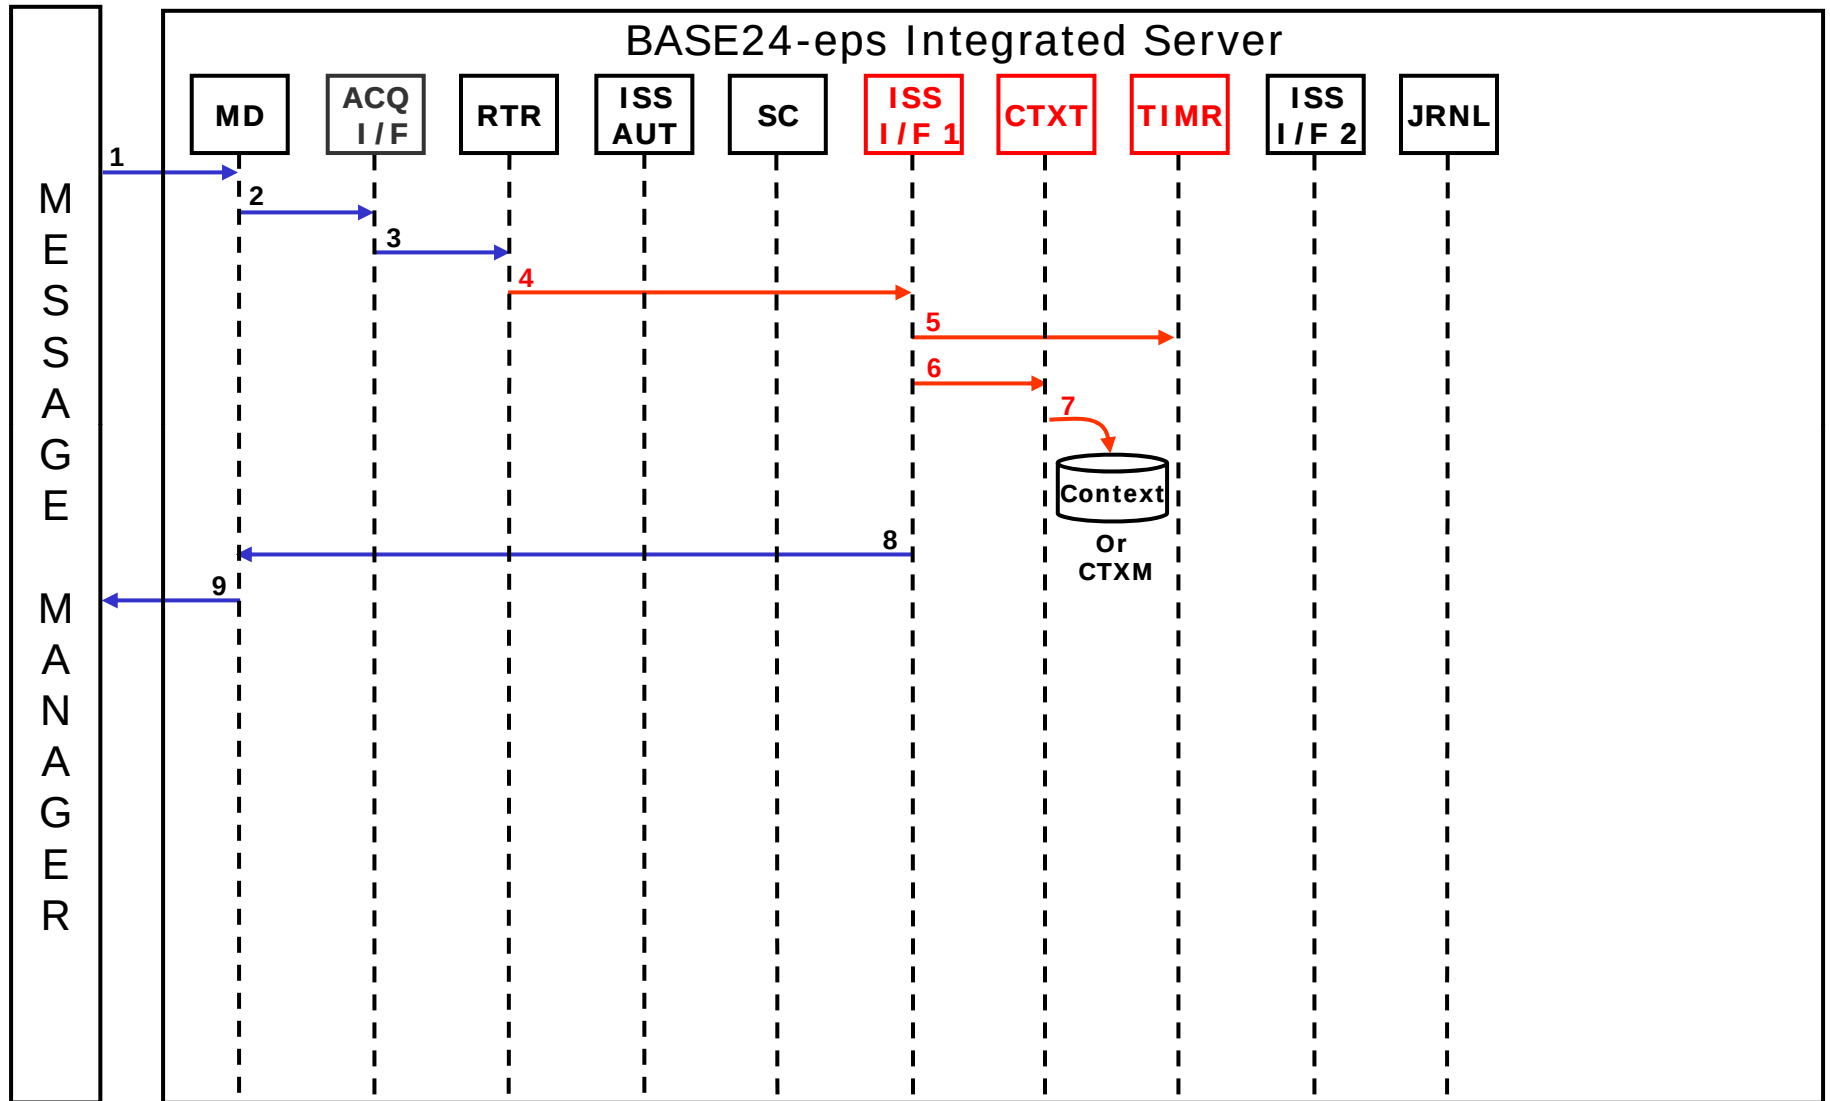


External Authorization – Request

Component Interactions

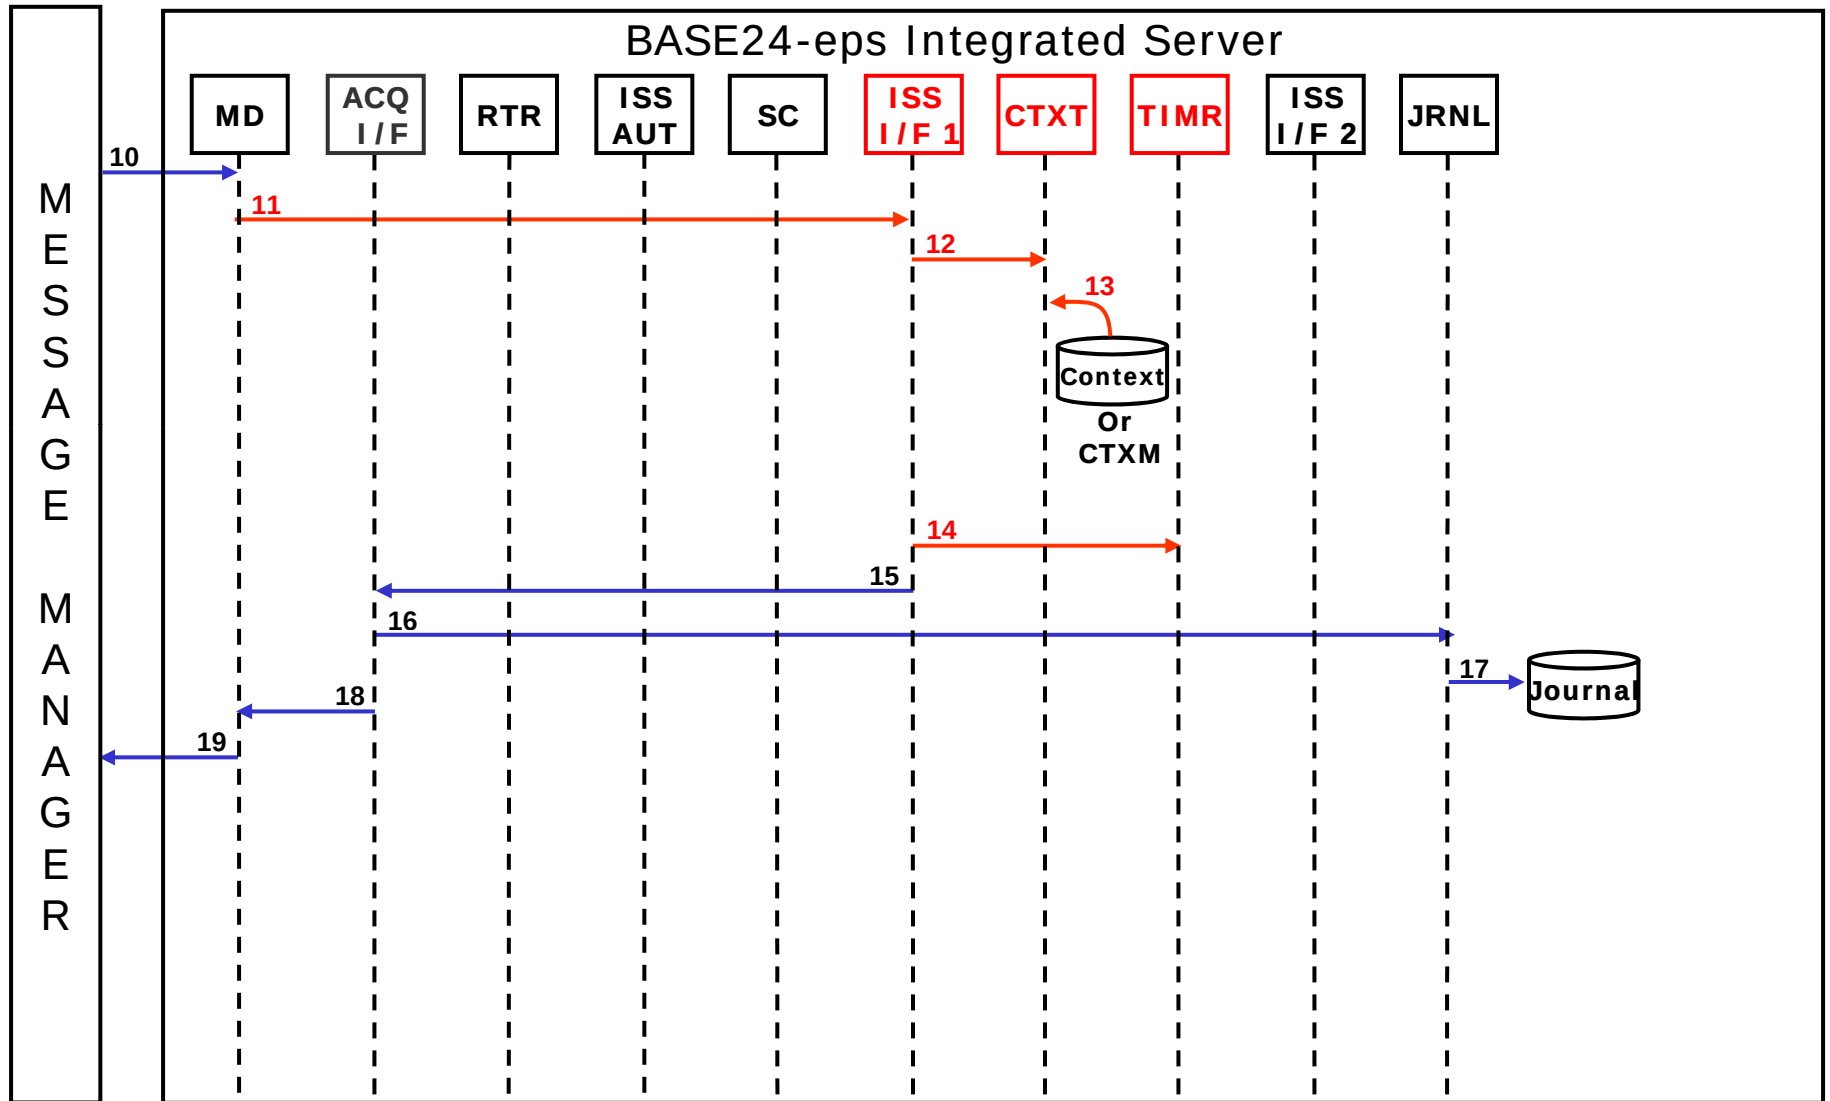


External Authorization – Response

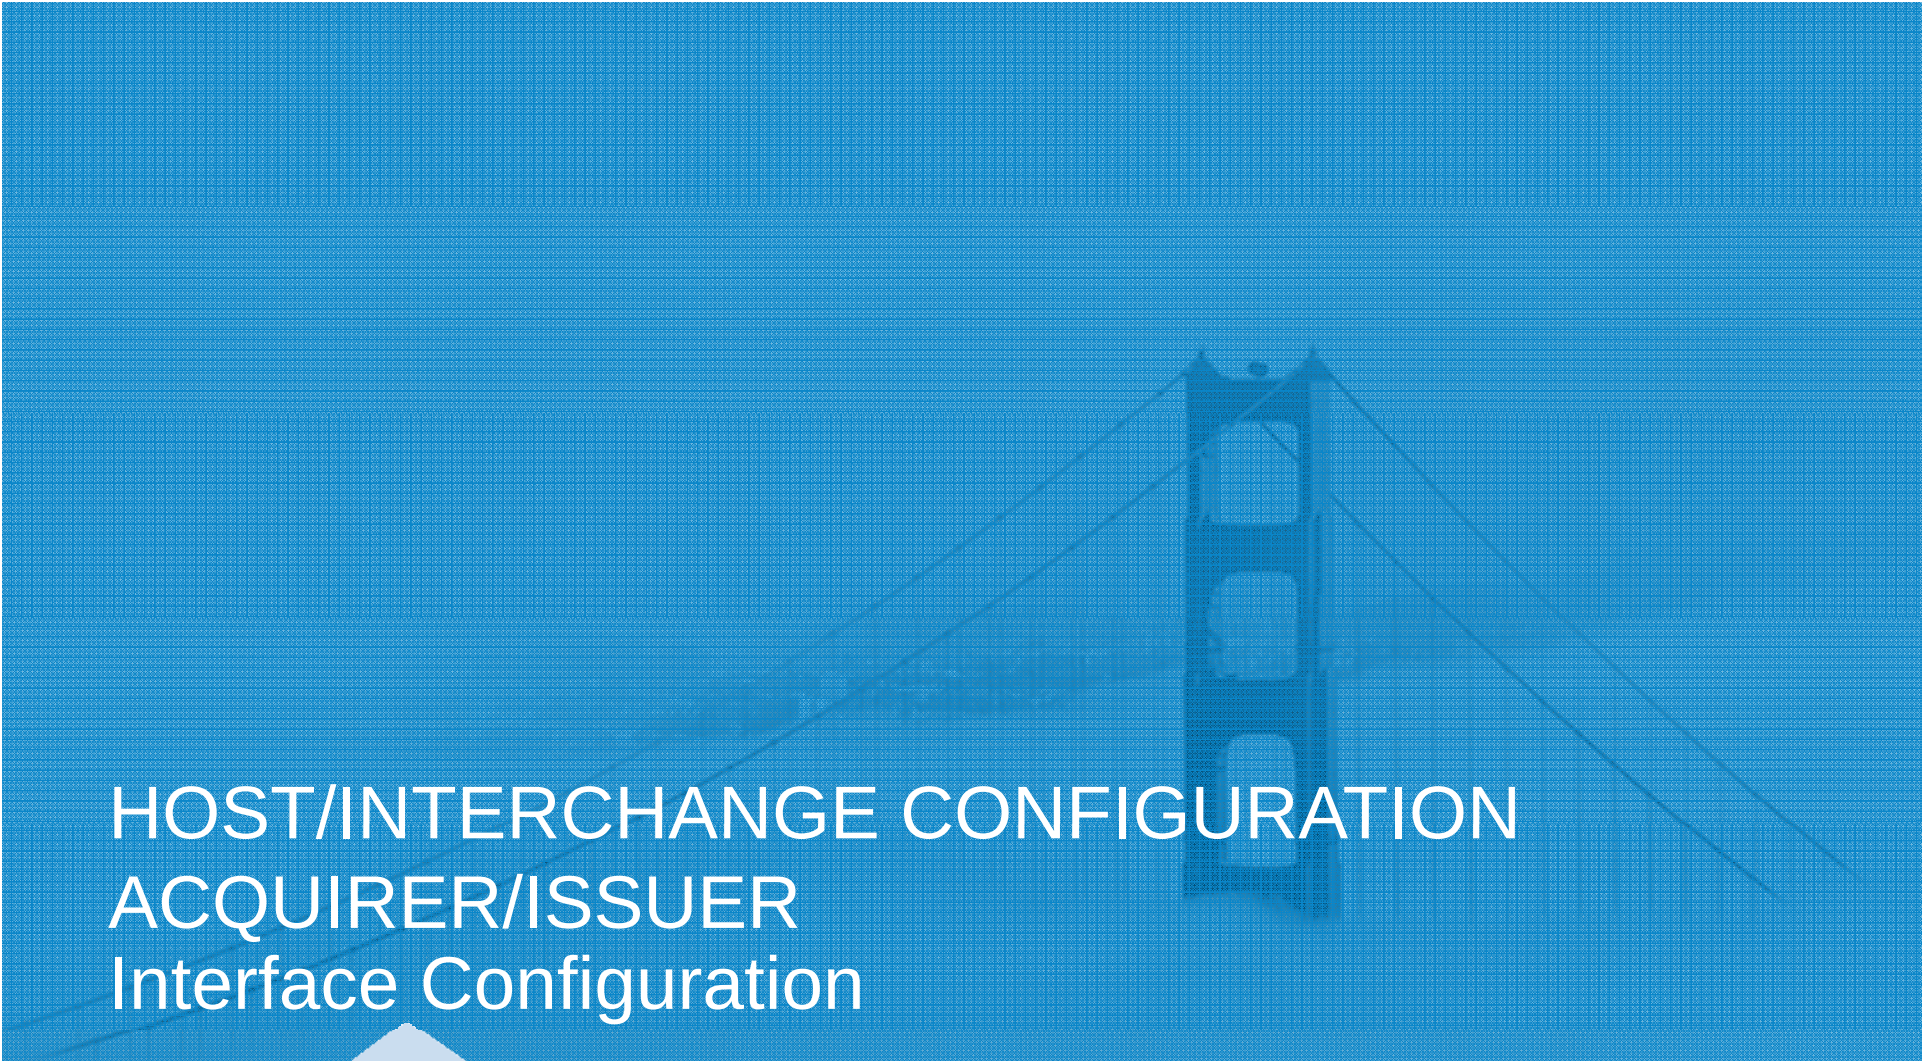

HOST/INTERCHANGE CONFIGURATION ACQUIRER/ISSUER Interface Configuration

Database Configuration – Interface Configuration


- Configure these profile records first when adding an Interface record:

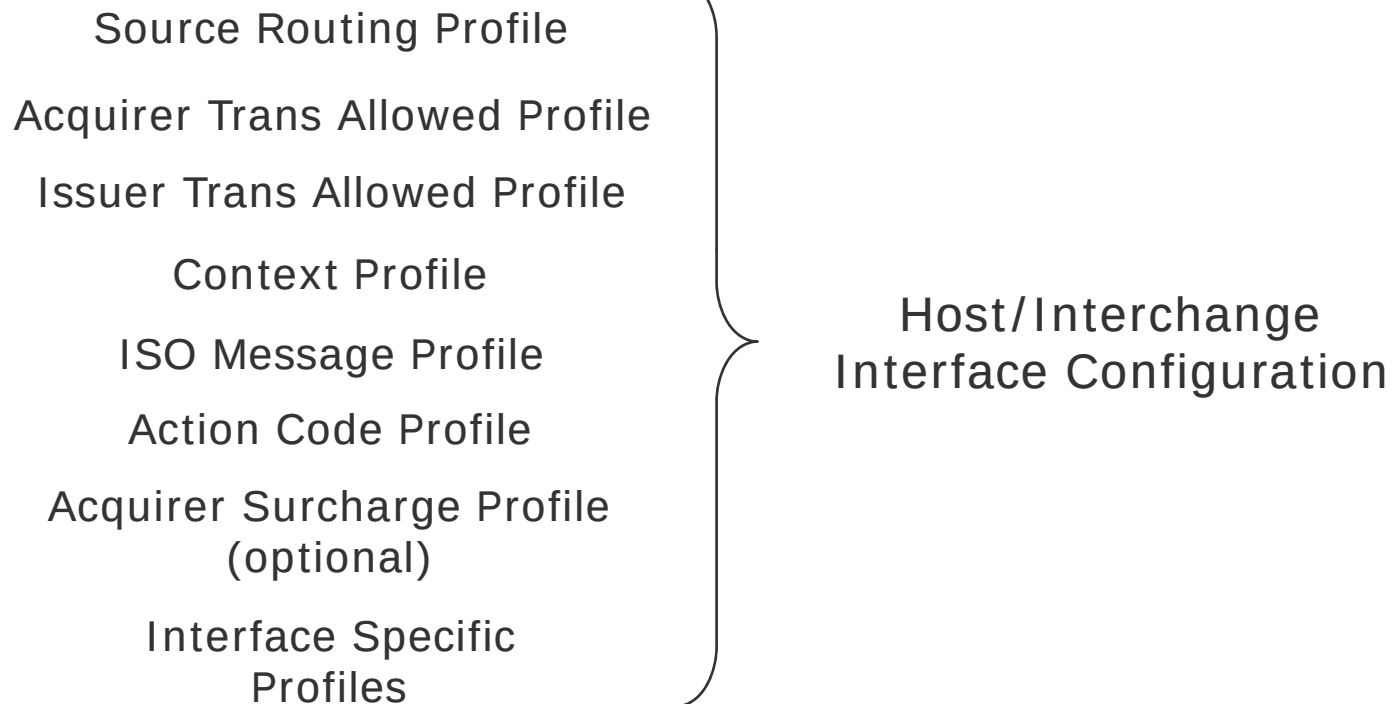

- The profile records and Interface records must be added before the Destination Routing records can be added if transactions will be authorized externally.



Host/Interchange

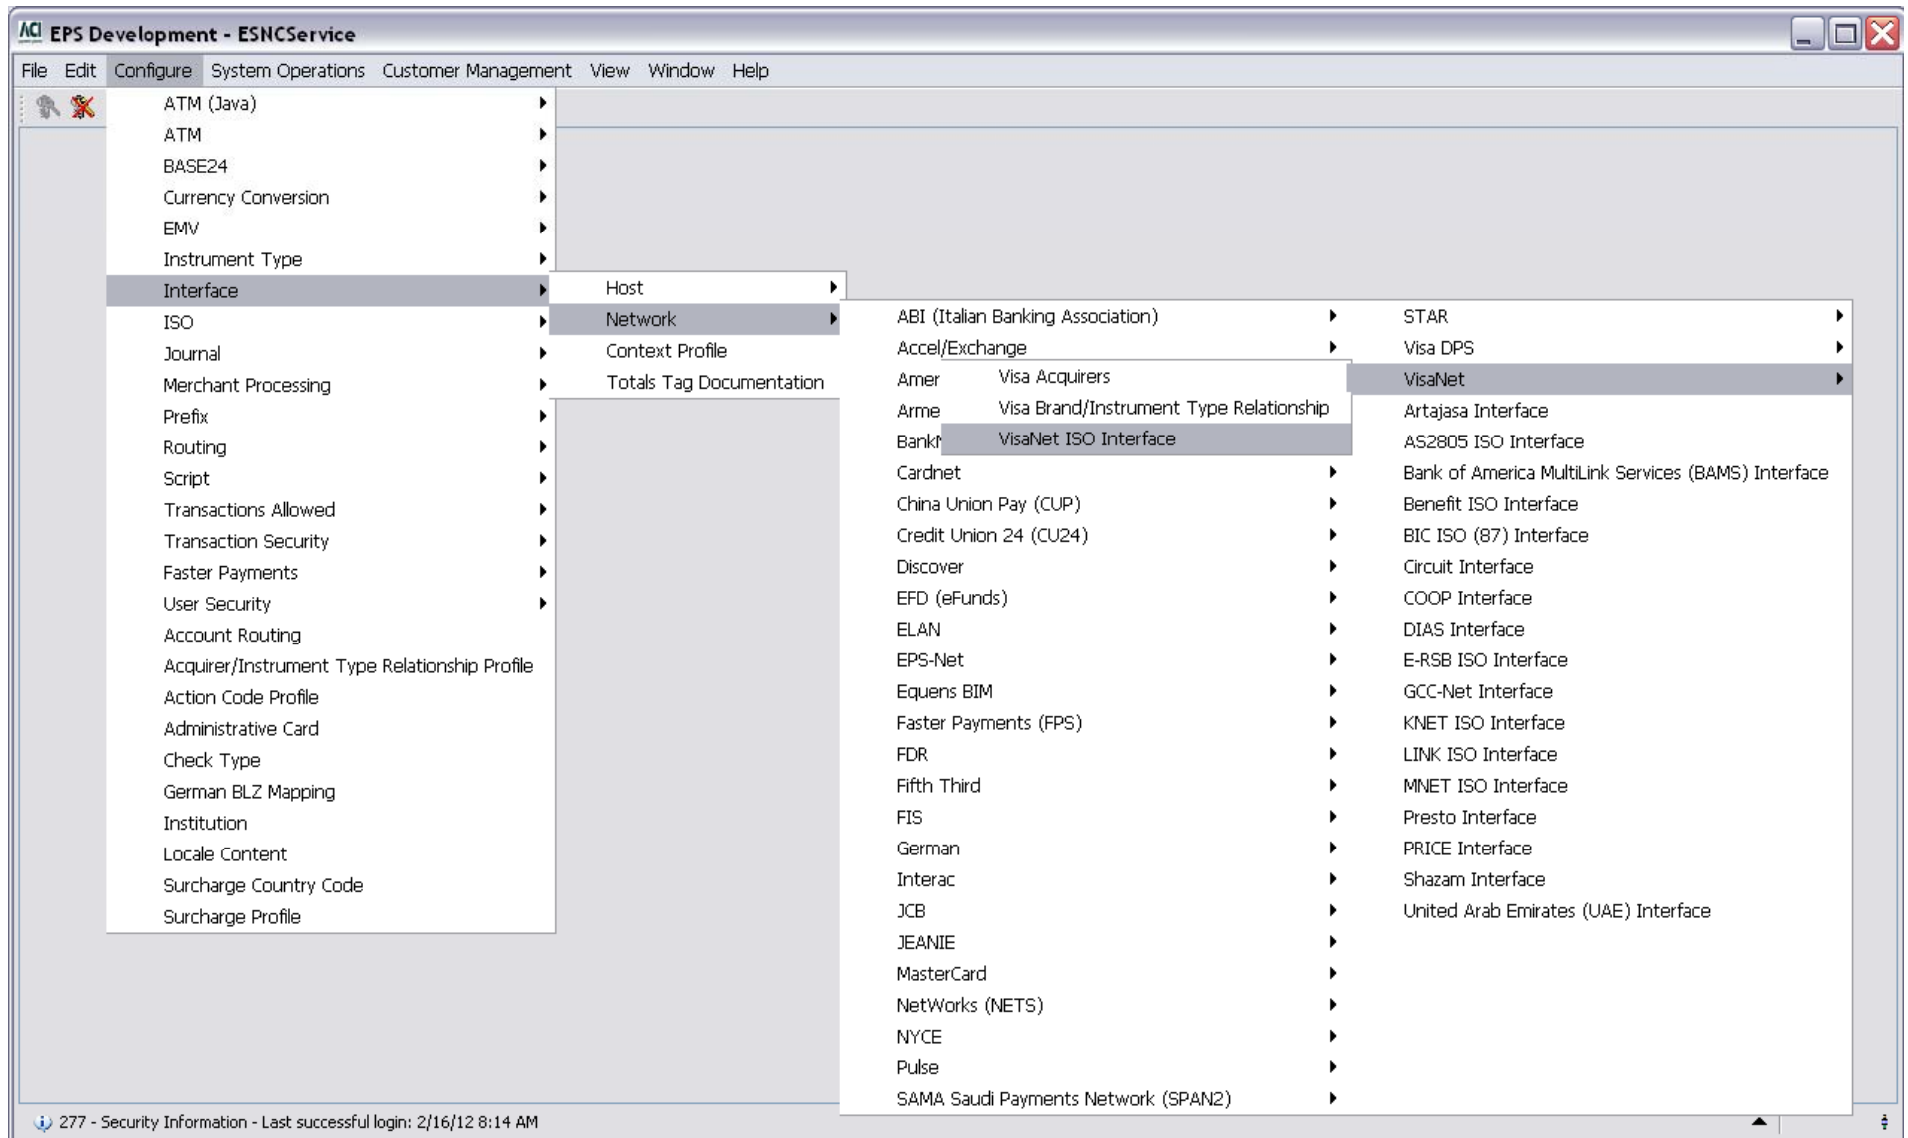

Host/Interchange

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI VisaNet ISO Interface Configuration - VISA_BASE1

Interface Name: VISA_BASE1

Processing Holidays Key Management Message Management Store and Forward (SAF) Station(s) Default Values Visa

Interface Cutover Time: 12:00 am Time Offset From Processor (hrs:mins): 00:00

Statistics Update Interval: 0

Settlement Processing Days

☐ 5-Day (Business Day) ☒ 7-Day

Interface Profiles

Source Routing Profile: *****

Acquirer Transactions Allowed Profile: QA_ACQ_TXN

Issuer Transactions Allowed Profile: QA_ISS_ALL

Context Profile: CTX_VISA

ISO Message Profile: MSG_VISA

Action Code Profile: ACT_CDE_VISA


Acquirer Surcharge Profile:

Currency Conversion Fee Profile:

2 - Successful view of VISA_BASE1.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

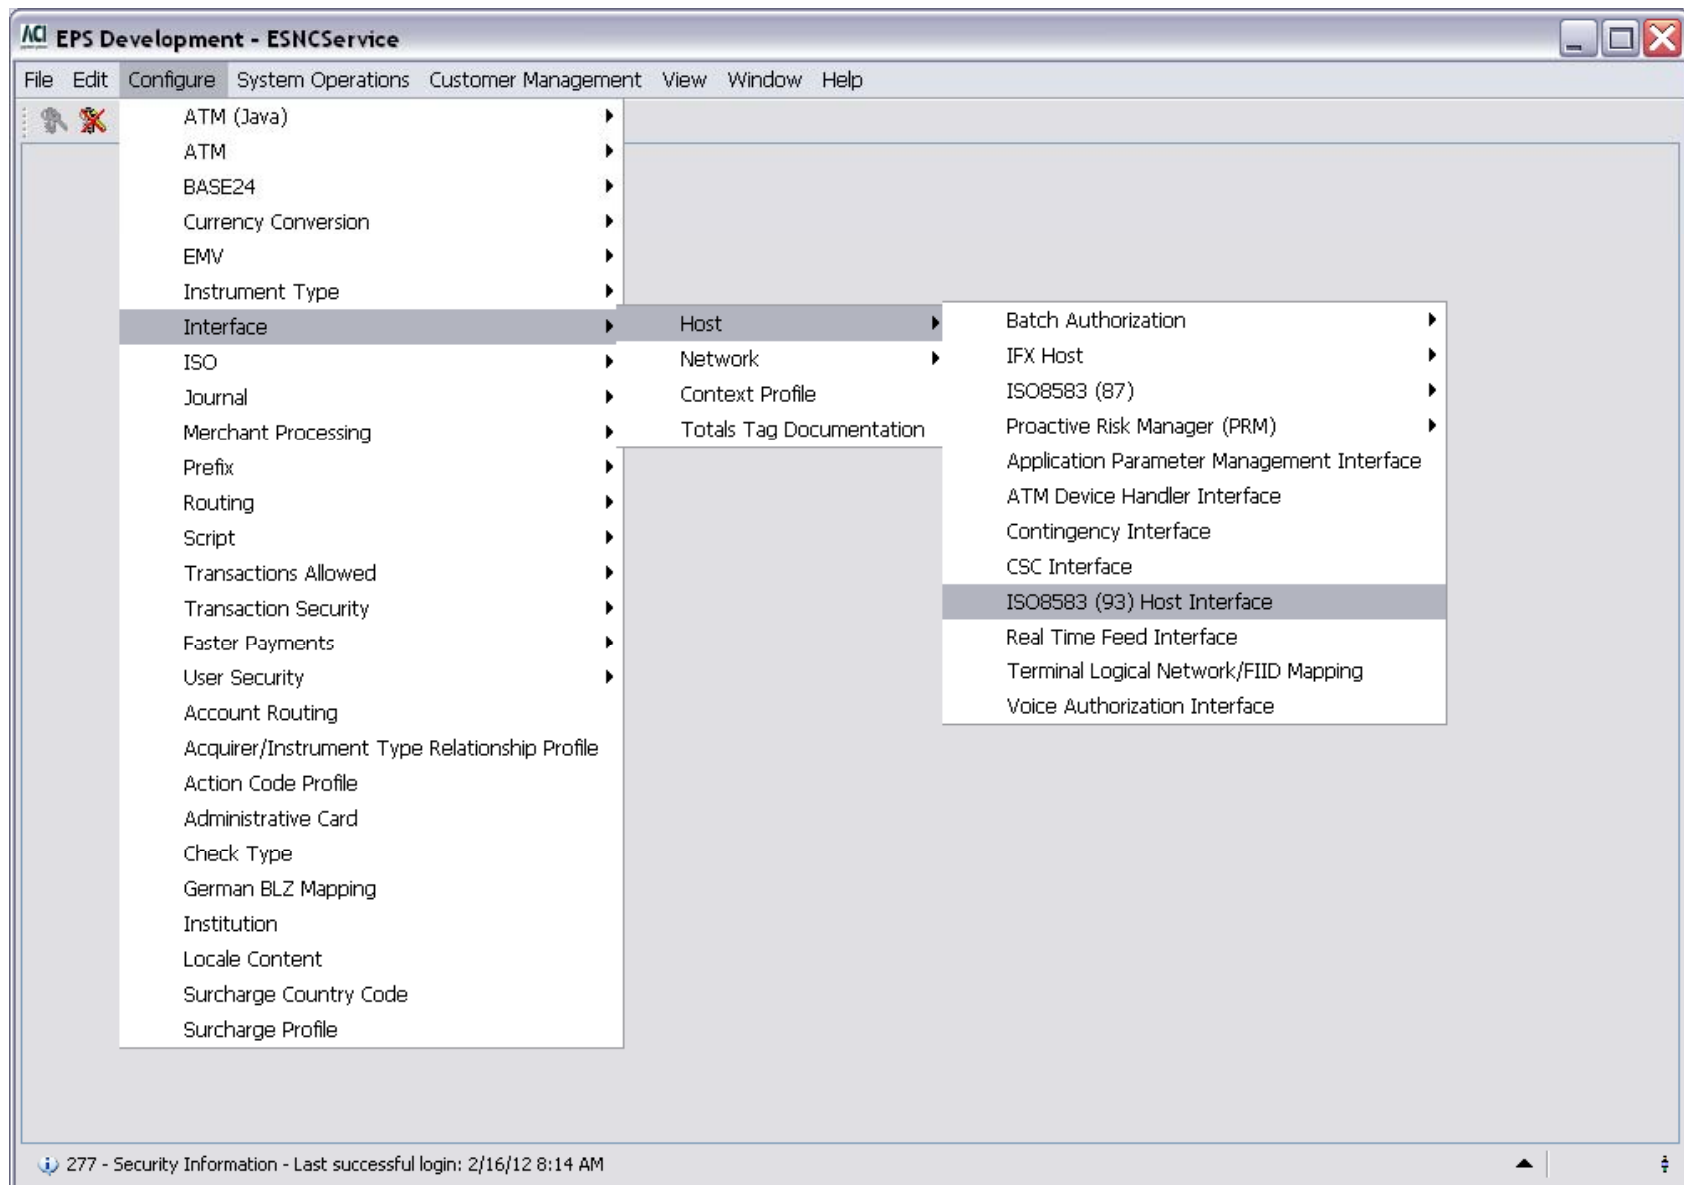

Host/Interchange

ACI EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

ACI ISO8583 (93) Host Interface Configuration - HISO93

Interface Name: HISO93

Processing Holidays Key Management Message Management Store and Forward (SAF) Station(s) Default Values ISO8583 (93) Host

Interface Cutover Time: 05:45 am Time Offset From Processor (hrs:mins): 00:00

Statistics Update Interval: 2

Settlement Processing Days

☐ 5-Day (Business Day) ☒ 7-Day

Interface Profiles

Source Routing Profile	HISO_93_ACQ_RTE
Acquirer Transactions Allowed Profile	QA_ACQ_TXN
Issuer Transactions Allowed Profile	QA_ISS_ALL
Context Profile	HISO93_CTX
ISO Message Profile	HISO93_MSG_PRFL
Action Code Profile	HISO93_ACT_PRFL
Acquirer Surcharge Profile	
Currency Conversion Fee Profile	

2 - Successful view of HISO93.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI ISO8583 (93) Host Interface Configuration - HISO93

Interface Name: HISO93

Processing Holidays Key Management Message Management Store and Forward (SAF) Station(s) Default Values ISO8583 (93) Host

Legend: ☒ Holiday ☐ Business Day

Calendar Year: 2012

Holidays:

December 2011							January 2012							February 2012						
Sun	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Mon	Tue	Wed	Thu	Fri	Sat
				1	2	3	1	2	3	4	5	6	7				1	2	3	4
4	5	6	7	8	9	10	8	9	10	11	12	13	14	5	6	7	8	9	10	11
11	12	13	14	15	16	17	15	16	17	18	19	20	21	12	13	14	15	16	17	18
18	19	20	21	22	23	24	22	23	24	25	26	27	28	19	20	21	22	23	24	25
25	26	27	28	29	30	31	29	30	31					26	27	28	29			

2 - Successful view of HISO93.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI ISO8583 (93) Host Interface Configuration - HISO93

Interface Name: HISO93

Processing Holidays **Key Management** Message Management Store and Forward (SAF) Station(s) Default Values ISO8583 (93) Host

Key Usage Update Interval: 10 [Security Details](#)

Key Exchange

Key Exchange Relationship Type: Secondary Key Counters Enabled Indicator: ☐

Keys Supported: ☐ Same ☒ Unique

Dynamic Key Threshold

PIN Key Information		MAC Key Information	
Timer Limit (minutes)	0	Timer Limit (minutes)	0
Maximum Transactions	0	Maximum Transactions	0
Maximum Errors Allowed	0	Maximum Errors Allowed	0

Data Encryption Key Information		Key Exchange Key Information	
Timer Limit (minutes)	0	Timer Limit (minutes)	0
Maximum Transactions	0	Maximum Transactions	0
Maximum Errors Allowed	0	Maximum Errors Allowed	0

2 - Successful view of HISO93.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

The screenshot displays the ACI EPS Development - ESNCSERVICE application window. The main menu includes File, Edit, Configure, System Operations, Customer Management, View, Window, and Help. The toolbar contains icons for file operations and help. The main window is titled "ISO8583 (93) Host Interface Configuration - HISO93".

The "Interface Name" field is set to "HISO93". Below this, there are several tabs: Processing, Holidays, Key Management, Message Management (selected), Store and Forward (SAF), Station(s), Default Values, and ISO8583 (93) Host.

The "Message Management" tab is active, showing the following configuration options:

- Outstanding Requests:**
 - Track Outstanding Count: ☐
 - Maximum: 1,000
 - Threshold: 1,000
 - Floor Limit: 0
- Authorization Request Time Limits (seconds):**
 - Inbound: 60
 - Outbound: 60
 - Minimum Outbound: 1
 - Queue: 10
- Overload Timer Limit (seconds):** 30
- Maximum Consecutive Timeouts:** 5
- Sequence Number Update Interval:** 10
- Network Management:**
 - Auto Logon Flag: ☐
 - Messages Enabled: ☐
 - Logon/Logoff Msg Support: ☐
 - Logon Type: Station
- Timer Limits (seconds):**
 - Requests: 930
 - Extended: 960
 - Wait For Traffic: 960
- Unmatched Reversal Processing:**
 - Send to Issuer: ☐

At the bottom of the window, there is a status bar with the following messages:

- 2 - Successful view of HISO93.
- 277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI ISO8583 (93) Host Interface Configuration - HISO93

Interface Name: HISO93

Processing Holidays Key Management Message Management **Store and Forward (SAF)** Station(s) Default Values ISO8583 (93) Host

Delay Interval (seconds): 30 Retry Interval (seconds): 60

Outstanding Requests Limit: 1 Maximum Retries Limit: 3

Send Count Limit: 1 Reset Interval (seconds): 0

Delay Interval-Slow (seconds): 0 Maximum SAF Count: 0

Allowed Percentage Full-Resume Normal: 0 Maximum Percentage Full-Forward Only: 0

Percentage Full-Warning: 0 Percentage Full-Error: 0

Database Update Interval: 0


SAF Mode: Stop SAF Rate: 0

Assign Name	SAF Manager Name
SAF_HISO	UI11.SAF1

2 - Successful view of HISO93.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

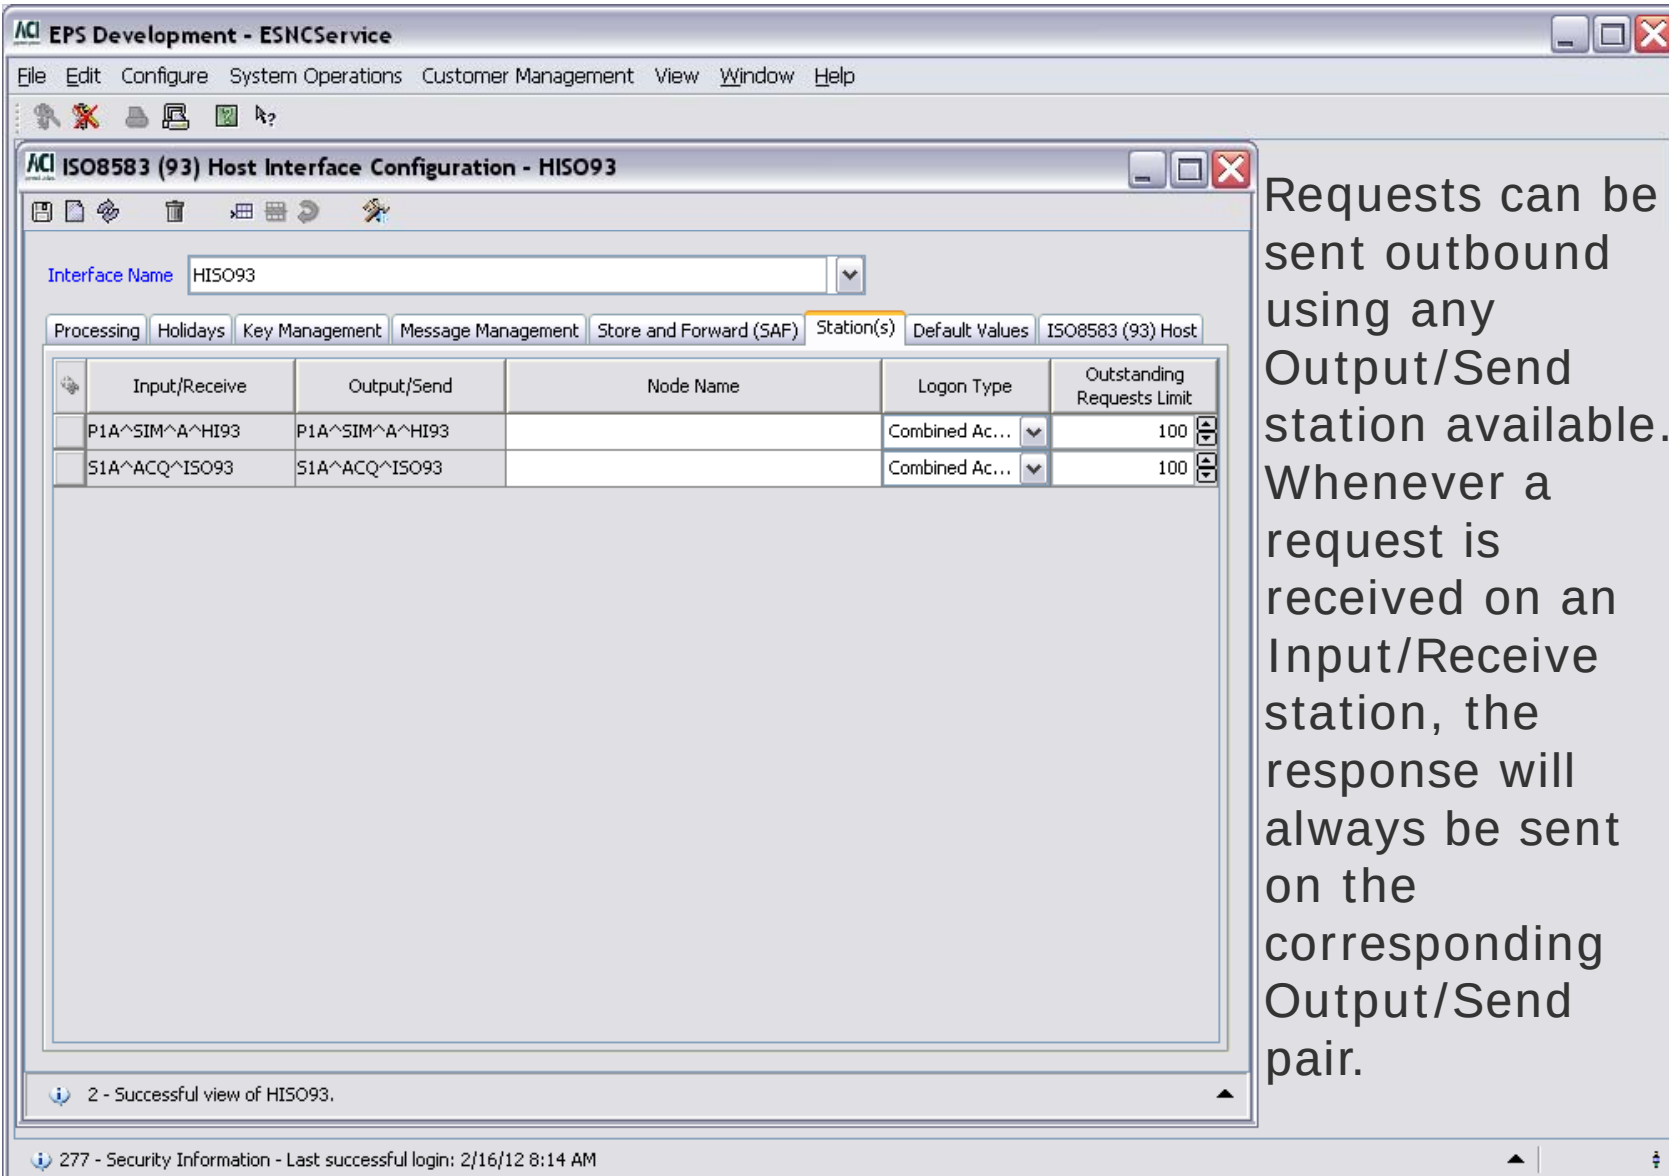

The screenshot shows the 'ISO8583 (93) Host Interface Configuration - HISO93' window. The 'Interface Name' is set to 'HISO93'. The 'Station(s)' tab is selected, showing a table with two rows of configuration data.

Input/Receive	Output/Send	Node Name	Logon Type	Outstanding Requests Limit
P1A^SIM^A^HI93	P1A^SIM^A^HI93		Combined Ac...	100
S1A^ACQ^ISO93	S1A^ACQ^ISO93		Combined Ac...	100

Requests can be sent outbound using any Output/Send station available. Whenever a request is received on an Input/Receive station, the response will always be sent on the corresponding Output/Send pair.

2 - Successful view of HISO93.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Host/Interchange

The screenshot shows the ACI EPS Development - ESNCSservice application window. The main window is titled "ISO8583 (93) Host Interface Configuration - HISO93". It features a menu bar with File, Edit, Configure, System Operations, Customer Management, View, Window, and Help. Below the menu bar is a toolbar with icons for file operations and help. The main configuration area is divided into several tabs: Processing, Holidays, Key Management, Message Management, Store and Forward (SAF), Station(s), Default Values, and ISO8583 (93) Host. The "Default Values" tab is currently selected. The configuration fields are organized into sections: "Balance Information" (Ledger and Available, Capture Mode: Authorize Only, Card Acceptor: 420, Merchant ID: MERCHANT0, Terminal ID: P52^SIM03, Referral Phone: 4023907600), "Acquirer Information" (Institution ID: ACQ0, Country: USA (840), Currency Code: USD (840), Forwarding Institution ID: 98765432198, Forwarding Institution ID Country: USA (840)), and "Default Pre-Auth. Hold" (Time: 3 Hours). A status bar at the bottom indicates "2 - Successful view of HISO93." and "277 - Security Information - Last successful login: 2/16/12 8:14 AM".

Interface Name: HISO93

Processing Holidays Key Management Message Management Store and Forward (SAF) Station(s) **Default Values** ISO8583 (93) Host

Balance Information: Ledger and Available

Capture Mode: Authorize Only

Card Acceptor: 420

Merchant ID: MERCHANT0

Terminal ID: P52^SIM03

Referral Phone: 4023907600

Acquirer Information

Institution ID: ACQ0

Country: USA (840)

Currency Code: USD (840)

Forwarding Institution ID: 98765432198

Forwarding Institution ID Country: USA (840)

Default Pre-Auth. Hold

Time: 3 Hours

2 - Successful view of HISO93.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

These are default configuration values used when the information is missing from the transaction message.

Host/Interchange

The screenshot shows the 'EPS Development - ESNCSERVICE' application window. The 'ISO8583 (93) Host Interface Configuration' sub-window is active, displaying various configuration options for a host interface. The 'Interface Name' is set to 'Select/Enter'. The 'Processing' tab is selected, showing options for 'Endpoint Type' (Host), 'Host Communication Type' (Messages are asynchronous), 'ISO Transaction Mapping Profile' (empty), 'Send Notification Message' (unchecked), 'Reversal Option' (reverse on late response), and 'VAT Issuer Indicator' (Combined). The 'Holidays' and 'Key Management' tabs are also visible.

Processing	Holidays	Key Management
Message Management	Store and Forward (SAF)	Station(s)
Default Values		ISO8583 (93) Host

Endpoint Type: Host

Host Communication Type: Messages are asynchronous

ISO Transaction Mapping Profile:

Send Notification Message: ☐

Reversal Option: reverse on late response

VAT Issuer Indicator: Combined

Endpoint Type - indicates whether the interface is functioning as a host interface or a switch interface. Settlement date information is used differently

Host Communication Type - defines whether the interface supports synchronous (IBM zSeries) or asynchronous communication to/from the host

ISO Transaction Mapping - used to optionally point to a mapping table to define "soft mapping" of ISO processing codes to/from EPS processing codes

Send Notification Message - indicates if a notification should be sent to the host if an exception transaction has been processed

Reversal Option - defines action taken when a timeout occurs

VAT Issuer Indicator - defines how the VAT amount is carried to the host

Host/Interchange

- Changes to the Host/Interchange configuration table(s) requires rebuilding and reloading the respective OLTP table(s):
 - inbound_station_oltp
 - interface_oltp
 - interface_acquirer_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.




Host/Interchange


- Changes to the Host/Interchange configuration table(s) requires rebuilding and reloading the respective OLTP table(s):
 - interface_terminal_oltp
 - instrum_typ_interchange_rel_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.




Source Routing Profile

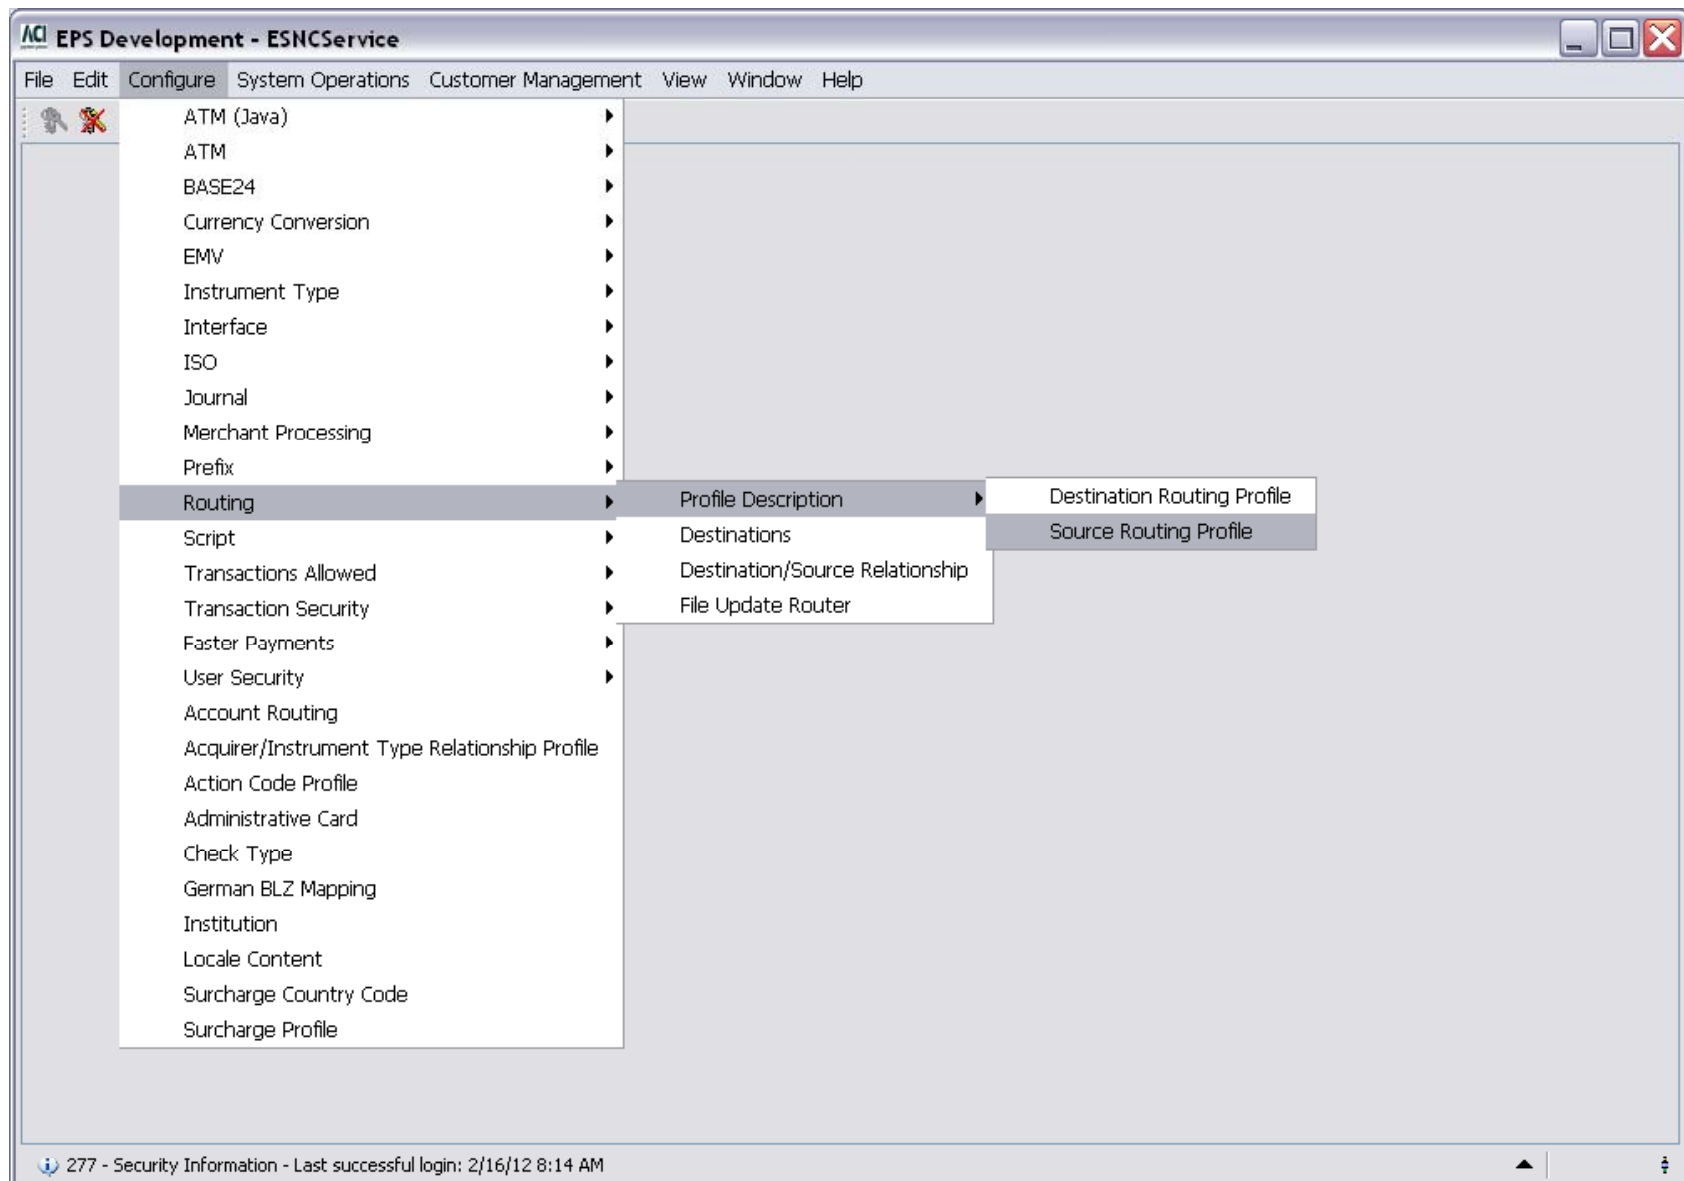

Source Routing Profile

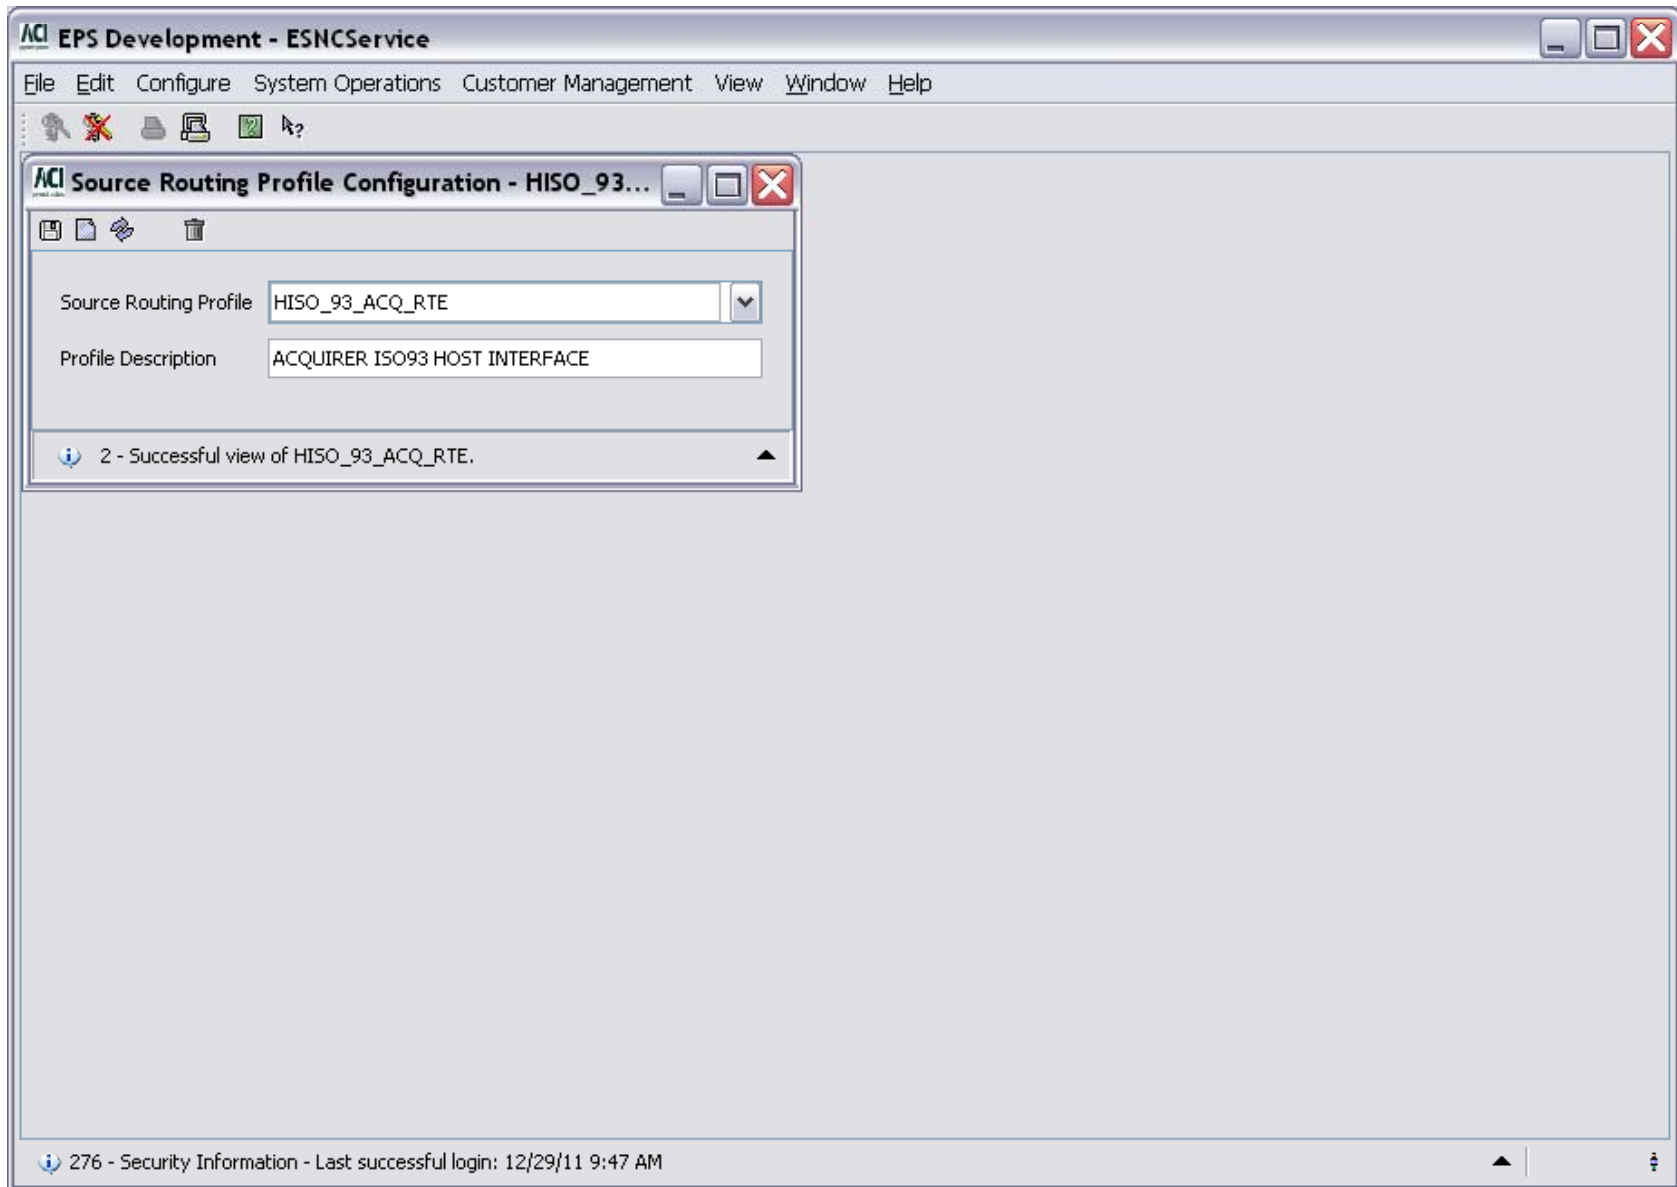

Acquirer Transactions Allowed Profile

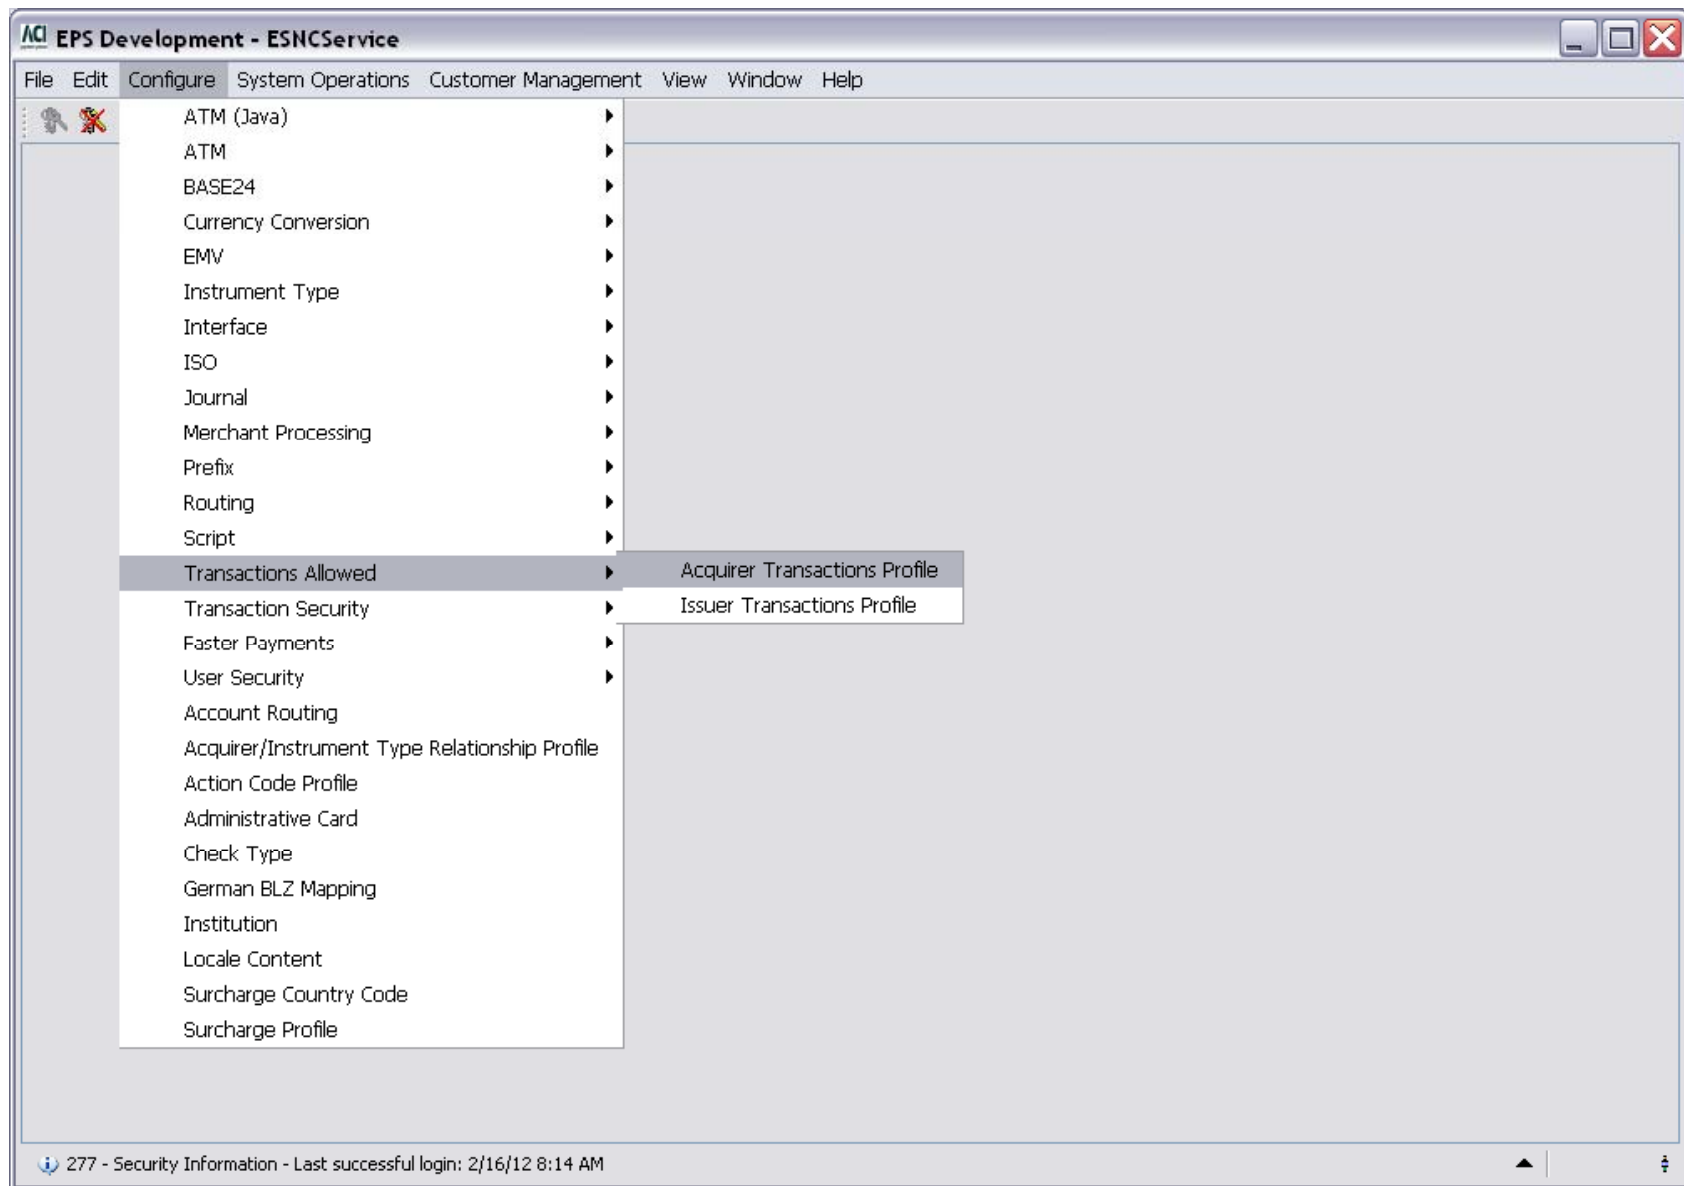

Acquirer Transactions Allowed Profile

The screenshot displays the 'Acquirer Transactions Allowed Profile Configuration - QA_ACQ_TXN' window. The 'Acquirer Transactions Profile' dropdown is set to 'QA_ACQ_TXN'. The main table lists transaction configurations with columns for Message Category, BASE24-eps Processing Code (Transaction Code, Account Type 1, Account Type 2), Admin Card Required, and On-Us. The table contains 16 rows of data, all with 'Internationally' selected in the 'On-Us' column. A status bar at the bottom indicates '2 - Successful view of QA_ACQ_TXN.' and a security notice at the very bottom states '277 - Security Information - Last successful login: 2/16/12 8:14 AM'.

Message Category	BASE24-eps Processing Code			Admin Card Required	On-Us
	Transaction Code	Account Type 1	Account Type 2		
Authorization	00 (Purchase)	00 (Default/None)	00 (Default/None)	☐	Internationally
Authorization	00 (Purchase)	10 (Savings)	00 (Default/None)	☐	Internationally
Authorization	00 (Purchase)	20 (Checking)	00 (Default/None)	☐	Internationally
Authorization	00 (Purchase)	30 (Credit)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	00 (Default/None)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	10 (Savings)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	20 (Checking)	00 (Default/None)	☐	Internationally
Authorization	02 (Debit Adjustment)	30 (Credit)	00 (Default/None)	☐	Internationally
Financial	00 (Purchase)	00 (Default/None)	00 (Default/None)	☐	Internationally
Financial	00 (Purchase)	10 (Savings)	00 (Default/None)	☐	Internationally
Financial	00 (Purchase)	20 (Checking)	00 (Default/None)	☐	Internationally
Financial	00 (Purchase)	30 (Credit)	00 (Default/None)	☐	Internationally
Financial	02 (Debit Adjustment)	00 (Default/None)	00 (Default/None)	☐	Internationally
Financial	02 (Debit Adjustment)	10 (Savings)	00 (Default/None)	☐	Internationally
Financial	02 (Debit Adjustment)	20 (Checking)	00 (Default/None)	☐	Internationally

2 - Successful view of QA_ACQ_TXN.

277 - Security Information - Last successful login: 2/16/12 8:14 AM


Transactions
allowed from
the acquirer.

Acquirer Transactions Allowed Profile

- Changes to the Acquirer Transactions Allowed Profile configuration table requires rebuilding and reloading the respective OLTP table(s):
 - acquirer_txn_allowed_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Issuer Transactions Allowed Profile

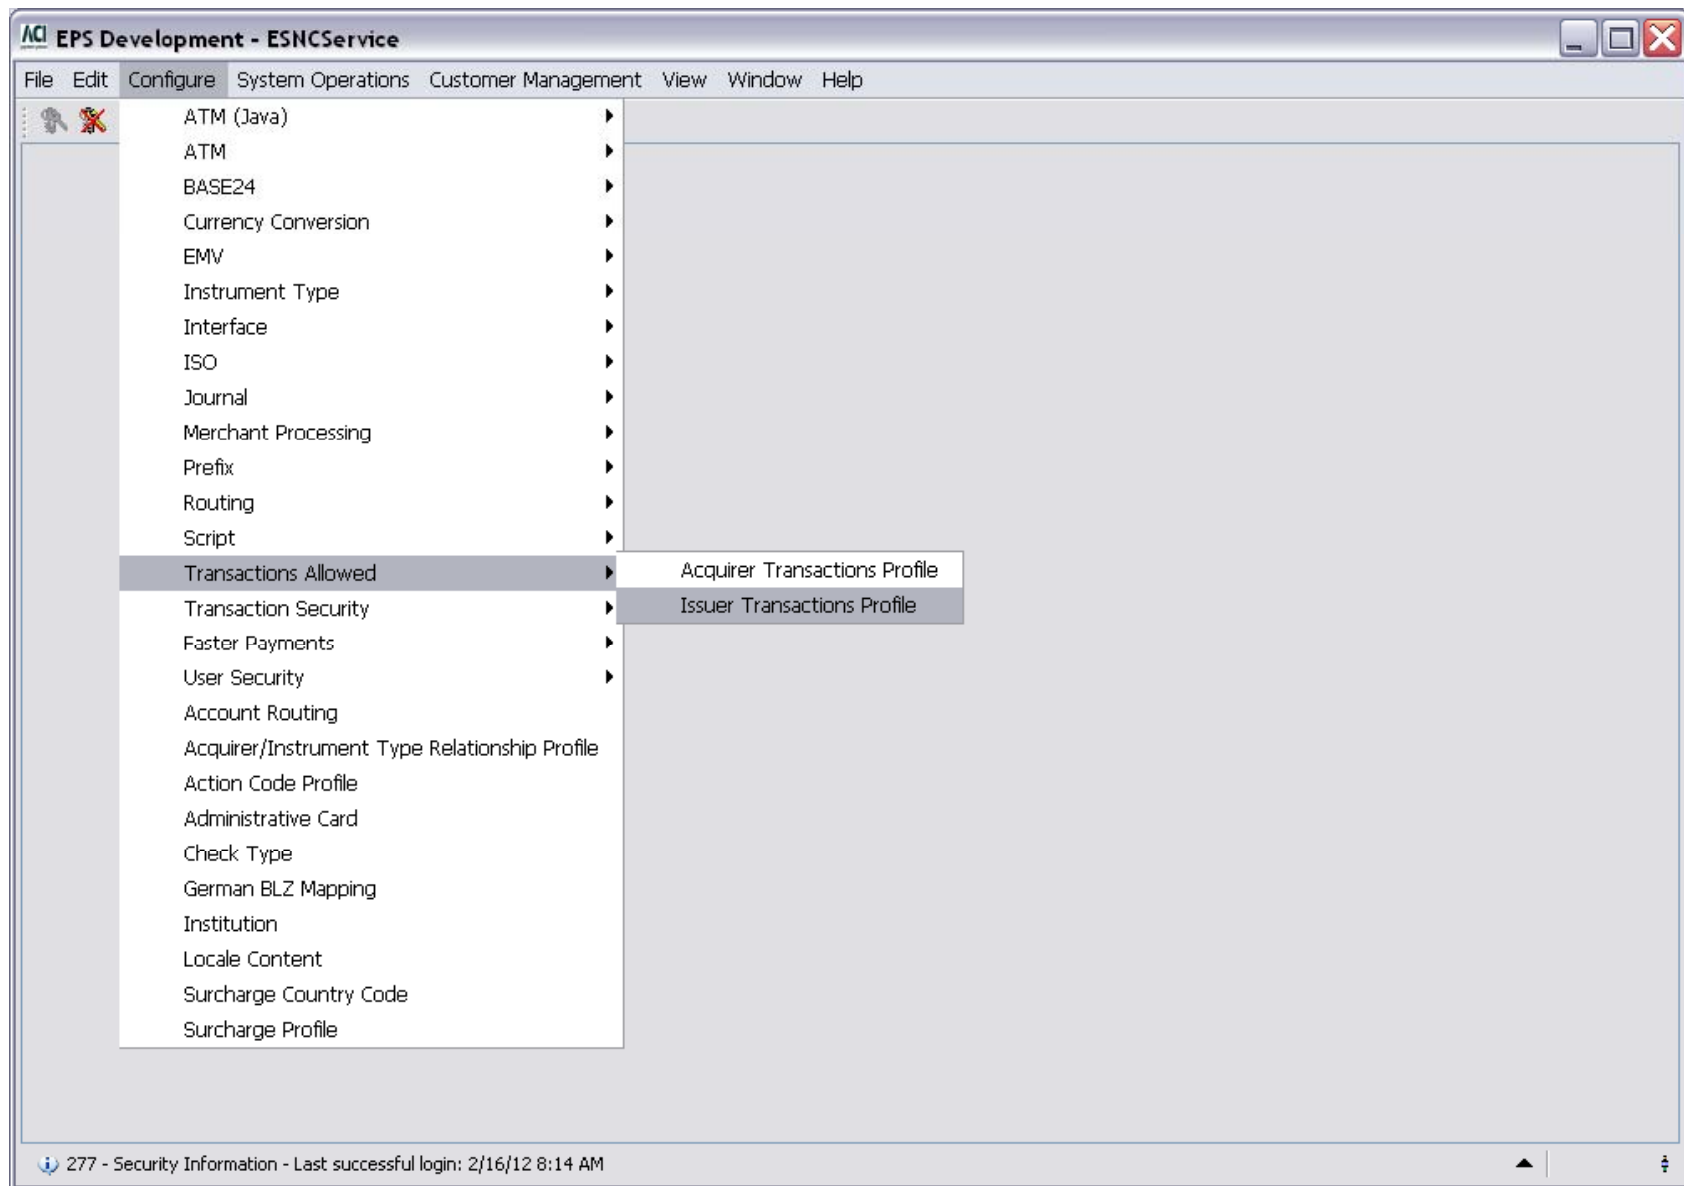

Issuer Transactions Allowed Profile

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI Issuer Transactions Allowed Profile Configuration - QA_ISS_ALL

Issuer Transactions Profile: QA_ISS_ALL

Message Category	BASE24-eps Processing Code			Discard Reversals	Settlement Impact	On-Us	Not-On-Us
	Transaction Code	Account Type 1	Account Type 2				
Authorization	00 (Purchase)	00 (Default/None)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	00 (Purchase)	10 (Savings)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	00 (Purchase)	20 (Checking)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	00 (Purchase)	30 (Credit)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	01 (Withdrawal/Cas...)	00 (Default/None)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	01 (Withdrawal/Cas...)	10 (Savings)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	01 (Withdrawal/Cas...)	20 (Checking)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	01 (Withdrawal/Cas...)	30 (Credit)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	02 (Debit Adjustment)	00 (Default/None)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	02 (Debit Adjustment)	10 (Savings)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	02 (Debit Adjustment)	20 (Checking)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	02 (Debit Adjustment)	30 (Credit)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	03 (Check Guarantee)	00 (Default/None)	00 (Default/None)	☐	1	Internatio...	Internatio...
Authorization	09 (Purchase with C...)	00 (Default/None)	00 (Default/None)	☐	1	Internatio...	Internatio...

2 - Successful view of QA_ISS_ALL.

277 - Security Information - Last successful login: 2/16/12 8:14 AM


Transactions allowed to the issuer

Issuer Transactions Allowed Profile


- Changes to the Issuer Transactions Allowed Profile configuration table requires rebuilding and reloading the respective OLTP table(s):
 - issuer_txn_allowed_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Context Profile

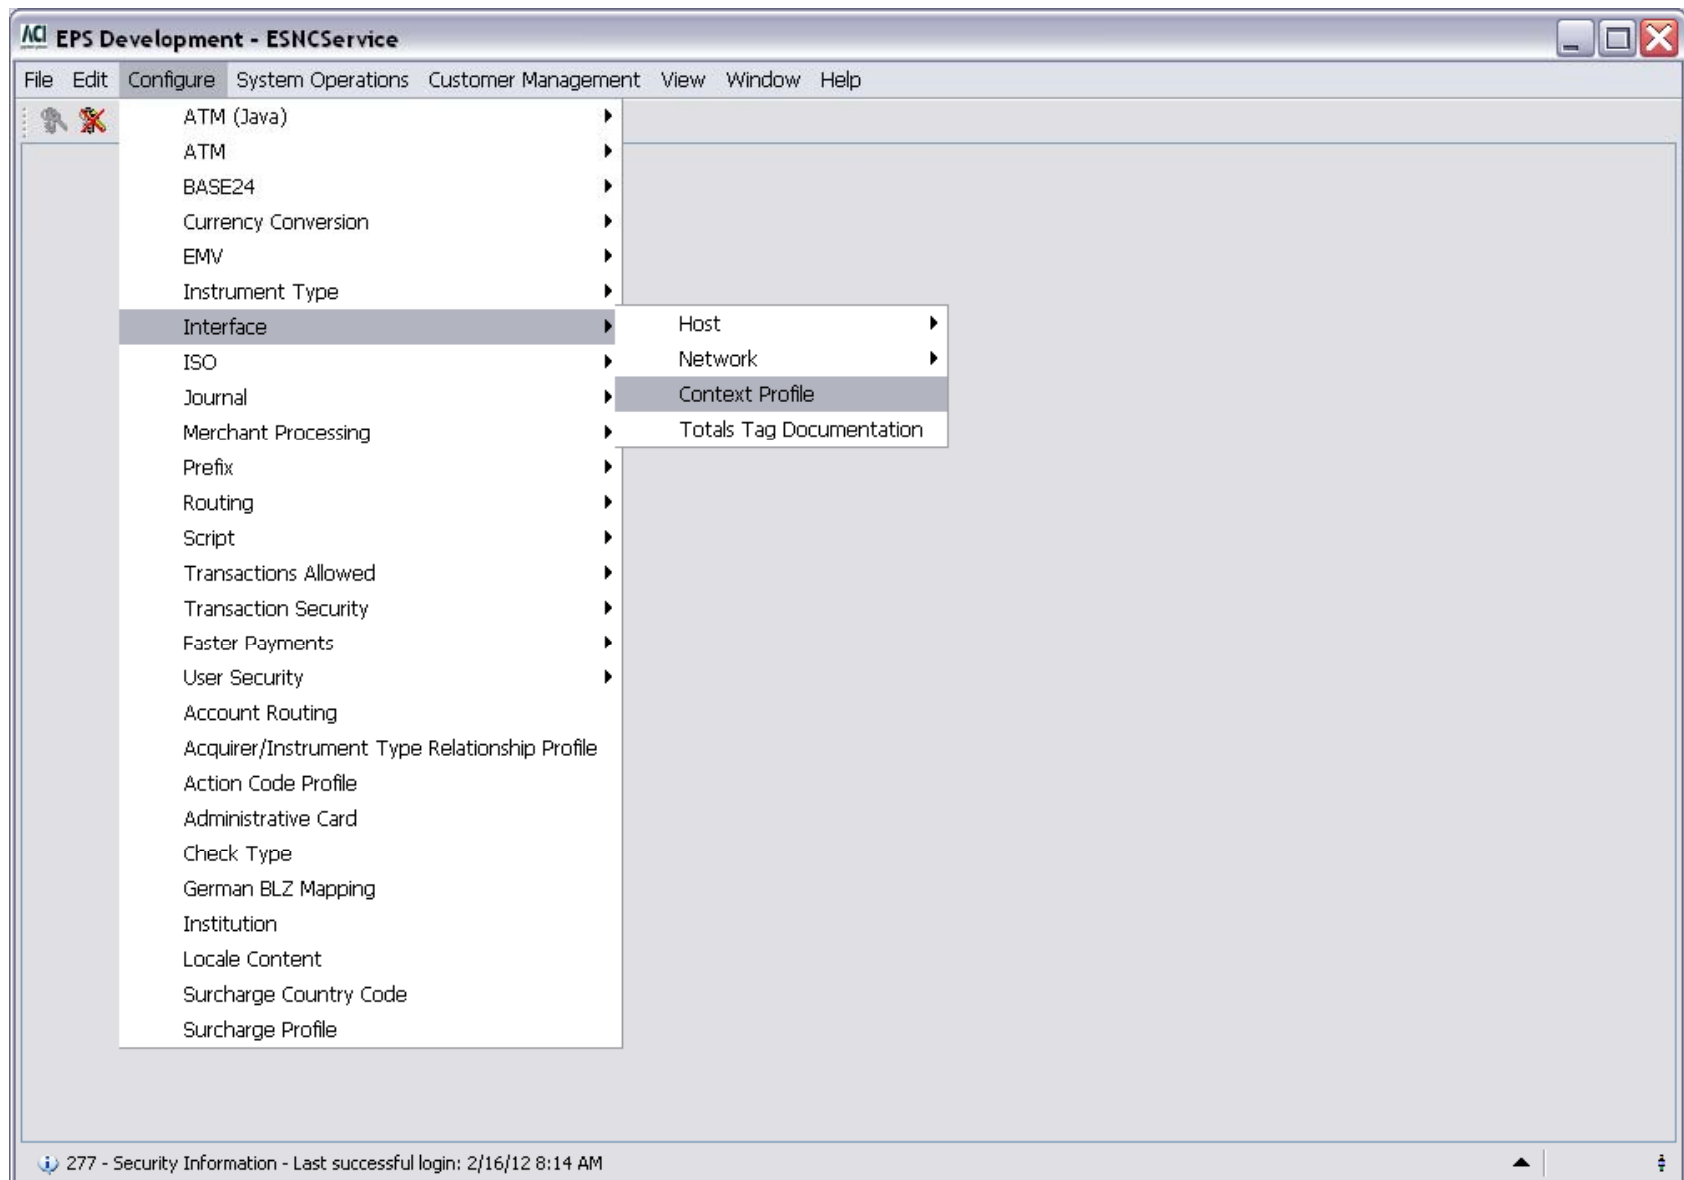

Context Profile

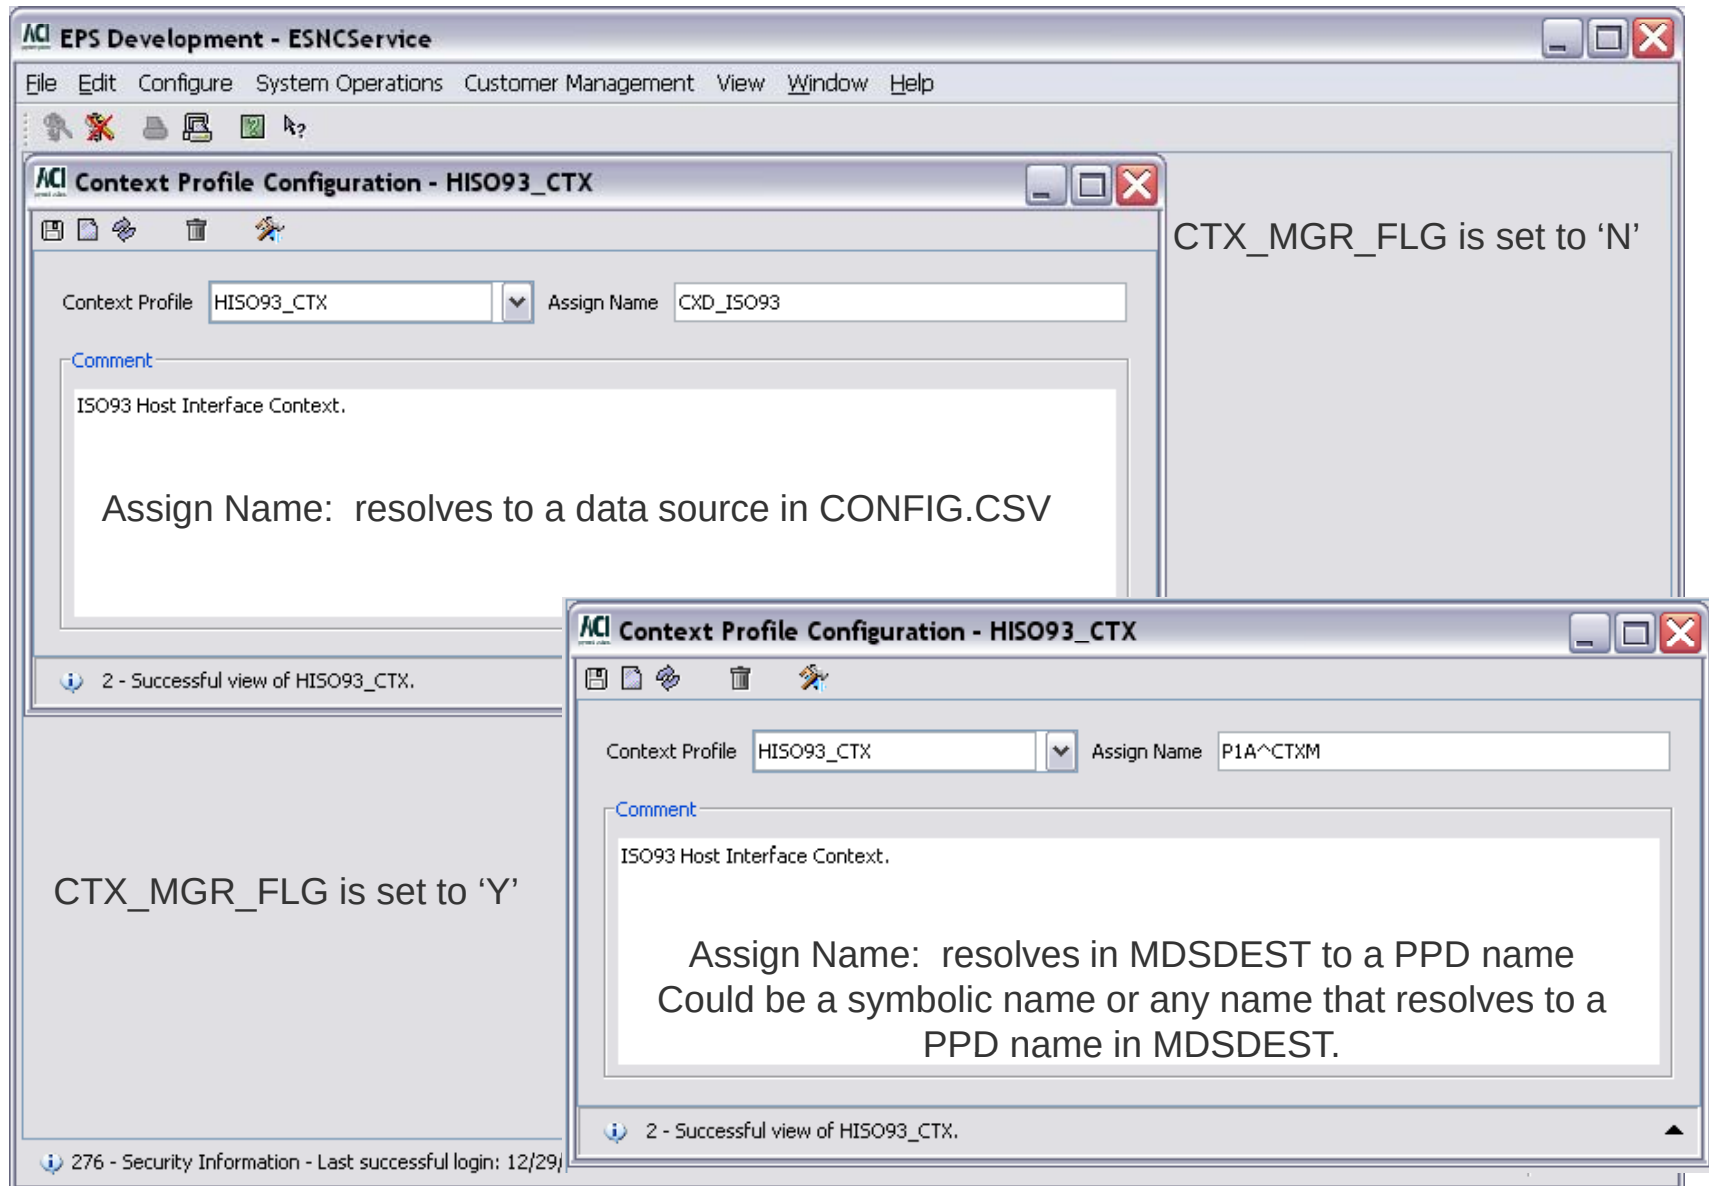


Context Profile

- Changes to the Context Profile configuration table requires rebuilding and reloading the respective OLTP table(s):
 - context_configuration_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



ISO Message Profile

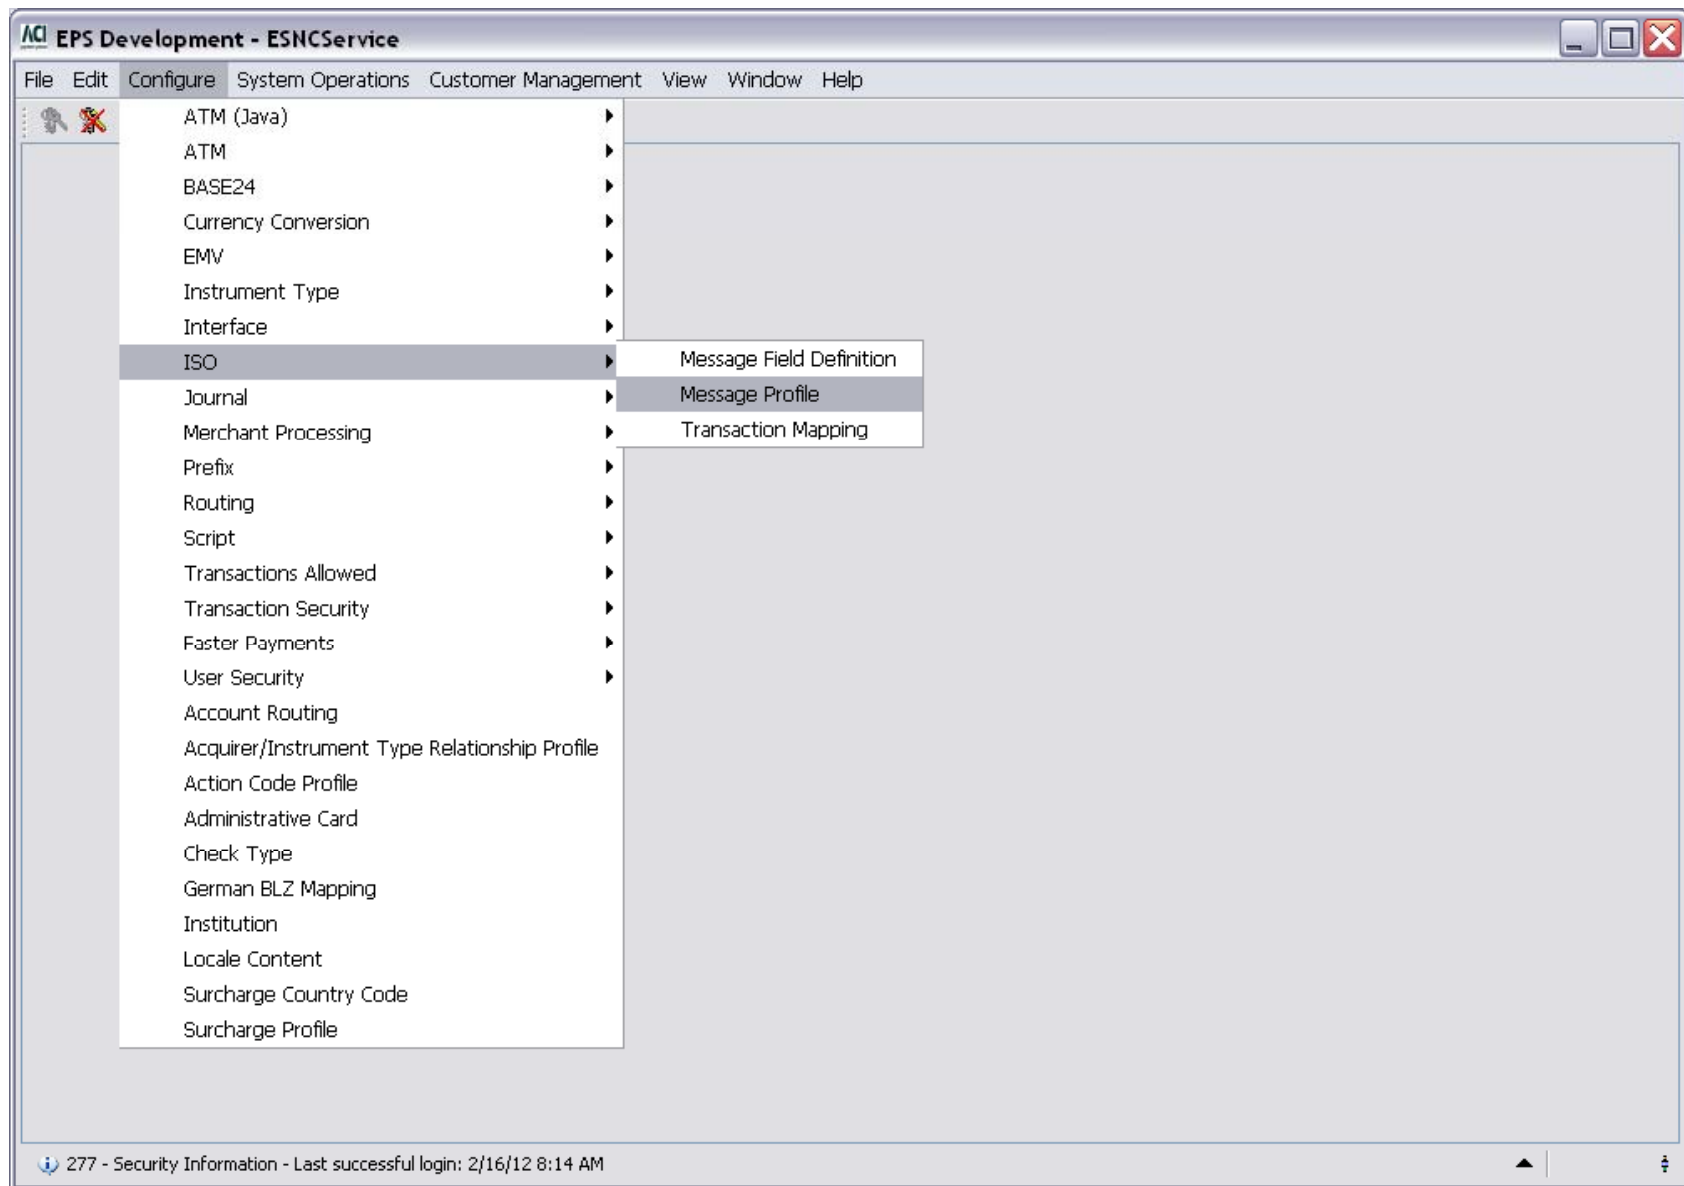

ISO Message Profile

ACI EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

ACI ISO Message Profile Configuration - HISO93_MSG_PRFL

ISO Message Profile: HISO93_MSG_PRFL

ISO Message Type: ☐ ISO 87 ☒ ISO 93 ☐ ISO 87/93

BCD/MAC information Message Type Bit Maps

Message Type: 1200 - Financial Request (1200)

MAC Indicators

☐ Message Header is MAC ☐ Message Type Identifier is MAC ☐ Primary Bit Map is MAC

Bit Maps

Textual Bit Map Representations

Inbound: 1C, 2C, 3M, 4M, 6C, 7M, 10C, 11M, 12M, 13C, 14C, 15C, 17C, 18C, 19C, 22M, 23C, 24M, 26M, 27C, 30C, 32M, 33C, 34C

Outbound: 1C, 2C, 3M, 4M, 6C, 7M, 10C, 11M, 12M, 13C, 14C, 15C, 17C, 18C, 19C, 22M, 23C, 24M, 26M, 27C, 30C, 32M, 33C, 34C

MAC:

Bit Position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40			
Inbound	C	C	M	M		C	M			C	M	M	Date and Time - Local Transaction (ISO93)										C	M	C	C	C	M															
Outbound	C	C	M	M		C	M			C	M	M	C	C	C	C	C		M	C	M	M	C			C	M	C	C	C	M												
MAC																																											

3 - Profile retrieved - HISO93_MSG_PRFL


276 - Security Information - Last successful login: 12/29/11 9:47 AM

ISO Message Profile

- Changes to the ISO Message Profile configuration table requires rebuilding and reloading the respective OLTP table(s):
 - iso_message_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Action Code Profile

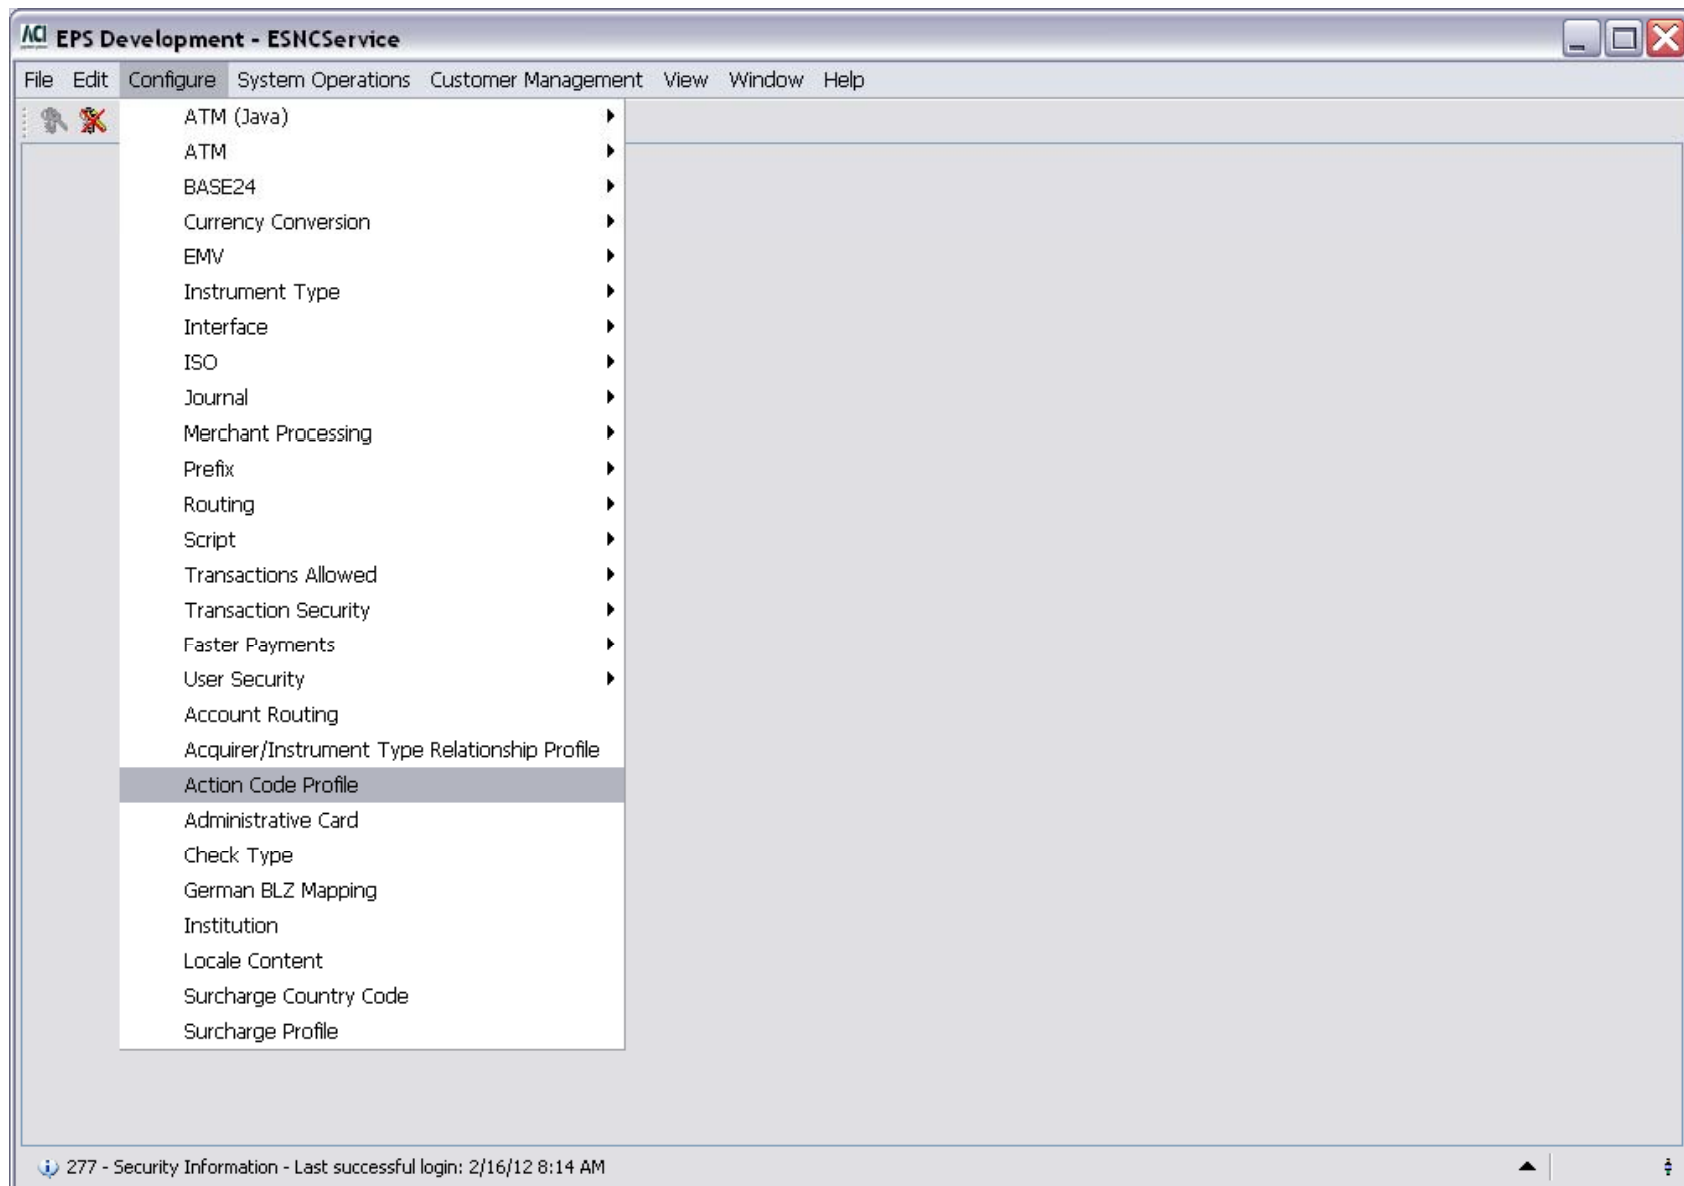

Action Code Profile

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI Action Code Profile Configuration - HISO93_ACT_PRFL

Action Code Profile: HISO93_ACT_PRFL

Inbound Mapping Outbound Mapping

External Action Code	External Action Code Description	External Action Code Description (Locale)	Internal Action Code
000	AC_APPRV		000 Approved
001	AC_APPRV_ID		001 Honor with identification
002	AC_APPRV_PART_AMT		002 Approved for partial amo...
003	AC_APPRV_VIP		003 Approved (VIP)
004	AC_APPRV_UPDT_TRK3		004 Approved, update track 3
005	AC_APPRV_ISS_AT		005 Approved, account type ...
006	AC_APPRV_PART_AMT_ISS_AT		006 Approved for partial amo...
007	AC_APPRV_UPDT_ICC		007 Approved, update ICC
080	AC_BACKUP_PRVT		080 Approved with backup ac...
081	AC_APPRV_OVRDFT_PRVT		081 Approved with overdraft
082	APPRV_SURCH_AMT_PRESENT		082 Approved, surcharge pre...
083	AC_APPRV_OAR_PRVT		083 Approved, Open Account...
084	AC_APPRV_NO_EMV_SCRIPT		084 Approved, No EMV script ...
087	APPROVE PURCHASE AMOUNT, C...		002 Approved for partial amo...

2 - Successful view of HISO93_ACT_PRFL.

277 - Security Information - Last successful login: 2/16/12 8:14 AM


BASE24-eps
internal to
external
action code
mappings.

Action Code Profile

- Changes to the Action Code Profile configuration table requires rebuilding and reloading the respective OLTP table(s):
 - action_code_intrn_extrn_oltp
 - action_code_extrn_intrn_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Acquirer Surcharge Profile

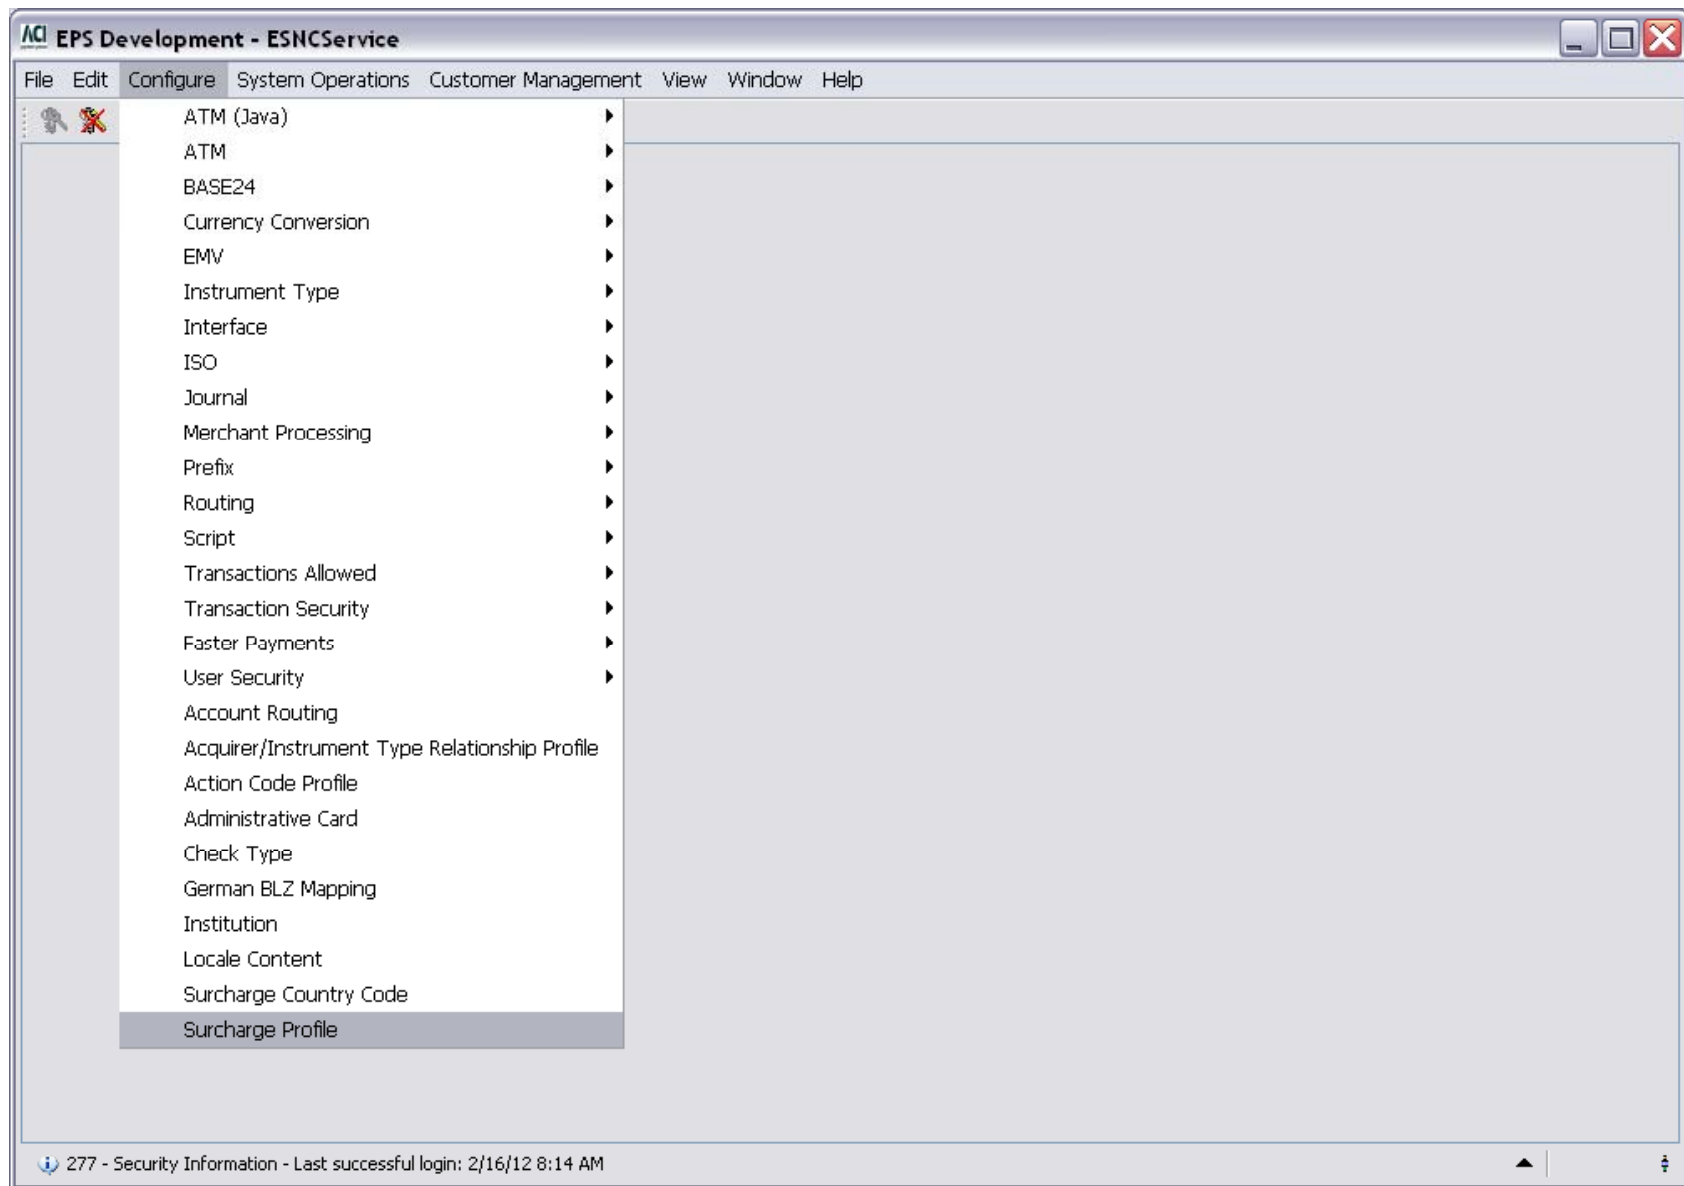

Acquirer Surcharge Profile

ACI EPS Development - ESNCSERVICE

File Edit Configure System Operations Customer Management View Window Help

ACI Surcharge Profile Configuration - DO_ACQ

Acquirer Surcharge Profile: DO_ACQ Issuer Surcharge Profile: ANY

Issuer Surcharge Profile	BASE24-eps Processing Code			Currency Code
	Transaction Code	Account Type 1	Account Type 2	
DO_ISS	**	**	**	AED (784) - UAE Dirham

Reversal Code: No fee

Surcharge Fee Amount: 0.00 AED

Surcharge Fee Percent (from 0.00 to 100.00): .00

Fee Indicator: Use the lesser of the two fees

Minimum Transaction Amount: 0.00 AED

2 - Successful view of DO_ACQ.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Acquirer Surcharge Profile

- Changes to the Surcharge Profile configuration table requires rebuilding and reloading the respective OLTP table(s):
 - surcharge_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.




Real Time Feed

- The Real Time Feed Interface enables you to extract and reformat transactions from the Journal data source using extract scripts in near real-time, and send them to a remote database server for subsequent processing and analysis.
- Once enabled, the RTF I/F is notified by Journal component when a transaction is written to the journal log file.
- If you need transactions extracted in multiple formats, you must configure a separate interface instance for each format desired and the appropriate scripts.
- ACI provides scripts that output the journal data in TLF or PTLF format.




Real Time Feed Processing


Integrated Server (IS)

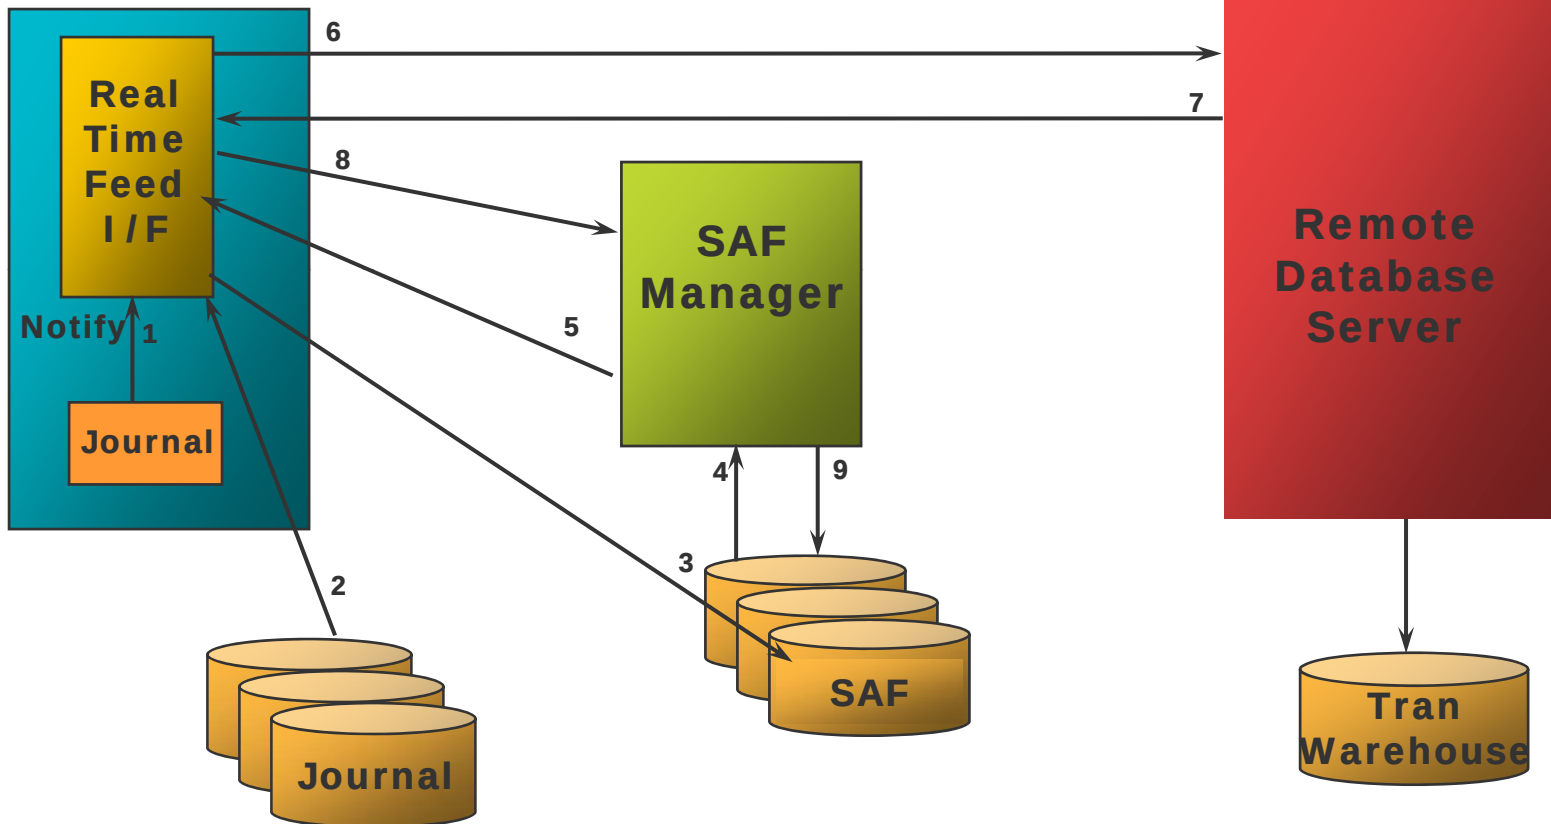

Real Time Feed Configuration

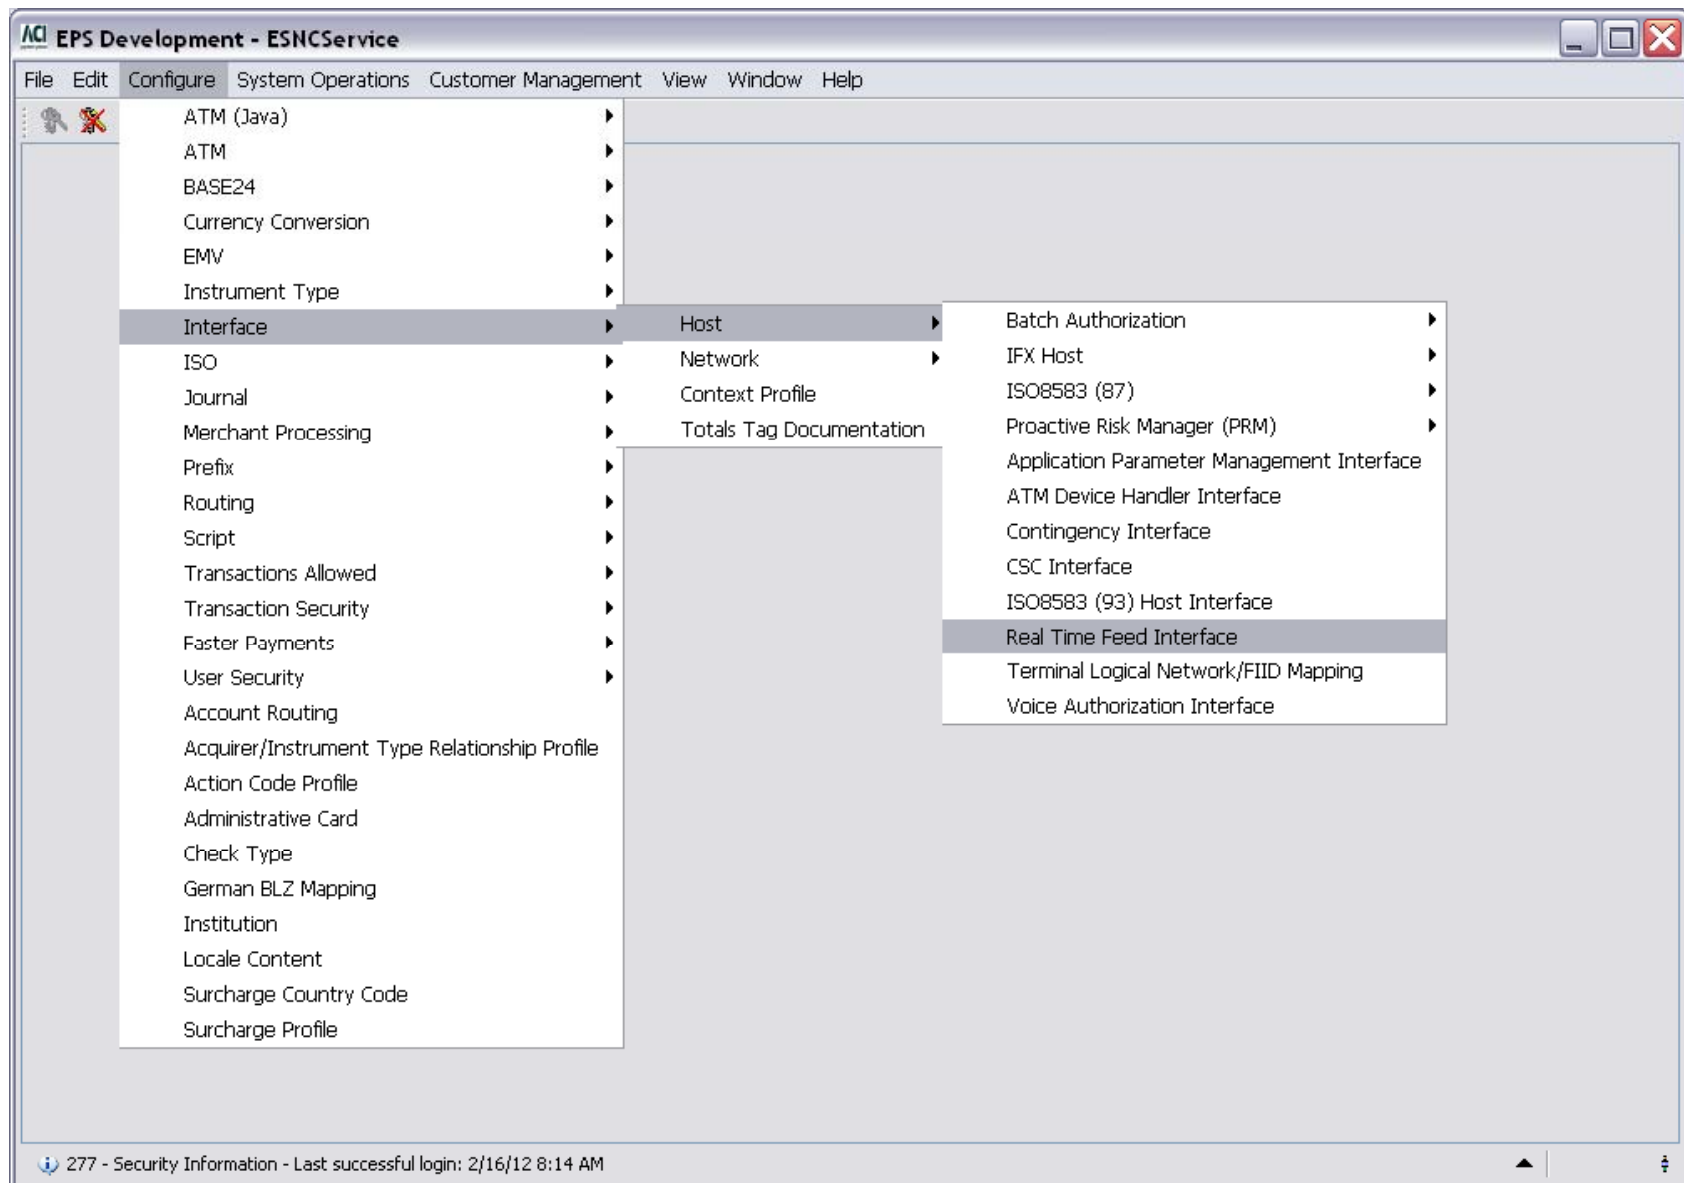

Real Time Feed Configuration

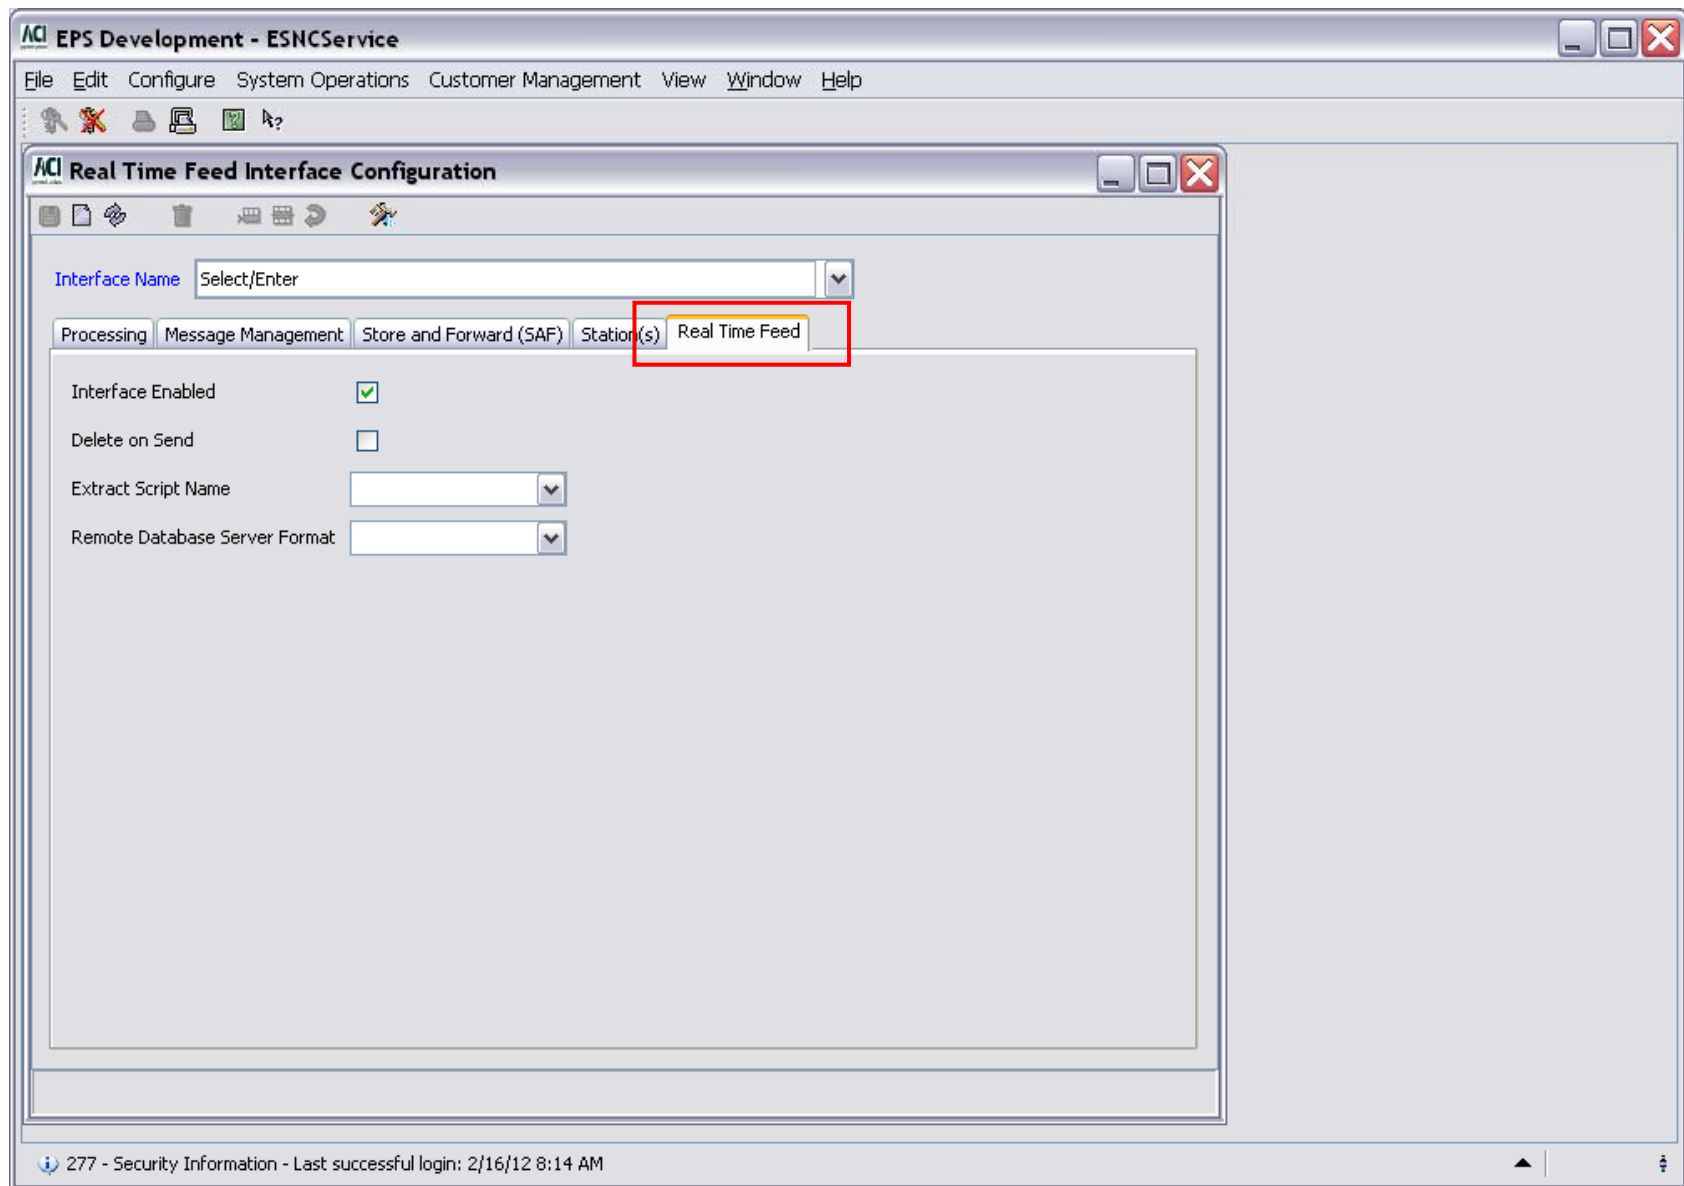

Lab Exercise

BASE24-eps Host/Interchange Interface Lab

Lab 1





MEETS THE CHALLENGE OF CHANGE