

SCRIPT CONFIGURATION

Scripting

- BASE24-eps scripting includes support for:
 - authentication
 - authorization
 - journal perusal
 - journal query (reports and extract)



Scripting

- BASE24-eps scripting includes support for:
 - Sequential routing scripts
 - Authentication (prescreen)
 - Authorization




Script Configuration

- If scripts are used to authenticate (pre-screen) or authorize transactions, they must be configured before Destination Routing can be configured:
 - Scripts are written and compiled
 - Authorization script sets are added to the database



Script Component

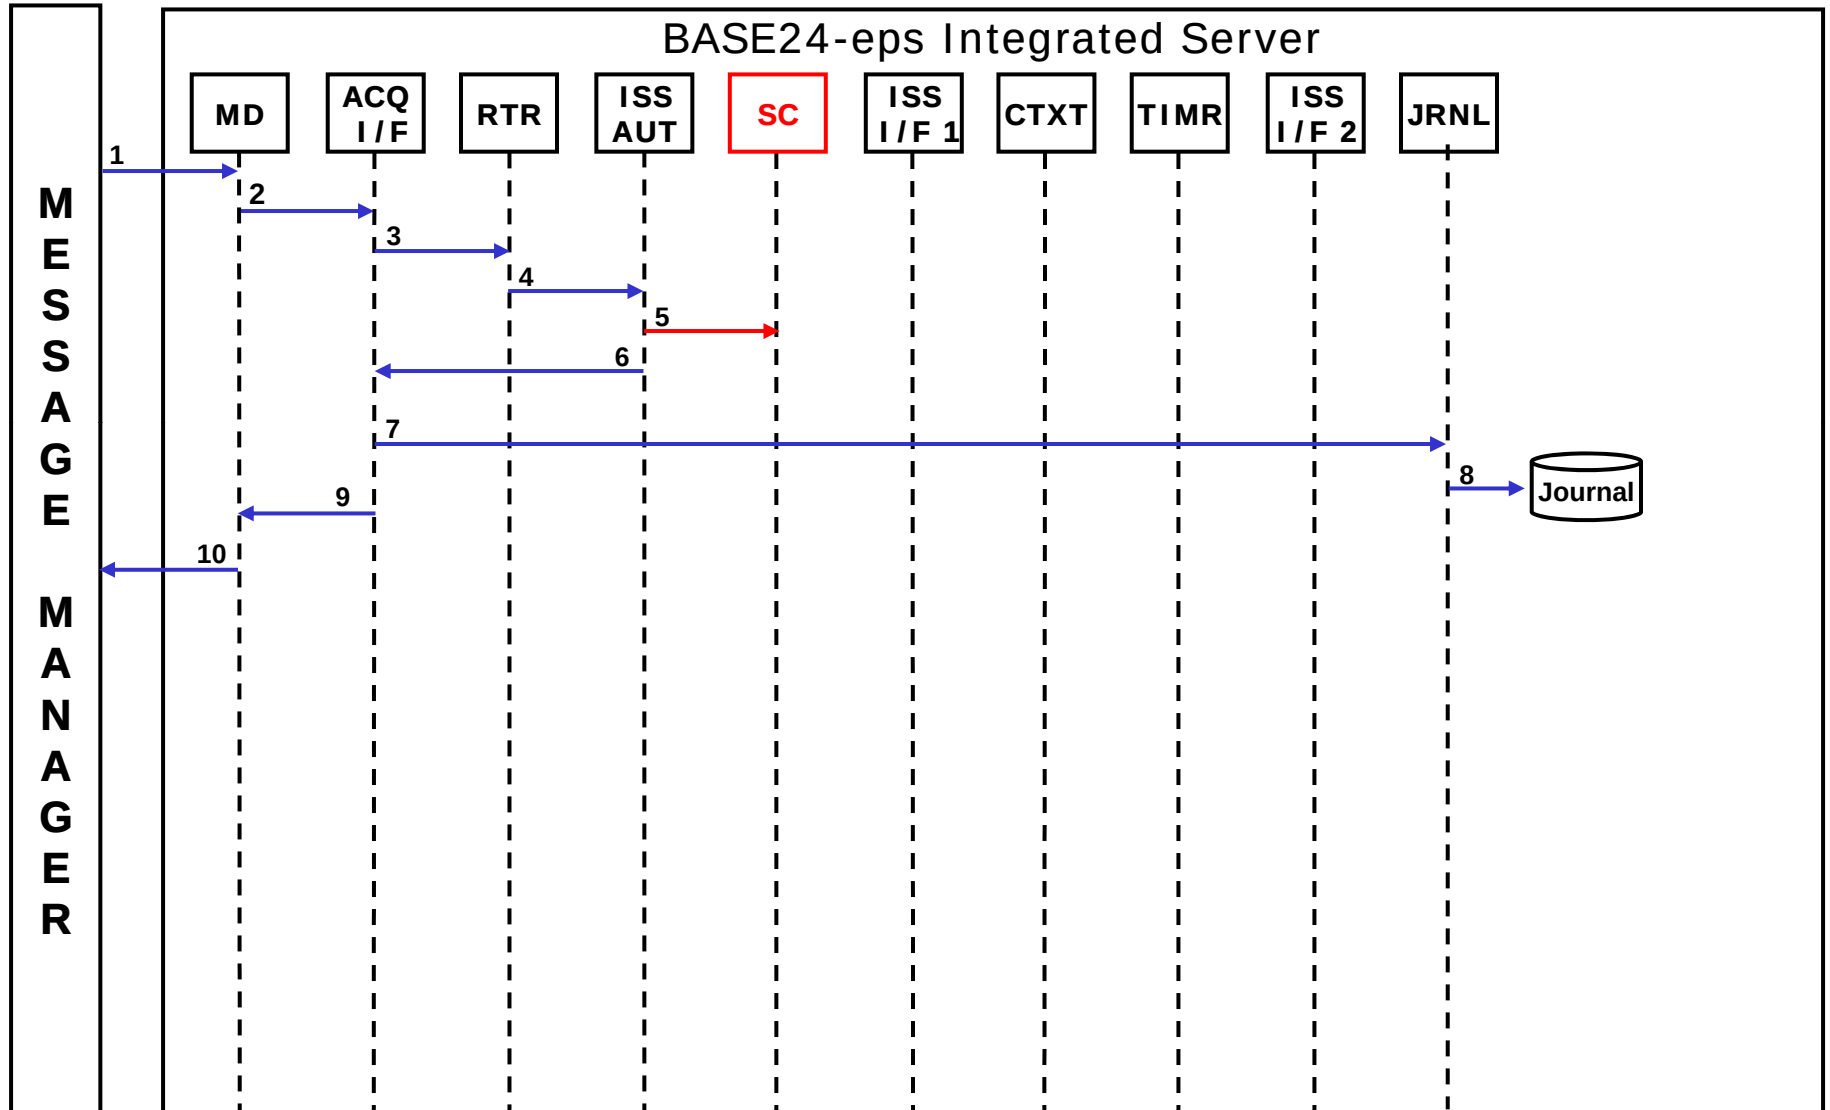

The role of the Script component in authorization processing




SCRIPT CONFIGURATION

Structure and Hierarchy

Structure and Hierarchy

- ACI recommends scripts be structured as:
 - business-level scripts – Business-level scripts direct business processing by calling supporting-level scripts. These scripts are configured in the Authorization Script data source and are invoked initially.
 - supporting-level scripts – Supporting-level scripts perform business processing (e.g., PIN verification). These scripts are called by the business-level scripts.



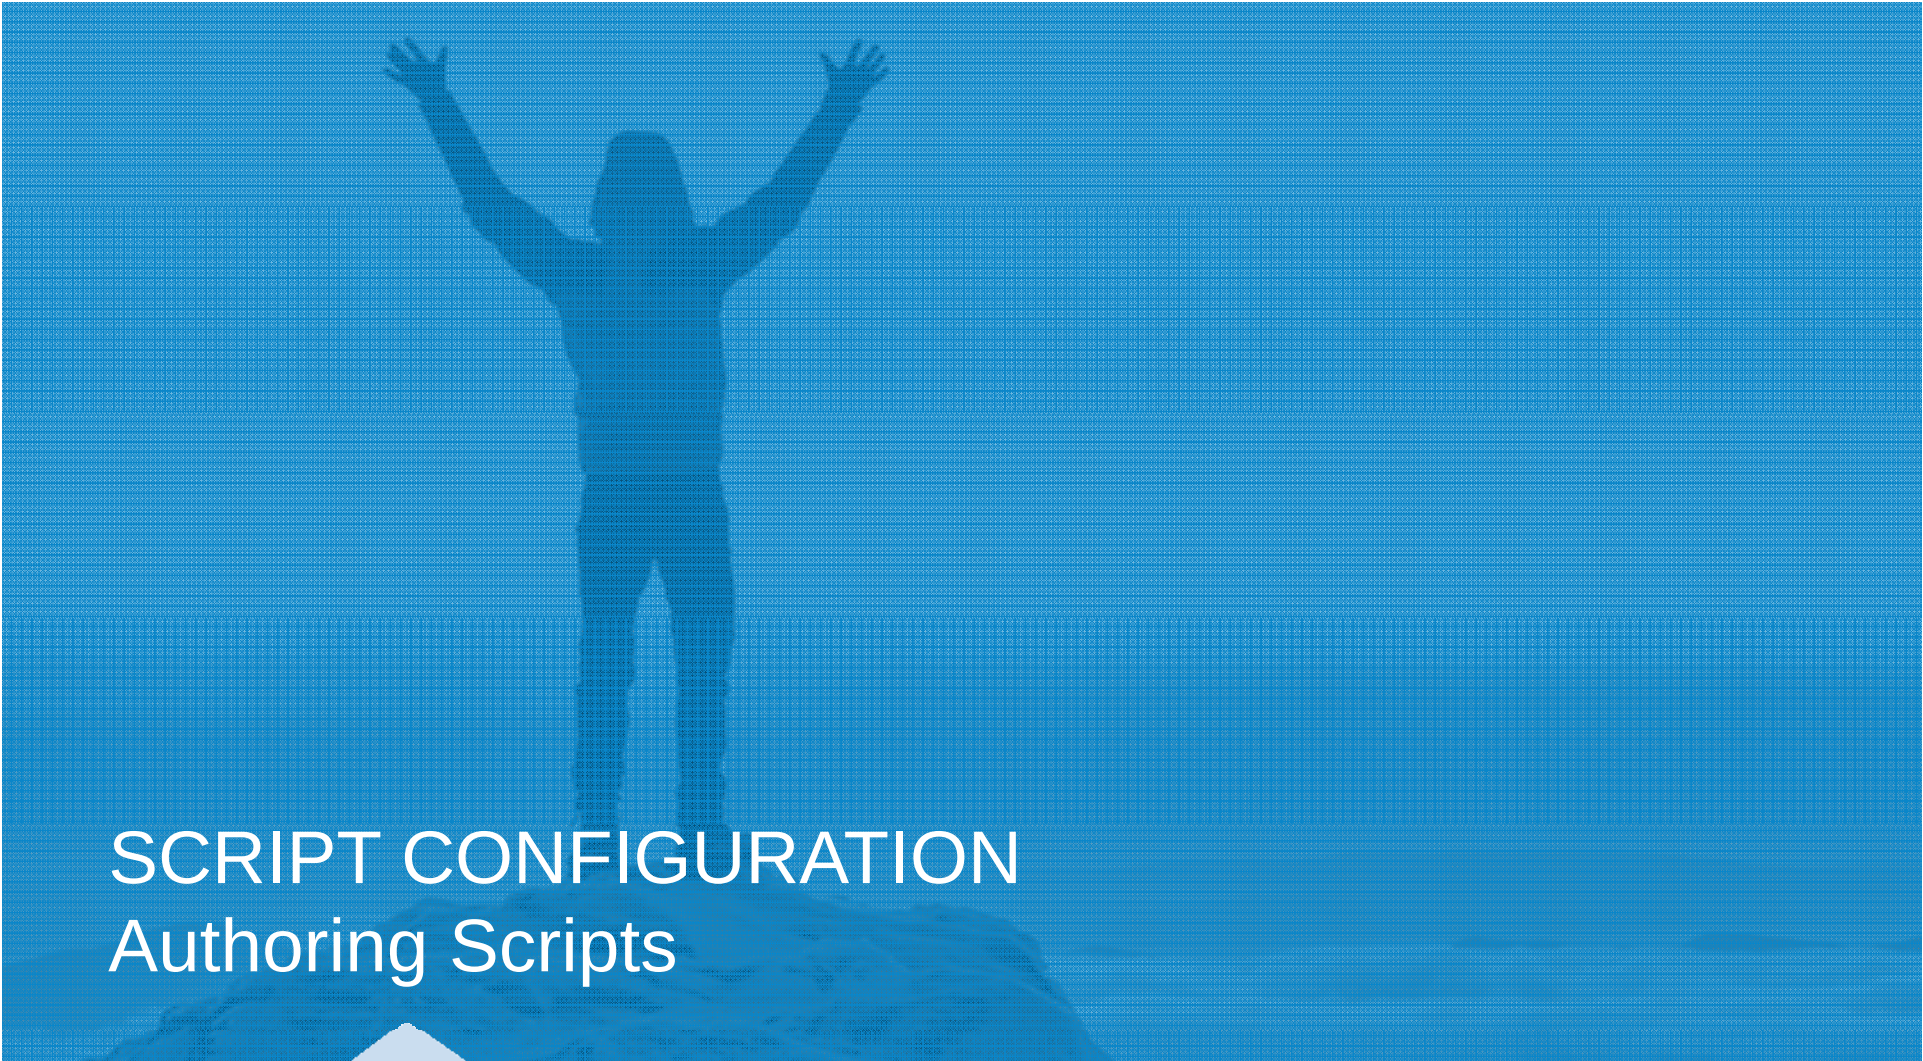

SCRIPT CONFIGURATION

Authoring Scripts

Example Scripts

- ACI provides example scripts for:
 - authentication and authorization
 - journal perusal
 - journal query




Example Scripts


- Included with the example scripts is a documentation file entitled “Standard Set of Sample Authorization Scripts Delivery Document” which includes :
 - The names of all the provided scripts and a short description of their function.
 - A cross reference of high level scripts with the support scripts that it uses.
 - Instructions on how to import a script from the text files delivered into a customer’s environment.
 - Documentation of the limits that the scripts require to be configured in order to execute properly.



Script Repository

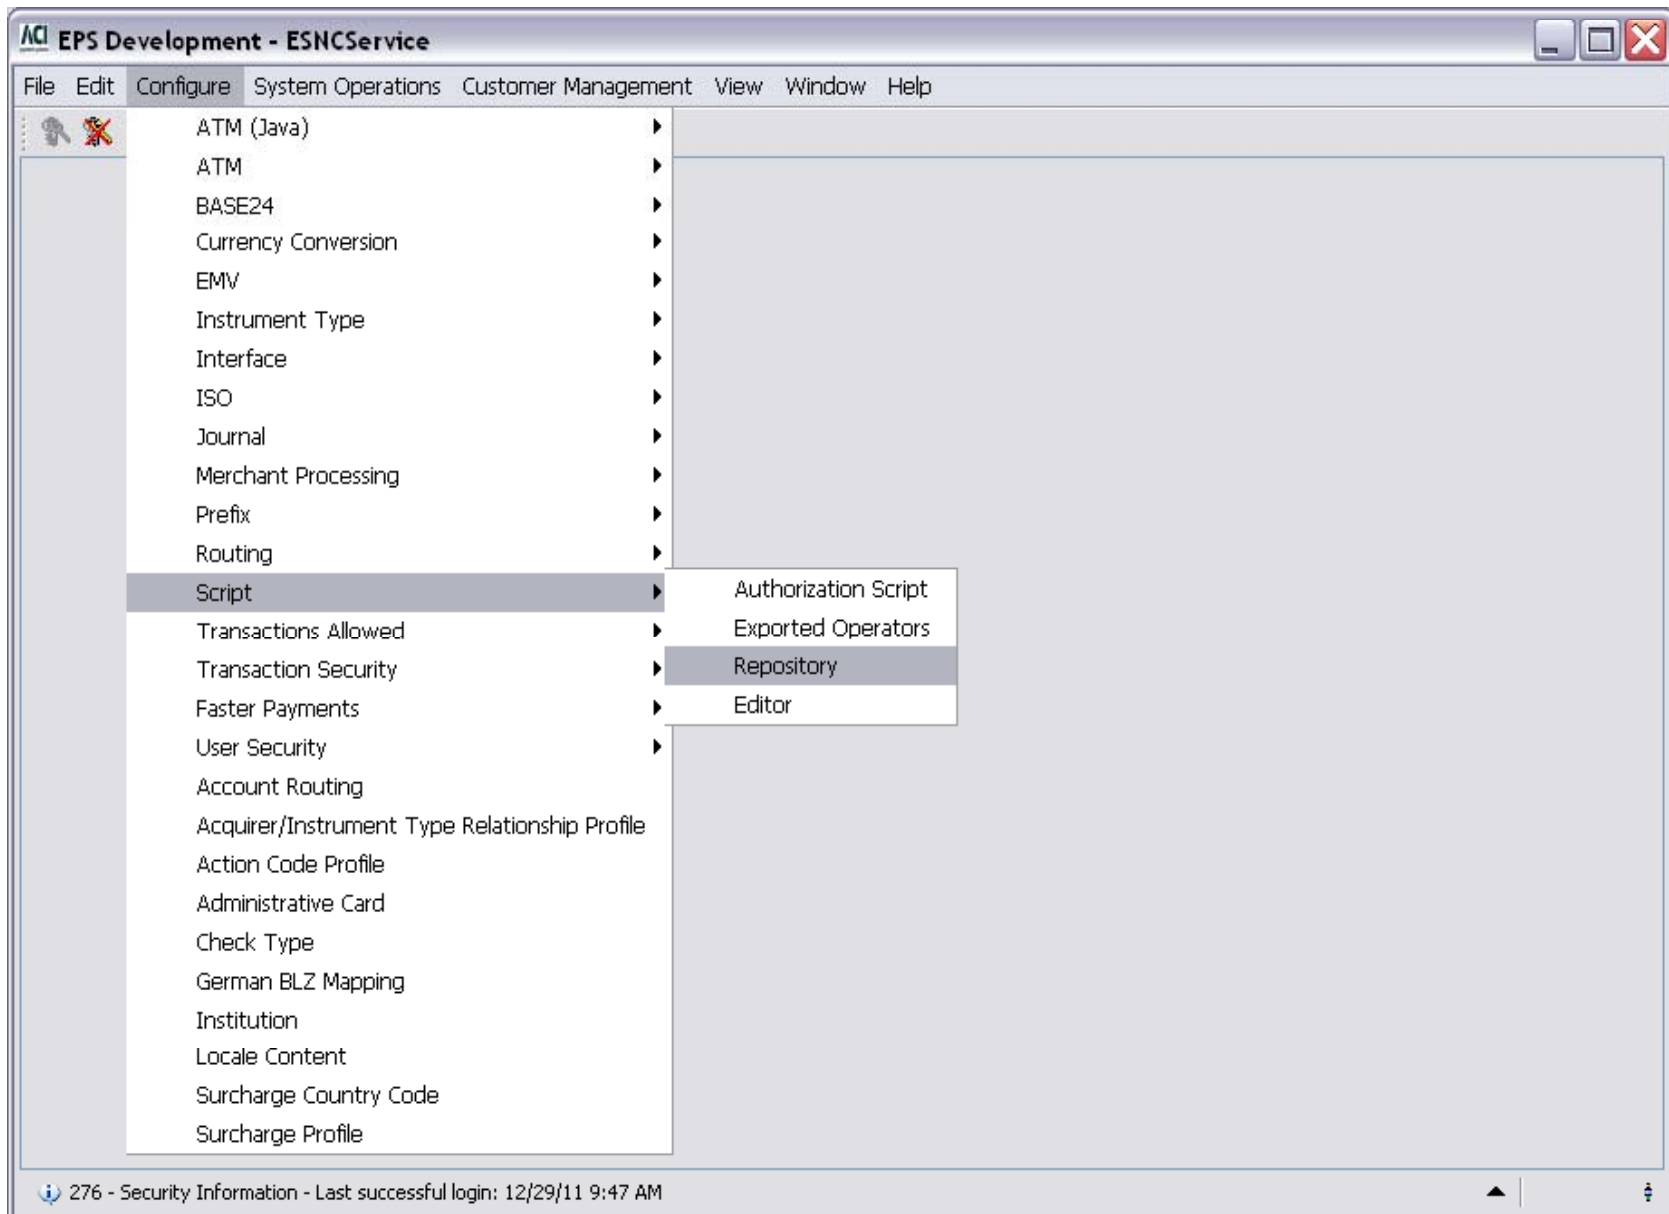

Script Repository

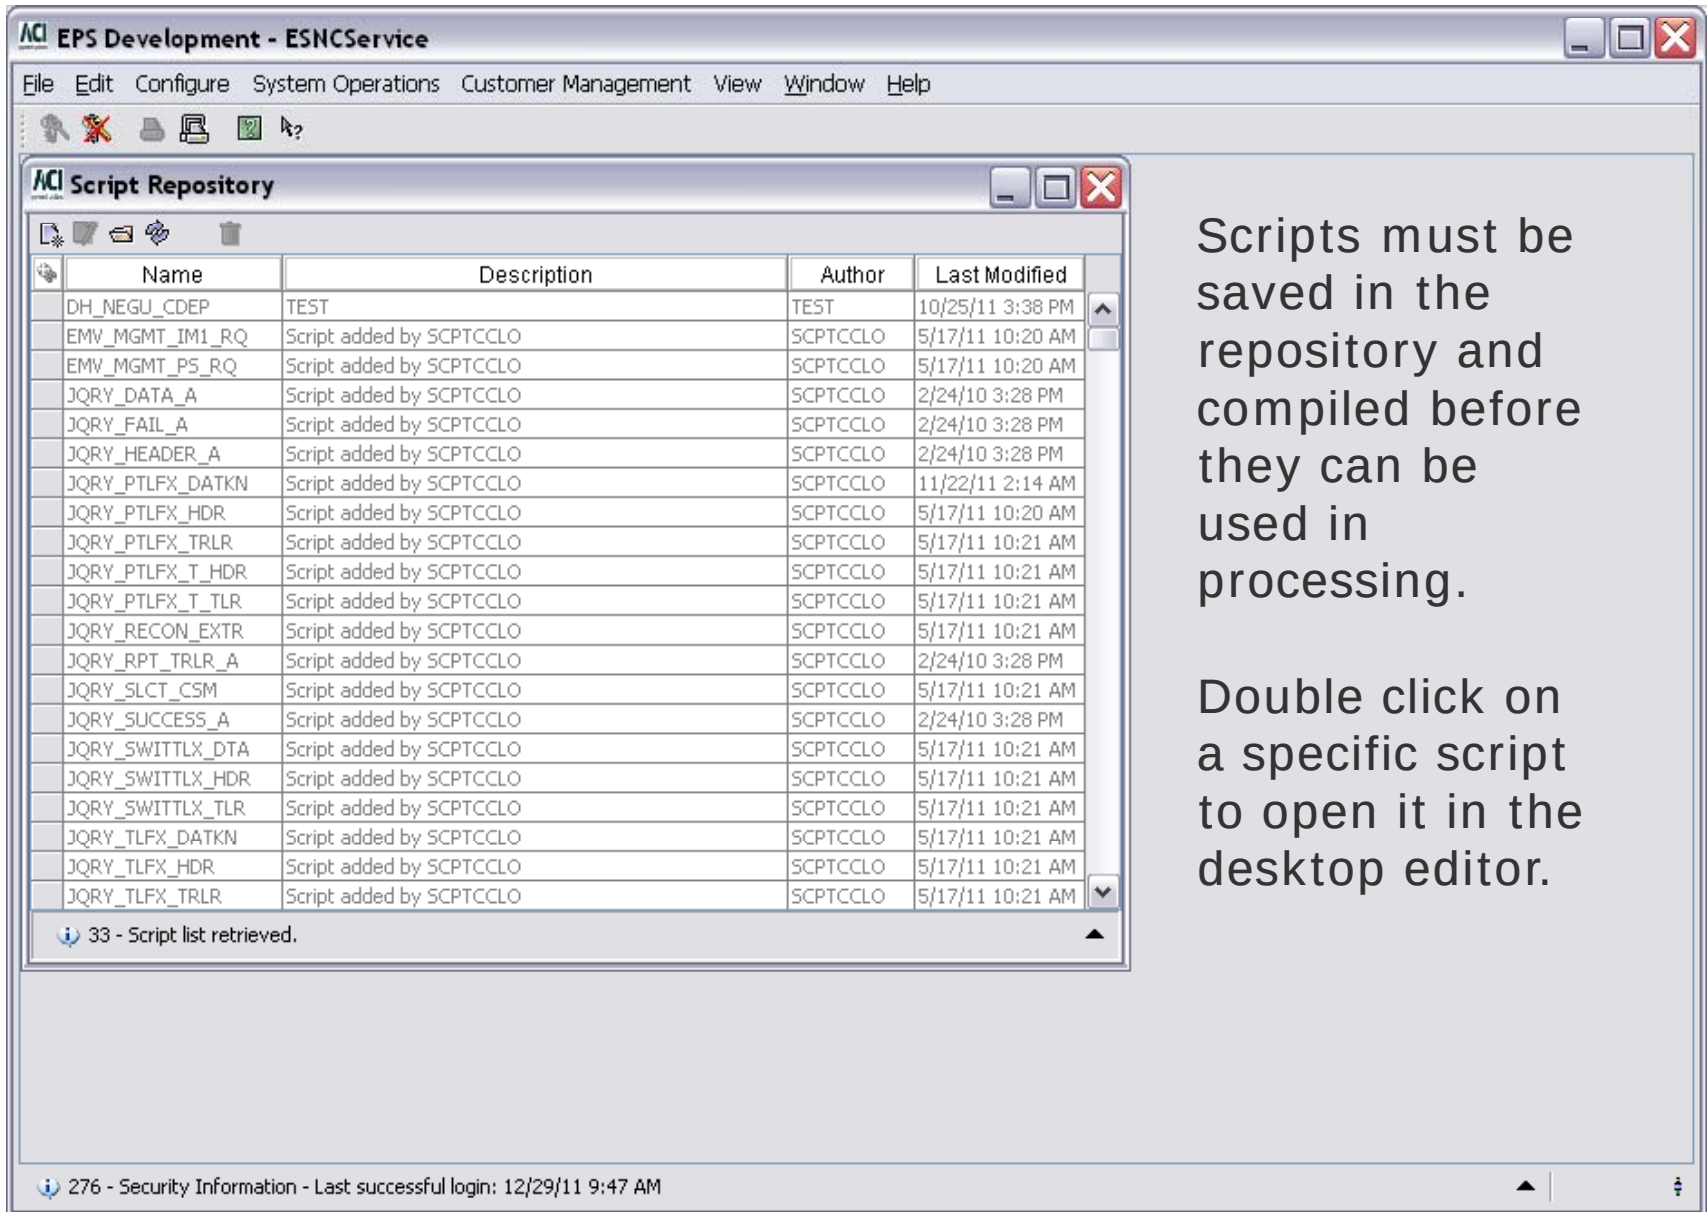

The screenshot shows the 'ACI Script Repository' window. The title bar reads 'ACI EPS Development - ESNCService'. The menu bar includes 'File', 'Edit', 'Configure', 'System Operations', 'Customer Management', 'View', 'Window', and 'Help'. Below the menu is a toolbar with icons for file operations. The main area contains a table with the following columns: 'Name', 'Description', 'Author', and 'Last Modified'. The table lists 24 scripts, all added by 'SCPTCCLO'. A status bar at the bottom indicates '33 - Script list retrieved.' and '276 - Security Information - Last successful login: 12/29/11 9:47 AM'.

Name	Description	Author	Last Modified
DH_NEGU_CDEP	TEST	TEST	10/25/11 3:38 PM
EMV_MGMT_IM1_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:20 AM
EMV_MGMT_PS_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:20 AM
JQRY_DATA_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_FAIL_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_HEADER_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_PTLFX_DATKN	Script added by SCPTCCLO	SCPTCCLO	11/22/11 2:14 AM
JQRY_PTLFX_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:20 AM
JQRY_PTLFX_TRLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_PTLFX_T_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_PTLFX_T_TLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_RECON_EXTR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_RPT_TRLR_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_SLCT_CSM	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_SUCCESS_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_SWITTLX_DTA	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_SWITTLX_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_SWITTLX_TLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_DATKN	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_TRLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM


33 - Script list retrieved.

276 - Security Information - Last successful login: 12/29/11 9:47 AM

Scripts must be saved in the repository and compiled before they can be used in processing.


Double click on a specific script to open it in the desktop editor.

Script Editor

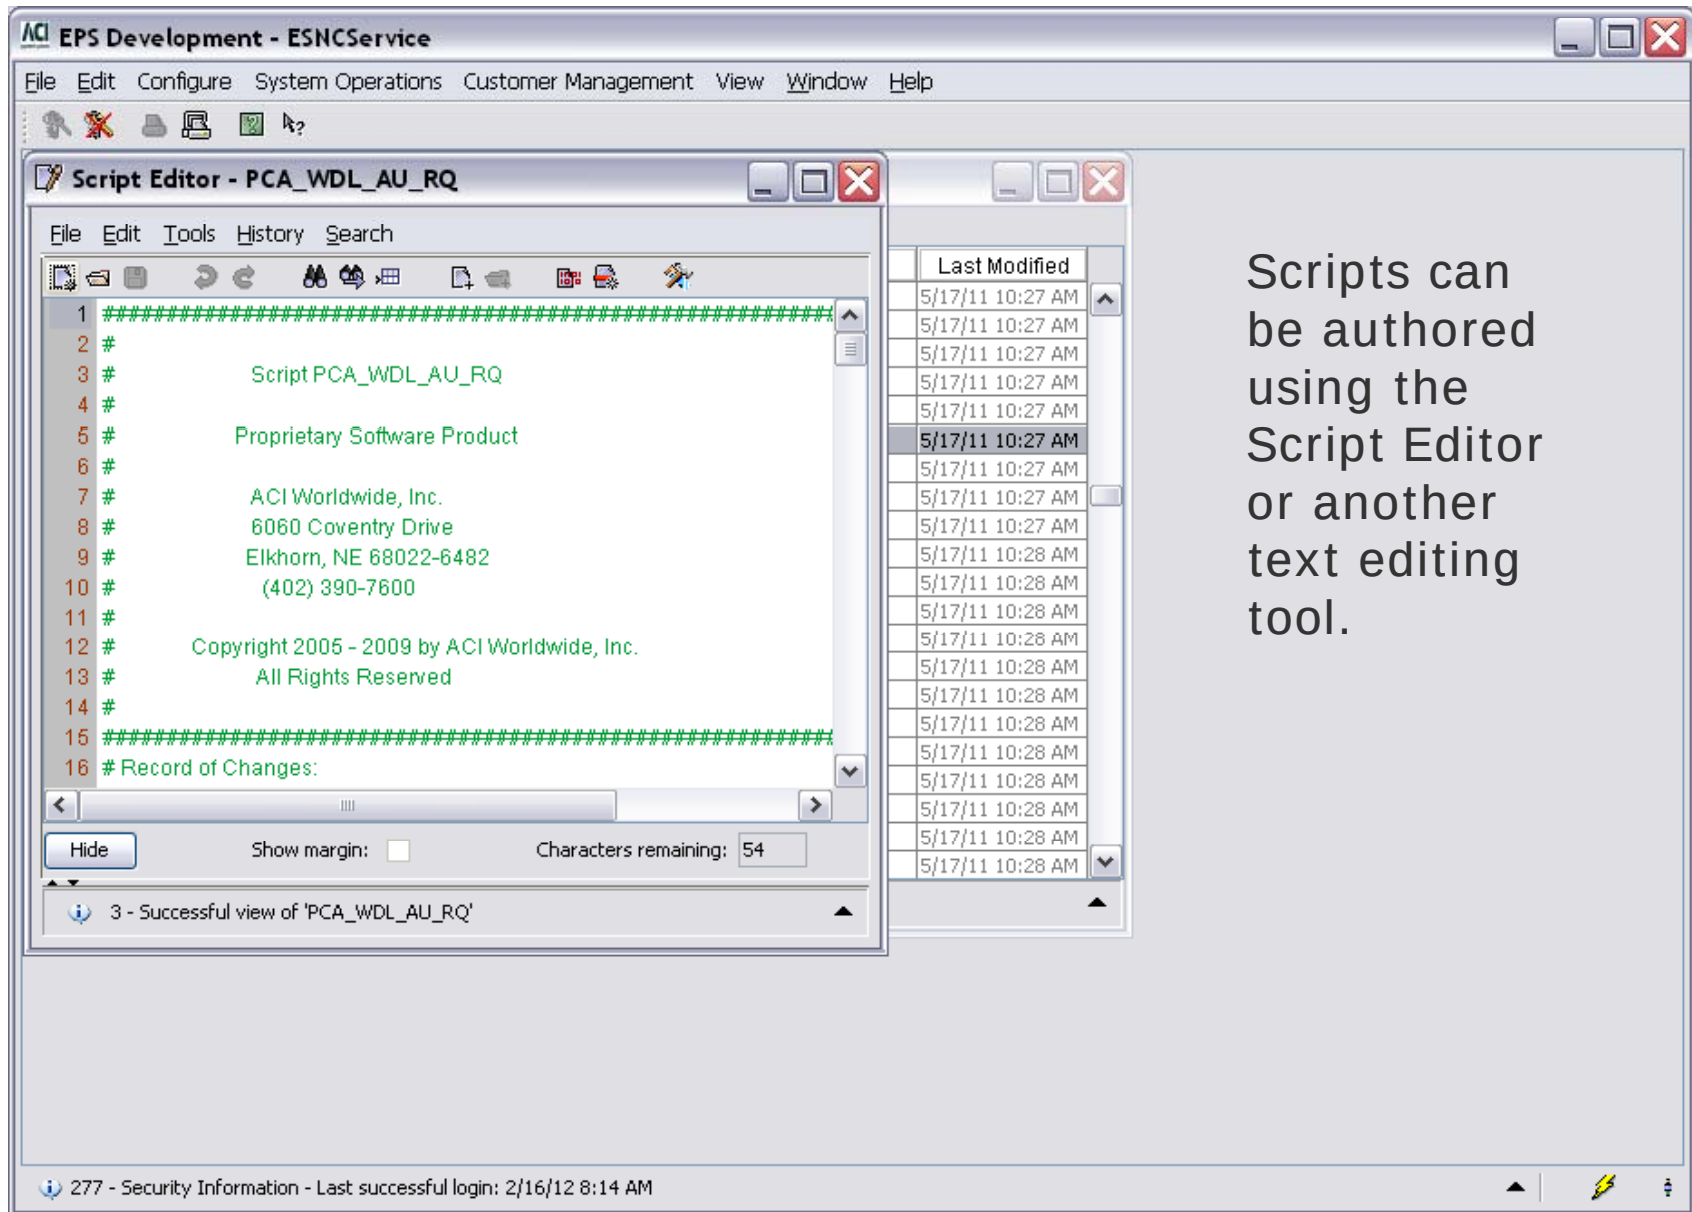

Scripts can be authored using the Script Editor or another text editing tool.


Retrieving an Example Script

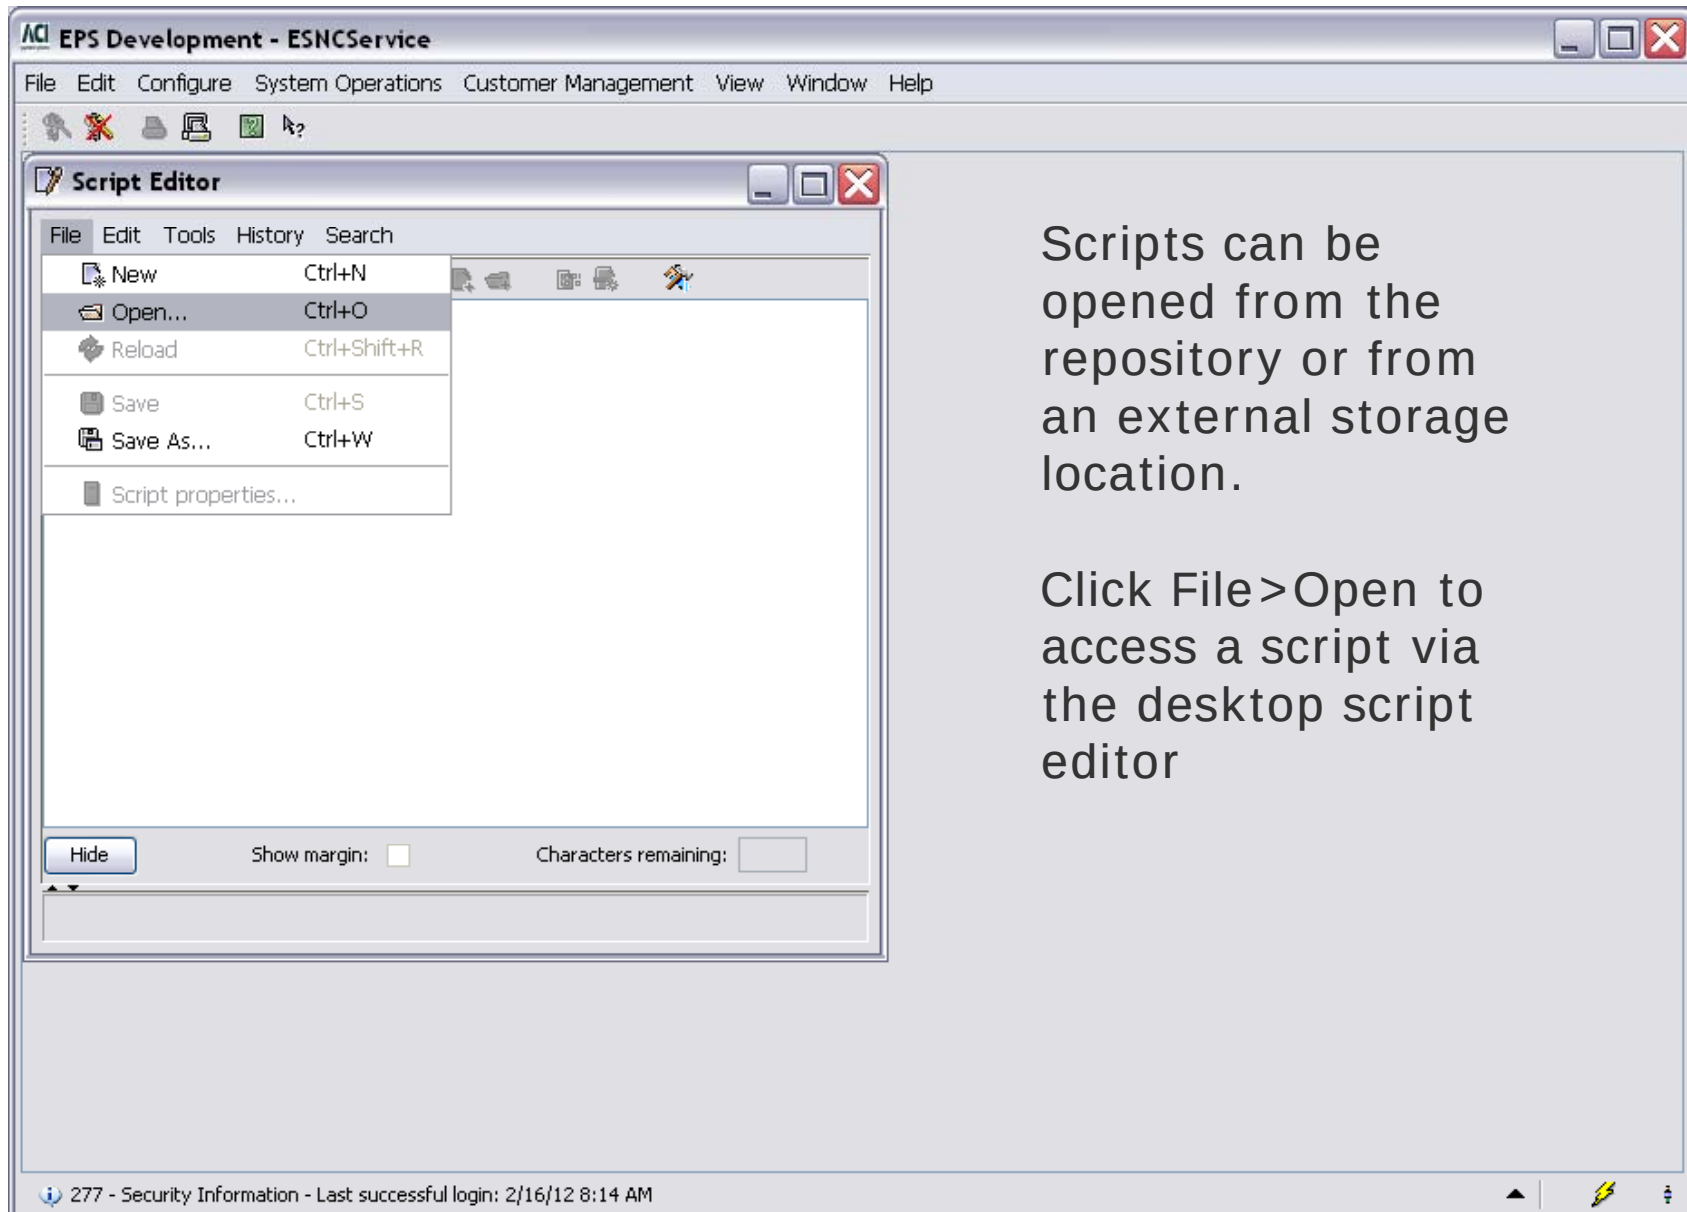

Scripts can be opened from the repository or from an external storage location.


Click File>Open to access a script via the desktop script editor

Retrieving an Example Script

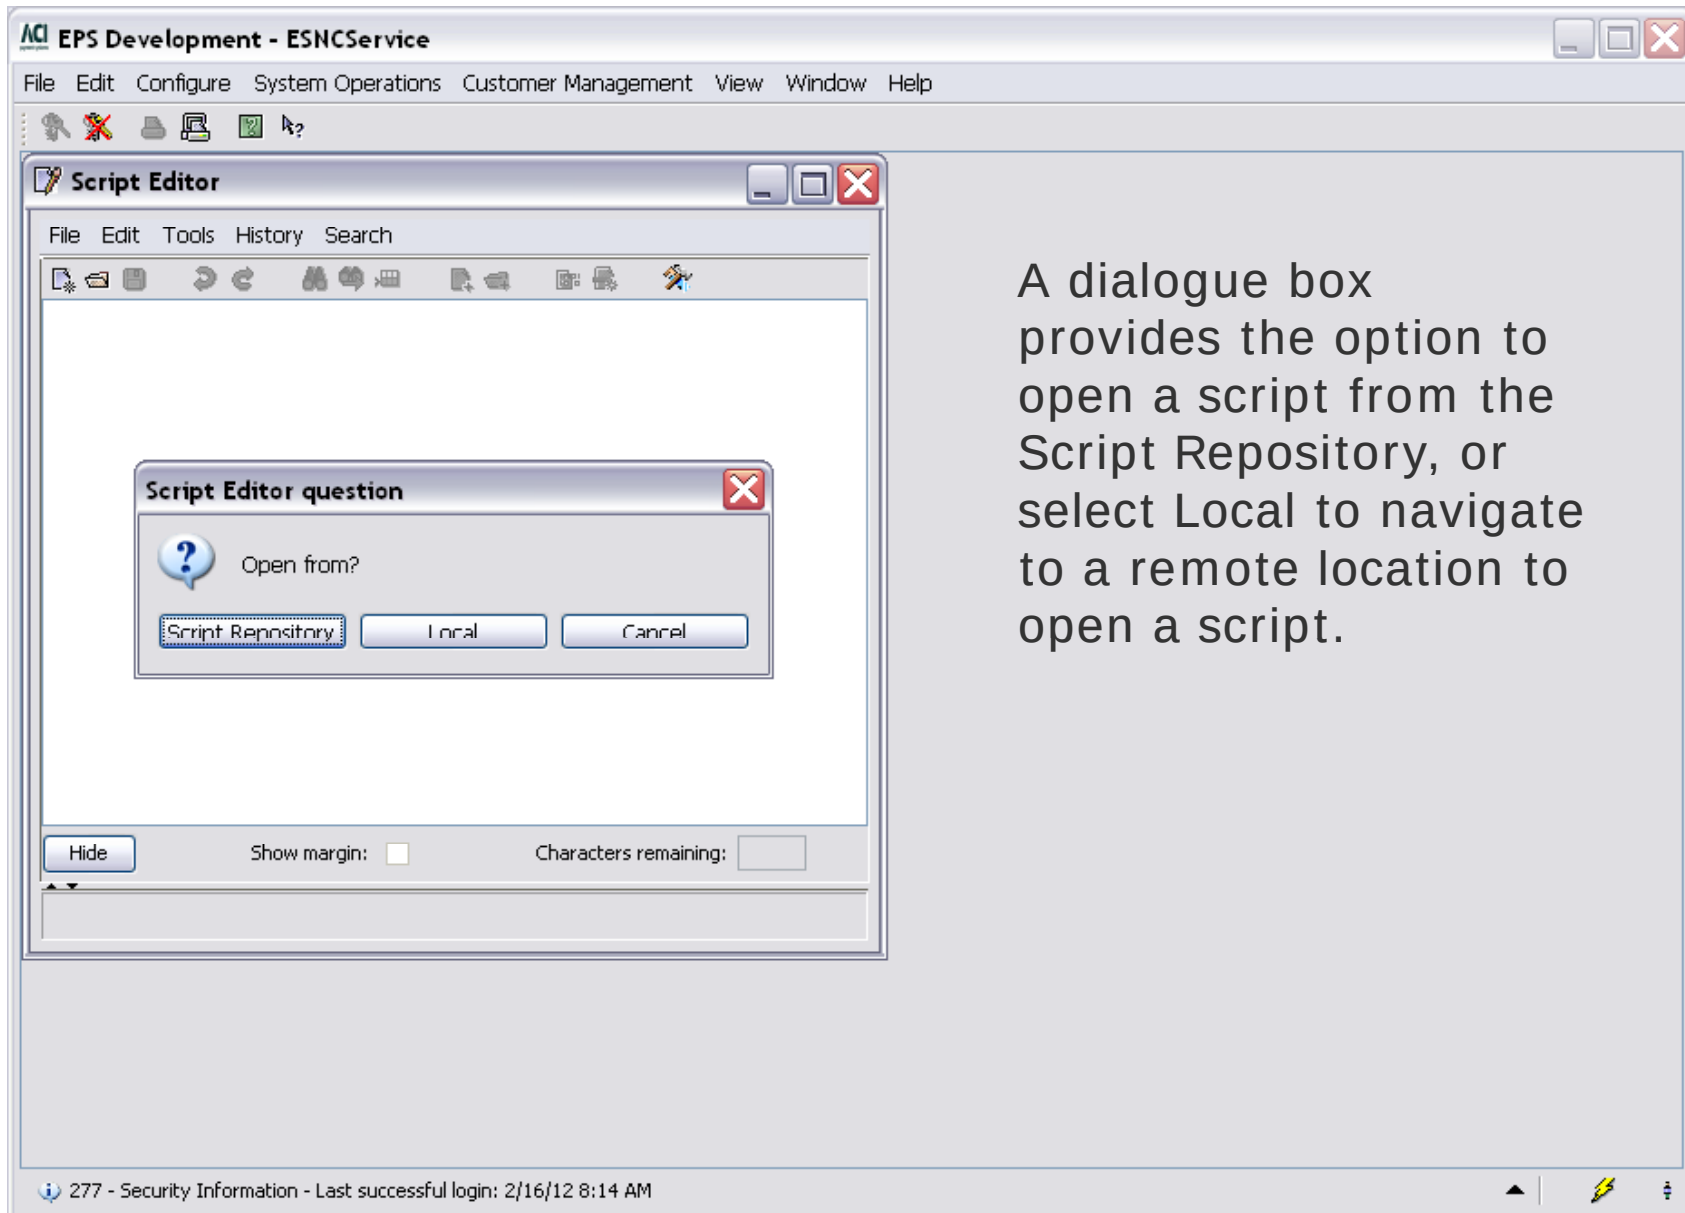

A dialogue box provides the option to open a script from the Script Repository, or select Local to navigate to a remote location to open a script.

Retrieving an Example Script

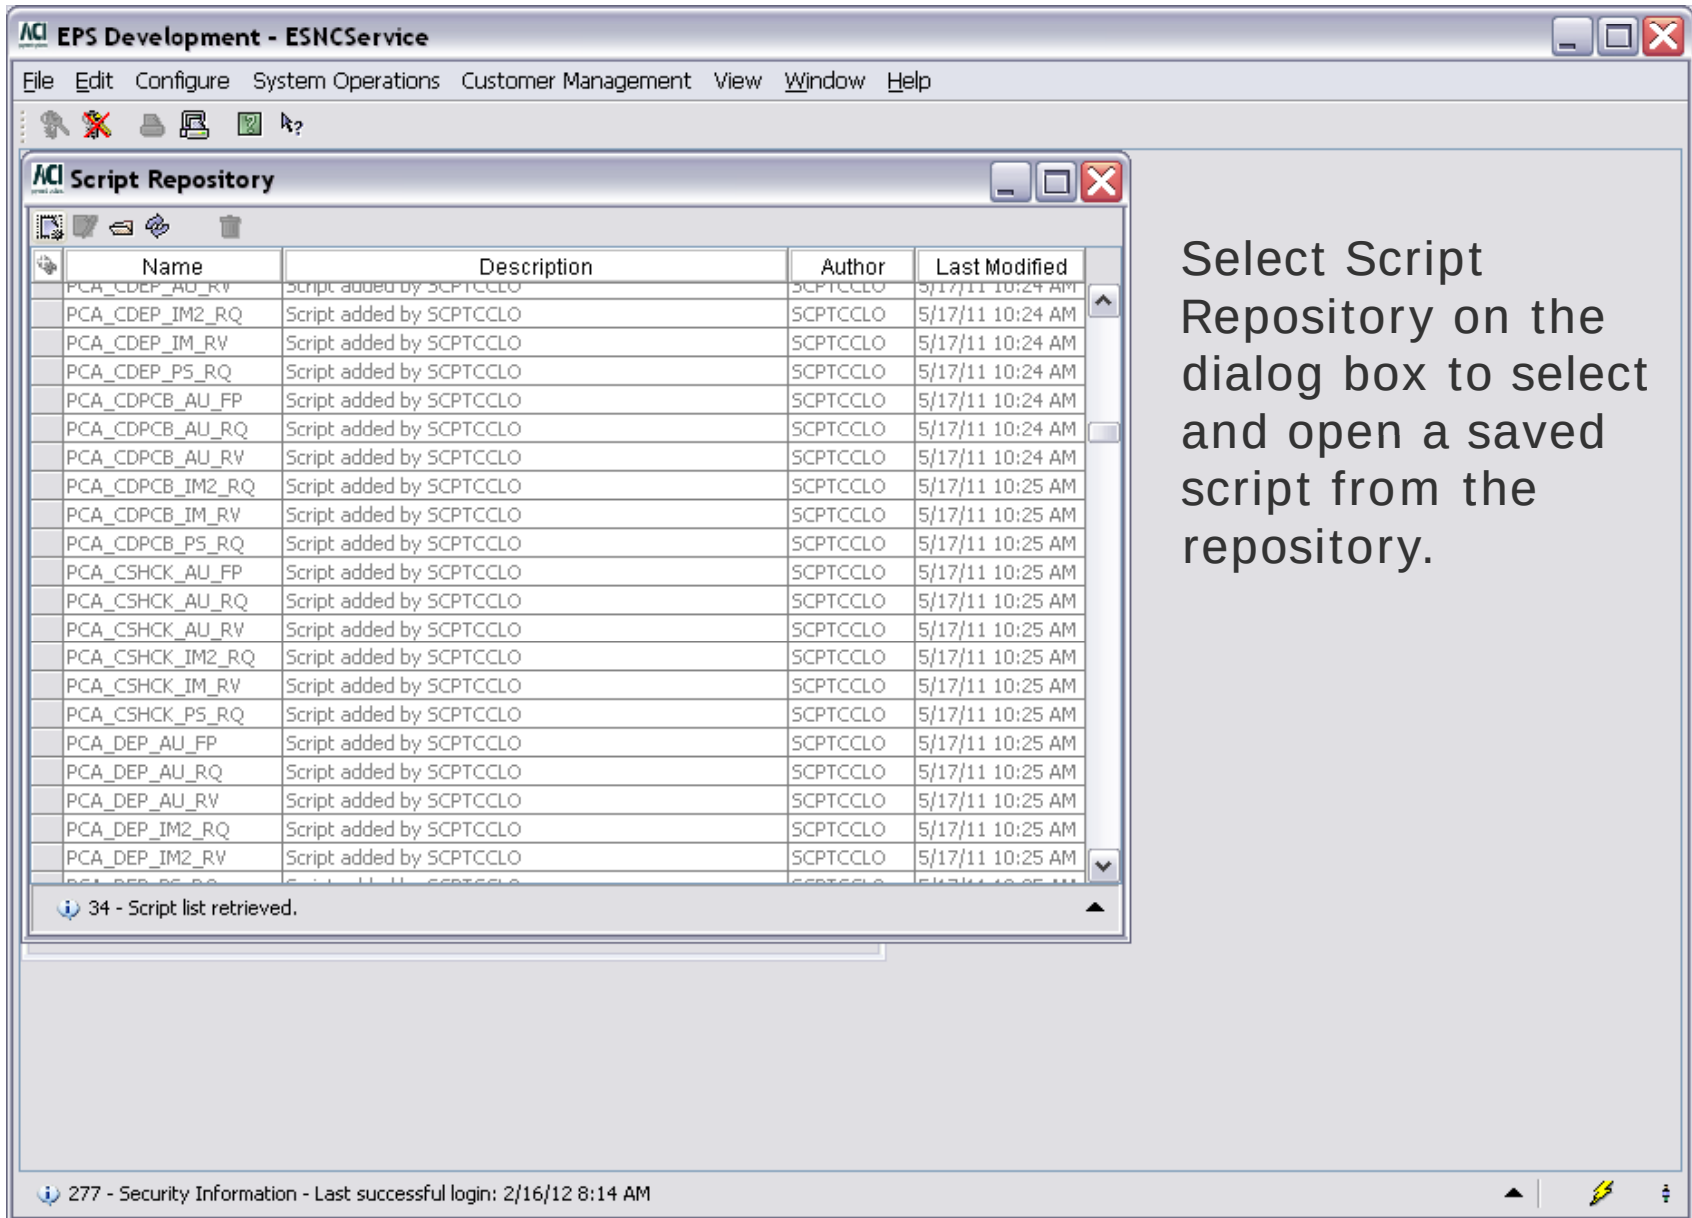


Select Script Repository on the dialog box to select and open a saved script from the repository.

Name	Description	Author	Last Modified
PCA_CDEP_AU_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDEP_IM2_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDEP_IM_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDEP_P5_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDPCEB_AU_FP	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDPCEB_AU_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDPCEB_AU_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:24 AM
PCA_CDPCEB_IM2_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CDPCEB_IM_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CDPCEB_P5_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CSHCK_AU_FP	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CSHCK_AU_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CSHCK_AU_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CSHCK_IM2_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CSHCK_IM_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_CSHCK_P5_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_DEP_AU_FP	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_DEP_AU_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_DEP_AU_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_DEP_IM2_RQ	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM
PCA_DEP_IM2_RV	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:25 AM


34 - Script list retrieved.

277 - Security Information - Last successful login: 2/16/12 8:14 AM

Retrieving an Example Script

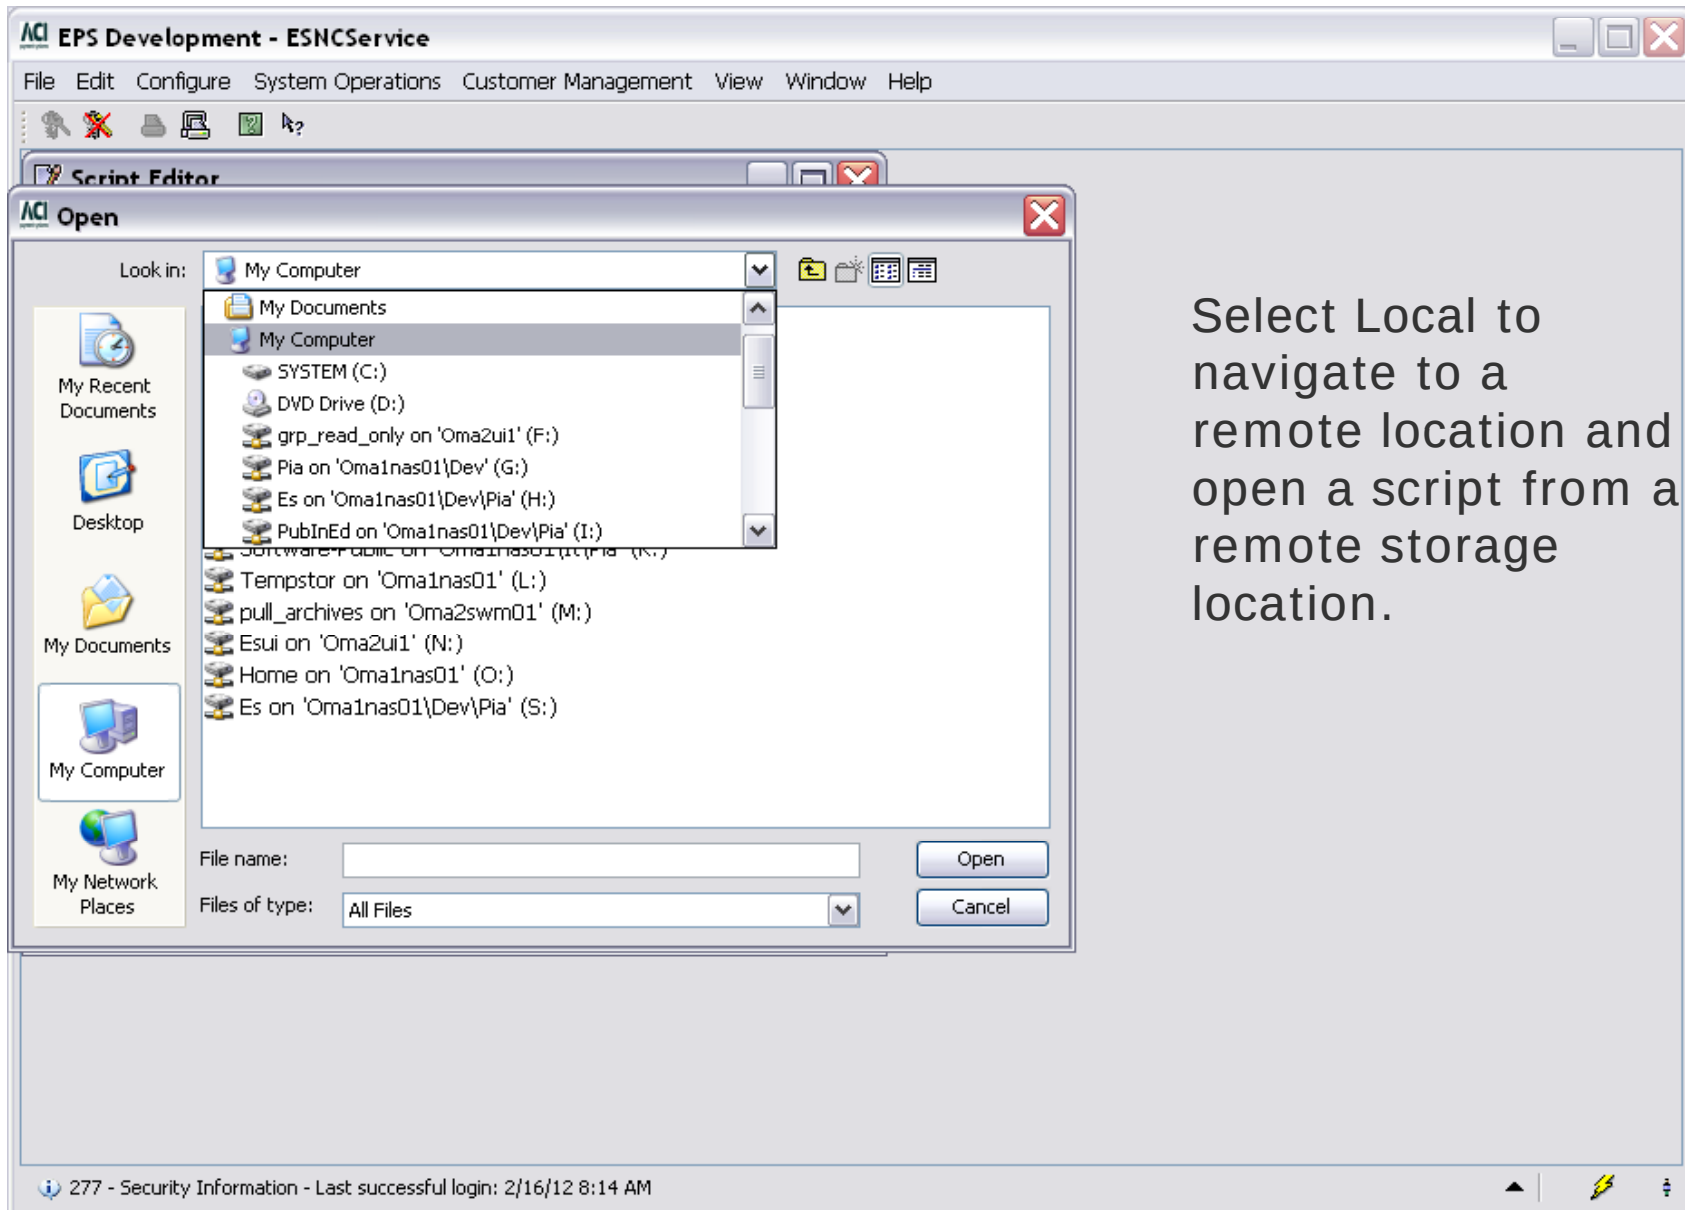

Saving a Script

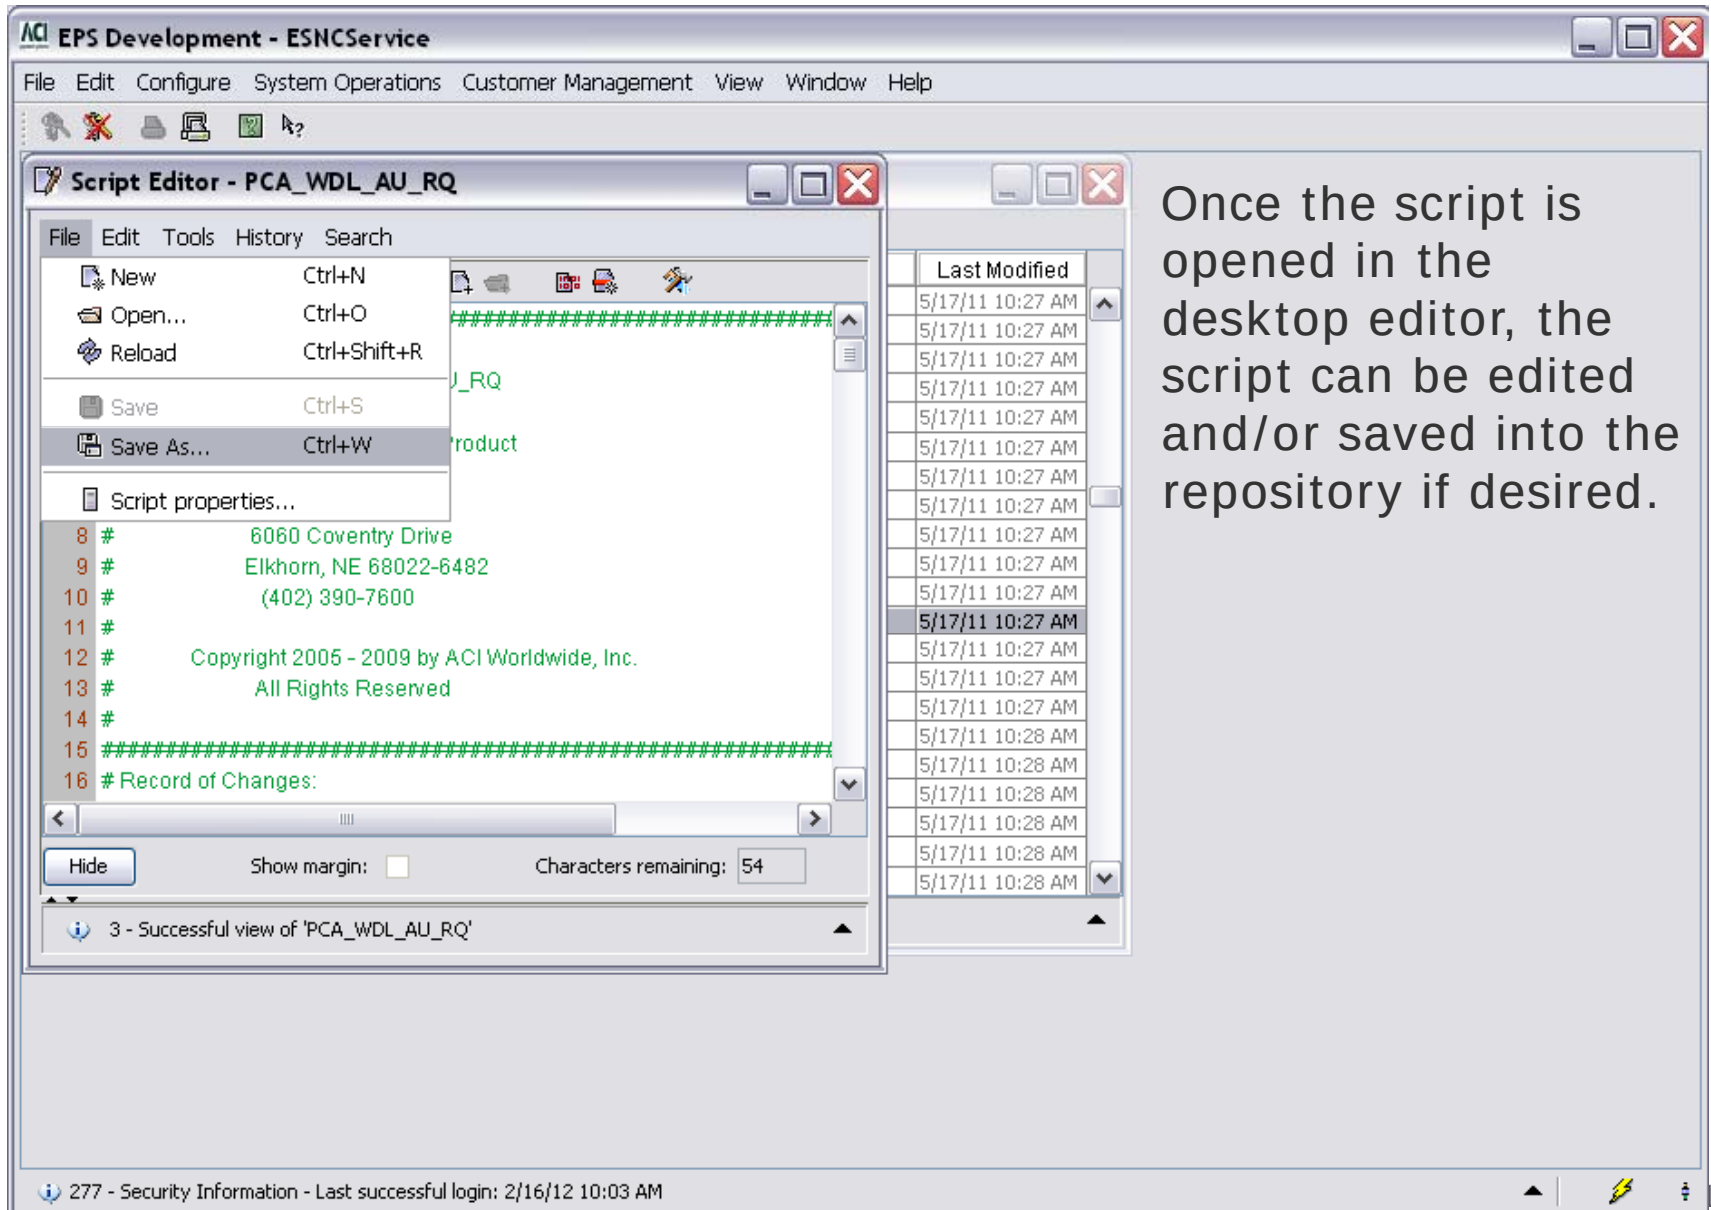

The screenshot displays the ACI EPS Development - ESNService application. The 'Script Editor - PCA_WDL_AU_RQ' window is open, showing a menu with options: New (Ctrl+N), Open... (Ctrl+O), Reload (Ctrl+Shift+R), Save (Ctrl+S), Save As... (Ctrl+W), and Script properties... The script content is as follows:

```
8 # 6060 Coventry Drive
9 # Elkhorn, NE 68022-6482
10 # (402) 390-7600
11 #
12 # Copyright 2005 - 2009 by ACI Worldwide, Inc.
13 # All Rights Reserved
14 #
15 #####
16 # Record of Changes:
```


At the bottom of the editor, a status bar indicates '3 - Successful view of 'PCA_WDL_AU_RQ''. To the right of the script editor, a table lists 'Last Modified' timestamps:

Last Modified
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:27 AM
5/17/11 10:28 AM
5/17/11 10:28 AM
5/17/11 10:28 AM
5/17/11 10:28 AM
5/17/11 10:28 AM
5/17/11 10:28 AM
5/17/11 10:28 AM

At the bottom of the application window, a status bar shows '277 - Security Information - Last successful login: 2/16/12 10:03 AM'.

Once the script is opened in the desktop editor, the script can be edited and/or saved into the repository if desired.



Saving a Script

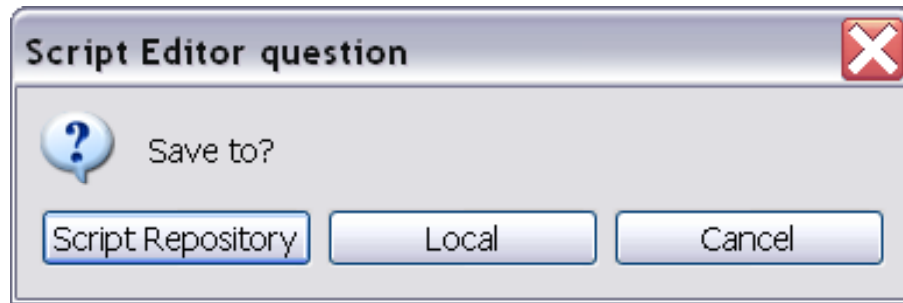

A dialogue box prompts the user to save the script into the Script Repository or to an external storage location.

If saved to the Script Repository, the user is prompted to provide a Script Name, Description and Author name.

If saved to an external location, the user is prompted to provide a destination.

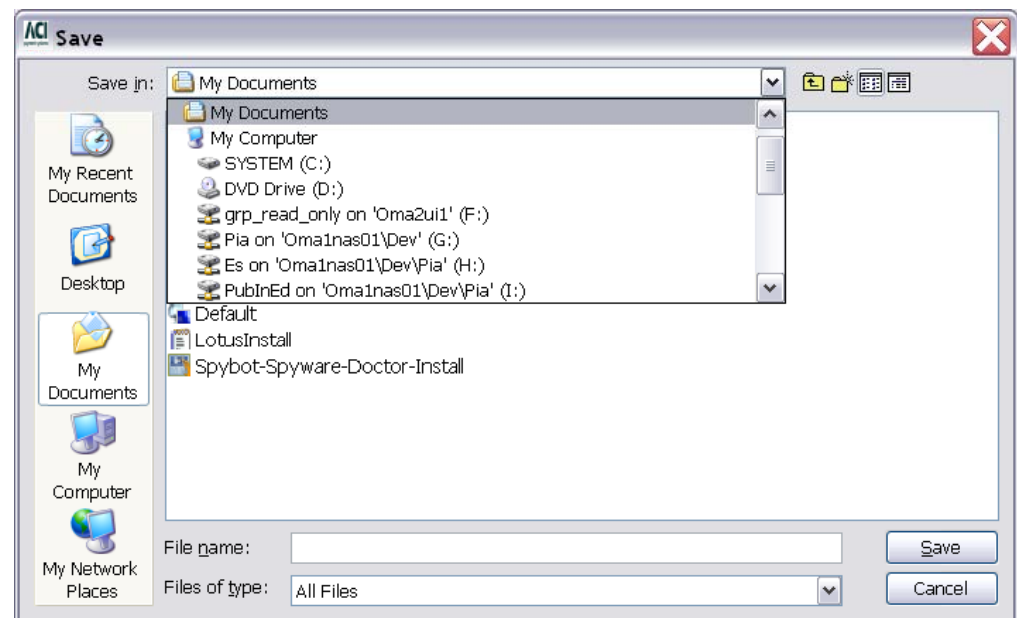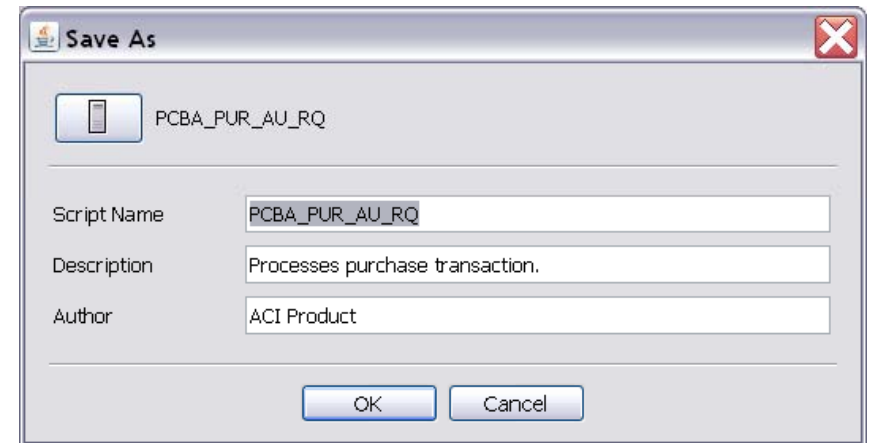

Saving a Script

The screenshot shows the 'EPS Development - ESNCServices' application window. The 'Script Editor - PCA_WDL_AU_RQ' is open, displaying a script with line numbers 1 through 16. The script content includes comments and a record of changes. A 'Script Editor question' dialog box is overlaid on the script editor, asking 'Save to?' with three buttons: 'Script Repository', 'Local', and 'Cancel'. The 'Script Repository' button is highlighted. The status bar at the bottom of the application window shows a message: '4 - 'PCA_WDL_AU_RQ' not saved to Script Repository'.

The script content is as follows:

```
1 #####
2 #
3 #     Script PCA_WDL_AU_RQ
4 #
5 #     Proprietary Software Product
6 #
7 #
8 #
9 #
10 #
11 #
12 #
13 #     All Rights Reserved
14 #
15 #####
16 # Record of Changes:
```

The 'Script Editor question' dialog box has the following text and buttons:

Script Editor question

Save to?

Script Repository Local Cancel

The status bar at the bottom of the application window shows the following message:

4 - 'PCA_WDL_AU_RQ' not saved to Script Repository

The script must be saved to the script repository before it can be compiled.

Compiling a Script

The screenshot displays the ACI EPS Development - ESNCSERVICE application window. The main window has a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. A sub-window titled "Script Editor - PCA_WDL_AU_RQ" is open, showing a script with 16 lines. The script content is as follows:

```
1 #####
2 #
3 #       Script PCA_WDL_AU_RQ
4 #
5 #       Proprietary Software Product
6 #
7 #       ACI Worldwide, Inc.
8 #       6060 Coventry Drive
9 #       Elkhorn, NE 68022-6482
10 #       (402) 390-7600
11 #
12 #       Copyright 2005 - 2009 by ACI Worldwide, Inc.
13 #       All Rights Reserved
14 #
15 #####
16 # Record of Changes:
```

Below the script editor, there is a status bar showing "Hide", "Show margin: ☐", and "Characters remaining: 54". At the bottom of the application, a message bar indicates: "5 - PCA_WDL_AU_RQ compiled (no errors or warnings)".

To the right of the script editor, a "Last Modified" table is visible, listing timestamps for various files. The table has a single column "Last Modified" and 16 rows, all showing the timestamp "5/17/11 10:27 AM".

A text box on the right side of the image contains the text: "A successful compile results in no errors and no warnings." An arrow points from this text box to the message bar at the bottom of the application window.

At the bottom of the application window, a status bar shows: "277 - Security Information - Last successful login: 2/16/12 10:03 AM".

Compiling a Script

The screenshot displays the 'Script Editor - PCA_WDL_AU_RQ' window within the 'EPS Development - ESNCSERVICE' application. The script editor shows a C-like script with the following content:

```
185 } # End of switch(ret_val)
186
187 #
188 # Invoke S_CRD_USG_WRT.
189 #
190 if(! ( S_CRD_USG_WRT(a_crd, true)))
191 {
192     exit;
193 }
194
195 exit
196
197 #
198 # End of sub-script PCA_WDL_AU_RQ
```

Below the script editor, the 'Compiler Results' pane shows '1 errors, 0 warnings'. A red error message is displayed: 'Error at line #195 - ** ERROR 270 ** EXPECTING A SEMICOLON.' An arrow points from the text on the right to this error message.


The right side of the image contains the following text:

The script compiler parses the script source and returns error messages on each occurrence of a parsing error.

At the bottom of the application window, a status bar shows: '277 - Security Information - Last successful login: 2/16/12 10:03 AM'.

Syntax Highlighting

- Highlights:
 - Key words (if, else, case, return, etc.)
 - **Reserved words (scriptable objects, etc.)**
 - Constants (true/false)
 - Comments ('#')
 - Strings ("quotes")
 - Operators (+, -, *, etc.)

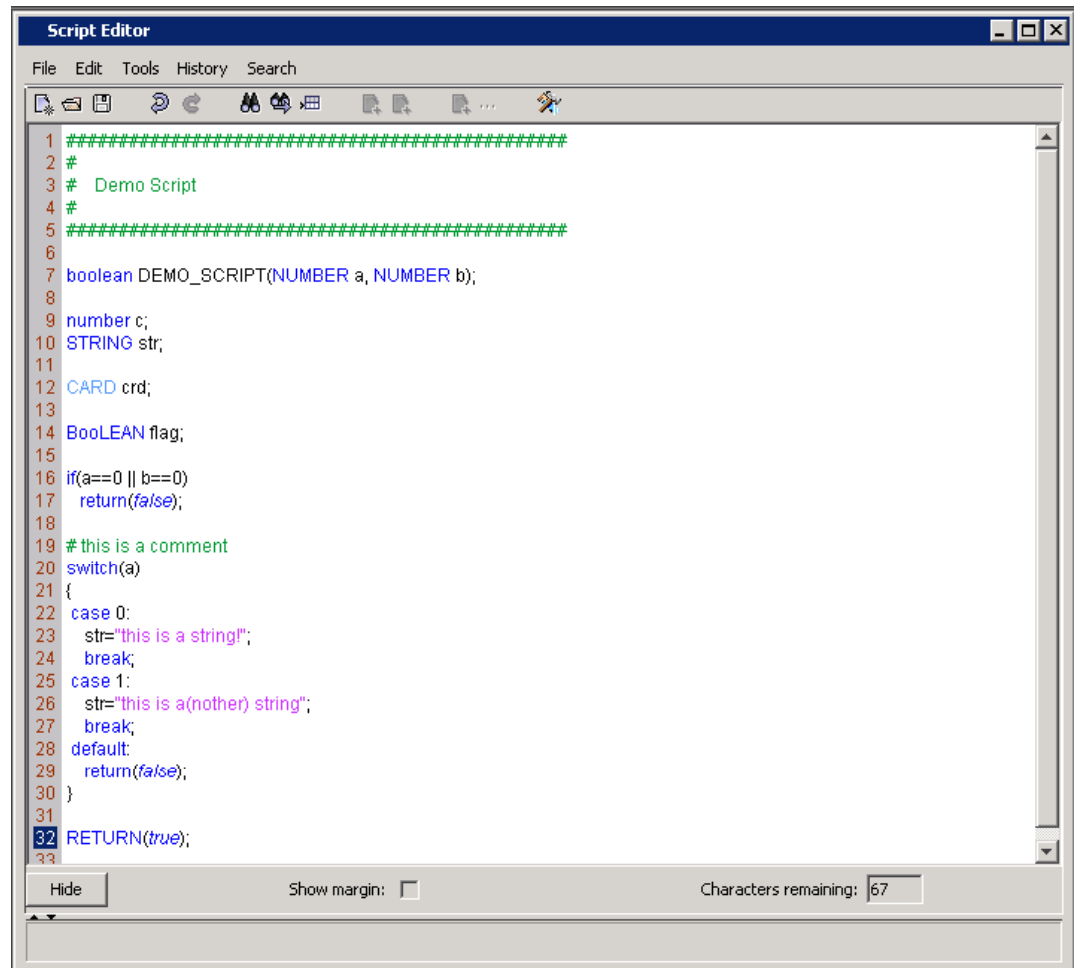

The screenshot shows a 'Script Editor' window with a menu bar (File, Edit, Tools, History, Search) and a toolbar. The code is syntax-highlighted: keywords are blue, reserved words are dark blue, constants are purple, comments are green, and strings are pink. Line numbers 1 through 33 are on the left. The code includes a demo script function with various data types, control structures, and comments.

```
1 #####
2 #
3 # Demo Script
4 #
5 #####
6
7 boolean DEMO_SCRIPT(NUMBER a, NUMBER b);
8
9 number c;
10 STRING str;
11
12 CARD crd;
13
14 BOOLEAN flag;
15
16 if(a==0 || b==0)
17     return(false);
18
19 # this is a comment
20 switch(a)
21 {
22     case 0:
23         str="this is a string";
24         break;
25     case 1:
26         str="this is a(nother) string";
27         break;
28     default:
29         return(false);
30 }
31
32 RETURN(true);
33
```

At the bottom, there is a 'Hide' button, a 'Show margin:' checkbox, and a 'Characters remaining: 67' indicator.

Syntax Highlighting

- Brackets: { [()] }

- When the cursor is before/after a bracket, it highlights the bracket and the matching bracket


- CTRL J jumps the cursor to the matching bracket

```
1 #####
2 #
3 # Demo Script
4 #
5 #####
6
7 boolean DEMO_SCRIPT(NUMBER a, NUMBER b);
8
9 CARD crd;
10
11 switch(a)
12 {
13 case 0:
14     if(b==0)
15     {
16         if(!S_ADDL_RQ_CHK(crd, true, false, "S"))
17         {
18             return(FALSE);
19         }
20         else
21         {
22             return(TRUE);
23         }
24     }
25     break;
26 case 1:
27     str="A";
28     if(b==0)
29     {
30         S_AUTH_RQ(crd,true,str,true,false,"S");
31     }
32     break;
33 default:
34     return(false);
35 }
36
```

```
14     if(b==0)
15     {
16         if(! ( S_ADDL_RQ_CHK (crd, true, false, "S" ) )
17         {
18             return(FALSE);
19         }
20     }
21
```


```
29     {
30         S_AUTH_RQ(crd,true,str,true,false,"S");
31     }
32
```


Line Delimiter

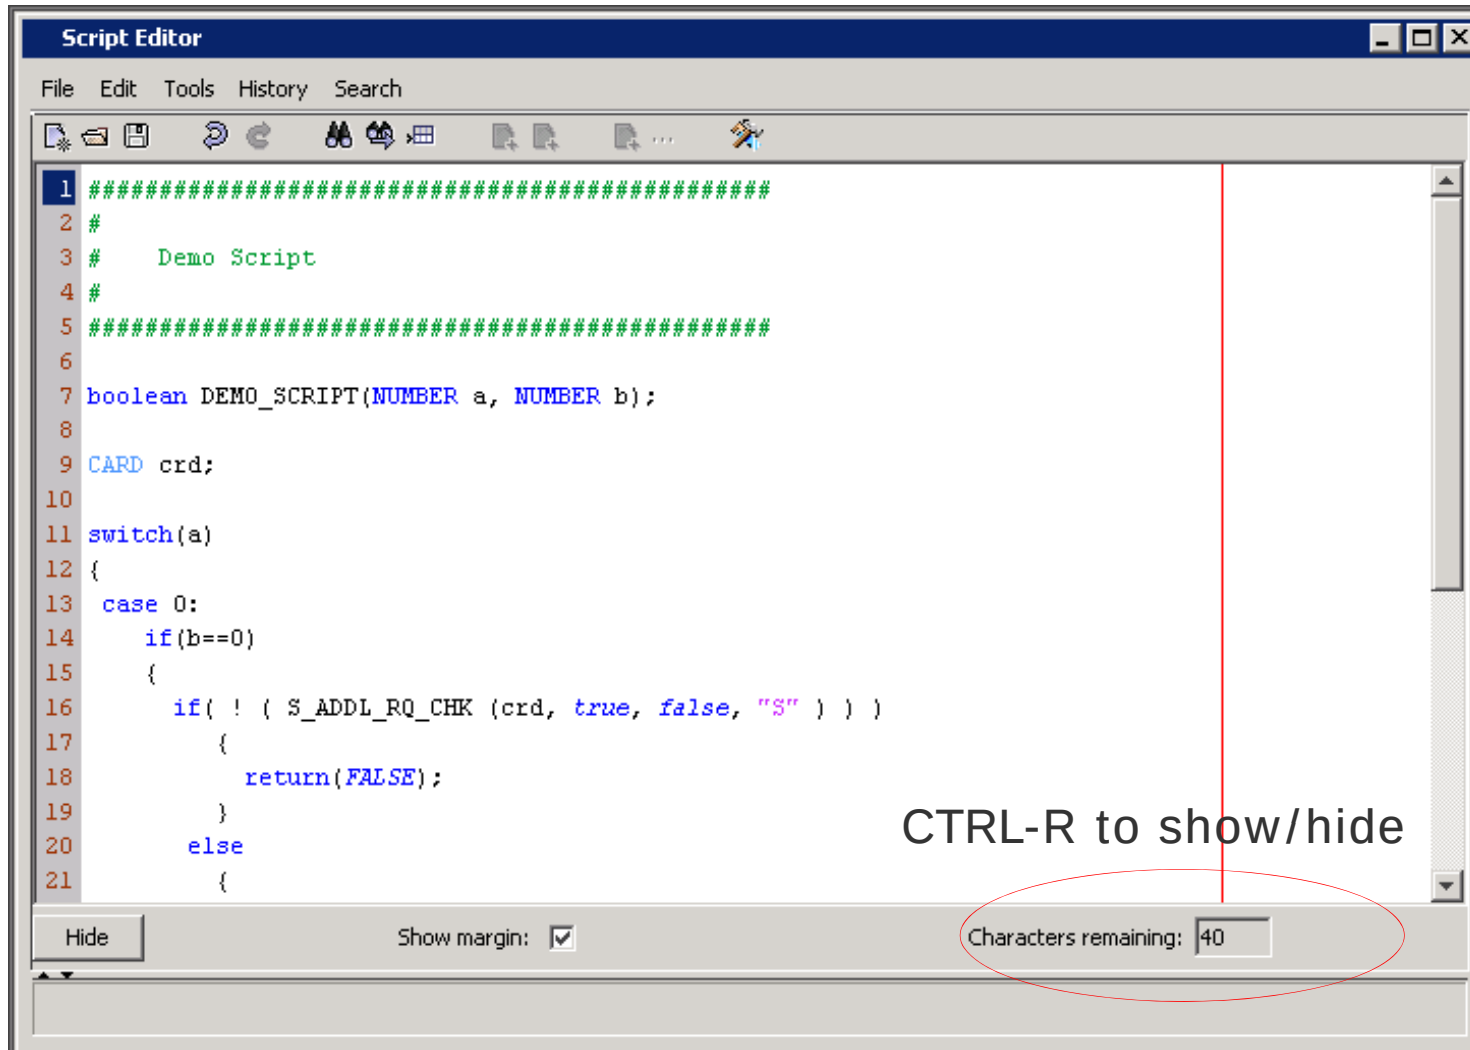

Characters remaining on the line; increased to 80 for compiler (132 total to include comments)

Auto-complete script names

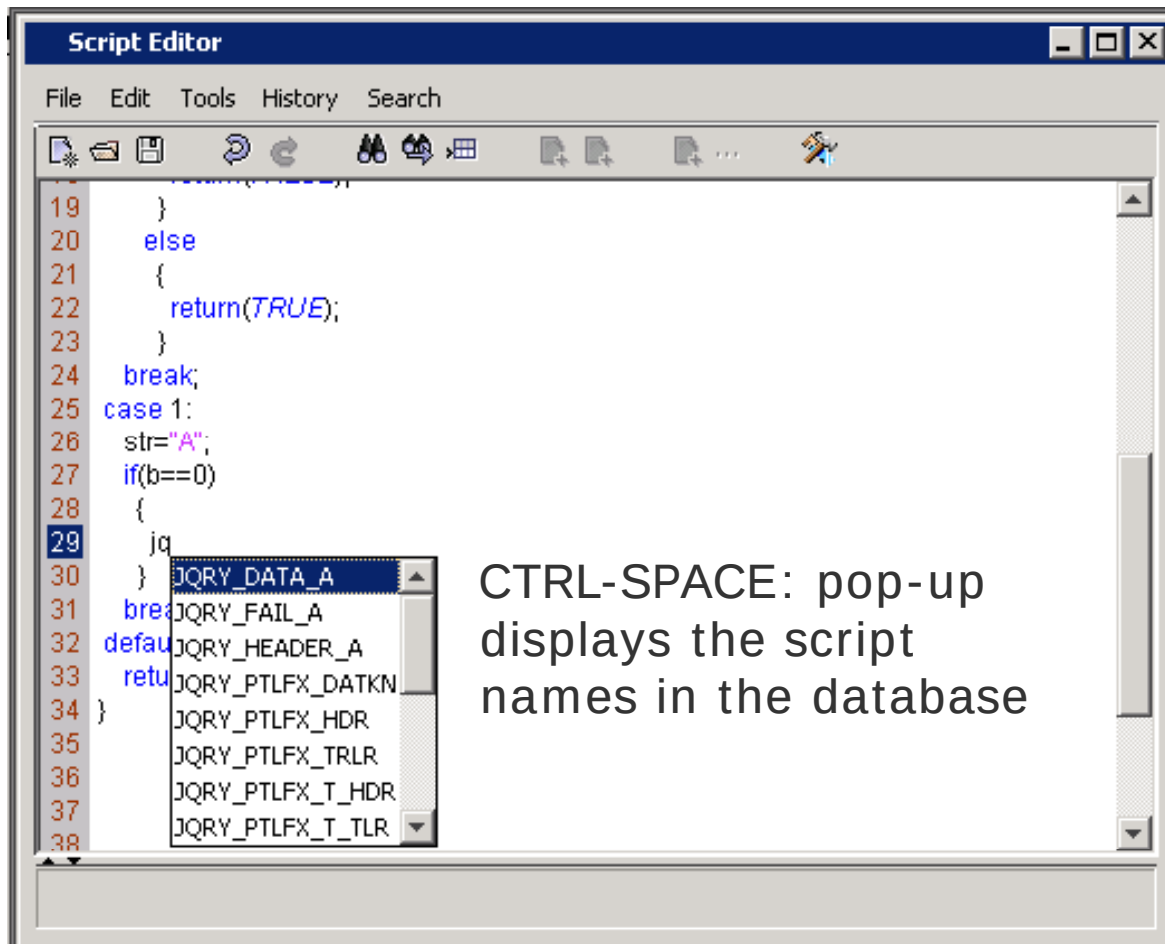



CTRL-CLICK: select a script to open in a new window

CTRL-SPACE: pop-up displays the script names in the database

Auto-complete tool-tips for script definitions

- Identifies a script call
- Identifies the script name
- Shows the script definition and current input parameter in **bold**

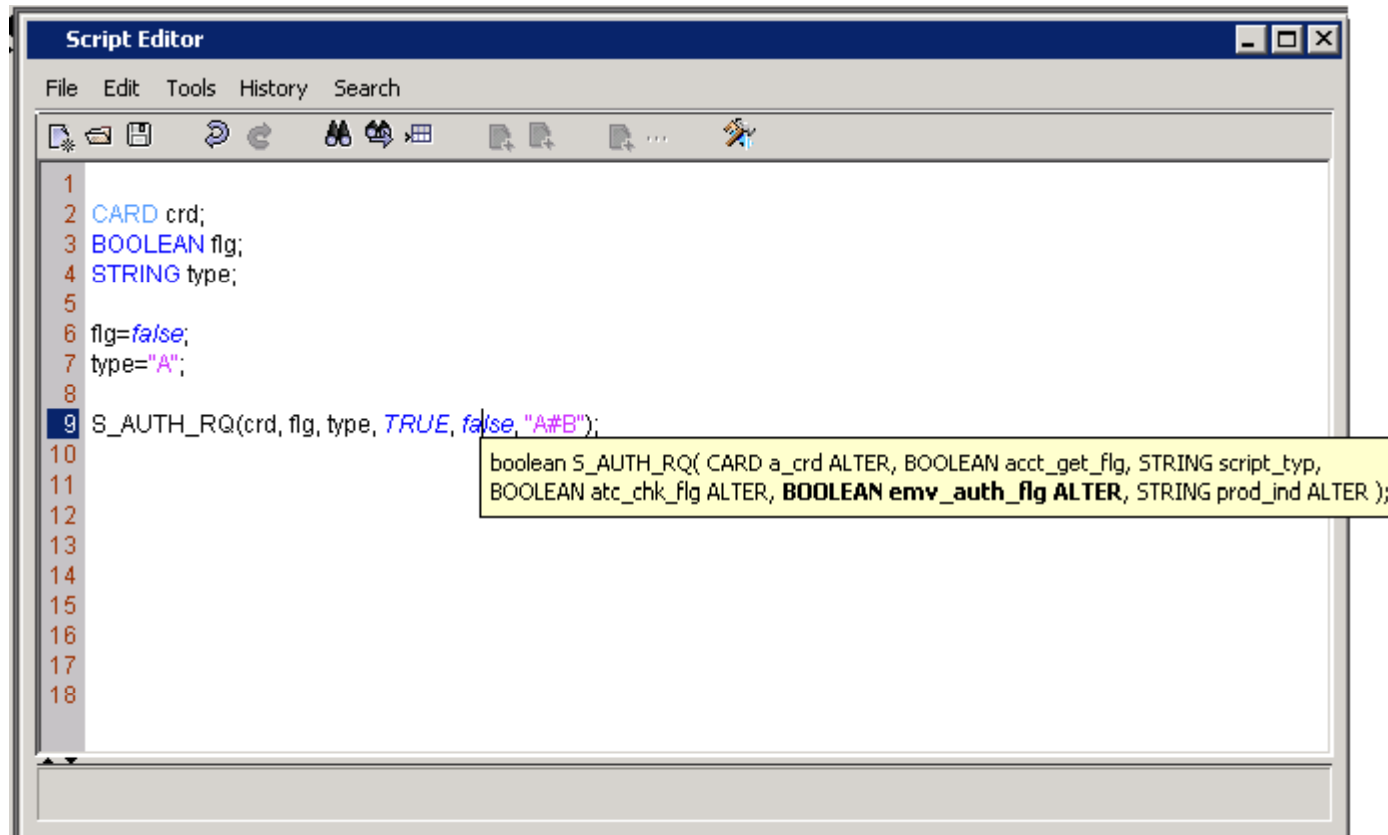


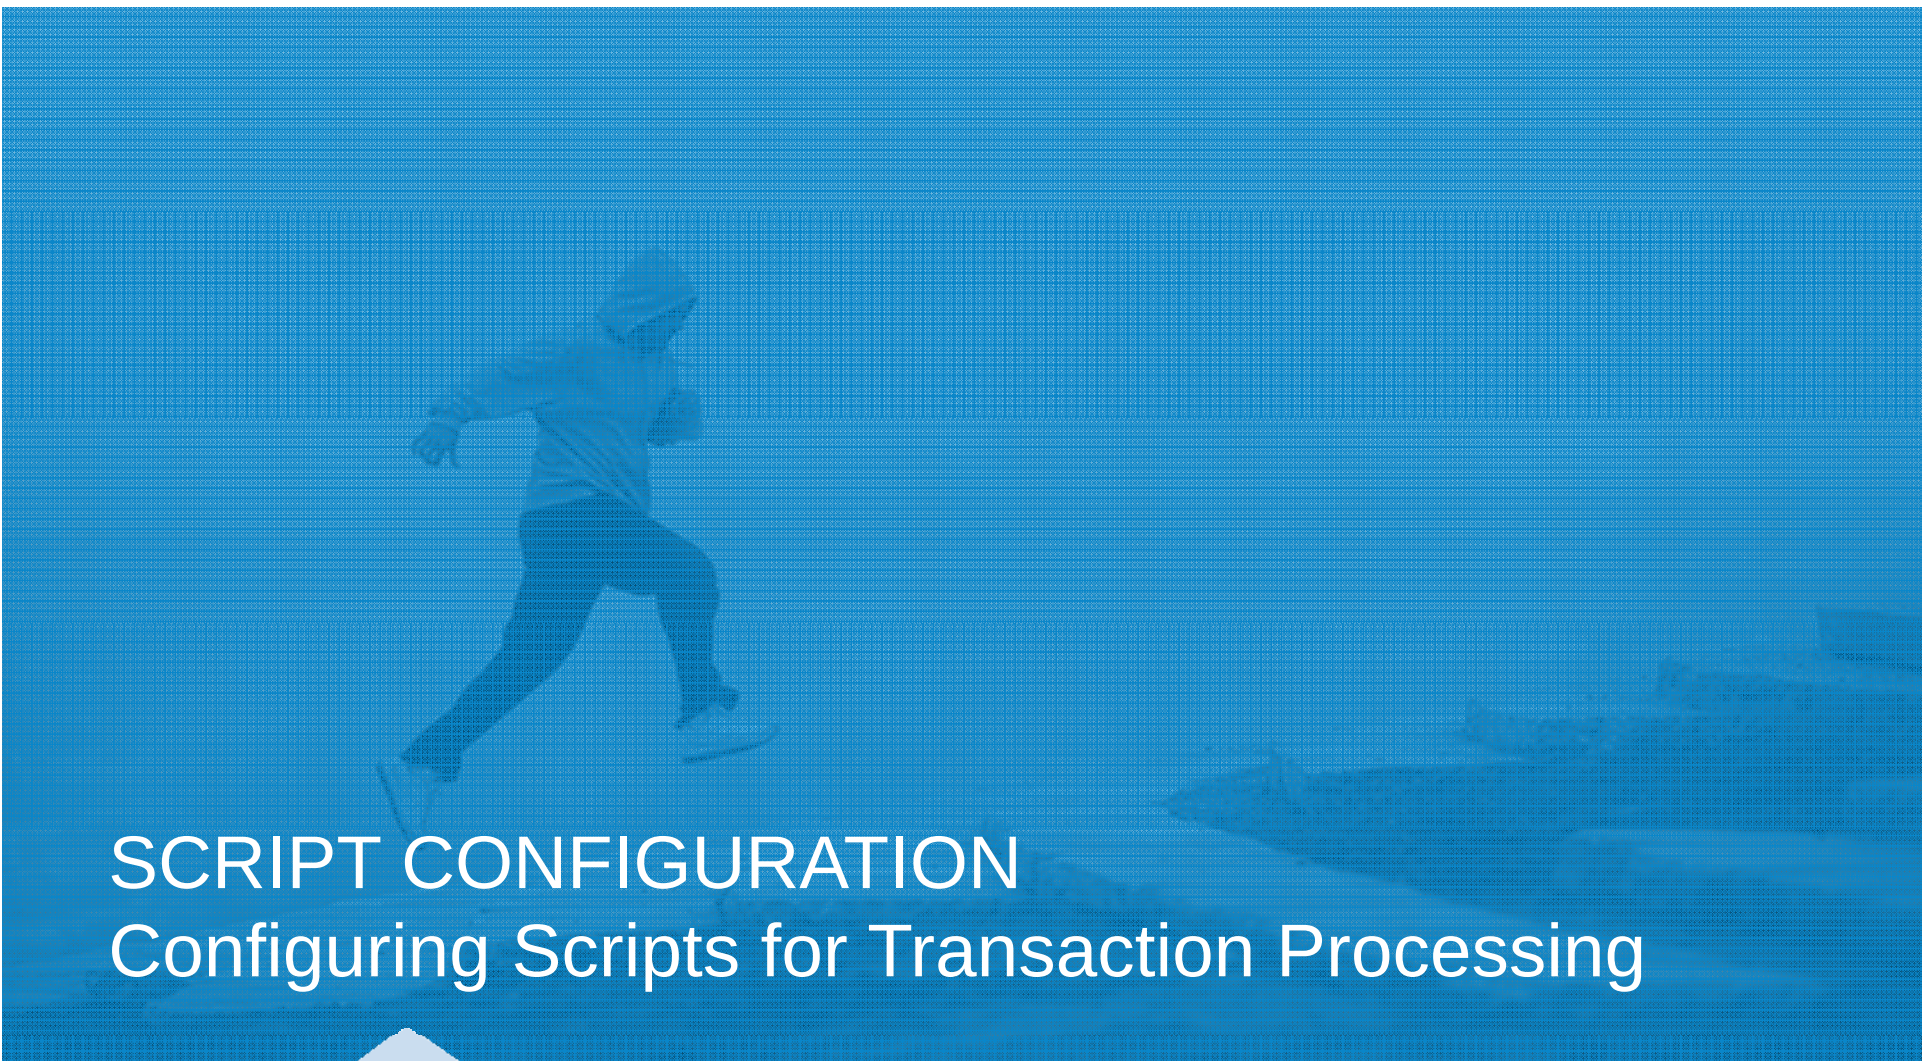


SCRIPT CONFIGURATION

Configuring Scripts for Transaction Processing

Authorization Script

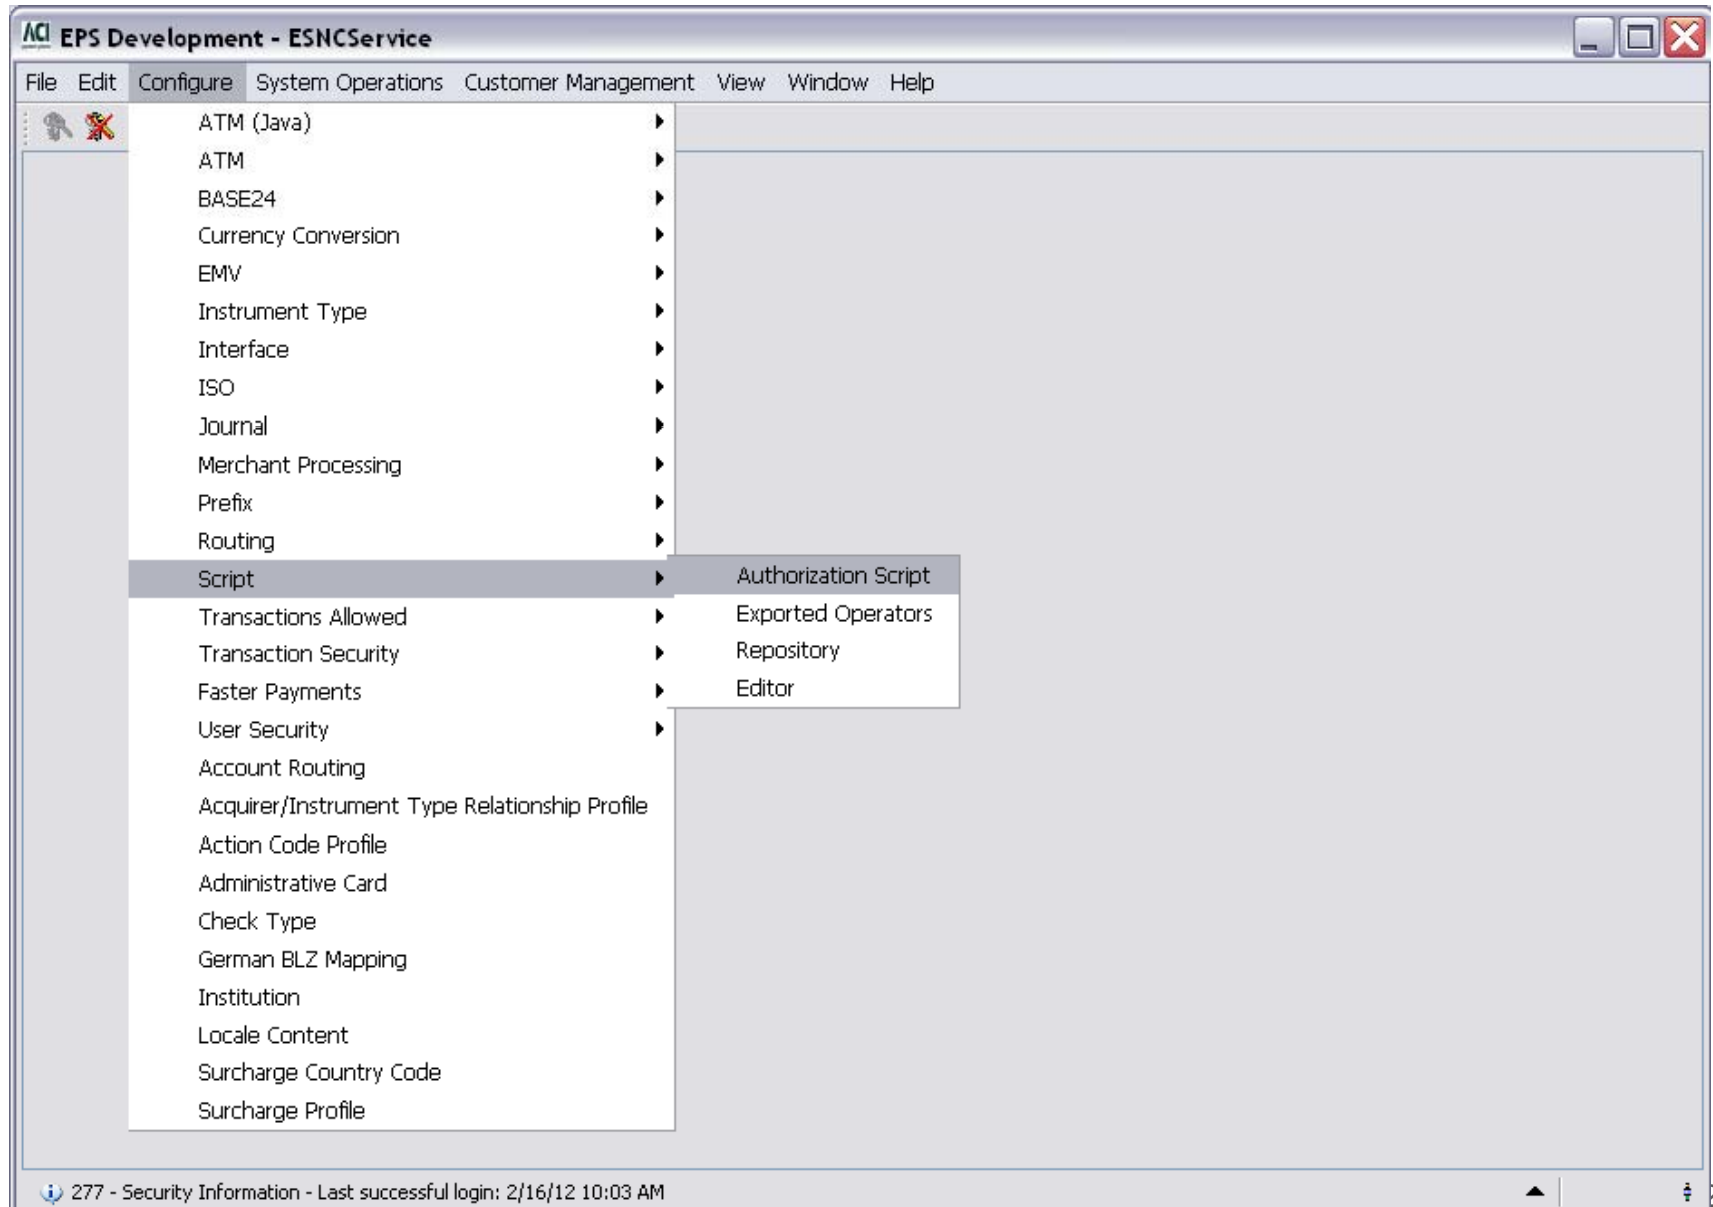

Authorization Script

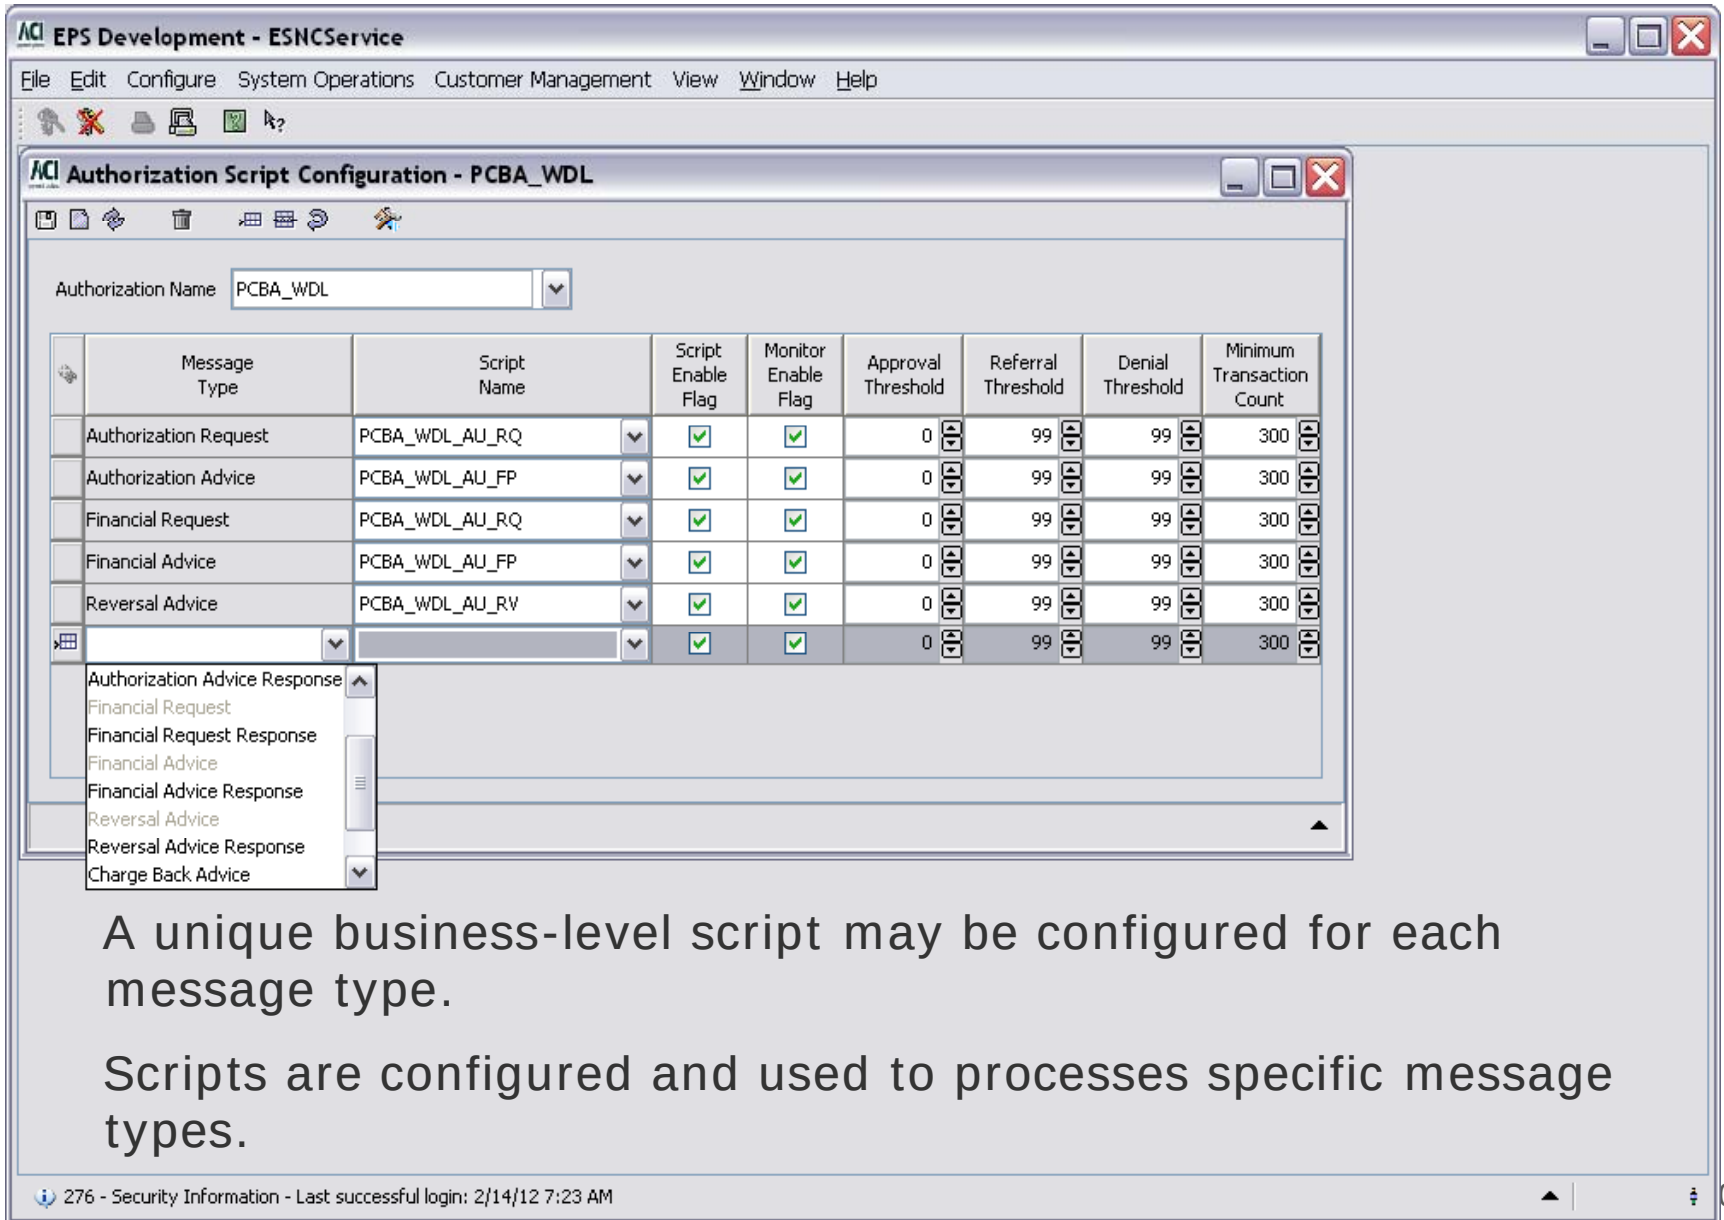

ACI EPS Development - ESNCServices

File Edit Configure System Operations Customer Management View Window Help

ACI Authorization Script Configuration - PCBA_WDL

Authorization Name: PCBA_WDL

Message Type	Script Name	Script Enable Flag	Monitor Enable Flag	Approval Threshold	Referral Threshold	Denial Threshold	Minimum Transaction Count
Authorization Request	PCBA_WDL_AU_RQ	☒	☒	0	99	99	300
Authorization Advice	PCBA_WDL_AU_FP	☒	☒	0	99	99	300
Financial Request	PCBA_WDL_AU_RQ	☒	☒	0	99	99	300
Financial Advice	PCBA_WDL_AU_FP	☒	☒	0	99	99	300
Reversal Advice	PCBA_WDL_AU_RV	☒	☒	0	99	99	300
		☒	☒	0	99	99	300


Authorization Advice Response
Financial Request
Financial Request Response
Financial Advice
Financial Advice Response
Reversal Advice
Reversal Advice Response
Charge Back Advice

276 - Security Information - Last successful login: 2/14/12 7:23 AM

A unique business-level script may be configured for each message type.


Scripts are configured and used to processes specific message types.

Authorization Script

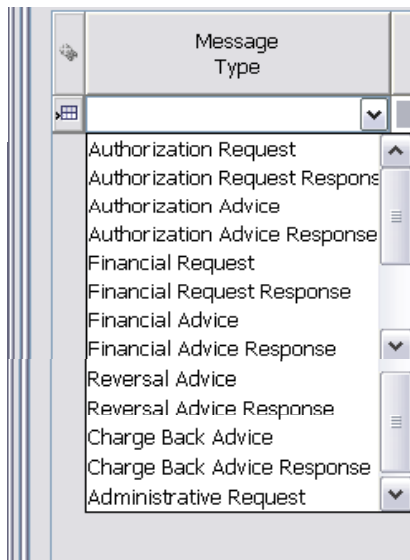

1100 Authorization Request (Pre-auth request)
1110 Authorization Request Response (Issuer response to Pre-auth request)
1120 Authorization Advice (Signed Voucher)
1130 Authorization Advice Response (Issuer response to an Auth Advice)
1200 Acquirer Financial Request
1210 Issuer Response to Financial Request
1220 Financial Advice (Acquirer Financial Advice)
1230 Financial Advice Response (Issuer Response to Financial Advice)
1420 Reversal Advice (Acquirer Reversal Advice)
1430 Reversal Advice Response (Issuer Reversal Response)
1422 Charge Back Advice
1432 Charge Back Advice Response
1604 Administrative Request

Authorization Script

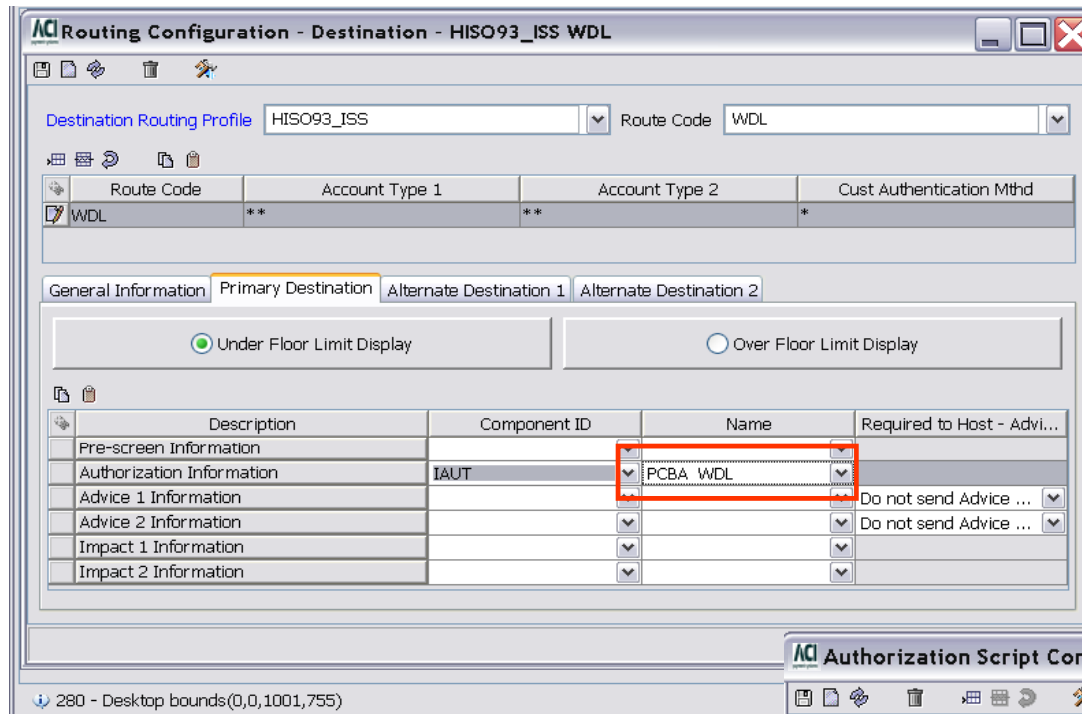

Routing Configuration - Destination - HISO93_ISS WDL

Destination Routing Profile: HISO93_ISS Route Code: WDL

Route Code	Account Type 1	Account Type 2	Cust Authentication Mthd
WDL	**	**	*

General Information Primary Destination Alternate Destination 1 Alternate Destination 2


☒ Under Floor Limit Display ☐ Over Floor Limit Display

Description	Component ID	Name	Required to Host - Adv...
Pre-screen Information			
Authorization Information	IAUT	PCBA_WDL	
Advice 1 Information			Do not send Advice ...
Advice 2 Information			Do not send Advice ...
Impact 1 Information			
Impact 2 Information			

280 - Desktop bounds(0,0,1001,755)

In the *Routing Configuration* UI, the Authorization Name (script set name) is used. The Router component determines the Authorization Name based on database configuration.

In the *Authorization Script Configuration* UI, the individual scripts are associated with a particular “set.” Based on the message type, Issuer Auth (IAUT) will determine which script in the set needs to be executed and will invoke Script Engine to run this script.

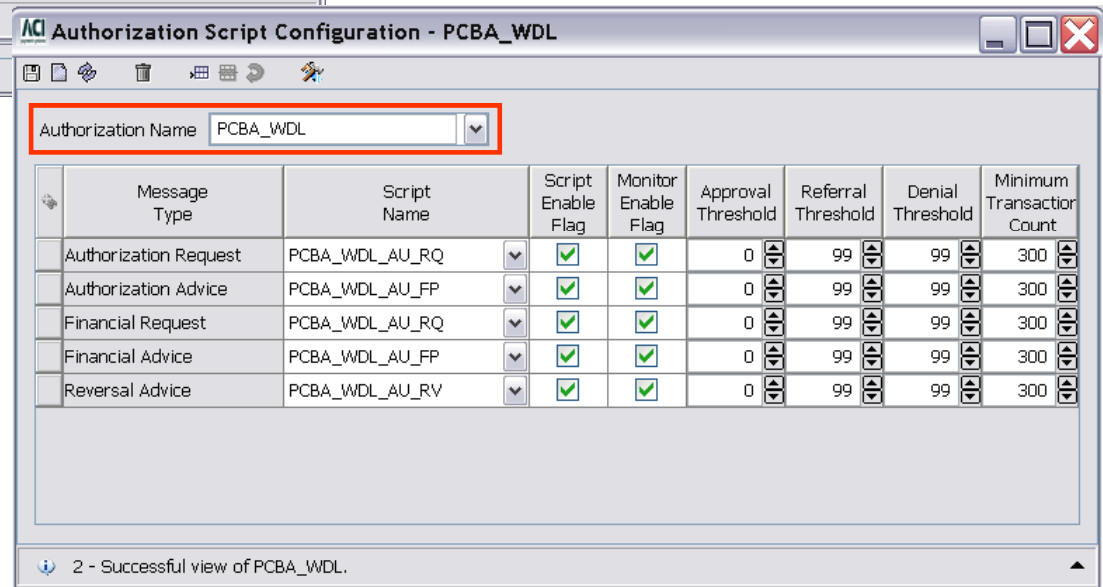

Authorization Script Configuration - PCBA_WDL

Authorization Name: PCBA_WDL

Message Type	Script Name	Script Enable Flag	Monitor Enable Flag	Approval Threshold	Referral Threshold	Denial Threshold	Minimum Transaction Count
Authorization Request	PCBA_WDL_AU_RQ	☒	☒	0	99	99	300
Authorization Advice	PCBA_WDL_AU_FP	☒	☒	0	99	99	300
Financial Request	PCBA_WDL_AU_RQ	☒	☒	0	99	99	300
Financial Advice	PCBA_WDL_AU_FP	☒	☒	0	99	99	300
Reversal Advice	PCBA_WDL_AU_RV	☒	☒	0	99	99	300

2 - Successful view of PCBA_WDL.

SCRIPT CONFIGURATION

Configuring Scripts for Journal Perusal/Journal Query



Journal Perusal


- Journal Perusal:
 - allows viewing of online transaction data
 - allows transaction summary and detail to be viewed
 - requires perusal scripts to have been written for summary and detail viewing
 - requires users to have a user profile relationship configured (i.e., associate a user ID with a perusal profile)



Journal Query

- Journal query includes processing for:
 - reporting on the journal
 - extracting (exporting) the journal to another file format (e.g., ASCII and/or EBCDIC)




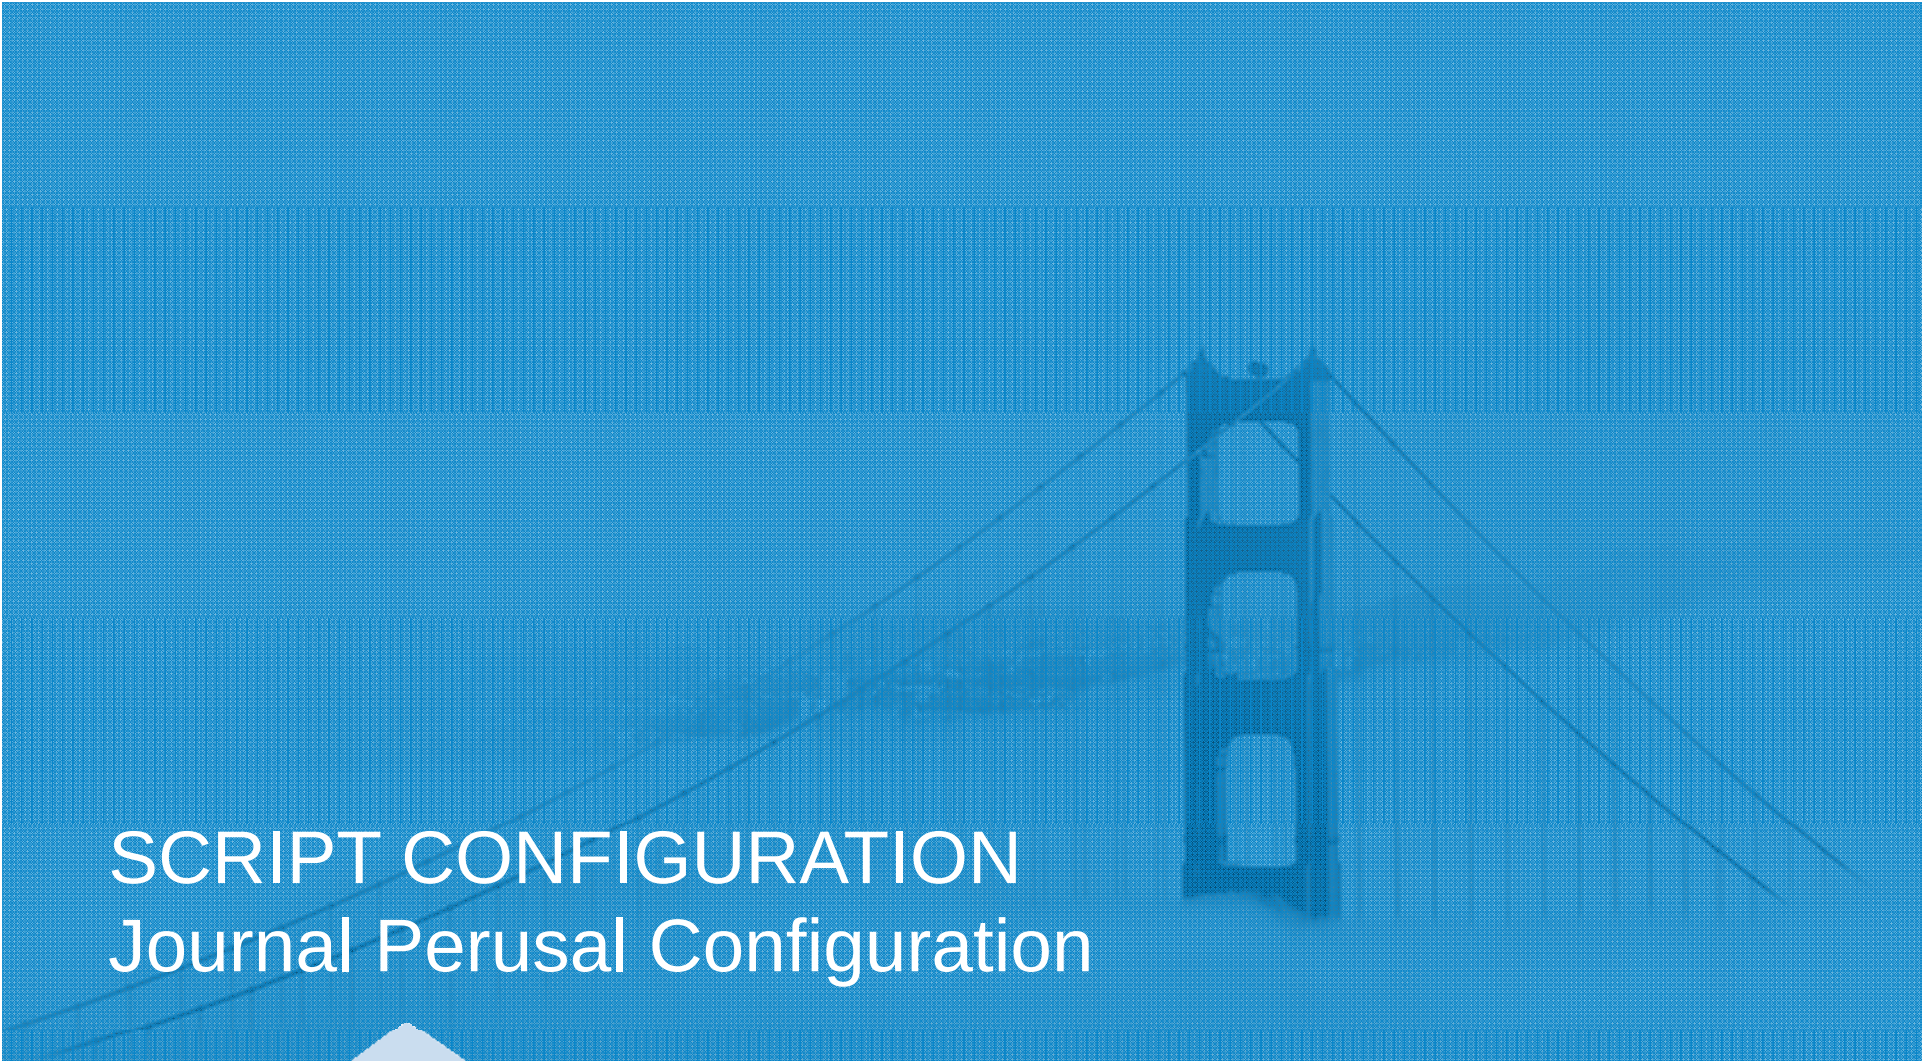


SCRIPT CONFIGURATION


Journal Perusal Configuration

Journal Profile Relationship


- Each script query view has a header script and a content script. Multiple views can be assigned to a profile.
- Users can be assigned to only one Perusal Profile.

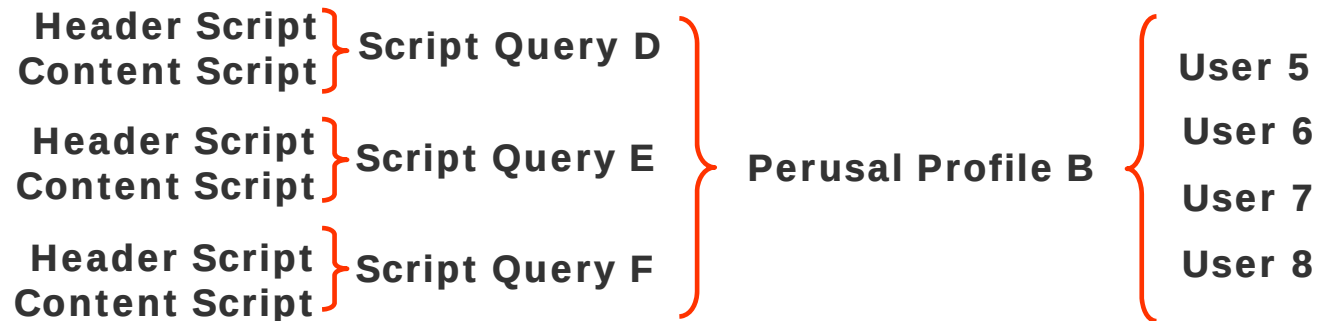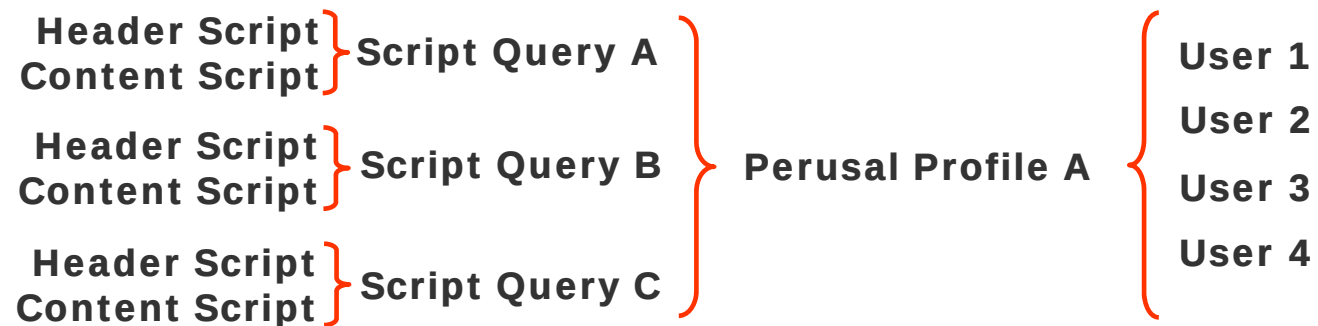

Perusal Profile

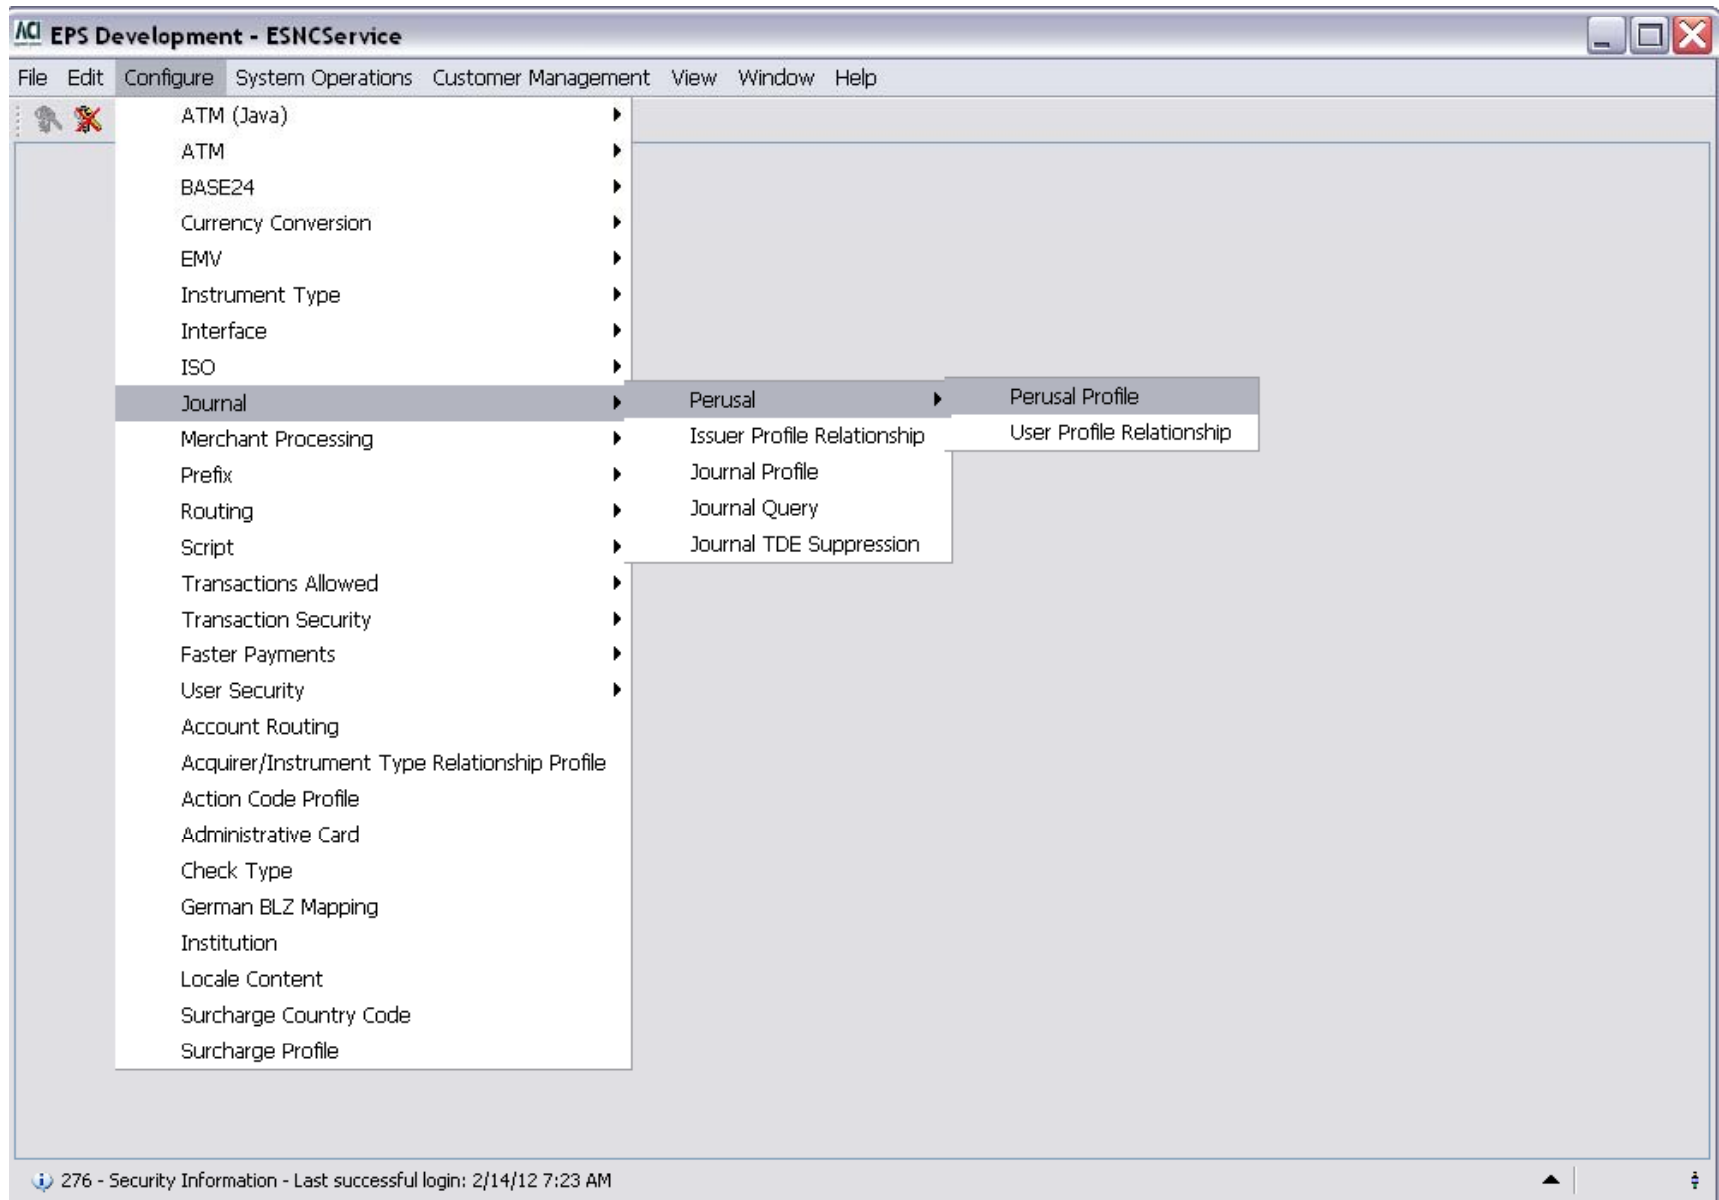

Perusal Profile

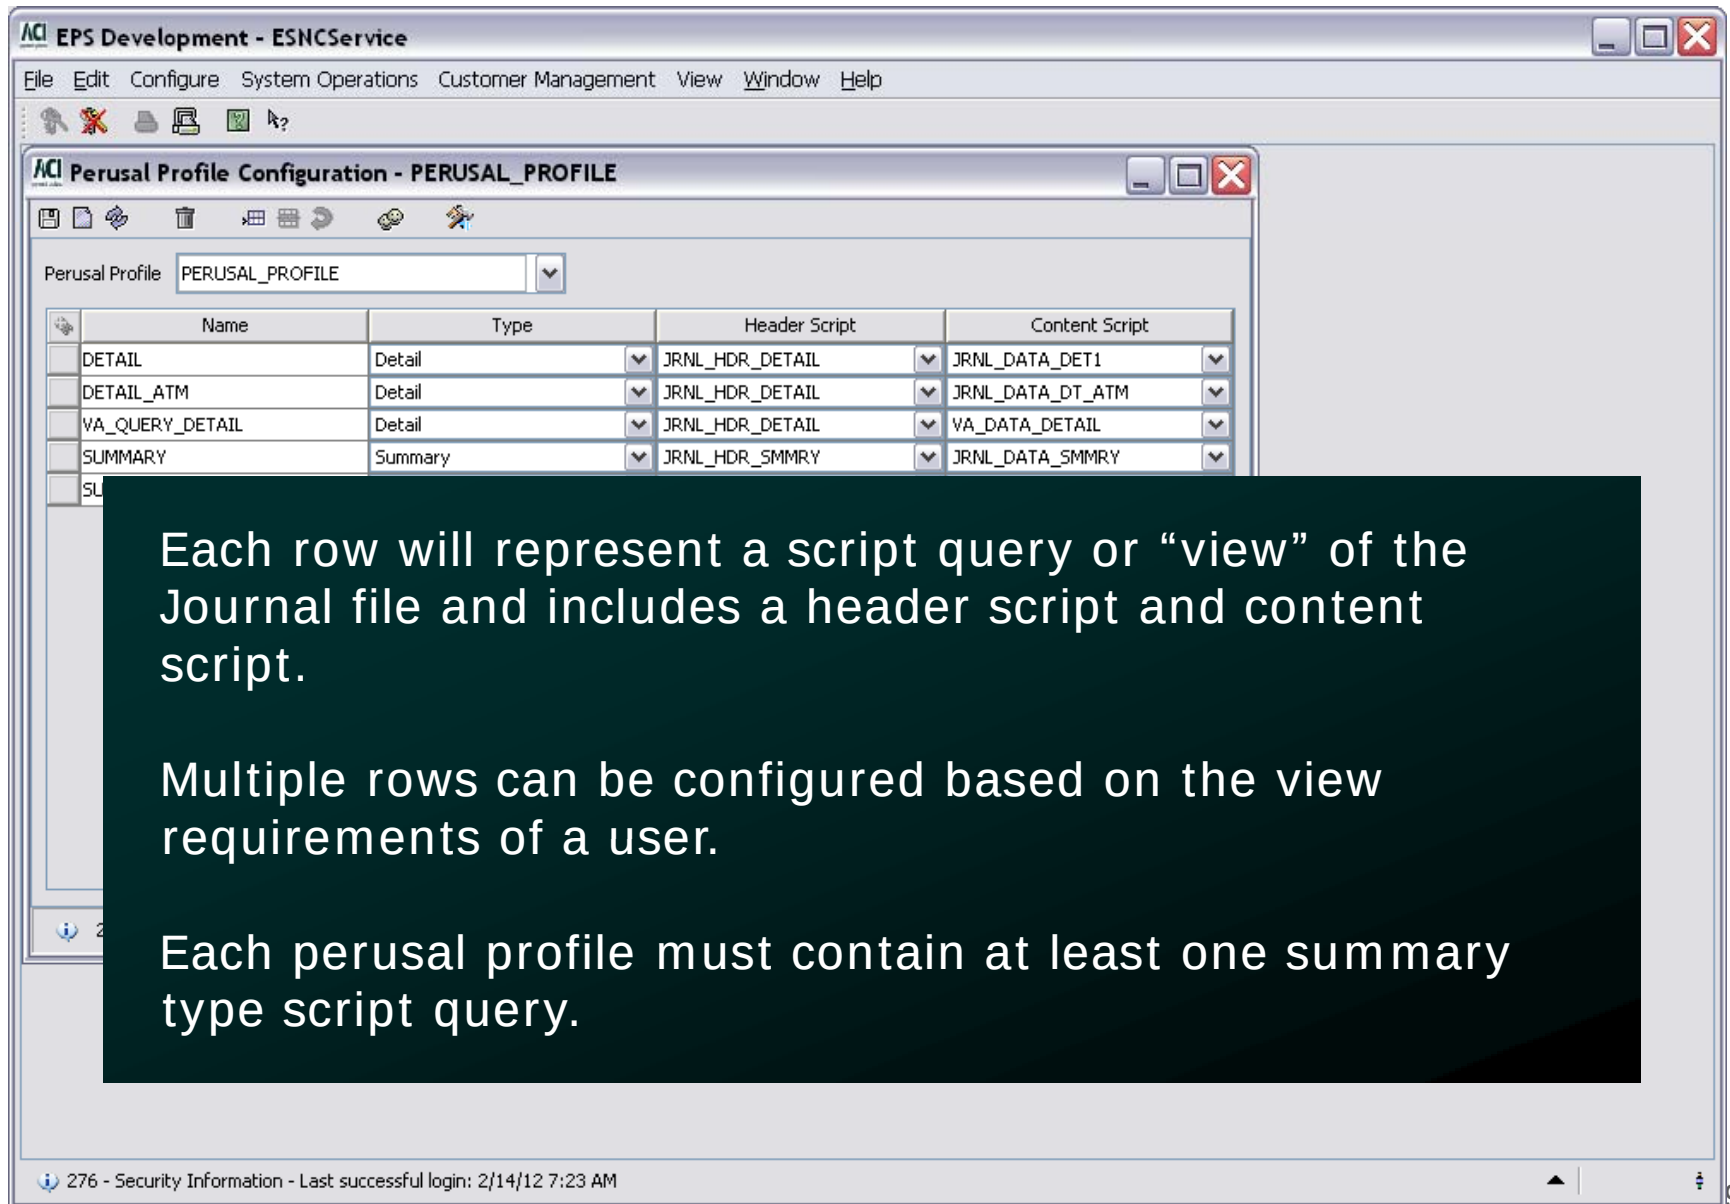


Each row will represent a script query or “view” of the Journal file and includes a header script and content script.

Multiple rows can be configured based on the view requirements of a user.


Each perusal profile must contain at least one summary type script query.

276 - Security Information - Last successful login: 2/14/12 7:23 AM

User Profile Relationship

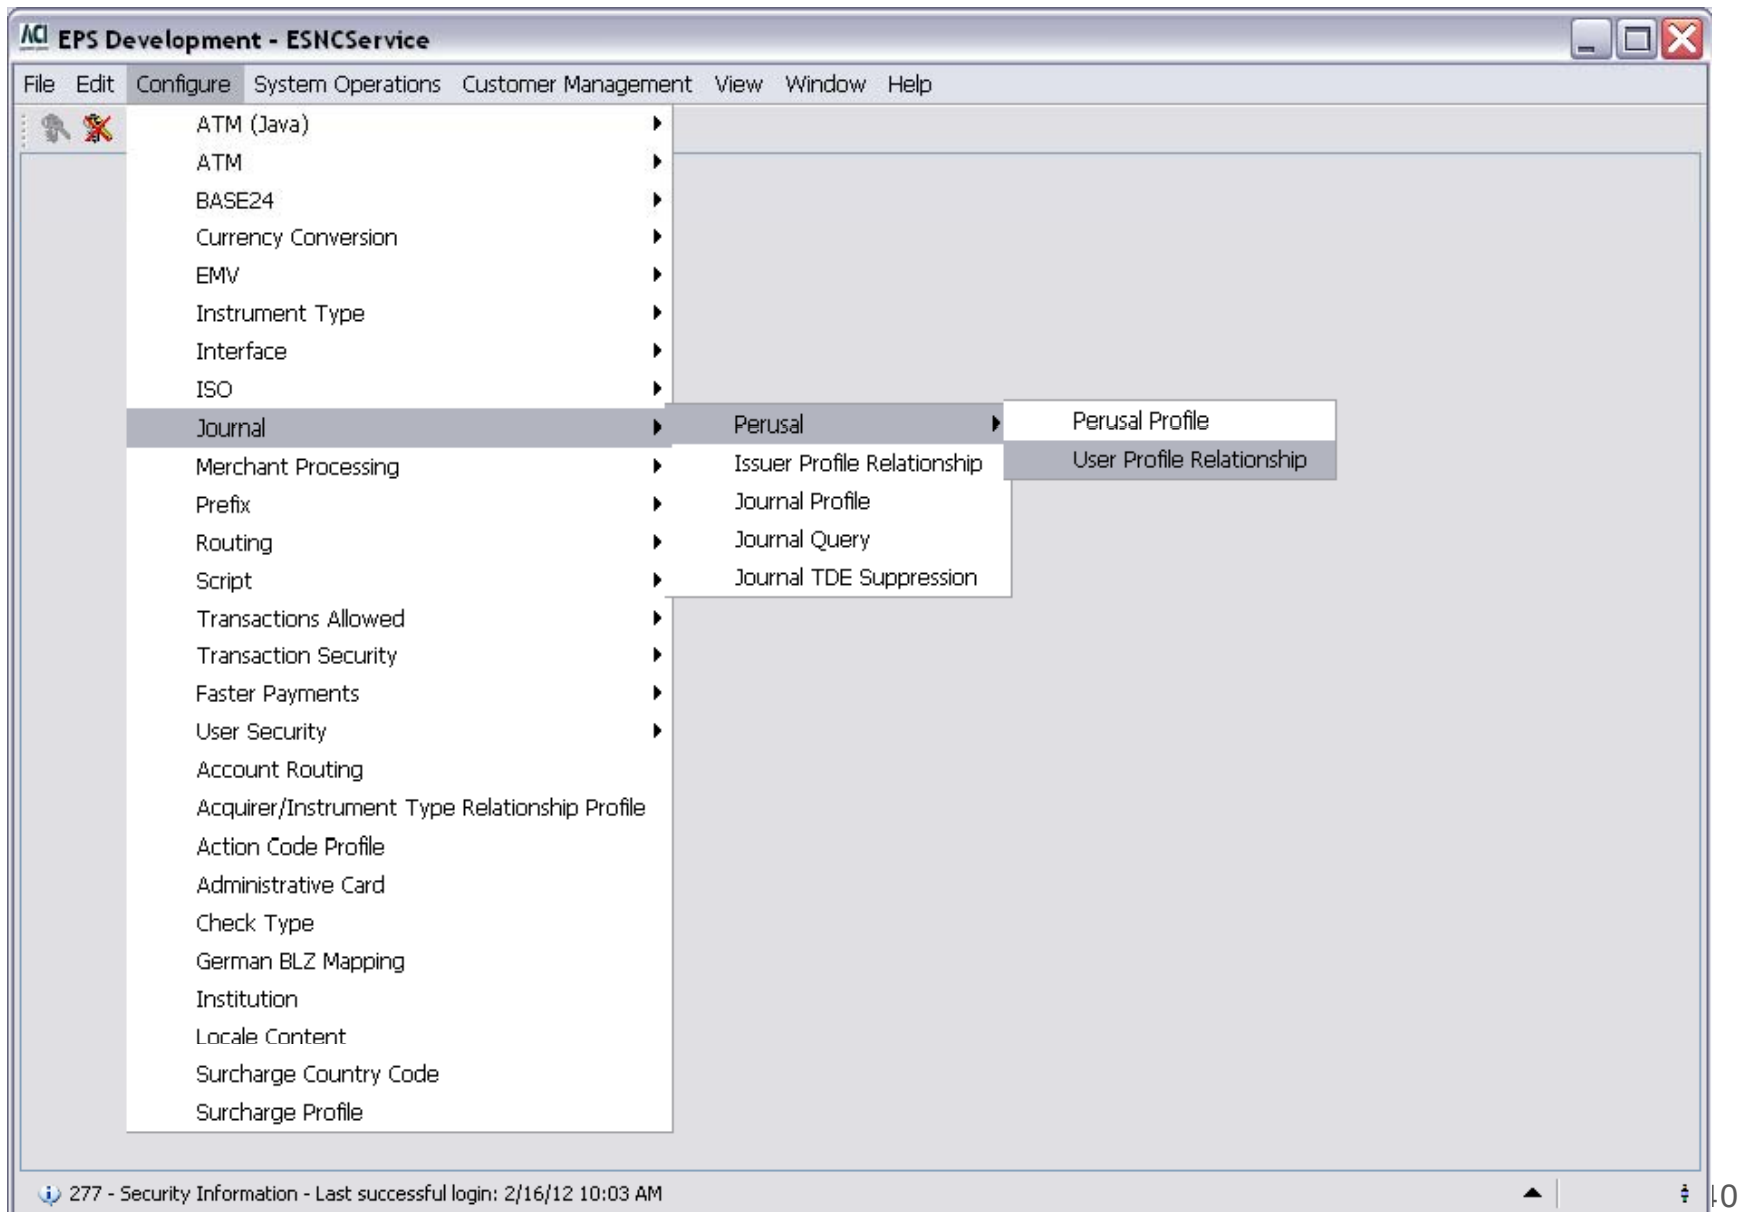

User Profile Relationship

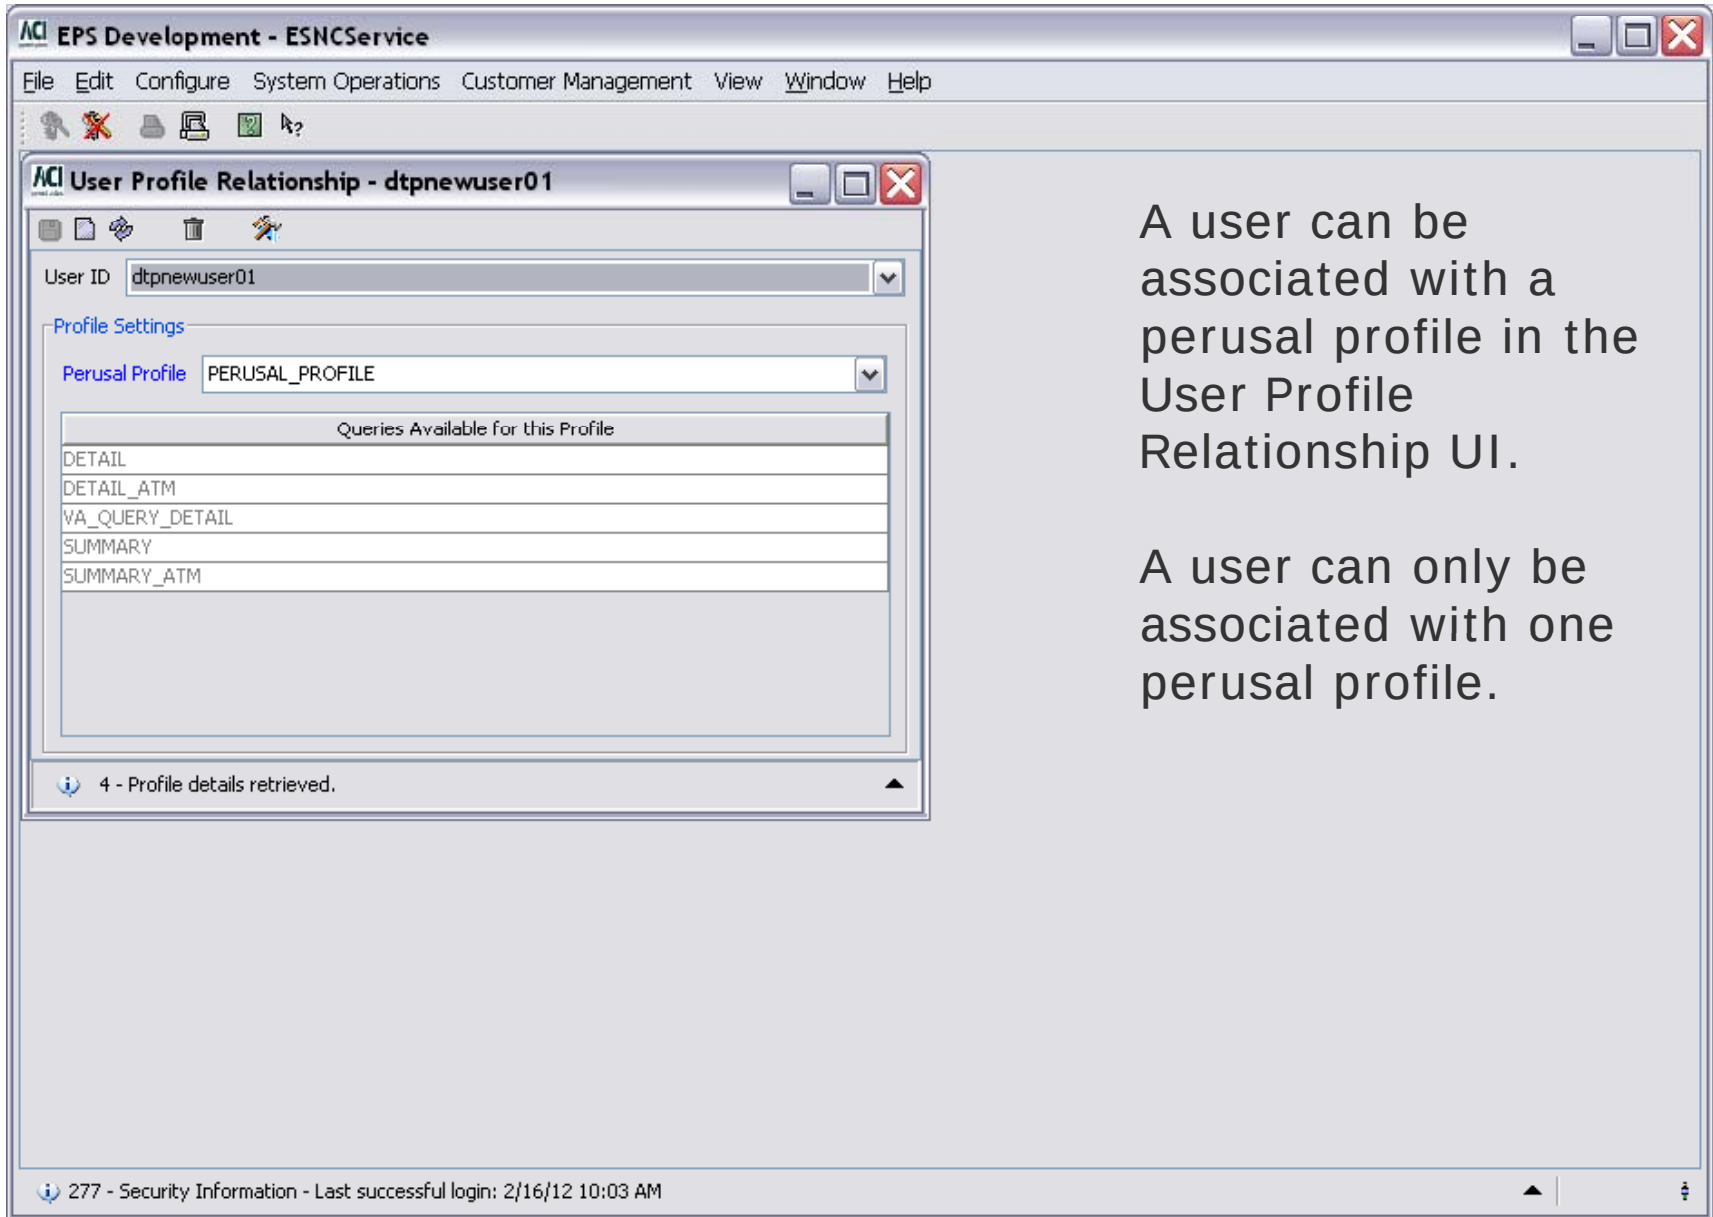

The screenshot shows a web application window titled "EPS Development - ESNCService". Inside, there is a sub-window titled "User Profile Relationship - dtpnewuser01". The sub-window contains a "User ID" dropdown menu set to "dtpnewuser01". Below this is a "Profile Settings" section with a "Perusal Profile" dropdown menu set to "PERUSAL_PROFILE". Underneath the dropdown is a table titled "Queries Available for this Profile" with the following rows:

Queries Available for this Profile
DETAIL
DETAIL_ATM
VA_QUERY_DETAIL
SUMMARY
SUMMARY_ATM

At the bottom of the sub-window, a status bar indicates "4 - Profile details retrieved." The main application window has a menu bar with "File", "Edit", "Configure", "System Operations", "Customer Management", "View", "Window", and "Help". The status bar at the bottom of the main window shows "277 - Security Information - Last successful login: 2/16/12 10:03 AM".


A user can be associated with a perusal profile in the User Profile Relationship UI.

A user can only be associated with one perusal profile.

SCRIPT CONFIGURATION

Journal Query Configuration

Journal Query Configuration

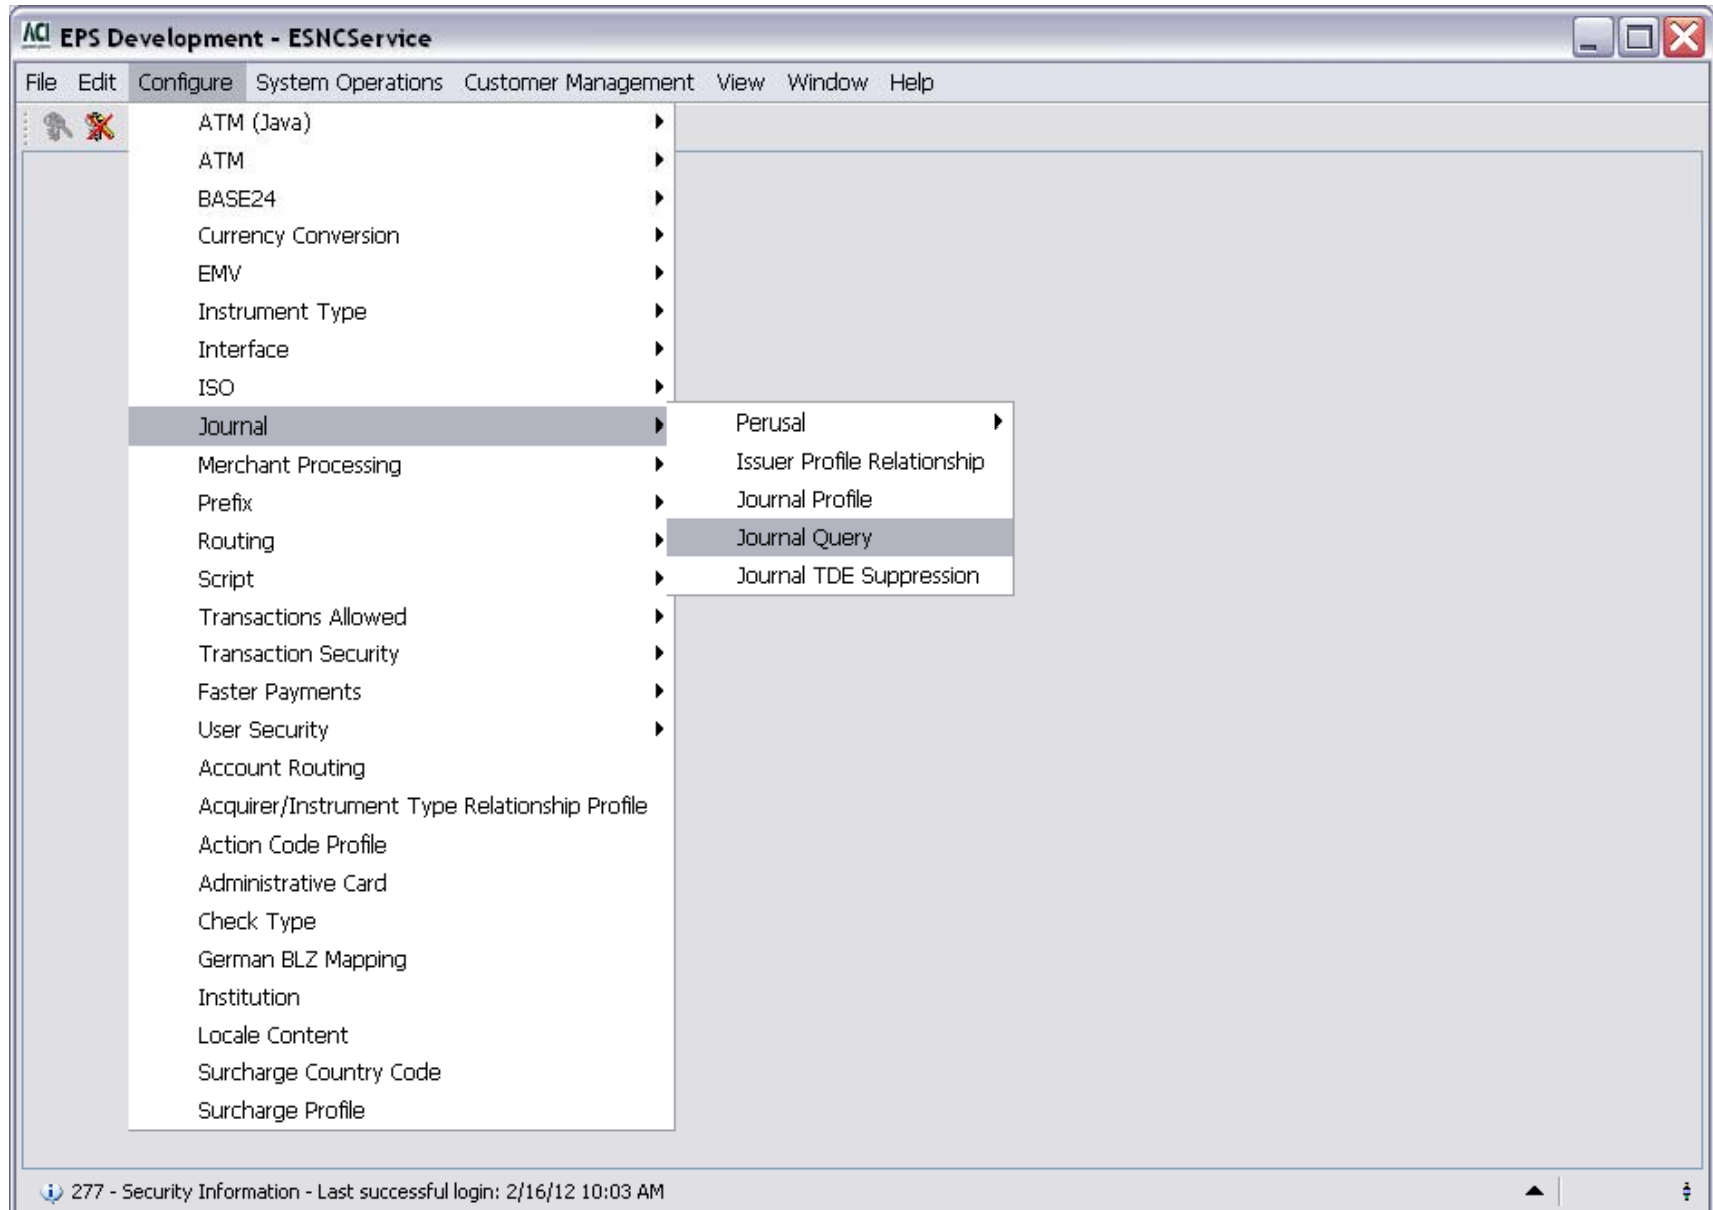

Journal Query Configuration

ACI EPS Development - ESNService

File Edit Configure System Operations Customer Management View Window Help

Journal Query Configuration - EXTR_TLFX

Query Name: EXTR_TLFX Issuer ID: *****

Scheduling Output

Query Options

☐ Retain Position Sort Key: {none}

Start Offset: -1 End Offset: 0 Report Name: JQRY_ASGN_TLFX_RPT

Success Script: JQRY_SUCCESS_A Error Script: JQRY_FAIL_A

Auto Restart Options

☐ Auto Start Timer Restart Time: 10:15 am

Restart Period: Fixed Number of Days Number of Days: 1

Query Run Times

Last: August 6, 2008 8:48 AM Next:

2 - Successful view of EXTR_TLFX.

277 - Security Information - Last successful login: 2/16/12 10:03 AM

Journal Query Configuration

The screenshot shows the 'Journal Query Configuration - EXTR_TLFX' window. At the top, the 'Query Name' is set to 'EXTR_TLFX' and the 'Issuer ID' is a masked field. Below these are tabs for 'Scheduling' and 'Output'. The 'Output' tab is active, displaying a table with the following data:

Output Profile	Header Flag	Record Type	Max Record Length	
OUT_PRFL_TLFX	☒	Use File Header and File Trailer	4000	Truncated - Pre

Below the table are two side-by-side panes. The left pane, titled 'Journal Query Profiles for OUT_PRFL_TLFX', contains a single entry: 'TLFX_OUT1'. The right pane, titled 'Assign Names for TLFX_OUT1', contains a single entry: 'JQRY_ASGN_TLFX_OUT1'. At the bottom of the window, a status bar shows the message: '6 - Successful view of TLFX_OUT1.' and a footer displays '277 - Security Information - Last successful login: 2/16/12 10:03 AM'.


Journal Query Configuration

The screenshot shows the 'Journal Query Configuration - EXTR_TLFX' window. At the top, the 'Query Name' is 'EXTR_TLFX' and the 'Issuer ID' is '*****'. Below this, there are two tabs: 'Scheduling' and 'Output'. The 'Output' tab is active, displaying a table with five columns: 'File Header Script', 'File Data Script', 'File Trailer Script', 'Report Header Script', and 'Report Trailer Script'. The rows in the table are 'RY_TLFX_HDR', 'JQRY_TLFX_DATKN', and 'JQRY_TLFX_TRLR'. Below the table, a large text box contains the text: 'Scripts control the format and output of headers, data, and trailers.'


Below the text box, there are two side-by-side panes. The left pane is titled 'Journal Query Profiles for OUT_PRFL_TLFX' and contains a list with 'TLFX_OUT1'. The right pane is titled 'Assign Names for TLFX_OUT1' and contains a list with 'JQRY_ASGN_TLFX_OUT1'.

At the bottom of the window, there is a status bar with the text: '6 - Successful view of TLFX_OUT1.' and a security information message: '277 - Security Information - Last successful login: 2/16/12 10:03 AM'.

Perusal/Query Scripts

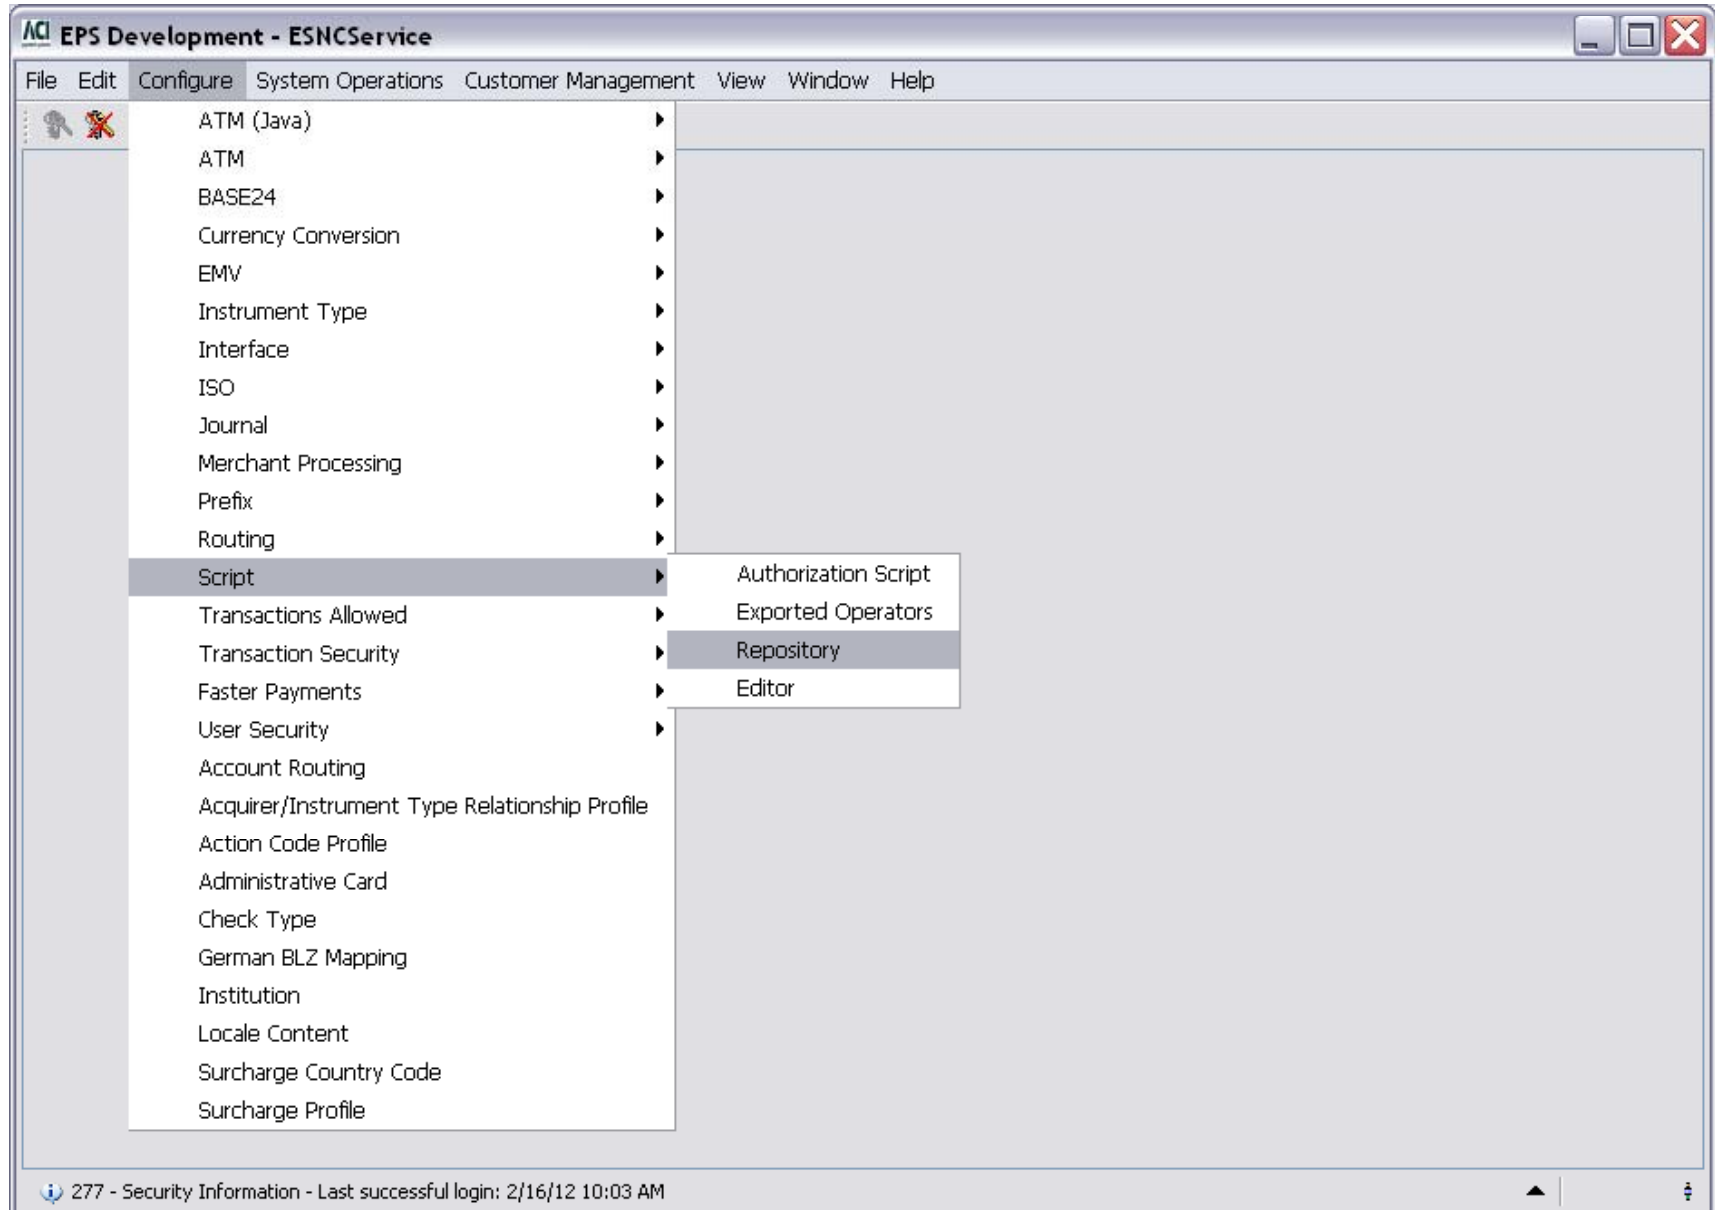

Perusal/Query Scripts

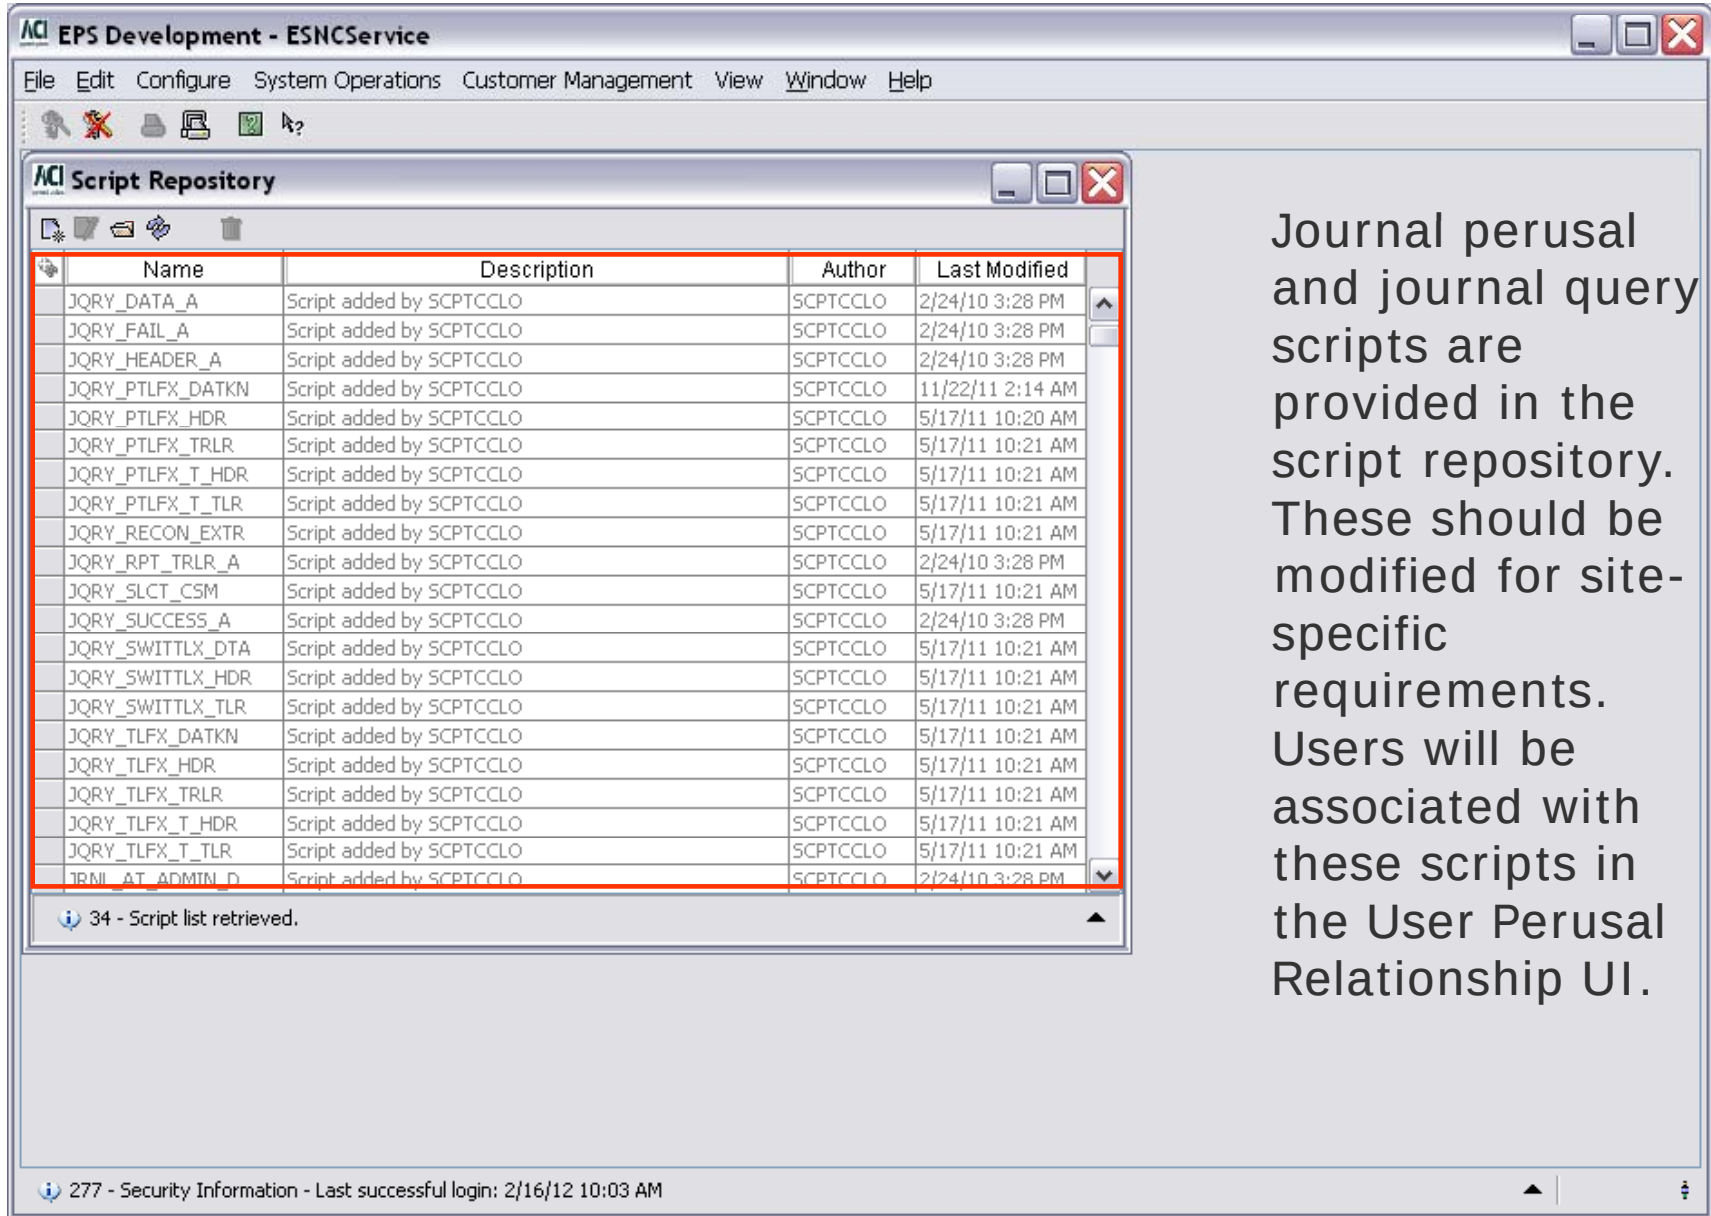

The screenshot shows the 'ACI Script Repository' window. The title bar reads 'ACI EPS Development - ESNCService'. The menu bar includes 'File', 'Edit', 'Configure', 'System Operations', 'Customer Management', 'View', 'Window', and 'Help'. The main area displays a table of scripts. The table has four columns: 'Name', 'Description', 'Author', and 'Last Modified'. The scripts listed are all 'Script added by SCPTCCLO'. The status bar at the bottom indicates '34 - Script list retrieved.' and '277 - Security Information - Last successful login: 2/16/12 10:03 AM'.

Name	Description	Author	Last Modified
JQRY_DATA_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_FAIL_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_HEADER_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_PTLFX_DATKN	Script added by SCPTCCLO	SCPTCCLO	11/22/11 2:14 AM
JQRY_PTLFX_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:20 AM
JQRY_PTLFX_TRLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_PTLFX_T_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_PTLFX_T_TLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_RECON_EXTR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_RPT_TRLR_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_SLCT_CSM	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_SUCCESS_A	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM
JQRY_SWITTLX_DTA	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_SWITTLX_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_SWITTLX_TLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_DATKN	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_TRLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_T_HDR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JQRY_TLFX_T_TLR	Script added by SCPTCCLO	SCPTCCLO	5/17/11 10:21 AM
JRNL_AT_ADMIN_D	Script added by SCPTCCLO	SCPTCCLO	2/24/10 3:28 PM

34 - Script list retrieved.

277 - Security Information - Last successful login: 2/16/12 10:03 AM

Journal perusal and journal query scripts are provided in the script repository. These should be modified for site-specific requirements. Users will be associated with these scripts in the User Perusal Relationship UI.

Journal Perusal

- Changes to the User Profile Relationship, Perusal Profile, and/or Script table(s) requires rebuilding and reloading the respective OLTP table(s):
 - user_perusal_prfl_relation_oltp
 - perusal_script_oltp
 - script_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Lab Exercise

BASE24-eps Authorization Script Configuration Lab

Lab 2





MEETS THE CHALLENGE OF CHANGE