

JOURNAL CONFIGURATION

Journal Log File

- Each transaction response that goes thru the BASE24-eps network is logged to the Issuers Journal.
- Data relevant to a transaction contained in the TDEs during processing will be logged.
- Some TDEs will always be logged, others will never be logged. Thru database configuration, optional TDEs can be logged if desired.
- Journal data can be perused via the ACI desktop, or output to a report for further processing.



Journal Log File

- For any journal record that exceeds the available context buffer limits, the Journal component will write the excess data to a continuation journal.
- The continuation journal is key sequenced.
- The key to the continuation record is the online key and the journal record number.
- The write to the continuation journal is managed by the Journal component.




Journal Log File

- A ring of journal continuation files is required.
- If the records from the Continuation files are unavailable, the original record in the Journal file cannot be used.
- The Journal build utility has been modified to create entries in the CONFCSV for primary, alternate and all continuation files required based on UI configuration.




Component Interactions

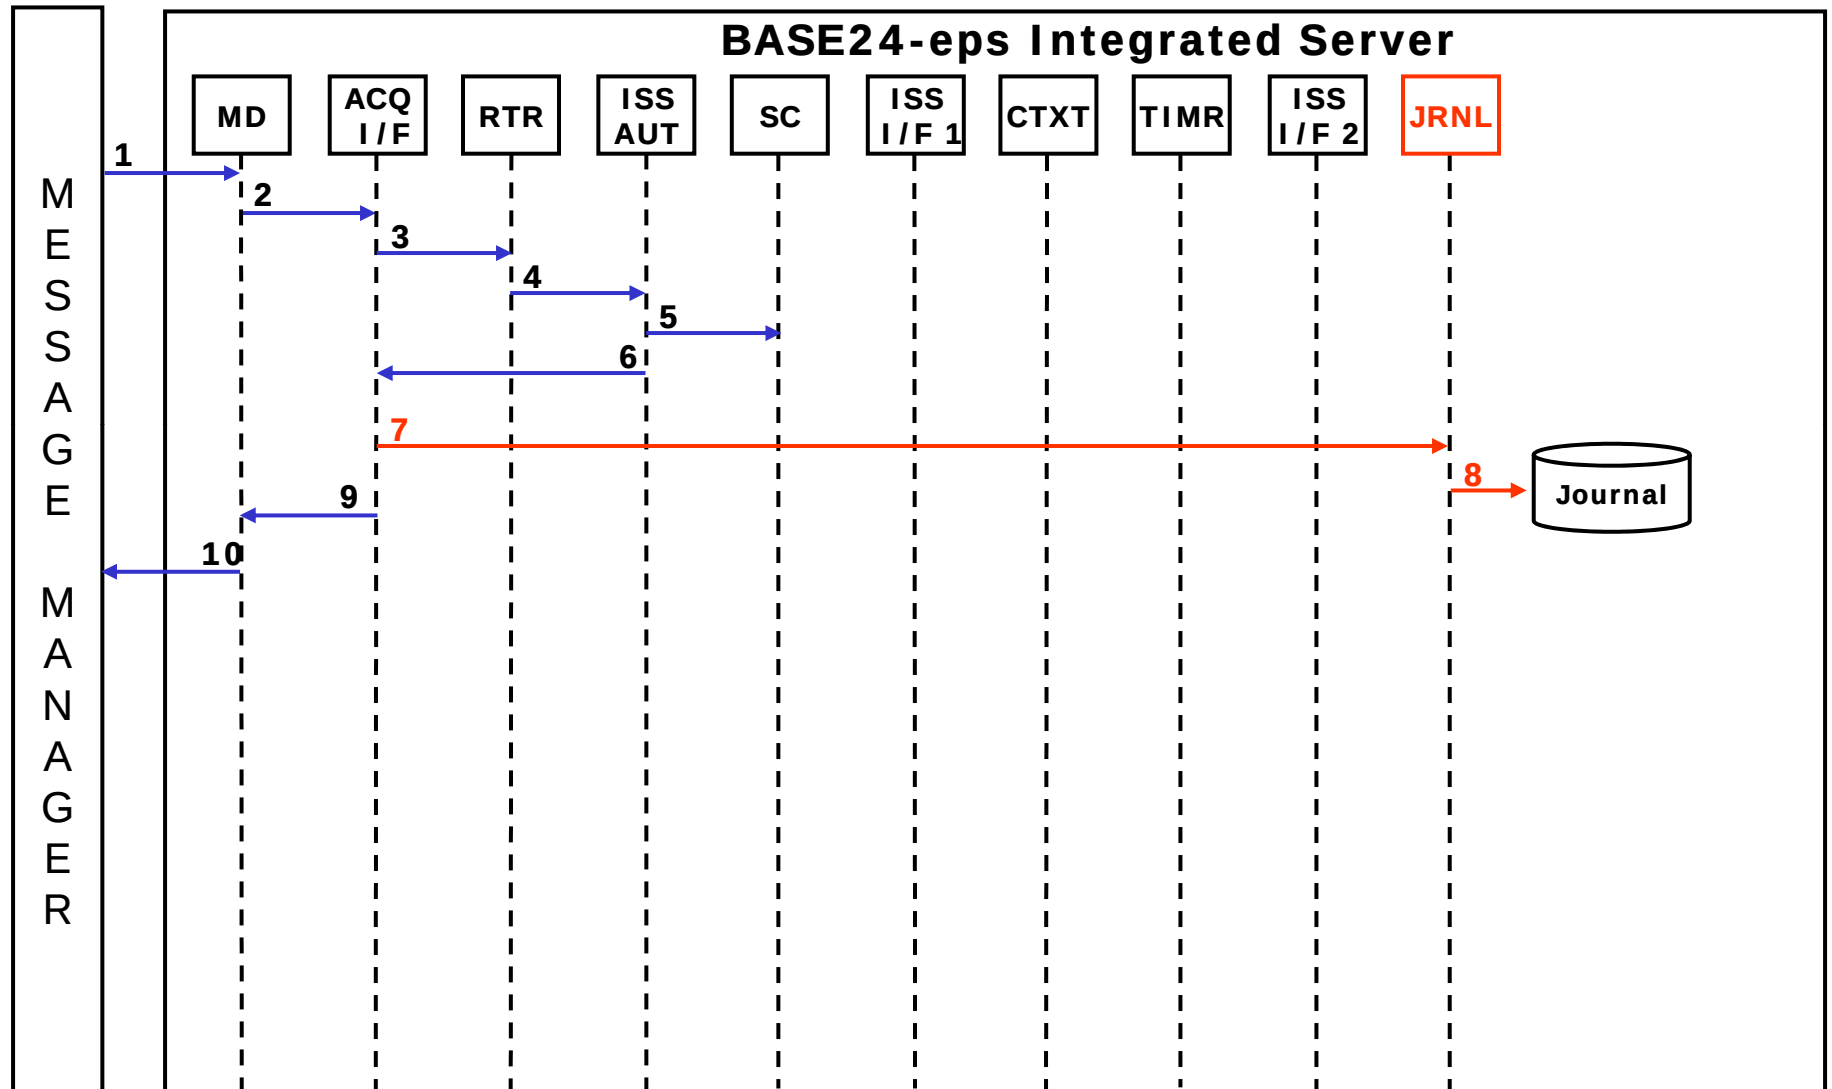

Internal Authorization – Request/Response

Journal Set

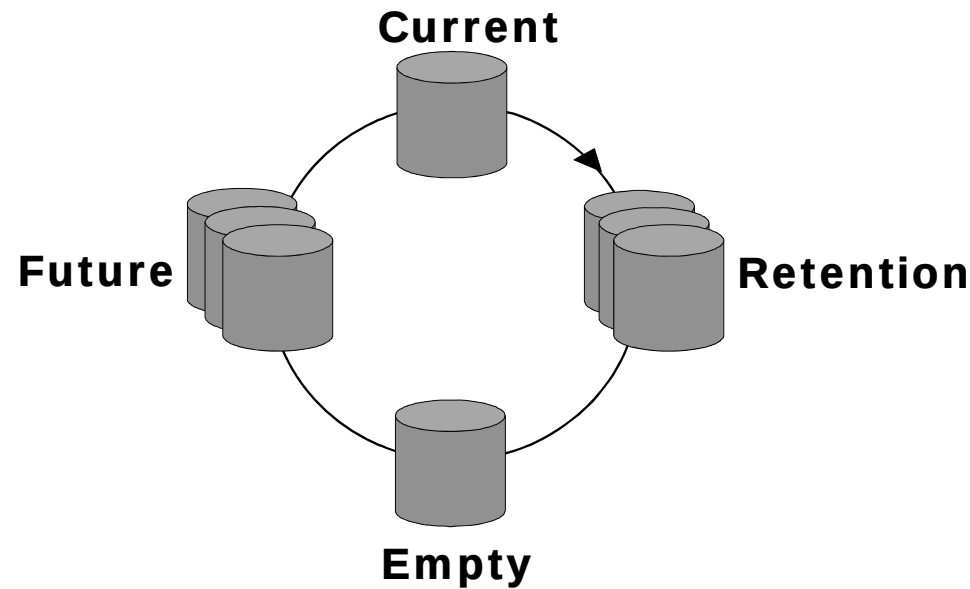

- A “journal set” is comprised of at least four journal tables. A date is associated (internally) with each table.
- Up to 99 future and 99 retention journals may be configured.
- Each day, when end of period processing is performed, the oldest retention journal is emptied and becomes the “empty” journal.

Journal Configuration

- Journal table assigns are initially defined via Metaman and are maintained in the CONFCSV file. For example:

Assign	Data Source	
JLF_P1_1	\$data.prodjrnl.jlfp11	} Primary
JLF_P1_2	\$data.prodjrnl.jlfp12	
JLF_P1_3	\$data.prodjrnl.jlfp13	
JLF_P1_4	\$data.prodjrnl.jlfp14	
JLF_A1_1	\$data.prodjrnl.jlfa11	} Alternate
JLF_A1_2	\$data.prodjrnl.jlfa12	
JLF_A1_3	\$data.prodjrnl.jlfa13	
JLF_A1_4	\$data.prodjrnl.jlfa14	


Continuation Journal Files

- Each journal set will have an assigned continuation set of journals.

Assign	Data Source Primary		Data Source Continuation Primary	Assign
JLF_P1_1	\$data.prodjrnl.jlfp11	Primary	\$data.prodjrnl.jlfpct11	JLF_P_CT_1
JLF_P1_2	\$data.prodjrnl.jlfp12		\$data.prodjrnl.jlfpct12	JLF_P_CT_2
JLF_P1_3	\$data.prodjrnl.jlfp13		\$data.prodjrnl.jlfpct13	JLF_P_CT_3
JLF_P1_4	\$data.prodjrnl.jlfp14		\$data.prodjrnl.jlfpct14	JLF_P_CT_4
	Alternate		Continuation Alternate	
JLF_A1_1	\$data.prodjrnl.jlfa11	Alternate	\$data.prodjrnl.jlfact11	JLF_A_CT_1
JLF_A1_2	\$data.prodjrnl.jlfa12		\$data.prodjrnl.jlfact12	JLF_A_CT_2
JLF_A1_3	\$data.prodjrnl.jlfa13		\$data.prodjrnl.jlfact13	JLF_A_CT_3
JLF_A1_4	\$data.prodjrnl.jlfa14		\$data.prodjrnl.jlfacr14	JLF_A_CT_4

Journal Profile

- Journal profiles must be created so that they can be assigned to issuers. Issuers may be assigned a unique journal profile or may share a journal profile.

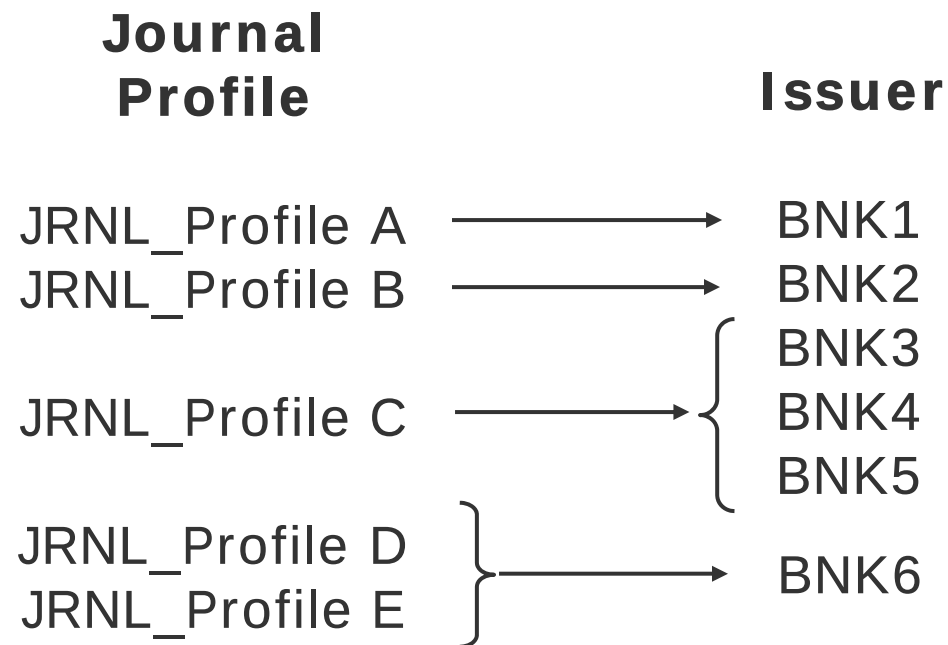



JOURNAL CONFIGURATION

Journal Profile/Journal Issuer Profile Configuration

Journal Assignment

The image shows two software windows and a diagram illustrating journal assignment.

Journal Issuer Profile Relationship Configuration - BNK1

Issuer ID: BNK1

Primary Journal Profile		Alternate Journal Profile	
JLF_ISS_PRI	PRIMARY PRFL	JLF_ISS_ALT	ALTERNATE PRFL

Journal Profile Configuration

Assign Profiles

Journal Profile	Journal Profile Description	File Data Format	Future Period Assigns	Retention Period Assigns
JLF_BNK1_R99	ALTERNATIVE 2	Native	1	1
JLF_BNK1_P40	PRIMARY 1	Native	1	1
JLF_BNK1_P99	PRIMARY 2	Native	1	1
JLF_ISS_ALT	ALTERNATE PRFL	Native	1	6
JLF_ISS_PRI	PRIMARY PRFL	Native	1	6

Data Source Assigns

Assign Name	Continuation Assign Name	Assign Period	Capture Date
JLF_ISS_P01	JLF_ISS_C01	Retention	7/8/11
JLF_ISS_P02	JLF_ISS_C02	Retention	7/9/11
JLF_ISS_P03	JLF_ISS_C03	Retention	7/10/11
JLF_ISS_P04	JLF_ISS_C04	Current	7/11/11
JLF_ISS_P05	JLF_ISS_C05	Future	7/12/11
JLF_ISS_P06	JLF_ISS_C06	Empty	7/13/11
JLF_ISS_P07	JLF_ISS_C07	Retention	7/5/11
JLF_ISS_P08	JLF_ISS_C08	Retention	7/6/11

Journal data sources

Primary Assign Name

- Retention
- Current
- Future


Continuation Assign Name

- Retention
- Current
- Future
- Empty

The diagram shows a sequence of data sources for Primary and Continuation Assign Names. The Primary Assign Name sequence is Retention, Current, Future. The Continuation Assign Name sequence is Retention, Current, Future, Empty. A blue arrow points from the 'JLF_ISS_PRI' entry in the 'Journal Profile Configuration' table to the 'Primary Assign Name' sequence.

4 - Successful view of JLF_ISS_PRI.

Journal Profile

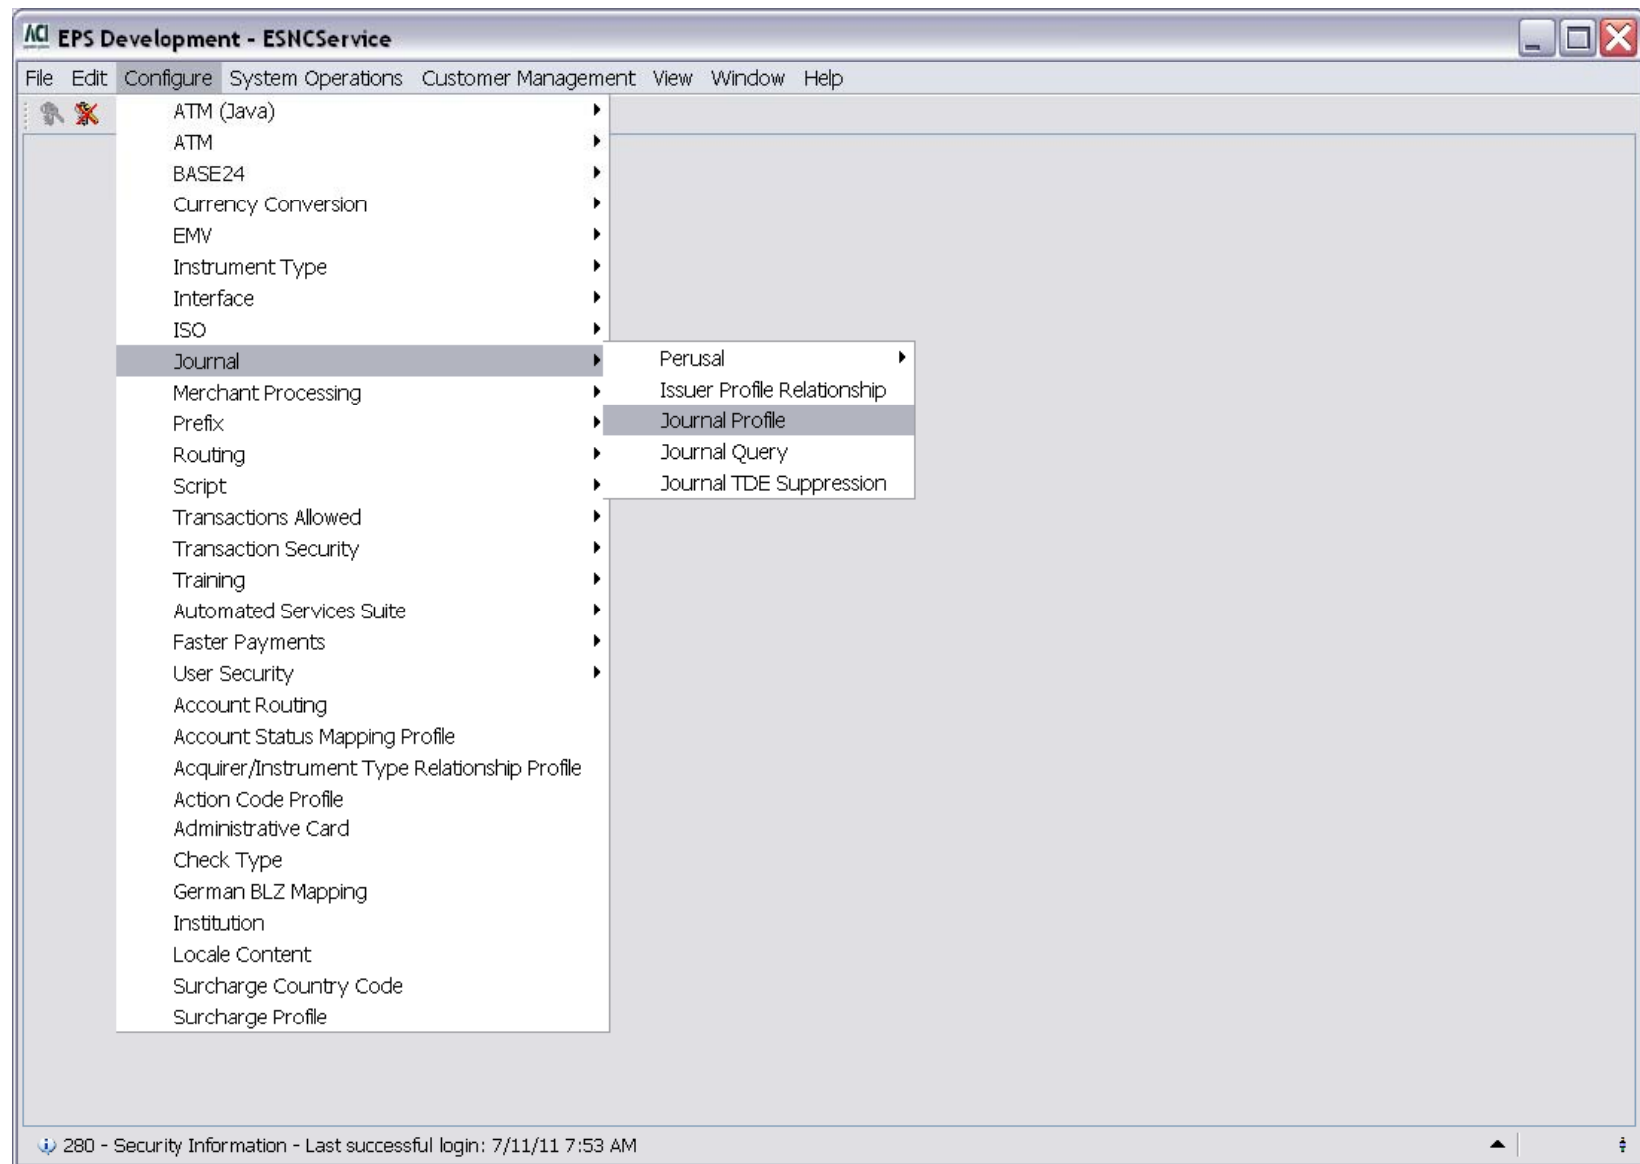

Journal Profile

The screenshot shows the 'Journal Profile Configuration' window. It contains two main tables. The first table, 'Assign Profiles', lists journal profiles with their descriptions, file data formats, future period assigns, and retention period assigns. The second table, 'Data Source Assigns', lists data source assigns with their continuation assign names, assign periods, and capture dates. A status bar at the bottom indicates a successful view of the JLF_ISS_PRI profile.

Journal Profile	Journal Profile Description	File Data Format	Future Period Assigns	Retention Period Assigns
JLF_BNK1_A99	ALTERNATIVE 2	Native	1	1
JLF_BNK1_P40	PRIMARY 1	Native	1	1
JLF_BNK1_P99	PRIMARY 2	Native	1	1
JLF_ISS_ALT	ALTERNATE PRFL	Native	1	6
JLF_ISS_PRI	PRIMARY PRFL	Native	1	6


Assign Name	Continuation Assign Name	Assign Period	Capture Date
JLF_ISS_P01	JLF_ISS_C01	Retention	7/8/11
JLF_ISS_P02	JLF_ISS_C02	Retention	7/9/11
JLF_ISS_P03	JLF_ISS_C03	Retention	7/10/11
JLF_ISS_P04	JLF_ISS_C04	Current	7/11/11
JLF_ISS_P05	JLF_ISS_C05	Future	7/12/11
JLF_ISS_P06	JLF_ISS_C06	Empty	7/13/11
JLF_ISS_P07	JLF_ISS_C07	Retention	7/5/11
JLF_ISS_P08	JLF_ISS_C08	Retention	7/6/11

4 - Successful view of JLF_ISS_PRI.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

The Journal tables will be associated with the correct date, respectively, when the configuration is saved. The Journal component maintains the journal dates daily.

Issuer Profile Relationship

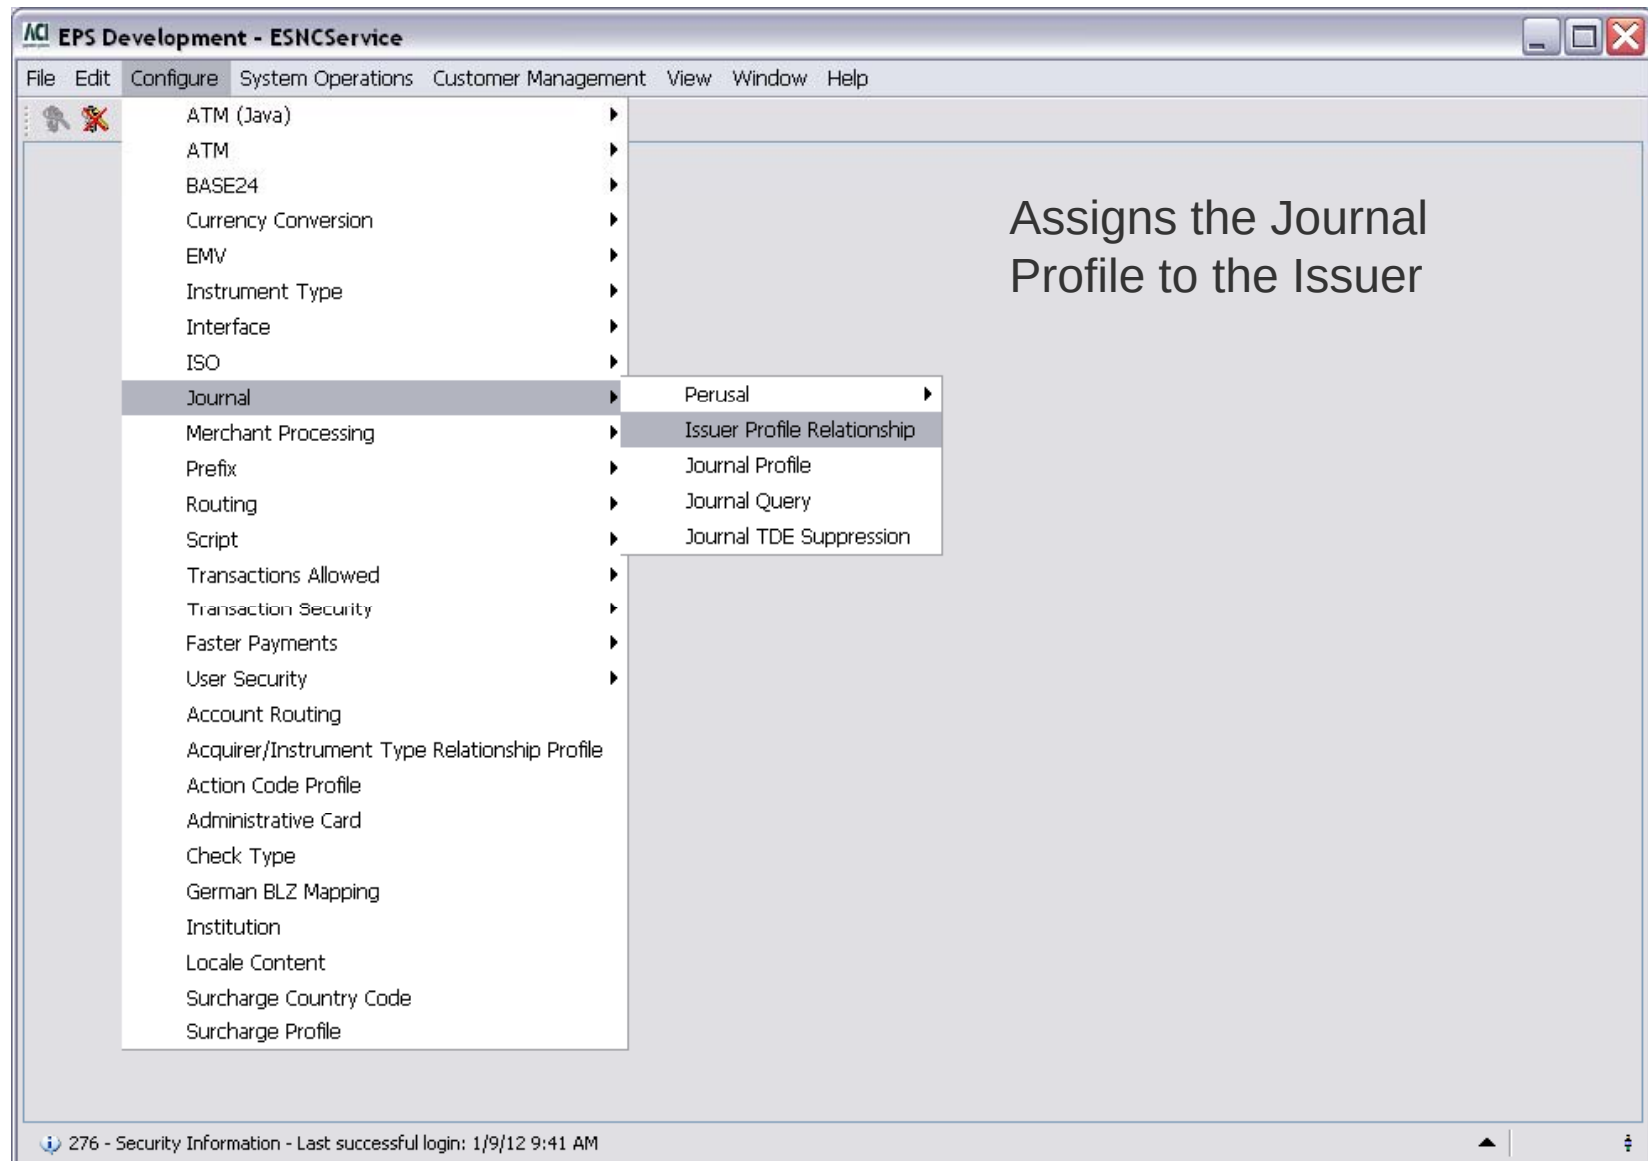

Issuer Profile Relationship

The screenshot displays the 'Journal Issuer Profile Relationship Configuration - BNK1' window within the 'EPS Development - ESNCService' application. The window features a menu bar (File, Edit, Configure, System Operations, Customer Management, View, Window, Help) and a toolbar. The 'Issuer ID' is set to 'BNK1'. Below this, there are two columns: 'Primary Journal Profile' and 'Alternate Journal Profile'. The 'Primary Journal Profile' column contains a table with two rows: the first row has 'JLF_ISS_PRI' and 'PRIMARY PRFL', and the second row is empty. The 'Alternate Journal Profile' column contains a table with two rows: the first row has 'JLF_ISS_ALT' and 'ALTERNATE PRFL', and the second row is empty. A status bar at the bottom of the window displays the message: '2 - After making all changes for Issuer BNK1 push the Save button'. The application's status bar at the very bottom shows '276 - Security Information - Last successful login: 1/9/12 9:41 AM'.

The Journal component uses this assignment to determine which journal to select for this issuer.

Journal Creation Utility

- All journal data sources configured for any issuer in the BASE24-eps network must already exist before processing.
- If journal data sources are configured for an issuer that do not exist, a journal creation utility can be run to create the required journal data sources.




Journal Configuration


- Changes to the Journal Profile and Journal Issuer Profile configuration table(s) requires rebuilding and reloading the respective OLTP table(s):
 - journal_prfl_group_assign_oltp
 - journal_profile_group_oltp
 - journal_continuation_assign_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Journal TDE Suppression

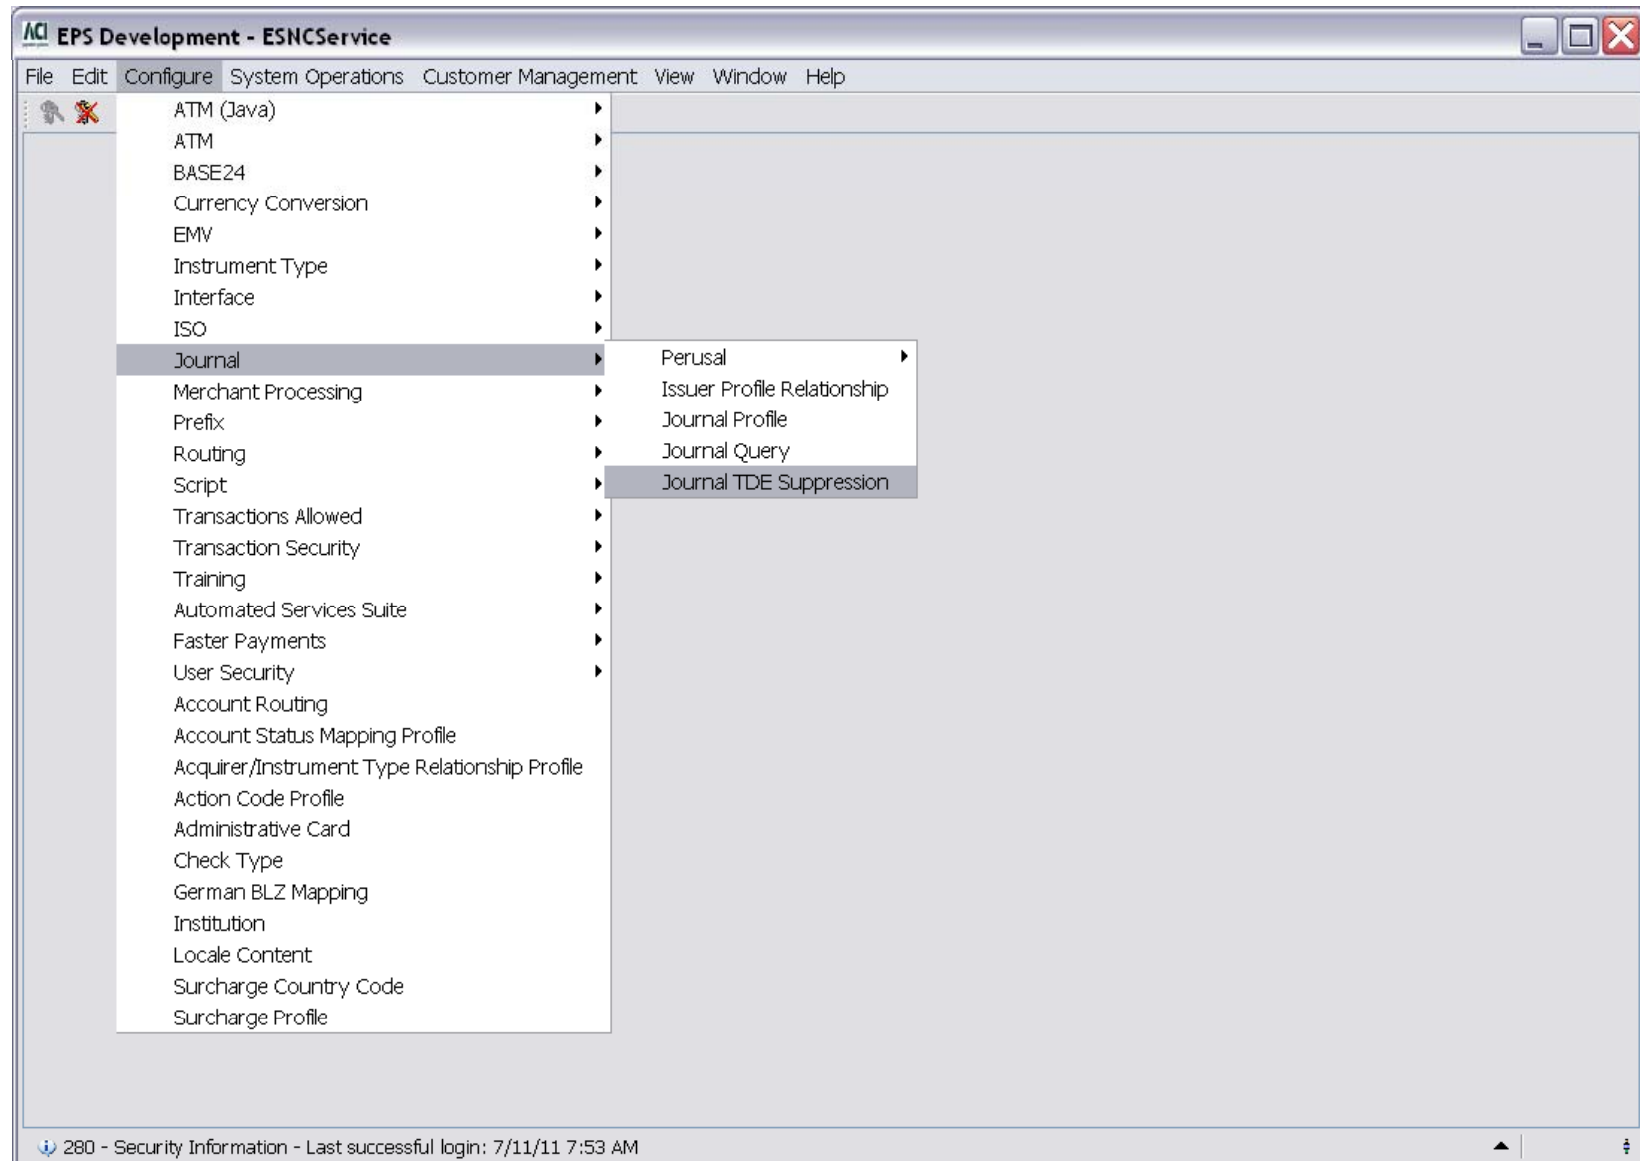

Journal TDE Suppression

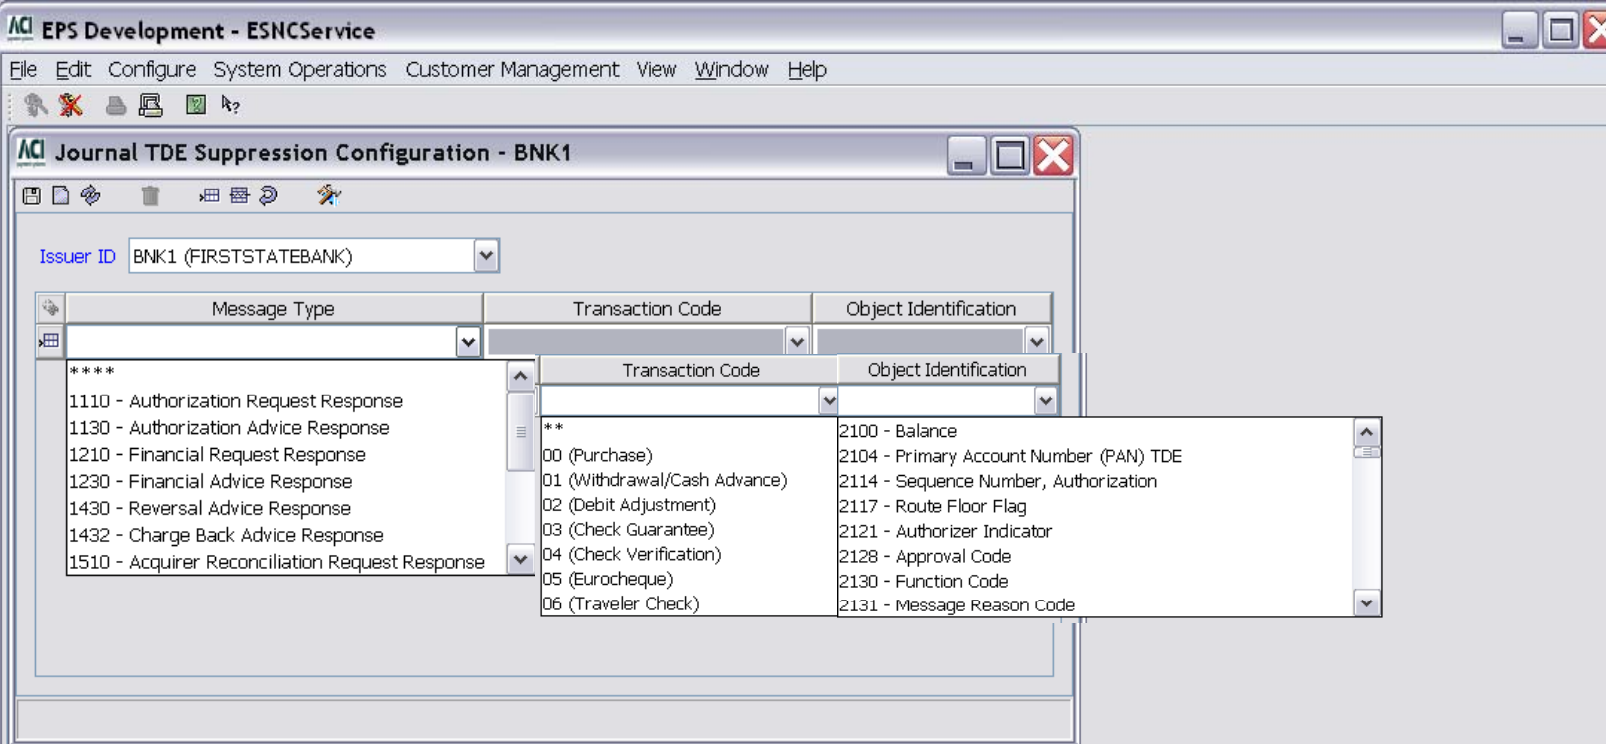

The screenshot displays the 'Journal TDE Suppression Configuration - BNK1' window. The 'Issuer ID' is set to 'BNK1 (FIRSTSTATEBANK)'. The 'Message Type' list includes:

- 1110 - Authorization Request Response
- 1130 - Authorization Advice Response
- 1210 - Financial Request Response
- 1230 - Financial Advice Response
- 1430 - Reversal Advice Response
- 1432 - Charge Back Advice Response
- 1510 - Acquirer Reconciliation Request Response

The 'Transaction Code' list includes:

- 00 (Purchase)
- 01 (Withdrawal/Cash Advance)
- 02 (Debit Adjustment)
- 03 (Check Guarantee)
- 04 (Check Verification)
- 05 (Eurocheque)
- 06 (Traveler Check)

The 'Object Identification' list includes:

- 2100 - Balance
- 2104 - Primary Account Number (PAN) TDE
- 2114 - Sequence Number, Authorization
- 2117 - Route Floor Flag
- 2121 - Authorizer Indicator
- 2128 - Approval Code
- 2130 - Function Code
- 2131 - Message Reason Code

Indicates the optional TDEs that should not be written in the journal.

By default, all mandatory and optional TDEs are included in the journal.

280 - Security Information - Last successful login: 7/11/11 7:53 AM

Journal TDE Suppression

- Changes to the Journal TDE Suppression configuration table(s) requires rebuilding and reloading the respective OLTP table(s):
 - journal_data_suppression_oltp
- OLTP tables can be rebuilt and loaded using Process Control or the OLTP Warmboot Management UI.



Lab Exercise

BASE24-eps Journal Configuration Lab

Lab 7





ACI UNIVERSAL
PAYMENTS.



MEETS THE CHALLENGE OF CHANGE