

- O chain= ArrayList<E> (id=197)
- ▲ elmentData= Object[5] (id=201)
 - (id=116) [0] ExposeInvocationInterceptor
 - ▲ [1]= AspectJAfterThrowingAdvice (id=206)
 - ▲ [2]= AfterReturningAdviceInterceptor (id=209)
 - >

 A [3]= AspectJAfterAdvice (id=211)
 - ▲ [4]= MethodBeforeAdviceInterceptor (id=213)
 - modCount= 5
 - size = 5


new CglibMethodInvocation(proxy, target, method, args, targetClass, chain, methodProxy)


CglibMethodInvocation.procced();

currentInterceptorIndex记录当前拦截 器的索引;从-1

每次执行proceed,索引自增一次



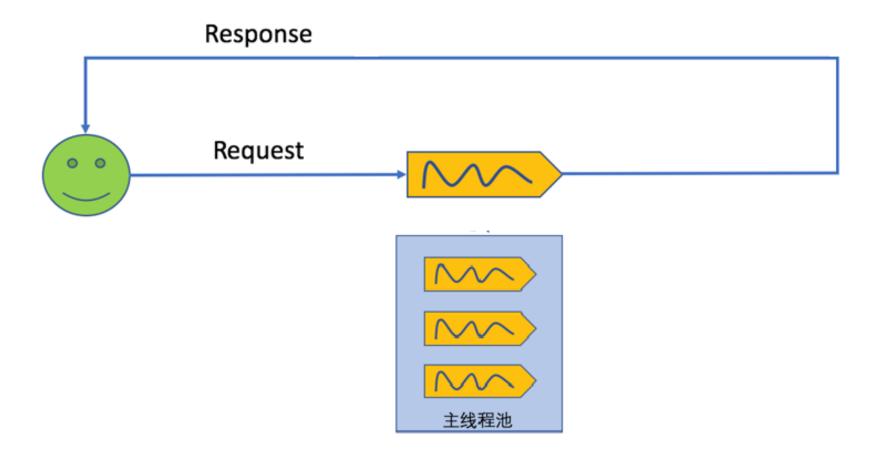

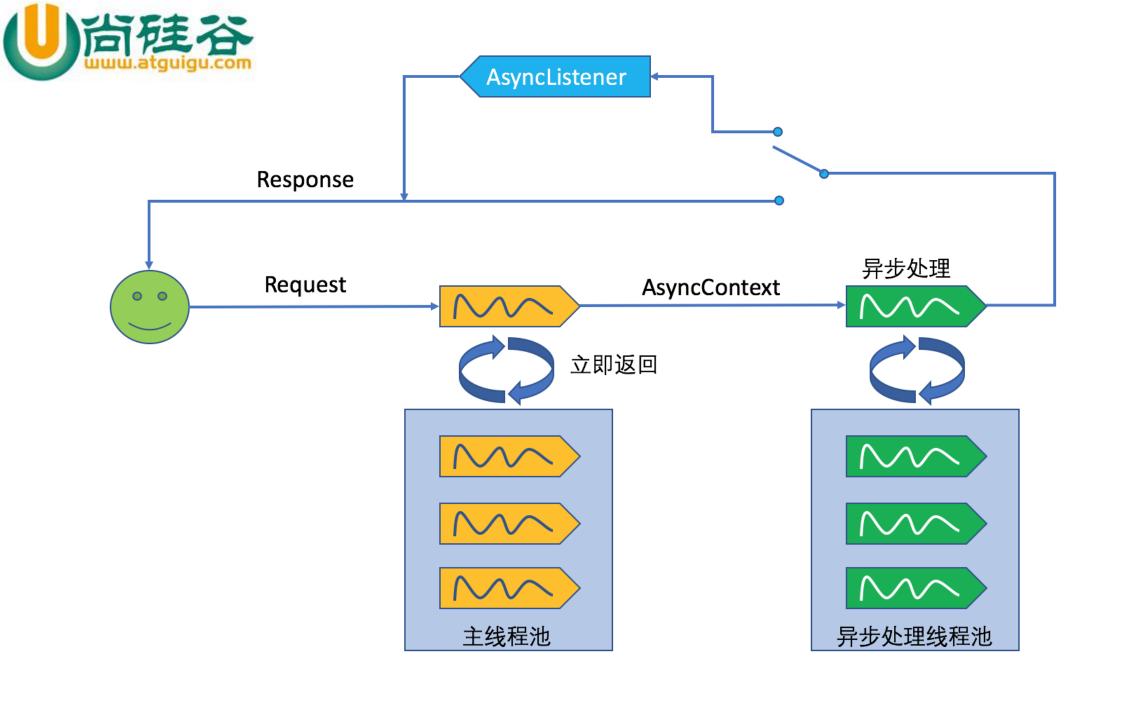



应用2 应用1 Tomcat 请求开始 2、监听消费消息 1、产生消息 线程1 处理 消息中间件 3、处理结果 监听获取结果 请求结束 线程2