


Tender Soul of Ocean with KKK

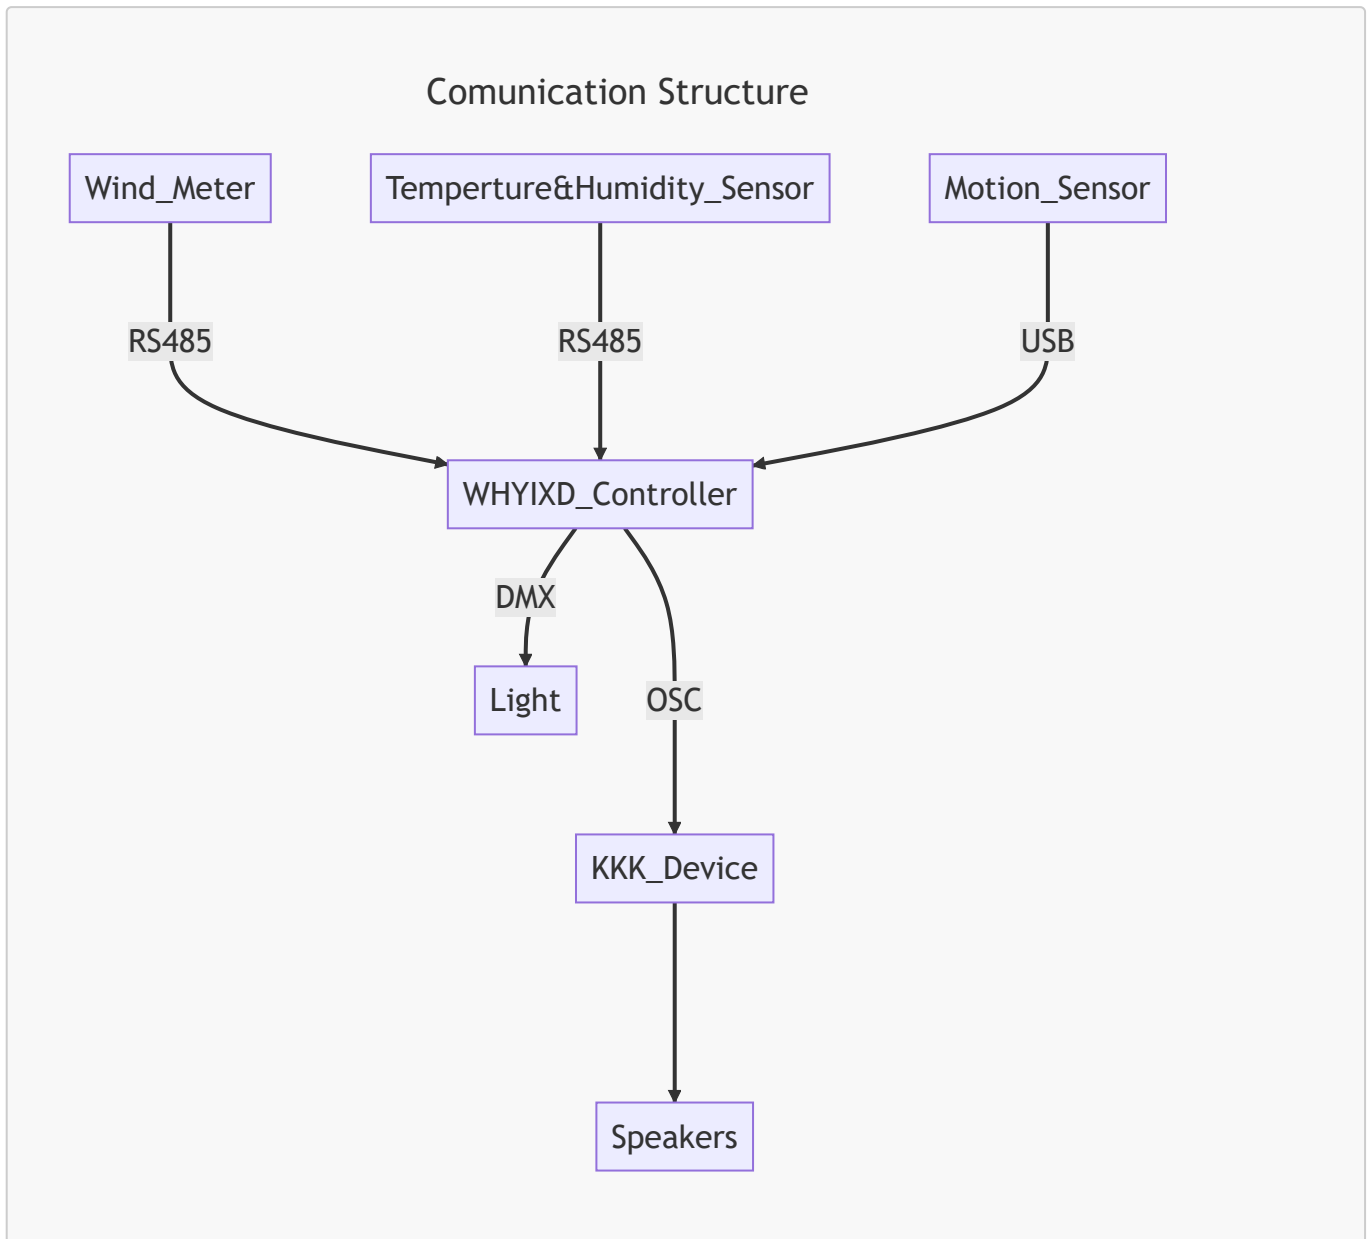

Data Packet

OSC

Address: `/whyixd/wind/speed`

Data: `float([wind speed])`

Description:

Wind speed in m/s

example:

```
/whyixd/wind/speed 1.8
```

Address: /whyixd/wind/speed_future

Data: float([wind speed])

Description:

Predicted future wind speed in m/s

example:

```
/whyixd/wind/speed_future 3.6
```

Address: /whyixd/wind/level

Data: int([wind level])

Description:

Wind level in Beaufort scale

example:

```
/whyixd/wind/level 2
```

Address: /whyixd/wind/level_future

Data: int([wind level])

Description:

Predicted future wind level in Beaufort scale

example:

```
/whyixd/wind/level_future 4
```

Address: /whyixd/wind/direction

Data: int([wind direction])

Description:

Wind direction in angle 0-360

example:

```
/whyixd/wind/direction 90
```

Address: /whyixd/wind/direction_future

Data: int([wind direction])

Description:

Predicted future wind direction in angle 0-360

example:

```
/whyixd/wind/direction_future 270
```

Address: /whyixd/temperature

Data: float([temperature])

Description:

Temperature in °C

example:

```
/whyixd/temperature 23.5
```

Address: /whyixd/humidity

Data: float([humidity])

Description:

Relative humidity in %

example:

```
/whyixd/humidity 65.5
```

If Motion Sensor is Infrared Camera

Address: /whyixd/player/count

Data: int([player count])

Description:

How many people been detected by camera

example:

```
/whyixd/player/count 5
```

Address: `/whyixd/player[index]`

Data: `int([player state])`

Description:

Return corresponding player is available

0 = not available

1 = available

example:

```
/whyixd/player2 0
```

Address: `/whyixd/player[index]/position`

Data: `float([player position x]) float([player position y])`

Description:

Return corresponding player position

example:

```
/whyixd/player2 -0.152 0.386
```