registers

rax -> return value, accumulator rcx -> counter, loop control rdx -> data, I/O rbx -> base, pointer rsp -> stack pointer rbp -> base pointer, frame pointer rsi -> source index, pointer rdi -> destination index, pointer r8 -> general purpose register r9 -> general purpose register r10 -> general purpose register r11 -> general purpose register r12 -> general purpose register r13 -> general purpose register r14 -> general purpose register r15 -> general purpose register

partial registers

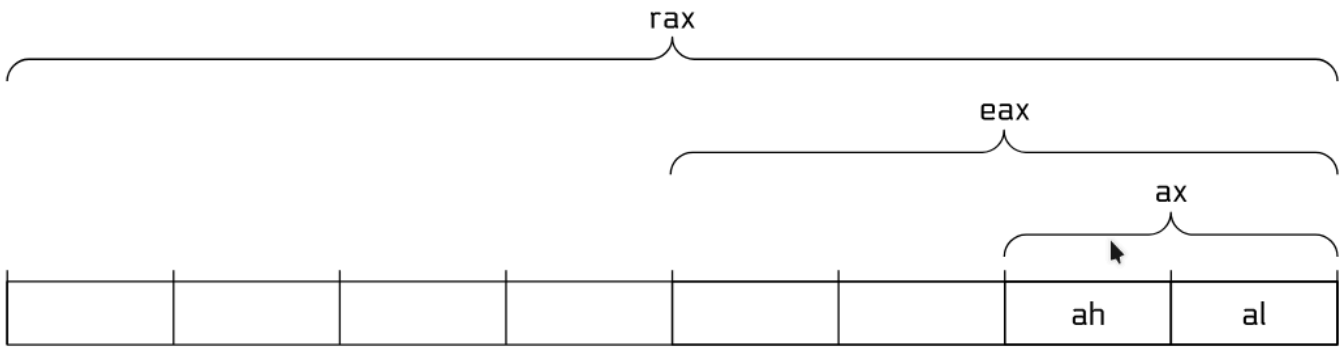

syscall arguments

- rdi -> 1st argument (arg0)
- rsi -> 2nd argument (arg1)
- rdx -> 3rd argument (arg2)
- r10 -> 4th argument (arg3)
- r8 -> 5th argument (arg4)
- r9 -> 6th argument (arg5)

syscalls

(s. syscall.sh)

syscall numbers

- 0 -> read
- 1 -> write
- 2 -> open
- 3 -> close
- 60 -> exit (exit code in rdi)