


C1 · Parsing-Retrieval Disconnect

Candidate parsers



Same page → two parses (appearance lies)

(1) PPT 제목: 무인(Successful)
(2) PPT 제목: 무인(Successful)
(3) PPT 제목: 무인(Successful)
(4) PPT 제목: 무인(Successful)
(5) PPT 제목: 무인(Successful)
(6) PPT 제목: 무인(Successful)
(7) PPT 제목: 무인(Successful)
(8) PPT 제목: 무인(Successful)
(9) PPT 제목: 무인(Successful)
(10) PPT 제목: 무인(Successful)



(1) PPT 제목: 무인(Successful)
(2) PPT 제목: 무인(Successful)
(3) PPT 제목: 무인(Successful)
(4) PPT 제목: 무인(Successful)
(5) PPT 제목: 무인(Successful)
(6) PPT 제목: 무인(Successful)
(7) PPT 제목: 무인(Successful)
(8) PPT 제목: 무인(Successful)
(9) PPT 제목: 무인(Successful)
(10) PPT 제목: 무인(Successful)

- 527 -

MinerU — BC 0.72

(cleanest)

(2) 即个张号 Sand Mat 音斗个张叶
clean structure, garbled text
MISS


Prod (Qwen3-VL-2B) — lower BC

모래수량은 Sand Mat 층을 제외한
수량
messier metric, answer kept
HIT

cleanest-looking parse retrieves worst — **r = -0.81**

C2 / C3 · Diagnose + Select

C2 · Coverage diagnostic (no retriever)

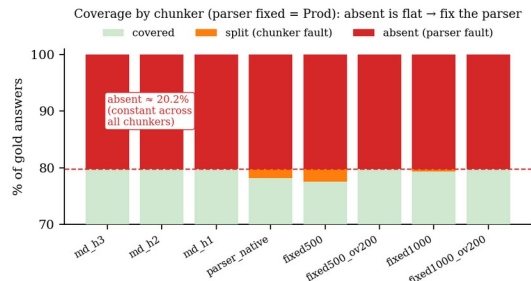

20.2% of answers absent = parser fault
flat across 8 chunkers → fix the parser, not the chunker

C3 · RCPS selection protocol (no training)

held-out Q-A probe, scored over 3 retrievers:



BGE-M3 · mE5 · Qwen3-Emb
→ rank parsers & chunkers by retrieval

C4 · Bounded Parser Training


C4 · Parser-side training

best-of-K parses from Prod, ranked two ways:

RADP-Distill — edit-distance → GT

RADP-DPO — page-local RCPS

Result

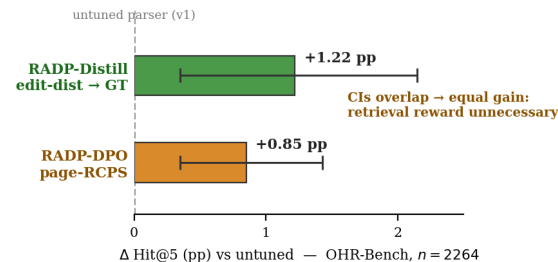

the two signals tie → retrieval reward unnecessary
the deployable lever is fidelity distillation

The parser — not the chunker — is the under-examined lever: choose it by retrieval, not by appearance (Hit@1 0.20 → 0.55, 2.8×)