Task Description:

Establish a new directory, populate it with script files, initiate an empty repository on GitHub, convert the local directory into a Git repository, and link it to GitHub for pushing the code into the repository.Perform merge, rebase, stash commands in following github repo.

ubuntu@ip-172-31-29-0: ~/github-practice

```
ubuntu@ip-172-31-29-0:~$ ls
ubuntu@ip-172-31-29-0:~$ pwd
/home/ubuntu
ubuntu@ip-172-31-29-0:~$ mkdir github-practice
cd github-practice
ubuntu@ip-172-31-29-0:~/github-practice$ ls
ubuntu@ip-172-31-29-0:~/github-practice$ touch script1.sh script2.sh script3.sh
ubuntu@ip-172-31-29-0:~/github-practice$ ls
script1.sh  script2.sh  script3.sh
ubuntu@ip-172-31-29-0:~/github-practice$ nano script1.sh
ubuntu@ip-172-31-29-0:~/github-practice$
```

```
ubuntu@ip-172-31-29-0:~/github-practice$ nano script1.sh
ubuntu@ip-172-31-29-0:~/github-practice$ nano script1.sh
ubuntu@ip-172-31-29-0:~/github-practice$ chmod +x *.sh
ubuntu@ip-172-31-29-0:~/github-practice$ ls -lart
total 12
-rwxrwxr-x 1 ubuntu ubuntu    0 Mar  8 13:34 script3.sh
-rwxrwxr-x 1 ubuntu ubuntu    0 Mar  8 13:34 script2.sh
drwxr-x--- 6 ubuntu ubuntu 4096 Mar  8 13:34 ..
-rwxrwxr-x 1 ubuntu ubuntu   36 Mar  8 13:35 script1.sh
drwxrwxr-x 2 ubuntu ubuntu 4096 Mar  8 13:37 .
ubuntu@ip-172-31-29-0:~/github-practice$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/ubuntu/github-practice/.git/
ubuntu@ip-172-31-29-0:~/github-practice$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        script1.sh
        script2.sh
        script3.sh
```

```
ubuntu@ip-172-31-29-0:~/github-practice$ git add .
git commit -m "Initial commit with shell scripts"
```

```
ubuntu@ip-172-31-29-0:~/github-practice$ git remote add https://github.com/wikkics/github-practice.git
usage: git remote add [<options>] <name> <url>

    -f, --[no-]fetch      fetch the remote branches
    --[no-]tags           import all tags and associated objects when fetching
                          or do not fetch any tag at all (--no-tags)
    -t, --[no-]track <branch>
                          branch(es) to track
    -m, --[no-]master <branch>
                          master branch
    --[no-]mirror[=(push|fetch)]
                          set up remote as a mirror to push to or fetch from

ubuntu@ip-172-31-29-0:~/github-practice$
```

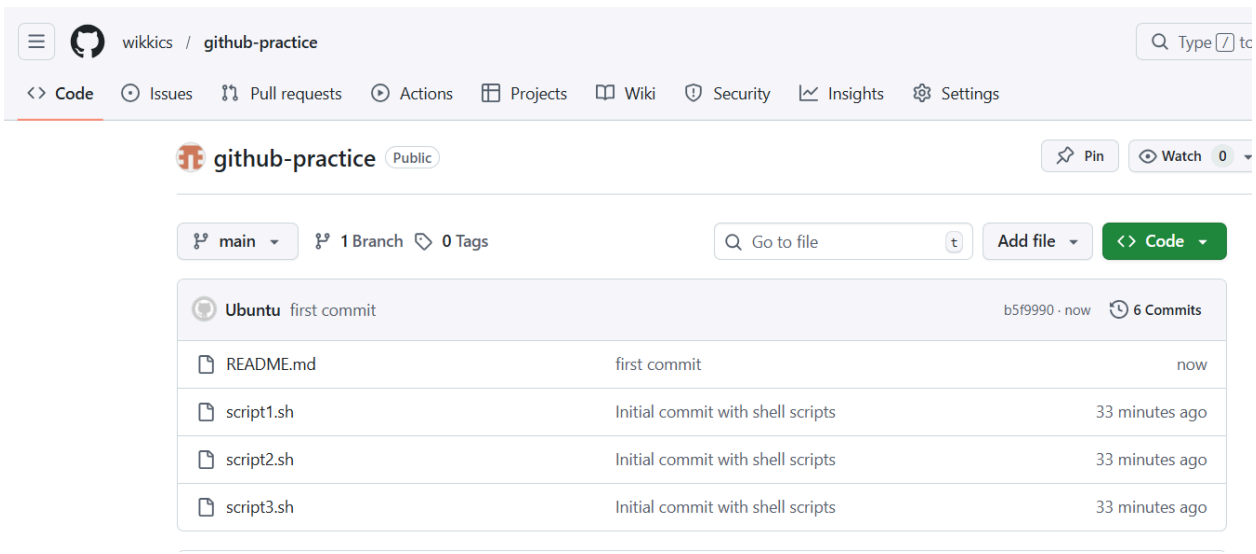


```
ubuntu@ip-172-31-29-0:~/github-practice$ git merge feature-branch
Updating b5f9990..3a83171
Fast-forward
 script1.sh | 3 +--
 1 file changed, 1 insertion(+), 2 deletions(-)
ubuntu@ip-172-31-29-0:~/github-practice$ git push origin main
Username for 'https://github.com': wikkics
Password for 'https://wikkics@github.com':
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 330 bytes | 330.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/wikkics/github-practice.git
   b5f9990..3a83171  main -> main
```

```
ubuntu@ip-172-31-29-0:~/github-practice$ git checkout -b rebase-demo
Switched to a new branch 'rebase-demo'
ubuntu@ip-172-31-29-0:~/github-practice$ nano script2.sh
ubuntu@ip-172-31-29-0:~/github-practice$ git add script2.sh
git commit -m "Added line in rebase-demo branch"
[rebase-demo fbfb7d6] Added line in rebase-demo branch
 Committer: Ubuntu <ubuntu@ip-172-31-29-0.us-west-2.compute.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 1 insertion(+)
ubuntu@ip-172-31-29-0:~/github-practice$ git checkout main
nano script3.sh
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
ubuntu@ip-172-31-29-0:~/github-practice$ git add script3.sh
git commit -m "Main branch change"
[main adbd820] Main branch change
 Committer: Ubuntu <ubuntu@ip-172-31-29-0.us-west-2.compute.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 1 insertion(+)
```

```
ubuntu@ip-172-31-29-0:~/github-practice$ git checkout rebase-demo
Switched to branch 'rebase-demo'
ubuntu@ip-172-31-29-0:~/github-practice$ git rebase main
Successfully rebased and updated refs/heads/rebase-demo.
ubuntu@ip-172-31-29-0:~/github-practice$
```

ubuntu@ip-172-31-29-0: ~/github-practice

```
ubuntu@ip-172-31-29-0:~/github-practice$ git stash
No local changes to save
ubuntu@ip-172-31-29-0:~/github-practice$ nano script1.sh
ubuntu@ip-172-31-29-0:~/github-practice$ git stash
Saved working directory and index state WIP on rebase-demo: 346bc07 Added line in rebase-demo branch
ubuntu@ip-172-31-29-0:~/github-practice$ git stash list
stash@{0}: WIP on rebase-demo: 346bc07 Added line in rebase-demo branch
stash@{1}: WIP on rebase-demo: 346bc07 Added line in rebase-demo branch
ubuntu@ip-172-31-29-0:~/github-practice$ git stash apply
```