

Digital Imaging Processing

數字影像處理

Project Three

Lin Dongwen

05, 2013

1 Step 1: Haar Wavelet transform

1.1 Background Knowledge——背景知識

首先看維基百科里關於Wavelet Transform的相關簡介：

The Haar transform is the simplest of the wavelet transforms. This transform cross-multiplies a function against the Haar wavelet with various shifts and stretches, like the Fourier transform cross-multiplies a function against a sine wave with two phases and many stretches.

Scaling function. Wavelets are defined by the wavelet function $\psi(t)$ (i.e. the mother wavelet) and scaling function $\phi(t)$ (also called father wavelet) in the time domain.

Wavelet function. The wavelet only has a time domain representation as the wavelet function $\psi(t)$. For instance, Mexican hat wavelets can be defined by a wavelet function.

1.2 How to

From the question we know that scaling function is $1/2, 1/2$, while the wavelet coefficients function is $1, -1$. Let N be the length of X_n , we will have $M = \lceil \frac{N}{2} \rceil$, we will have

$$L_k = \frac{1}{2}(x_{2k-1} + x_{2k}); \quad (1)$$

$$H_k = |(x_{2k-1} - x_{2k})|; \quad (2)$$

1.3 The result

The result can be seen in (4(a))

Similarly, we can utilize the same method Vertically. See fig(4(b)).

The related code is in main.m: Step 1 and Haar Wavelet transform is in hwt.m

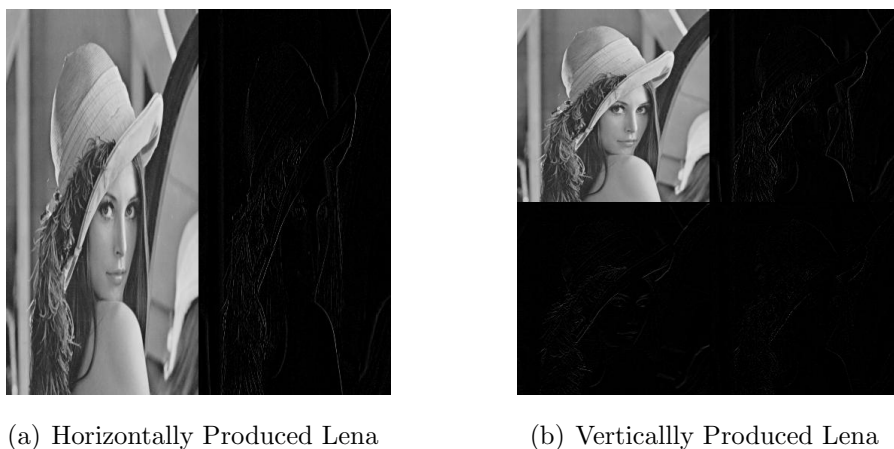


Figure 1: The result for the first problem

David Lin
Tung-wen

Figure 2: The Water Mark

2 Step 2:Watermark 2 Binary

2.1 How to

第二步需要做的是把要植入的水印做變化使它變為Binary的Code，圖像在這裡會丟失一些內容。變為兩個明暗度。然後再對其做行列變化使其變為一列。比如說原來是 M 行 N 列的矩陣，在變化后，變為有 $M \times N$ 個元素的行向量。

2.2 The result

詳細可看附的文件夾中文件名為“Myname.jpg”（變化前）的文件，和文件名為“bits.jpg”（變化后）的文件。分別是做變化前的水印和變化后的水印。相關代碼參見main.m的Step 2的部份。

3 Step 3:Embedding

第三步要做的是Watermark的Embed的過程。這一步是整個程式里最核心的部份。

3.1 Related Knowledge

加密算法主要通過Haar Wavelet Transform來實現，也叫做Integer Wavelet Transform或Difference Expansion Transform，The difference Expansion的原理如下：

假設需要展開兩個值 $x = 206, y = 201$ ，則有

$$l = \lceil \frac{206 + 201}{2} \rceil = \lceil \frac{407}{2} \rceil, h = 206 - 201 = 5$$

我們想要在裏面植入bit=1的話，讓

$$h' = 2 \times h + b = 2 \times 5 + 1$$

這樣新的值就變成了

$$x = l + \lceil \frac{h+1}{2} \rceil = 209, y = l - \lceil \frac{h}{2} \rceil = 198$$

通過這樣的原理就可以植入bit在圖像裏面。

爲了區別植入和沒有植入的變量，我們又新引入了一個閾值T。根據T將圖像中的點分成不同的情況：

- 如果 $|h| \leq \lceil \frac{T}{2} \rceil$ 則為集合M
- 如果 $2T + 1 \geq |h| > \lceil \frac{T}{2} \rceil$ 則為集合N
 - 如果 $T \geq |h| > \lceil \frac{T}{2} \rceil$ 則為集合 N_e
 - 如果 $2T + 1 \geq |h| > T$ 則為集合 $N_{\bar{e}}$
- 如果 $|h| > 2T + 1$ 則為集合U

藏數據的時候，我們會把所有的數據都藏在集合 N_e 和M裏面。

關於T值確定的辦法：

在Decode的時候，由於集合 N_e 和 $N_{\bar{e}}$ 的確定需要Map才能確定，這樣才能保證能夠恢復到原圖片。而在N裏面只有 N_e 是可以藏數據的，所以一共只能藏 $M - N_{\bar{e}}$ 個的數據，首先確定需要藏的水印的大小，然後根據這個大小來確定需要T的最小值。T越大，則圖像的失真會越大。具體的確定算法參見caculate_T.m



Figure 3: watermarked

3.2 How to

Step0 首先計算 T 的值得大小。

Step1 通過引入一個同圖像像素行列相同的矩陣ID來表示圖像每一個屬於的集合類型

Step2 根據矩陣ID來得出Map表，用來表示矩陣 N_e 和 N_e

Step3 將Map與Payload連接起來，然後首先把數據藏在 M 矩陣之中，然後再把剩下的數據藏在 N_e 里。加密的時候利用加密算法。

3.3 The result

The result can be seen in fig (5)



(a) Horizontally Produced Lena



(b) Verticallly Produced Lena

Figure 4: The result for the first problem

4 Step 4: Compute the Histogram

4.1 Related Knowledge

在計算機圖像學領域中，常用一種灰度直方圖。灰度直方圖是灰度級的函數，描述的是圖像中具有該灰度級的像素的個數：橫坐標是灰度級，縱坐標是該灰度出現的頻率（像素個數）。

4.2 How to

使用Matlab的一個函數叫imhist即可繪出直方圖（需要注意的是先把圖片換成uint8的類型）

4.3 The result

The result can be seen in fig

David Lin Tung-wen

Figure 5: watermarked

5 Step 5:Decoding

5.1 How to

Decoding的過程與encoding的過程恰好相反，可以將水印從圖片里提取出來，同時也會將圖像還原到原來的情況。

Decoding的相關算法如下：

Step1 根據T的值與H的值把不同的點對按照集合劃分為三類，M,N和U，分別標記其ID， $ID = 1$ 為U $ID = 4$ 為M， $ID = 5$ 為N。

Step2 根據N的大小計算出Map的位數，並從M中取出Map。

Step3 依據Map把N分為 N_e 和 $N_{\bar{e}}$ 。標記ID， $ID = 2$ 為 $N_{\bar{e}}$ ， $ID = 3$ 為 N_e ，

Step4 根據ID對M($ID = 4$ ，先恢復)以及 N_e ($ID = 3$ ，后恢復)進行復原，並提取出Bit。

5.2 The result

The result can be seen in fig

6 Step 6: Compare the extracted binary signature and the recovered image

6.1 How to

使用Matlab的函數imhist繪出直方圖即可，同理需要先把圖像變換成uint8的類型

6.2 The result

The result can be seen here.

7 Source Code

Here are the source code for this project.

Input matlab source:

```
clear all

%% -----STEP1: Haar Wavelet Transform----- %%

disp('-----STEP1: Haar Wavelet Transform-----')
%1.Read The Image
x=imread('lena-gray_512.tif');
[row,col]=size(x);
x_original=x;
x=double(x);
%myimshow(x,'Original Image');

%2Horizontal
for j=1:row
    tmp1=x(j,:);
    [L,H]=hwt(tmp1);
    x1(j,:)=[L,H];
end
%figure;myimshow(x1,'horizontally produce');
imwrite(x1,'horizontally produce.jpg');
```



```

%3Vertically
for i=1:col
    tmp1=x1(:,i)';
    [ra1,rd1]=hwt(tmp1);
    x1(:,i)=[ra1,rd1]';
end
figure;myimshow(x1,'vertically produce');
imwrite(x1,'vertically produce.jpg');

%% -----STEP2: Watermark 2 Binary----- %%
disp('-----STEP2: Watermark 2 Binary-----')
%1.To get the Binary Code
watermark = imtobinary('myname.JPG');
figure;myimshow(watermark,'Befroe');

%2.Change it shape to a line of binary code.
bits = reshape(watermark,1,[]);
figure;myimshow(bits,'after');
imwrite(bits,'bits.jpg')

%% -----STEP3 Embedding----- %%
disp('-----STEP3 Embedding----- ')
%To demonstrate the principle, we simply let T=1; other wise T could
%be another variable.

M=floor(col/2);
T=caculate_T(length(bits),x);

%Mark ID
%Step 1.
%USE ID to mark the node to different set. ID=1:U ID=2:Ne_bar ID=3:Ne,
%ID=4:M ID=0>Error or Unknown.
count_ne_bar=0;count_u=0;count_m=0;count_ne=0;count_n=0;count_total=0;ID=[];
for i=1:row
    for k=1:M
        count_total = count_total + 1;
        h(i,k) = abs(x(i,2*k-1) - x(i,2*k));
        if h(i,k) > 2 * T + 1 || ((x(i,2*k-1) + x(i,2*k)) * 1/2) >=
255 - T || ((x(i,2*k-1) + x(i,2*k)) * 1/2) < T
            count_u =count_u + 1;

```

```

        ID(i,k) = 1; %u
    elseif h(i,k) > floor(T/2)
        count_n=count_n + 1;
        if h(i,k) > floor(T)
            count_ne_bar=count_ne_bar + 1;
            ID(i,k) = 2; %ne_bar
        else
            count_ne=count_ne + 1;
            ID(i,k) = 3; %ne
        end
    else
        count_m=count_m + 1;
        ID(i,k) = 4; %_m
    end
end
end

%Step 2 Draw the Map
map = zeros(1,count_n);
count = 1; %to indicate where I'm writing
for i=1:row
    for k=1:M
        if ID(i,k) == 2
            count=count+1;
        elseif ID(i,k) == 3
            map(count) = 1;
            count=count+1;
        end
    end
end

%Thus payload = [Map, watermark]
payload = [map, bits];
payload = [payload, zeros(1,count_m+count_ne-length(payload))]; %match the size of th
%myimshow(payload,'payload')

%Step 3.Watermark_Embedding

%%% ATTENTION

```

```

%%% In this case M is for more larger than the data that we will
%%% embed, which means that we did not use Ne to embed payload.
%%% Otherwise the code would be diffenrent

count = 1; %to indicate where I'm writin
for i=1:row
    for k=1:M
        if (ID(i,k) == 4) % If that is in SET M
            [x(i,2*k-1),x(i,2*k)] = embed(x(i,2*k-1),x(i,2*k),payload(count));
            count = count + 1;
        end
    end
end
str=sprintf('We have embeded %d bits in M',count-1);
disp(str)

count;%to indicate where I'm writin
for i=1:row
    for k=1:M
        if (ID(i,k) == 3) % If that is in SET N
            [x(i,2*k-1),x(i,2*k)] = embed(x(i,2*k-1),x(i,2*k),payload(count));
            count = count + 1;
        end
    end
end
str=sprintf('We have embeded %d bits in M & Ne ',count-1);
disp(str);

%Step 4.Image Demonstration or Writing
% figure;myimshow(x,'After Embedding');
imwrite(x,'marked.tif')

%% -----STEP4 Compute the Histogram----- %%
x2 = uint8(x)
disp('-----STEP4 Compute the Histogram-----')
figure;subplot(2,1,1);imhist(x-original);title('Original histogram');
subplot(2,1,2);imhist(x2);title('Watermarked image''s Histogram');

%% -----STEP5 Decoding----- %%
disp(' -----STEP5 Decoding----- ')

```

```

%watermark=decoder(x,length(bits))

%function [wartermark]=decoder(watermarked_image,length_watermark)
%
%This function is used to decode the image. In case to decode the watermark
%we need to know the length of map and the length of the watermarked image
%in this case.
%
%TIPS: A more universal way is to save those details in the head of the payload,
%but since this project is just for demonstration use, there is no need to
%do these things.
%
% David Lin
% NATIONAL CHIAO TUNG UNIVERSITY
%
%x=watermarked_image;

[d_row,d_col]=size(x);
M=floor(d_col/2);

%length_map=count_n
%length_watermark=200*100=20000

% ———STEP1: Mark the ID——— %%
% This is used to return a martrix to mark each of pixel that is we are here to mark

%ID=1:U
%ID=2:Ne_bar
%ID=3:Ne
%ID=4:M
%ID=5;N
%ID=0>Error or Unknown. (NOT USED IN THIS CASE)

d_count_ne_bar=0;d_count_u=0;d_count_m=0;d_count_ne=0;d_count_n=0;d_count_total=0;d_I
for i=1:d_row
    for k=1:M
        d_count_total = d_count_total + 1;
        d_h(i,k)=x(i,2*k-1) - x(i,2*k);
        %1. This case is U.
        if abs(h(i,k)) > 2 * T + 1 || ((x(i,2*k-1) + x(i,2*k)) * 1/2) >=

```

```

255 - T || ((x(i,2*k-1) + x(i,2*k)) * 1/2) < T
    d_count_u = d_count_u + 1;
    d_ID(i,k) = 1;
    %3.This case is M
    elseif 2 * fix(-T/2) <= d_h(i,k) <= 2 * fix(T/2) + 1
    d_count_m = d_count_m + 1;
    d_ID(i,k) = 4; %m
    %2. This case is N
    else
        d_count_n = d_count_n + 1;
        d_ID(i,k) = 5;
    end
end
end
end

% STEP2: Draw the location map from M
d_count = 1; d_map = []
for i=1:d_row
    for k=1:M
        if (mod(d_h(i,k),2)==0) && d_count <= d_count_n
            d_map(d_count) = 0;
            d_count = d_count + 1;
        end
        if (mod(d_h(i,k),2)==1) && d_count <= d_count_n
            d_map(d_count) = 1;
            d_count = d_count + 1;
        end
    end
end
end

% STEP3: Use map to recover Ne and Ne_bar
%2_1 This case is Ne_bar
d_count = 1;
for i=1:d_row
    for k=1:M
        if d_ID(i,k) == 5;
            if d_map(d_count) == 0
                d_ID(i,k) = 2; %ne_bar
                d_count_ne_bar = d_count_ne_bar + 1;
                d_count = d_count + 1;
            end
        end
    end
end

```

```

        elseif d_map(d_count) == 1
            d_ID(i,k) = 3; %ne
            d_count=d_count+1;
            d_count_ne = d_count_ne + 1;
        end
    end
end

% STEP4: Recorver the data.
count = 1; d_payload = []
for i=1:row
    for k=1:M
        if ID(i,k) == 4
            [x(i,2*k-1),x(i,2*k),d_payload(count)] = recover(x(i,2*k-1),x(i,2*k));
            count=count+1;
        end
    end
end

count;
for i=1:row
    for k=1:M
        if ID(i,k) == 3
            if x(i,2*k-1) - x(i,2*k) > 0
                [x(i,2*k-1),x(i,2*k),d_payload(count)] = recover(x(i,2*k-1),x(i,2*k));
                count=count+1;
            end
        end
    end
end

d_watermark = reshape(d_payload(50803:70802),100,200);
figure;imshow(reshape(d_payload(50803:70802),100,200));
imwrite(d_watermark,'d_watermark.jpg');
x = uint8(x);
imshow(x);

%% -----STEP6 Comparing----- %%
figure;

```

```

subplot(2,2,1);imhist(x_original)
subplot(2,2,2);imhist(x)
subplot(2,2,3);imhist(watermark)
subplot(2,2,4);imhist(d_watermark)

```

Input matlab source:

```

function [cA,cD]=hwt(x)

%This function is used to do Haar Wavelet Transform

sfc=[1/2,1/2];wfc=[1,-1];

N=length(x);           % The length of the sequence
M=floor(N/2);
k=1:M;
cA(k)=x(2*k-1) * 1/2 + x(2*k) * 1/2;
cD(k)=abs(x(2*k-1) - x(2*k));

```

Input matlab source:

```

function myimshow(x,str)
%%%%
%function myimshow(x,str)
%eg. myimshow(x,'Original Image');
%To show the image as well as the size of the image
%%%%
[row,col]=size(x);
imshow(x);title(str);
xlabel(['Size : ',num2str(row),'*',num2str(col)]);

```

Input matlab source:

```

function T = caculate_T(data_size,x)

[row,col]=size(x)
M=floor(col/2);
T=0;
while 1
    count_ne_bar=0;count_u=0;count_m=0;count_ne=0;count_n=0;count_total=0;ID=[];
    T=T+1;
    for i=1:row
        for k=1:M

```

```

        count_total = count_total + 1;
        h(i,k) = abs(x(i,2*k-1) - x(i,2*k));
        if h(i,k) > 2 * T + 1 || ((x(i,2*k-1) + x(i,2*k)) * 1/2) >=
255 - T || ((x(i,2*k-1) + x(i,2*k)) * 1/2) < T
            count_u = count_u + 1;
            ID(i,k) = 1; %u
        elseif h(i,k) > floor(T/2)
            count_n = count_n + 1;
            if h(i,k) > floor(T)
                count_ne_bar = count_ne_bar + 1;
                ID(i,k) = 2; %ne_bar
            else
                count_ne = count_ne + 1;
                ID(i,k) = 3; %ne
            end
        else
            count_m = count_m + 1;
            ID(i,k) = 4; %_m
        end
    end
end
if count_m >= count_n && count_m - count_ne > data-size
    break;
end
end
str = sprintf('T=%d; count_ne_bar=%d; count_u=%d; count_m=%d; count_ne=%d; count_n=%d; count_
disp(str)

```

References

- [1] Jun Tian, Reversible Data Embedding Using a Difference Expansion, IEEE, 2003
- [2] wikipedia.http://en.wikipedia.org/wiki/Haar_wavelet