

A CHILD OR A GOLDEN RETRIEVER

The five-minute primer for the Shoggoth, the Interceptor, Hex, and Fiat.

Four names. One bounded delivery system. The target repository still decides.

SHOGGOTH

Shoggoth is the Wildcat agent-and-skill collective.

THE INTERCEPTOR

The Interceptor is that same collective working through its external problem-solving harness under the target repository's authority.

HEXAEMERON

Hexaameron is the delivery plugin and ordered system.

FIAT

Fiat is Hex's explicit controller and receipt ledger.




[OPEN THE FIVE-MINUTE DEMO](#)

STUDY -> RUNBOOK -> IMPLEMENT -> AUDIT -> PROSE -> PUSH -> INTEGRATE

WHO IS WHO?

Four names. One bounded system. The target repository still decides.

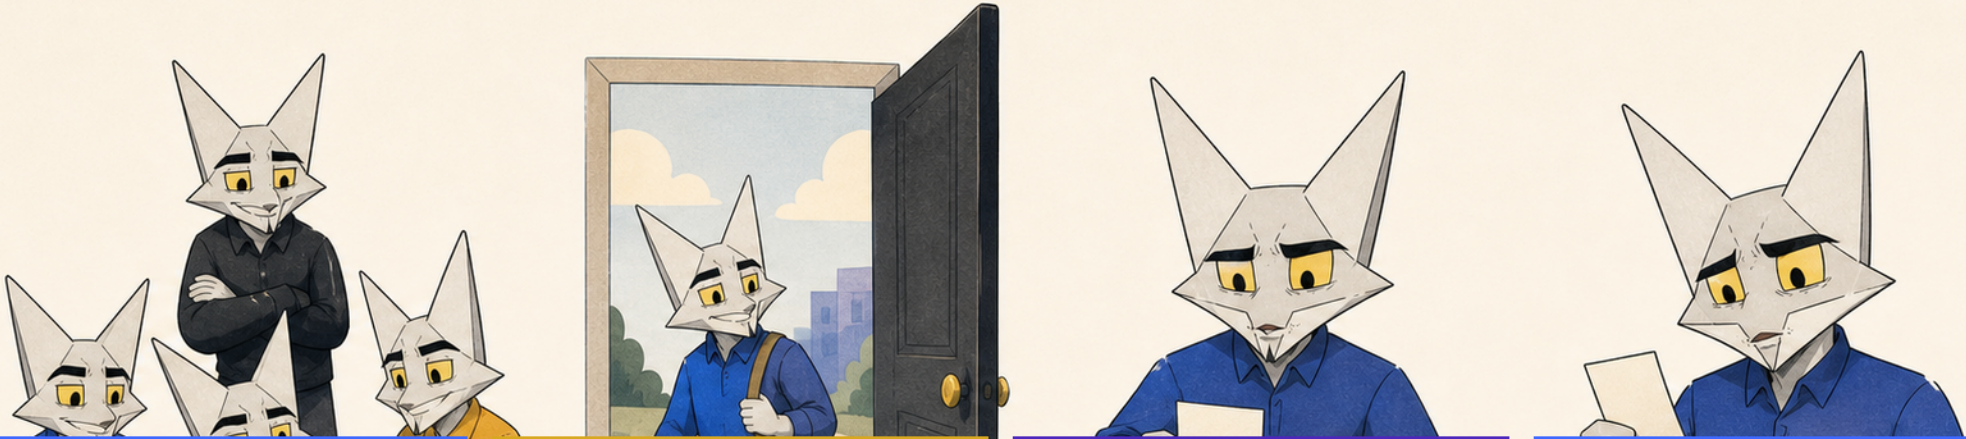

SHOGGOTH

Shoggoth is the Wildcat agent-and-skill collective.

THE INTERCEPTOR

The Interceptor is that same collective working through its external problem-solving harness under the target repository's authority.

HEXAEMERON

Hexaemeron is the delivery plugin and ordered system.


FIAT

Fiat is Hex's explicit controller and receipt ledger.

STUDY -> RUNBOOK -> IMPLEMENT -> AUDIT -> PROSE -> PUSH -> INTEGRATE

FIAT KEEPS THE RUN IN ORDER

One next action. One receipt. Then the next action.

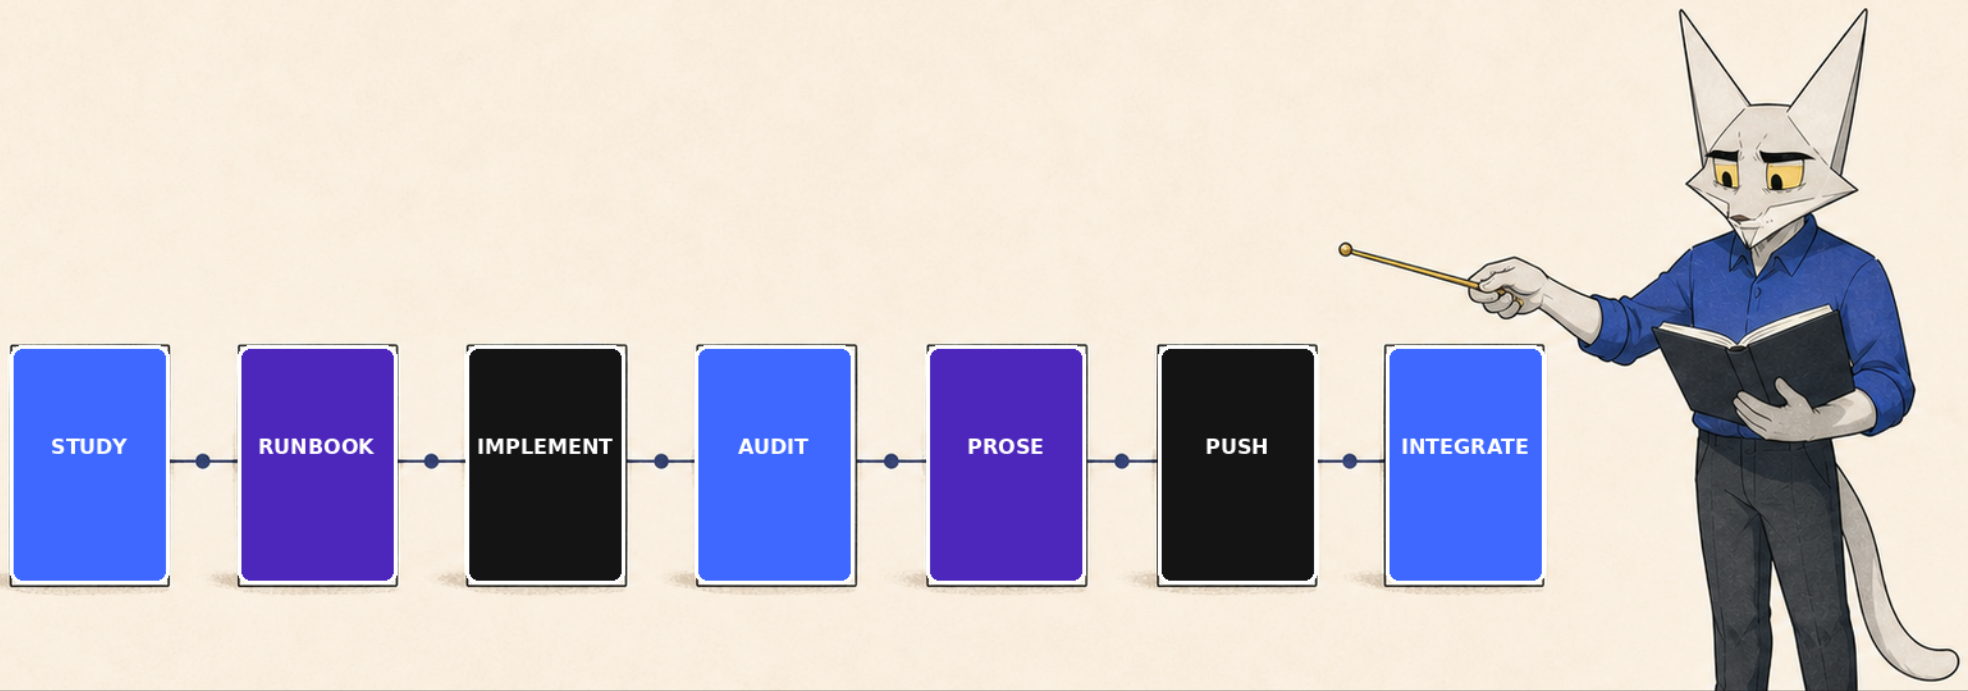

SHOGGOTH

Shoggoth is the Wildcat agent-and-skill collective.

THE INTERCEPTOR

The Interceptor is that same collective working through its external problem-solving harness under the target repository's authority.

HEXAEMERON

Hexaameron is the delivery plugin and ordered system.

FIAT

Fiat is Hex's explicit controller and receipt ledger.


THE FIRST SAFE ACTION

Fiat is explicit-only. Mentioning Hex or calling someone Shog does not start it.

First safe action: Open the target repository in a local coding harness, read its AGENTS.md, install Hexaameron from INSTALL.md, then explicitly say: Run Fiat for: <one small, named outcome>.

INSTALL HEXAEMERON

FIAT LIFECYCLE

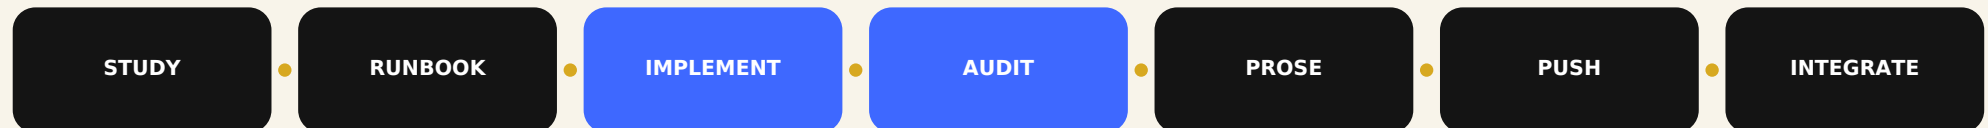

Stop when: The target repository denies the action, the controller says blocked or audit-verdict, a gate fails, or no explicitly authorised publisher has a repository-valid signing key and account. Keep the state and evidence; repair or ask before continuing.

THE FIVE-MINUTE DEMO

1. Is the Interceptor a new member, or the same collective in an external harness?

2. Which name is the delivery plugin, and which is its explicit controller?

3. Can you put study, runbook, implement, audit, prose, push, and integrate in order?

4. Can you point to the first safe action and name the reasons to stop?

If an answer is fuzzy, look at the two infographics and try once more. An explanation that still needs private context is the failure case.

[READ THE SOURCE PRIMER](#)

[SEE THE INTERCEPTOR](#)