



How to help build the Shoggoth

Start with one real gap: try it, preserve it, explain it,
or build the next checked piece.

**YOU DO NOT NEED TO
LEARN THE WHOLE COLLECTIVE
BEFORE YOU CAN HELP**

1

TRY

one real operation

2

PROVE

one useful change

3

SHARE

one reviewable result

Make one real gap smaller.

A reproducible failure or clear example can be more valuable than a broad new feature.

START WHERE YOU HAVE EVIDENCE

You can test one shipped operation, add a missing specimen or adapter, improve a confusing front door, implement one recorded frontier, or review a promise and its recovery path.

TRY

Run one documented operation on real work. Preserve the exact command, first failure, and boundary it exposed.

ADD

Contribute one source adapter, historical specimen, host boundary, corpus rule, or checked example.

BUILD

Take one accepted evolution frontier through implementation, a red-to-green guard, prose, and checks.

SELF-DIRECTED ROUTE

Choose one gap. Read its README, runtime contract, canonical skill, and current evolution frontier. Run the scoped checks.

ATLAS + FIAT ROUTE

Want the project to choose an unblocked issue and control the whole delivery? Use one Atlas route on the next page.

Pick the path it actually supports.

The Atlas chooses one unblocked issue. A bootstrap, a local package, and a file-reading fallback are different things.

CHECKED ONE-CLICK BOOTSTRAPS

OPENAI

ChatGPT web bootstrap

Atlas job + prefilled prompt

ANTHROPIC

Claude web bootstrap

Atlas job + prefilled prompt

If a web chat cannot work in the repository and publish as you, stop before init and move the prompt to a local coding harness.

NATIVE LOCAL PACKAGE ROUTES

Codex

Wildcat marketplace package.
Open the repo, install, paste the Atlas prompt.

Claude Code

Wildcat plugin marketplace package.
Open the repo, install, paste the Atlas prompt.


MANUAL ONLY - PROBED DARWIN-ARM64, 2026-09-01

GitHub Copilot / Cursor / Gemini CLI / Windsurf / Cline

Read AGENTS.md, then paste job.prompt. No checked Atlas launcher here. Unsupported: Roo Code.

Visible steps. One reviewable contribution.

Fiat supplies the order, checks, and record around one bounded issue.

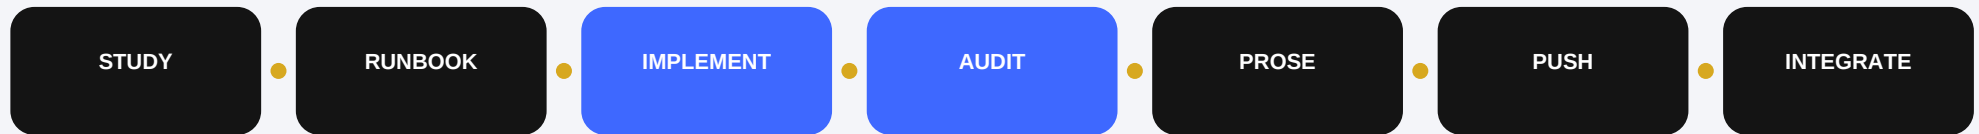

FIAT OWNS

- A study and runbook before implementation.
- One step at a time, with the required checks.
- Audit and prose review before publication.

THE CONTRIBUTOR OWNS

- Their own Git author, signer and GitHub account.
- Keeping the same local workspace available.
- Following a failed gate instead of skipping it.

DONE MEANS

IMPLEMENTATION COMPLETE / REQUIRED CHECKS COMPLETE / CHANGES COMMITTED AND PUSHED AS DIRECTED / NORMAL GITHUB PR READY

Completion makes the work inspectable. It does not promise acceptance or merge. Human authorship stays with the contributor.

Stop clearly. Keep the evidence.

Resume only when the recovery is real; a failure is not permission to widen the job or invent a clean result.

NO JOB

Do not invent a number or choose a Wave.
Stop and retry the Atlas later.

ALREADY CLAIMED

If an owner, issue branch or PR is active,
ask the Atlas for another job before Fiat
starts.

FAILED CHECK

Keep the state and output. Follow the named
recovery and rerun the same check.

WHY THIS SHAPE

Random allocation spreads contributors across the dependency-clear pool. The issue number bounds the work. Fiat leaves study, implementation and review evidence a maintainer can inspect. The accepted-boundary rule stops unfinished controller state being mistaken for a portable hand-off. Restore carries the same verified ledger.

SECONDARY MANUAL ROUTE

1

GET /api/job

2

Read number, URL, prompt

3

Open repo; read AGENTS.md

4

Paste the exact prompt

5

Finish the same local run