

## A CHILD OR A GOLDEN RETRIEVER

# The five-minute primer for the Shoggoth, the Interceptor, Hex, and Fiat.

Four names. One bounded delivery system. The target repository still decides.

### SHOGGOTH

Shoggoth is the Wildcat agent-and-skill collective.

### THE INTERCEPTOR

The Interceptor is that same collective working through its external problem-solving harness under the target repository's authority.

### HEXAEMERON

Hexaemeron is the delivery plugin and ordered system.

### FIAT

Fiat is Hex's explicit controller and receipt ledger.




[OPEN THE FIVE-MINUTE DEMO](#)

STUDY -> RUNBOOK -> IMPLEMENT -> AUDIT -> PROSE -> PUSH -> INTEGRATE

# WHO IS WHO?

Four names. One bounded system. The target repository still decides.

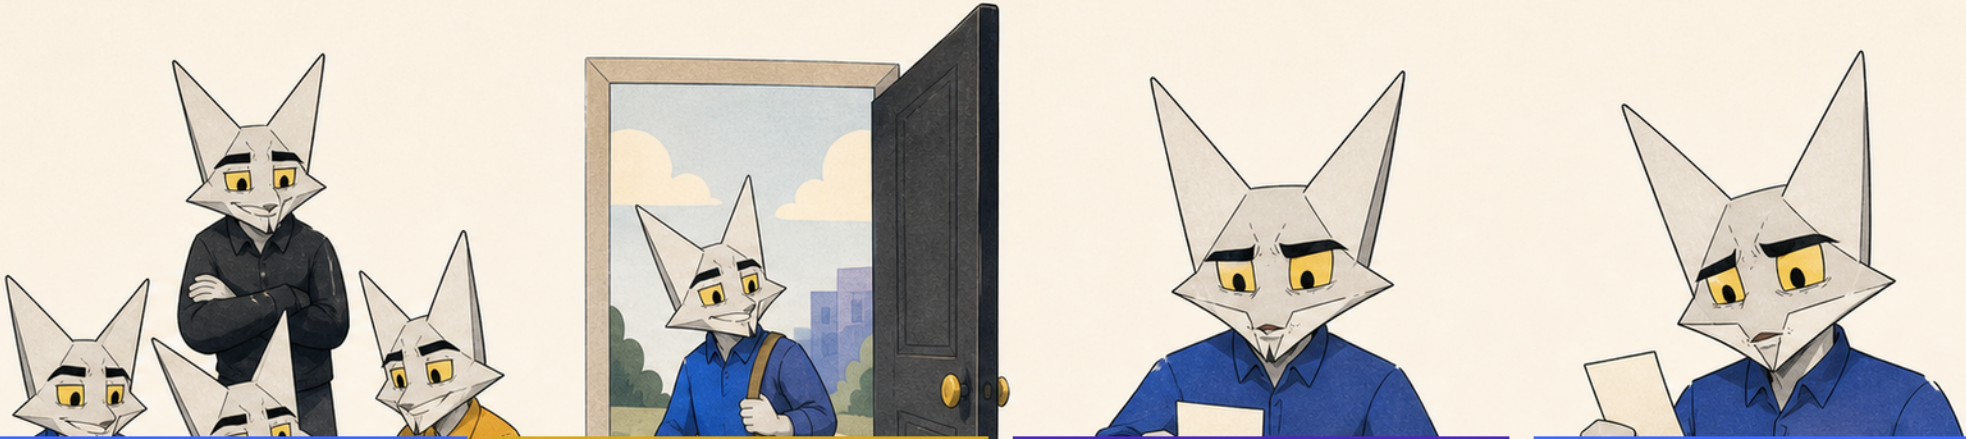

### SHOGGOTH

Shoggoth is the Wildcat agent-and-skill collective.

### THE INTERCEPTOR

The Interceptor is that same collective working through its external problem-solving harness under the target repository's authority.

### HEXAEMERON

Hexaemeron is the delivery plugin and ordered system.


### FIAT

Fiat is Hex's explicit controller and receipt ledger.

**STUDY -> RUNBOOK -> IMPLEMENT -> AUDIT -> PROSE -> PUSH -> INTEGRATE**

# FIAT KEEPS THE RUN IN ORDER

One next action. One receipt. Then the next action.

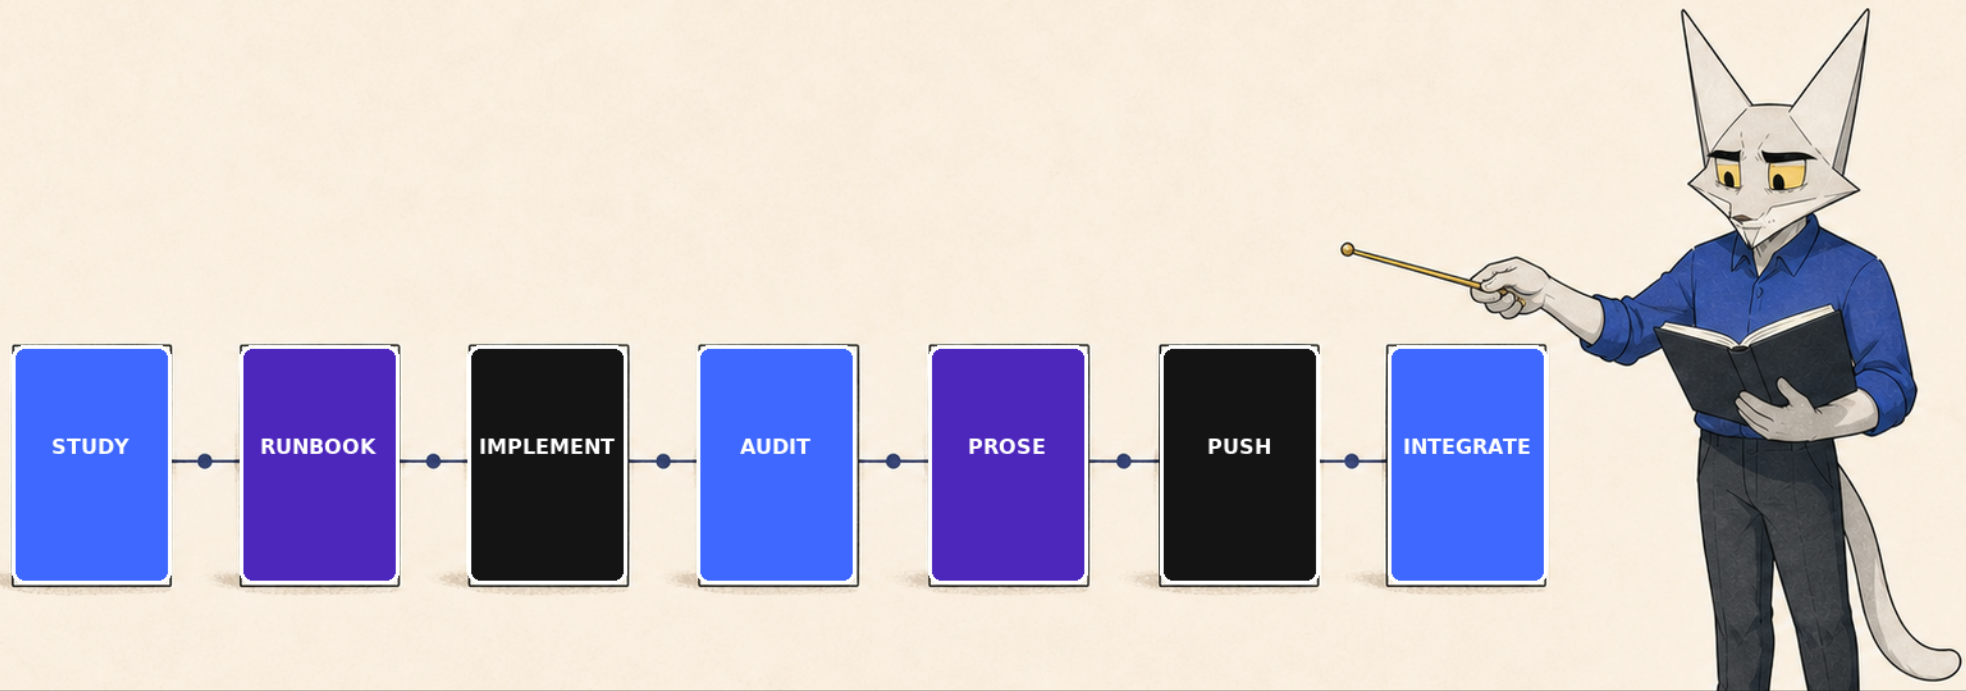

### SHOGGOTH

Shoggoth is the Wildcat agent-and-skill collective.

### THE INTERCEPTOR

The Interceptor is that same collective working through its external problem-solving harness under the target repository's authority.

### HEXAEMERON

Hexaameron is the delivery plugin and ordered system.

### FIAT

Fiat is Hex's explicit controller and receipt ledger.


# THE FIRST SAFE ACTION

Fiat is explicit-only. Mentioning Hex or calling someone Shog does not start it.

**First safe action: Open the target repository in a local coding harness, read its AGENTS.md, install Hexaameron from INSTALL.md, then explicitly say: Run Fiat for: <one small, named outcome>.**

INSTALL HEXAEMERON

## FIAT LIFECYCLE

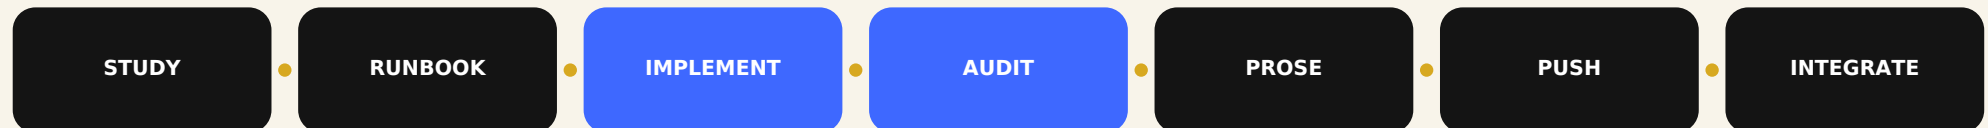

**Stop when: The target repository denies the action, the controller says blocked or audit-verdict, a gate fails, or no explicitly authorised publisher has a repository-valid signing key and account. Keep the state and evidence; repair or ask before continuing.**

# THE FIVE-MINUTE DEMO

**1. Is the Interceptor a new member, or the same collective in an external harness?**

**2. Which name is the delivery plugin, and which is its explicit controller?**

**3. Can you put study, runbook, implement, audit, prose, push, and integrate in order?**

**4. Can you point to the first safe action and name the reasons to stop?**

If an answer is fuzzy, look at the two infographics and try once more. An explanation that still needs private context is the failure case.

[READ THE SOURCE PRIMER](#)

[SEE THE INTERCEPTOR](#)