

LG Collared Report Workflow — User Guide

This guide walks you through configuring and running the LG Collared Report Workflow, which generates a movement analysis report for GPS-collared lions in the Amboseli ecosystem sourced from EarthRanger.

Overview

The workflow produces, for each collared subject (or group):

- A **Home Range map** (Elliptical Time Density contours at 50–99th percentiles)
 - A **Subject Tracks map** (movement corridors for the analysis period)
 - **Speed and distance summary statistics** per subject
 - A **Word document report** (`.docx`) with a cover page and one section per subject
 - An **interactive widget dashboard**
-

Prerequisites

Before running the workflow, ensure you have:

- Access to an **EarthRanger** instance with a configured data source
- The **Subject Group Name** of the collared lions exactly as it appears in EarthRanger

The two spatial boundary files (group ranch boundaries and conflict hotspot areas) are downloaded automatically from Dropbox — no local copies are required.


Step-by-Step Configuration

Step 1 — Add an EarthRanger Connection

Navigate to **Data Sources** and add a new EarthRanger connection. Fill in:

- **Data Source Name** — a label to identify this connection
- **EarthRanger URL** — your instance URL (e.g. `your-site.pamdas.org`)
- **EarthRanger Username** and **EarthRanger Password**

Credentials are not validated at setup time. Any authentication errors will appear when the workflow runs.

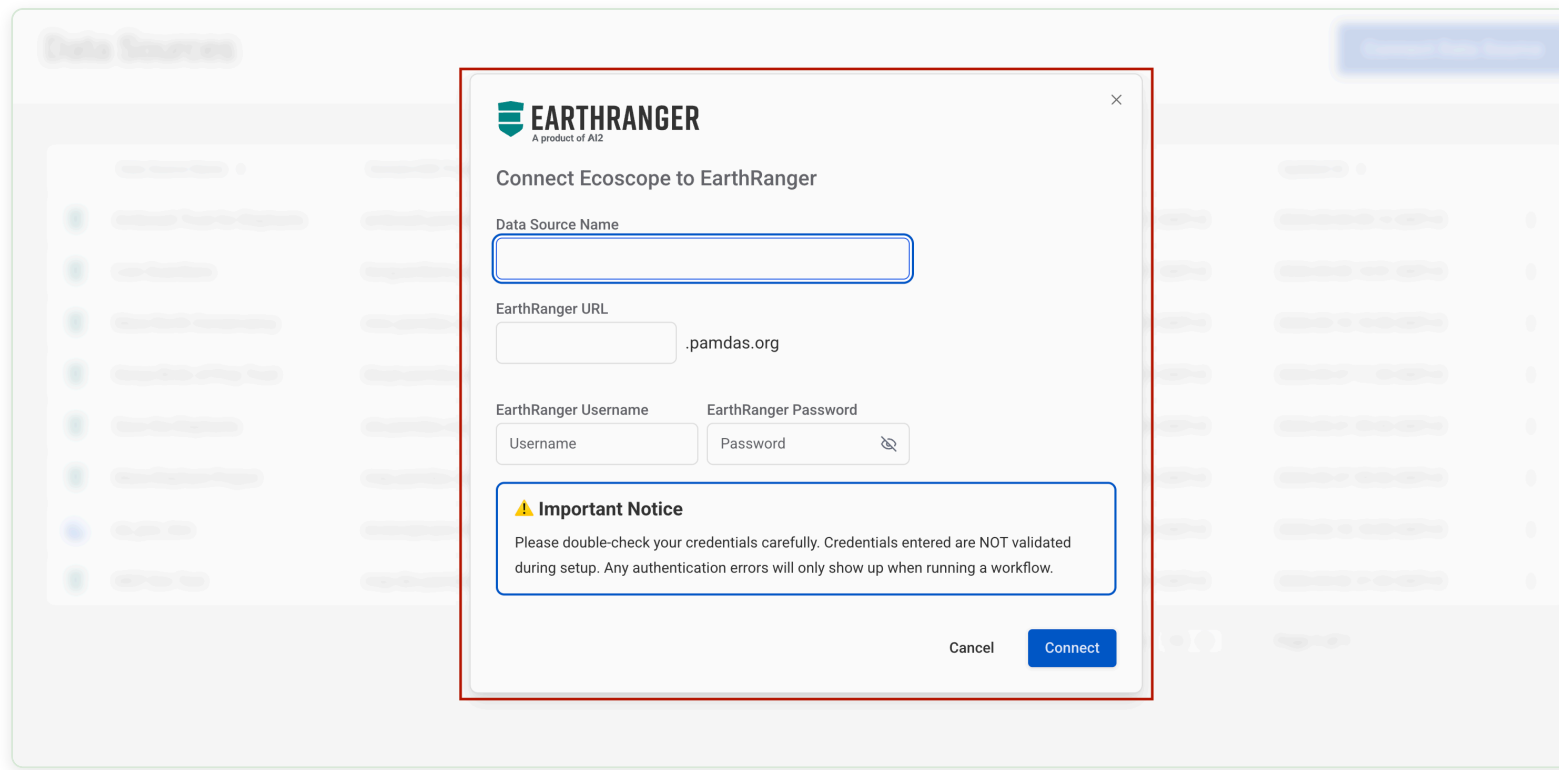


EarthRanger Connection

Step 2 — Add the Workflow Template

In the workflow runner, go to **Workflow Templates** and click **Add Workflow Template**. Paste the GitHub repository URL into the **Github Link** field:

```
https://github.com/wildlife-dynamics/lg-collared-report.git
```

Then click **Add Template**.

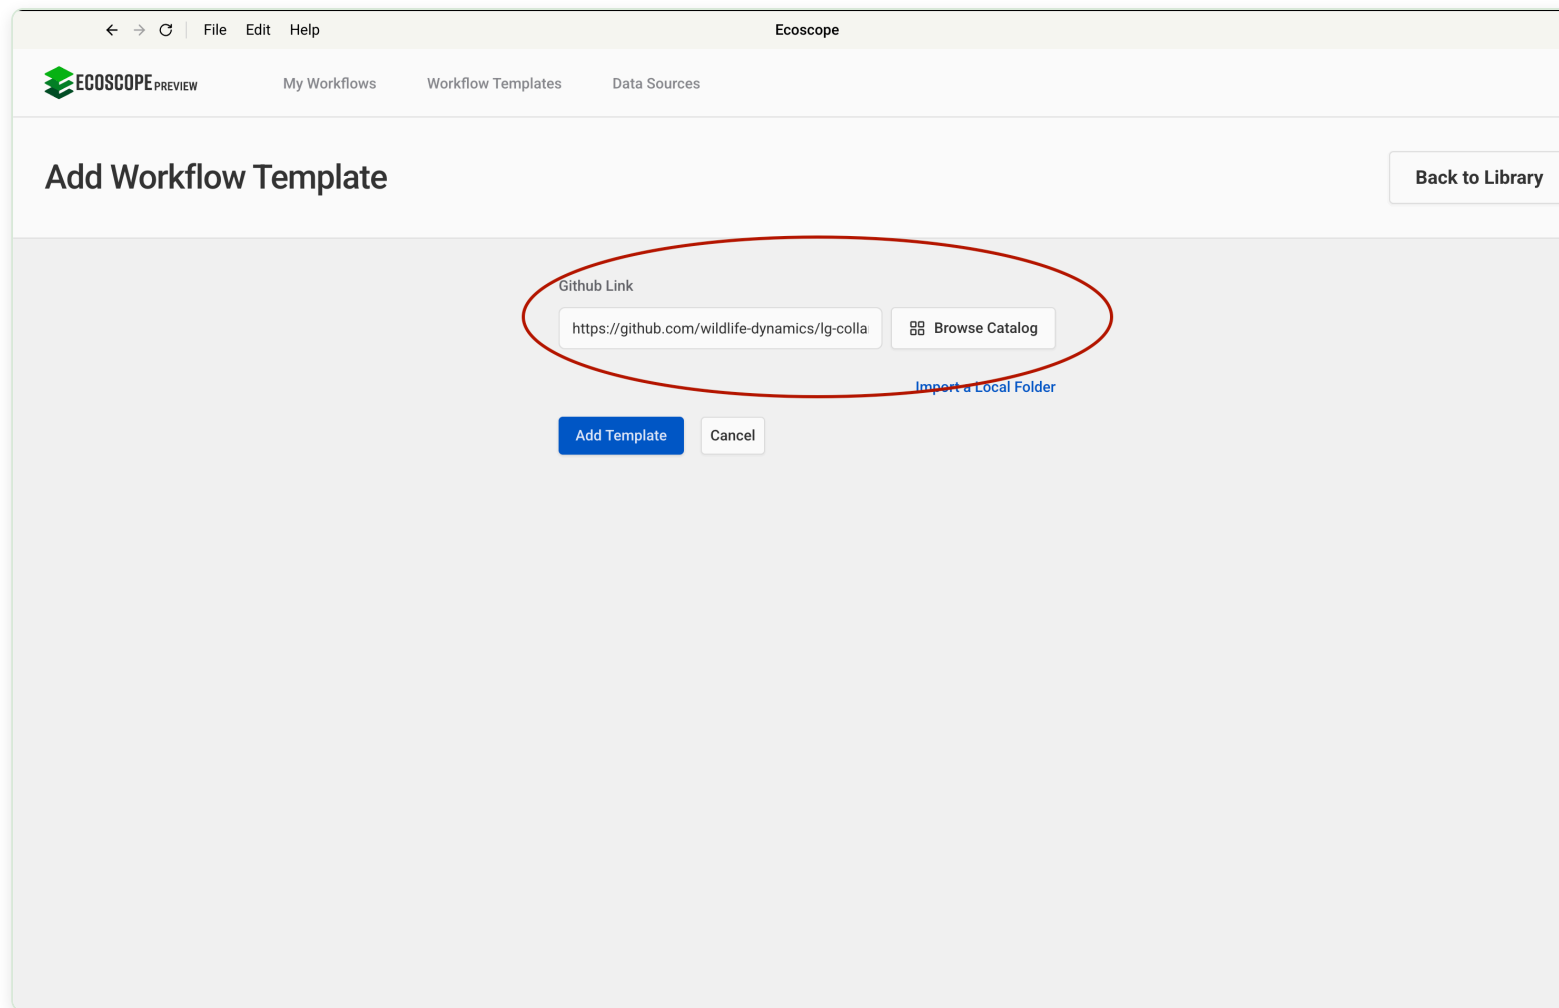


Add Workflow Template

Step 3 — Select the Workflow

After the template is added, it appears in the **Workflow Templates** list as **lg-collared-report**. Click it to open the workflow configuration form.

The card may show **Initializing...** briefly while the environment is set up.

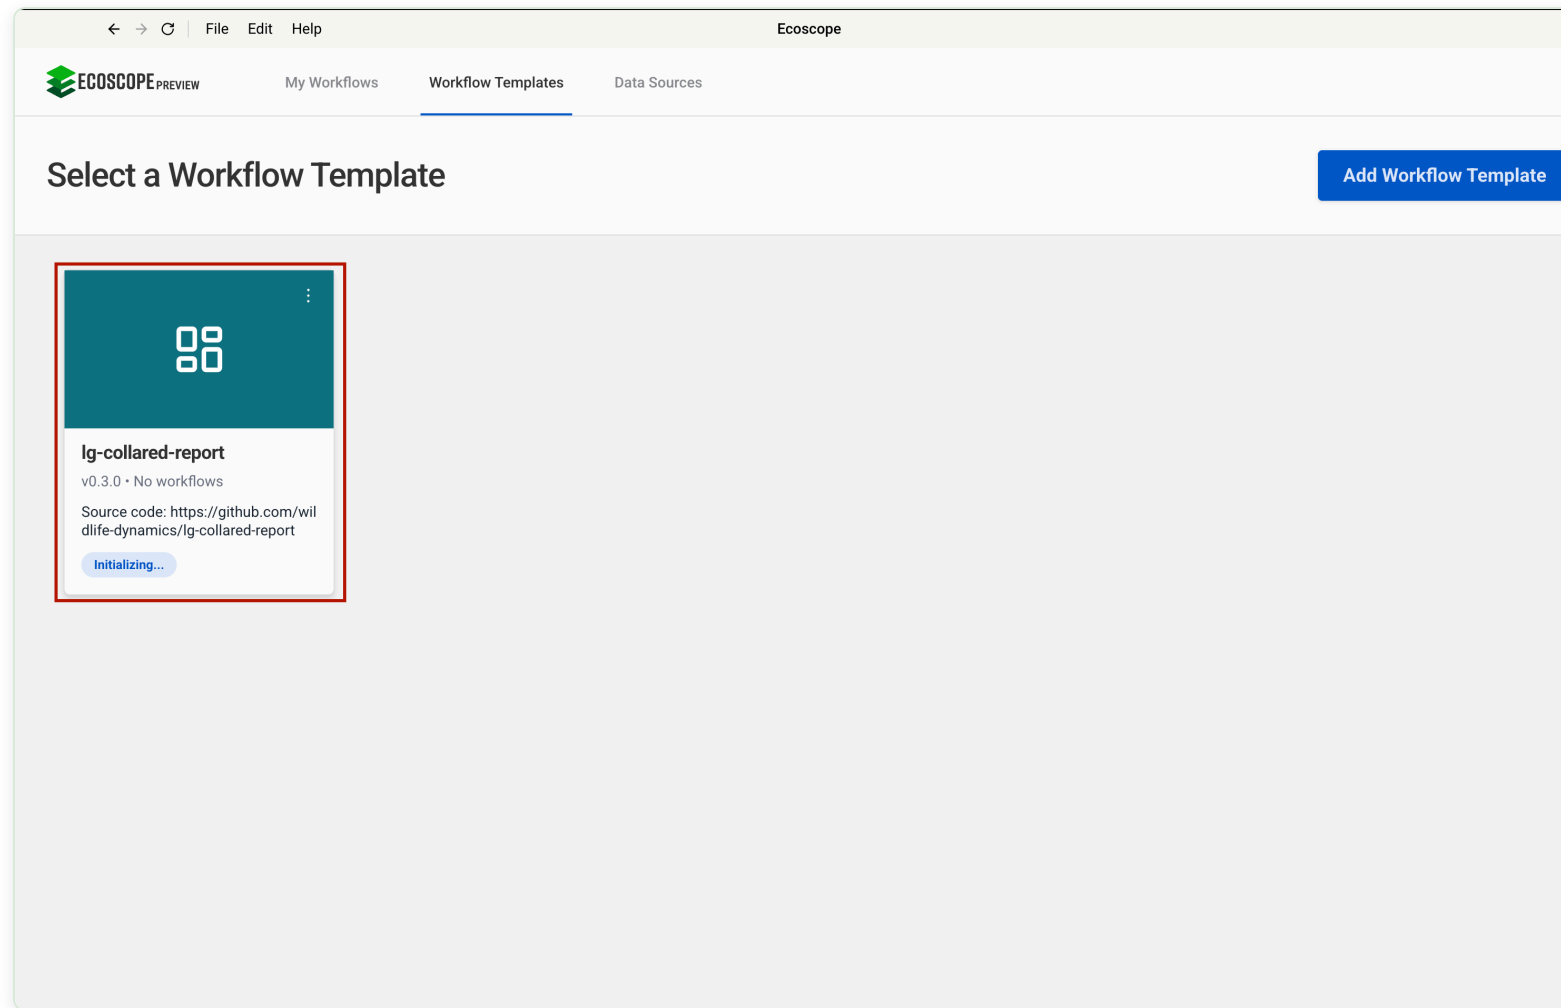

Select Workflow Template

Step 4 — Configure Workflow Details and Time Range

The configuration form opens with two sections at the top.

Set Workflow Details

Field	Description
Workflow Name	A short name to identify this run
Workflow Description	Optional notes about the run (e.g. date range or subject group)

Define time range

Field	Description
Timezone	Select the local timezone (e.g. <code>Africa/Nairobi UTC+03:00</code>)
Since	Start date and time of the analysis period
Until	End date and time of the analysis period

All movement data, trajectories, and home ranges are computed within this window.

Configure Workflow Details and Time Range

Step 5 — Set Groupers, Connect to EarthRanger, and Subject Group

Scroll down to configure three sections.

Set Groupers *(optional)*

Groupers control how the workflow partitions subjects for per-group outputs. If left blank, all data appears in a single view. Click **Add** to add a grouper. Available options:

Grouper	Effect
Subject Name	One map, metrics, and report section per individual lion
Subject Sex	Aggregate outputs by sex (M / F)
Subject Subtype	Aggregate outputs by subtype

Connect to EarthRanger

Select the EarthRanger data source configured in Step 1 from the **Connect to EarthRanger** dropdown.

Get Subject Group observations from EarthRanger

Enter the **Subject Group Name** exactly as it appears in EarthRanger (case-sensitive). This is the group of collared lions to include in the report.

Using a subject group that contains mixed subtypes may produce unexpected results.

The screenshot shows the Ecoscope application interface. On the left is a sidebar with a list of workflow steps: "Set Workflow Details", "Define time range", "Set Groupers", "Data Source", "Get Subject Group observations from EarthRanger", "Transform relocations to trajectories", and "Time density map". The main area contains the configuration for these steps. The "Set Groupers" step is highlighted with a red box and contains a description and an "Add" button. The "Data Source" step is also highlighted with a red box and shows a dropdown menu with "Amboseli Trust for Elephants" selected. The "Get Subject Group observations from EarthRanger" step is highlighted with a red box and contains a text input field for "Subject Group Name*" and a warning message. The "Transform relocations to trajectories" step is expanded to show "Advanced Configurations", which includes a description of the filter. At the bottom right are "Cancel" and "Submit" buttons.

Set Groupers

Specify how the data should be grouped to create the views for your dashboard. This field is optional; if left blank, all the data will appear in a single view.

Data Source

Select one of your configured data sources.

Data Source*

Amboseli Trust for Elephants

Get Subject Group observations from EarthRanger

Subject Group Name*

⚠ The use of a group with mixed subtypes could lead to unexpected results

Transform relocations to trajectories

Advanced Configurations

Filter track data by setting limits on track segment length, duration, and speed. Segments outside these bounds are removed, reducing noise and to focus on meaningful movement patterns.

Cancel Submit

Set Groupers, Data Source, and Subject Group

Step 6 — Set the Trajectory Filter

Expand **Advanced Configurations** under **Transform relocations to trajectories** to set the segment filter. These parameters remove GPS noise and biologically unrealistic movements before trajectory analysis.

Field	Default	Description
Minimum Segment Length (m)	10	Discard segments shorter than this distance
Maximum Segment Length (m)	10000	Discard segments longer than this distance
Minimum Segment Duration (s)	10	Discard segments shorter than this duration
Maximum Segment Duration (s)	21600	Discard segments longer than this duration (6 hours)
Minimum Segment Speed (km/h)	1	Discard segments below this average speed
Maximum Segment Speed (km/h)	30	Discard segments above this average speed

Adjust these values to suit the movement characteristics of your collared lions.

← → ↻ File Edit Help Ecoscope

my resources my resources my resources my resources

Set Workflow Details

Define time range

Set Groupers

Data Source

Get Subject Group observations from EarthRanger

Transform relocations to trajectories

Time density map

Transform relocations to trajectories

^ Advanced Configurations

Filter track data by setting limits on track segment length, duration, and speed. Segments outside these bounds are removed, reducing noise and to focus on meaningful movement patterns.

Minimum Segment Length (Meters)

0.001

Maximum Segment Length (Meters)

100000

Minimum Segment Duration (Seconds)

1

Maximum Segment Duration (Seconds)

172800

Minimum Segment Speed (Kilometers per Hour)

0.01

Maximum Segment Speed (Kilometers per Hour)

500

Time density map

These settings show a grid-based heatmap showing where subjects spent the most time.

Cancel Submit

Set Trajectory Filter

Step 7 — Configure Time Density Map and Zoom to Envelope

Expand **Advanced Configurations** under **Time density map** to control the home range computation, and configure the map zoom settings below it.

Time density map

Field	Default	Description
Grid Cell Size	Auto-scale	Cell size of the density raster — Auto-scale derives it from data density
Max Speed Factor	1.05	Estimate of the subject's maximum speed as a factor of the maximum measured speed in the dataset
Shape Buffer Expansion Factor	1.3	Controls how far time density values spread across the grid, affecting the smoothness of the output

Zoom to envelope

Field	Default	Description
Expansion Factor	1.00	Factor to expand the bounding box around the data extent before zooming (e.g. 1.2 = 20% larger)

A value of 1.0 gives a tight fit to the data; increasing it adds padding around the map extent.

← → ↻ | File Edit Help Ecoscope

my resources my resources my resources my resources

Set Workflow Details

Define time range

Set Groupers

Data Source

Get Subject Group observations from EarthRanger

Transform relocations to trajectories

Time density map

Time density map

These settings show a grid-based heatmap showing where subjects spent the most time.

Advanced Configurations

Grid Cell Size*

Auto-scale

Auto-scale

Grid Cell Size

Auto-scale

Max Speed Factor (Kilometers per Hour)

1.05

An estimate of the subject's maximum speed as a factor of the maximum measured speed value in the dataset.

Shape Buffer Expansion Factor

1.05

Controls how far time density values spread across the grid, affecting the smoothness of the output.

zoom to envelope

Expansion Factor

1.05

Factor to expand the bounding box (e.g., 1.2 = 20% larger)

Cancel Submit

Time Density Map and Zoom to Envelope

Running the Workflow

Once all parameters are configured, click **Submit**. The runner will:

1. Pull movement data from EarthRanger for the specified subject group and time range.

2. Download the static boundary files (group ranches, conflict hotspots).
3. Convert observations to relocations and build trajectory segments.
4. Compute Elliptical Time Density home ranges per group.
5. Generate the Home Range and Subject Tracks maps (interactive HTML + PNG screenshots).
6. Calculate speed and distance summary statistics per subject.
7. Render the Word report (cover page + per-subject sections) and assemble the dashboard.
8. Save all outputs to the directory specified by `ECOSCOPE_WORKFLOWS_RESULTS` .

Output Files

All outputs are written to `$ECOSCOPE_WORKFLOWS_RESULTS/` :

File	Description
<code>relocations.geoparquet</code>	Cleaned GPS fix locations
<code>trajectories.geoparquet</code>	Trajectory segments with speed and distance
<code><group>_homerange.html</code>	Interactive ETD home range map per group
<code><group>_tracks.html</code>	Interactive subject tracks map per group
<code><group>_homerange.png</code>	Screenshot of the home range map (2× resolution)
<code><group>_tracks.png</code>	Screenshot of the tracks map (2× resolution)
<code><group>_summary.csv</code>	Speed and distance summary table with totals row
<code>lg_cover_page.docx</code>	Rendered report cover page
<code><group>.docx</code>	Per-grouper report section

File	Description
Merged report .docx	Final combined Word report