


```
serialize::SerializeMap  
< K, V, typename std::  
enable_if< is_vector< V  
>::value >::type >::serialize
```

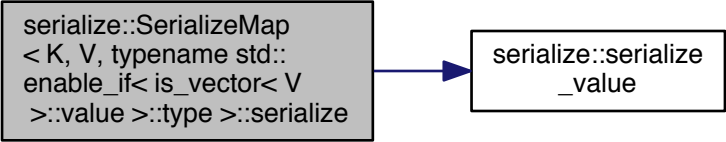

A diagram illustrating a function call. On the left, a gray rectangular box contains the C++ code for the `serialize::SerializeMap` template. A blue arrow points from the right side of this box to a white rectangular box on the right. The white box contains the code for the `serialize::serialize_value` function, indicating that the `serialize` member function of `SerializeMap` calls `serialize_value`.

```
serialize::serialize  
_value
```