

Chapter 17 Database File Indexing Techniques

Chapter 17 Outline

- Type of Single-Level Ordered Indexes
- Multilevel Indexes
- Dynamic Multilevel Indexes Using B-Trees and B⁺-Trees
- Indexes on Multiple Keys
- Other Types of Indexes
- Some general Issues Concerning Indexing

Indexes as Access Paths

- A single-level index is an auxiliary file that makes it more efficient to search for a record in the data file
- The index is usually specified on one field of the file (although it could be specified on several fields)
- One form of an index is a file of entries **<field value, pointer to record>**, which is ordered by field value
- The index is called an access path on the field
- The index file usually occupies considerably less disk blocks than the data file because its entries are much smaller
- A binary search on the index yields a pointer to the file record

Indexes as Access Paths (cont'd.)

- Indexes can also be characterized as dense or sparse
 - A **dense index** has an index entry for every search key value (and hence every record) in the data file.
 - A **sparse (or nondense) index**, on the other hand, has index entries for only some of the search values

Indexes as Access Paths (cont'd.)

- Example: Given the following data file
EMPLOYEE(NAME, SSN, ADDRESS, JOB, SAL, ...)
- Suppose that:
 - record size $R=150$ bytes block size $B=512$ bytes
 $r=30000$ records
- Then, we get:
 - blocking factor $Bfr = B \text{ div } R = 512 \text{ div } 150 = 3$
 records/block
 - number of file blocks $b = (r/Bfr) = (30000/3) = 10000$
 blocks

Indexes as Access Paths (cont'd.)

- For an index on the SSN field, assume the field size $V_{SSN}=9$ bytes, assume the record pointer size $P_R=7$ bytes. Then:
 - index entry size $RI=(V_{SSN}+ P_R)=(9+7)=16$ bytes
 - index blocking factor $BfrI= B \text{ div } RI= 512 \text{ div } 16= 32$ entries/block
 - number of index blocks $b= (r/ BfrI)= (30000/32)= 938$ blocks
 - binary search needs $\log_2 bI= \log_2 938= 10$ block accesses

Indexes as Access Paths (cont'd.)

- For an index on the SSN field, assume the field size $V_{SSN}=9$ bytes, assume the record pointer size $P_R=7$ bytes. Then (cont'd.):
 - This is compared to an average linear search cost of:
 - $(b/2) = 30000/2 = 15000$ block accesses
 - If the file records are ordered, the binary search cost would be:
 - $\log_2 b = \log_2 30000 = 15$ block accesses

Types of Single-Level Indexes

- Primary Index
- Clustering Indexes
- Secondary Indexes

Primary Index


- Primary Index
- Defined on an ordered data file
- The data file is ordered on a **key field**
- Includes one index entry *for each block* in the data file; the index entry has the key field value for the *first record* in the block, which is called the *block anchor*

Primary Index (cont'd)

- A similar scheme can use the *last record* in a block
- A primary index is a nondense (sparse) index, since it includes an entry for each disk block of the data file and the keys of its anchor record rather than for every search value

Primary Index on the Ordering Key Field

Figure 17.1
Primary index on the ordering key field of the file shown in Figure 16.7.

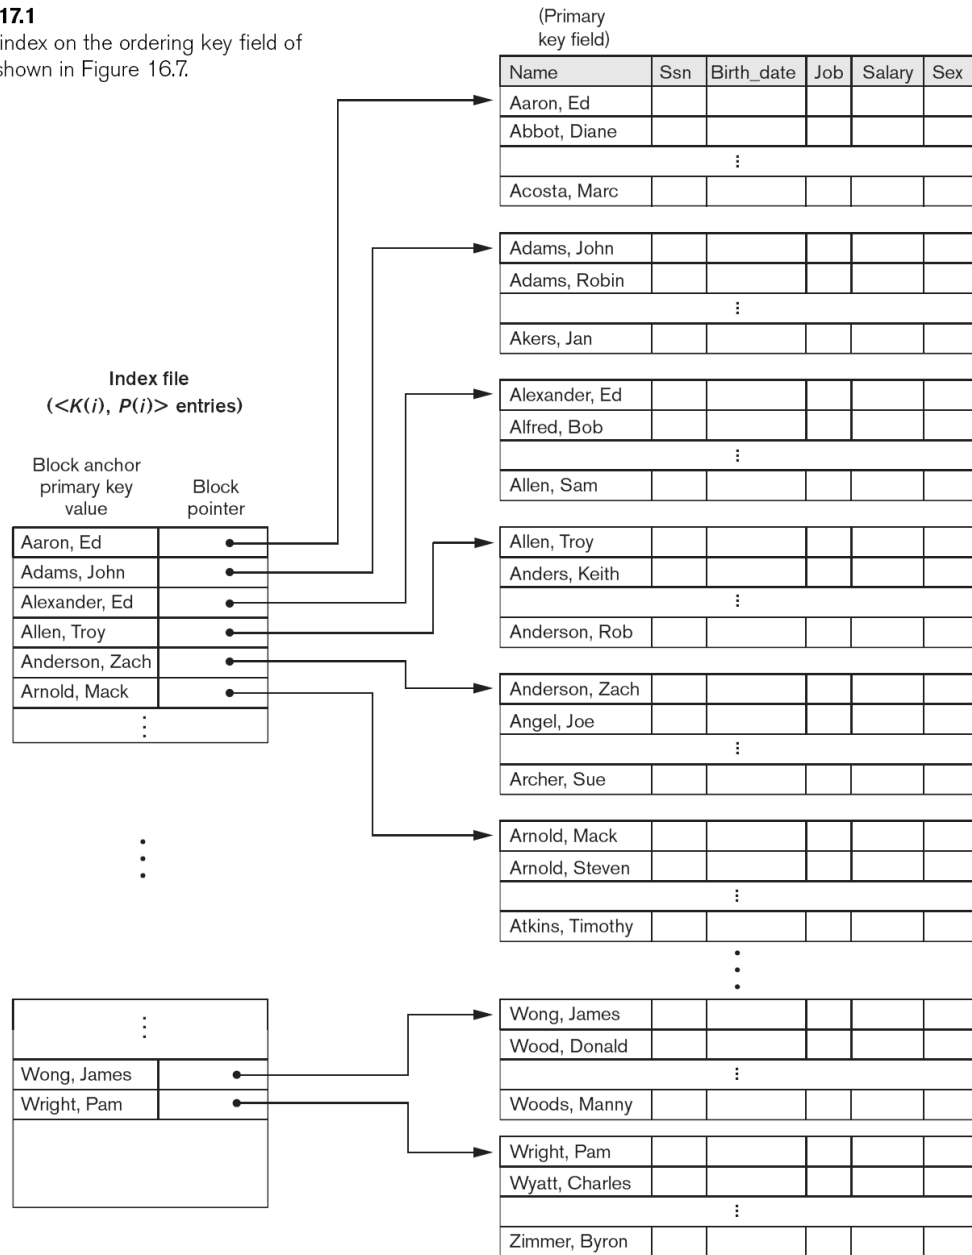

Clustering Index

- Defined on an ordered data file
- The data file is ordered on a *non-key field* unlike primary index, which requires that the ordering field of the data file have a distinct value for each record
- Includes one index entry *for each distinct value* of the field; the index entry points to the first data block that contains records with that field value
- It is another example of *nondense* index where Insertion and Deletion is relatively straightforward with a clustering index

A Clustering Index Example


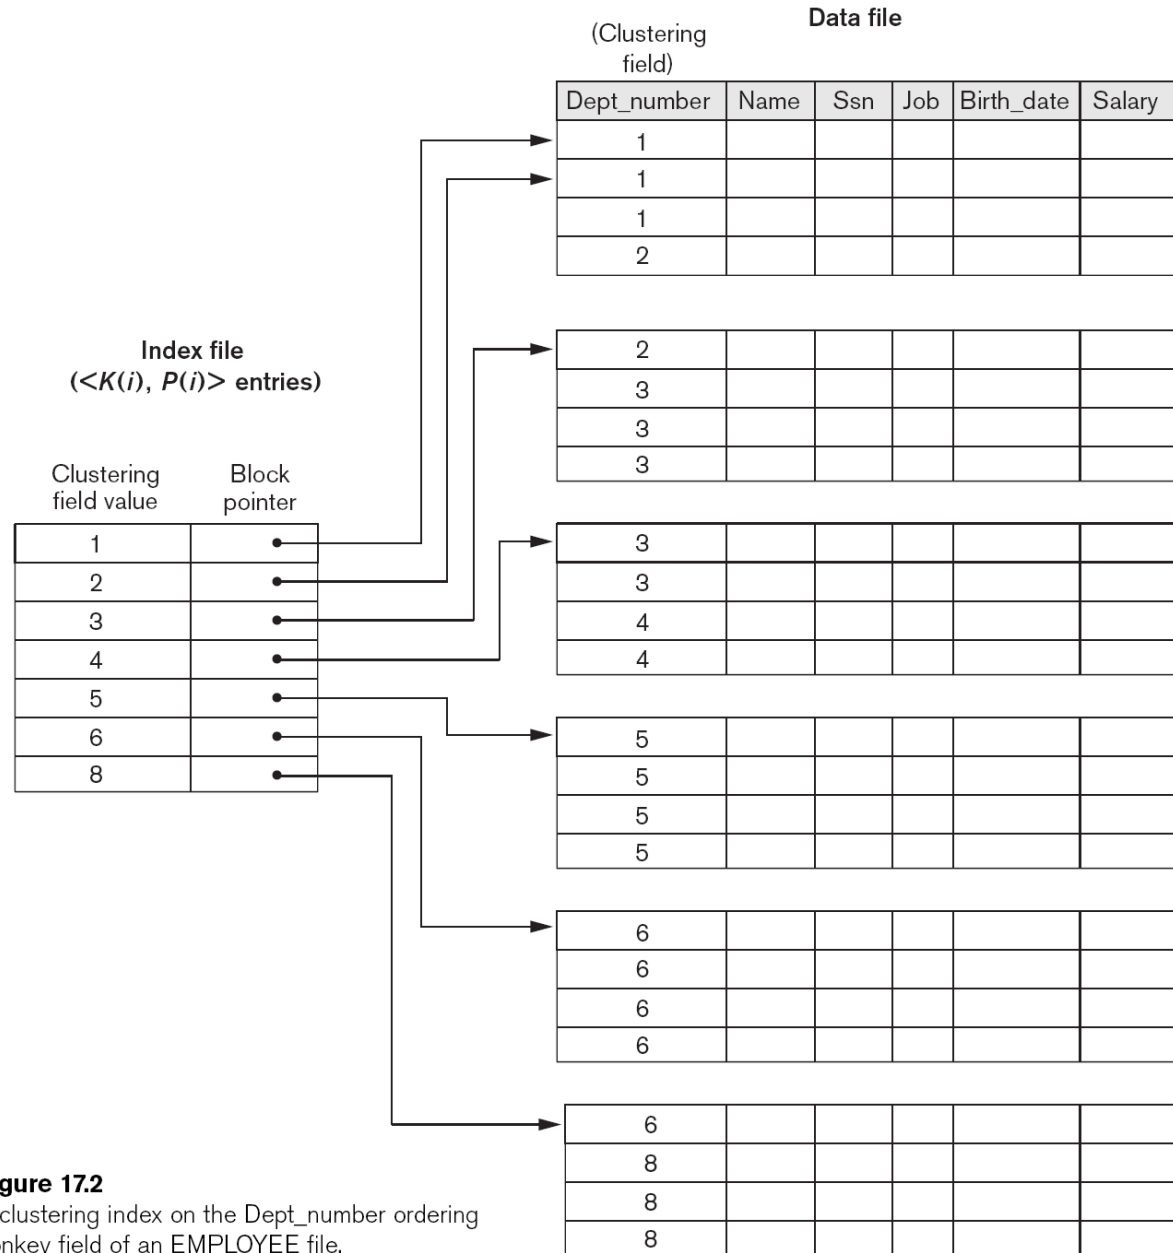


Figure 17.2

A clustering index on the Dept_number ordering nonkey field of an EMPLOYEE file.

Another Clustering Index Example

Figure 17.3
Clustering index with a separate block cluster for each group of records that share the same value for the clustering field.

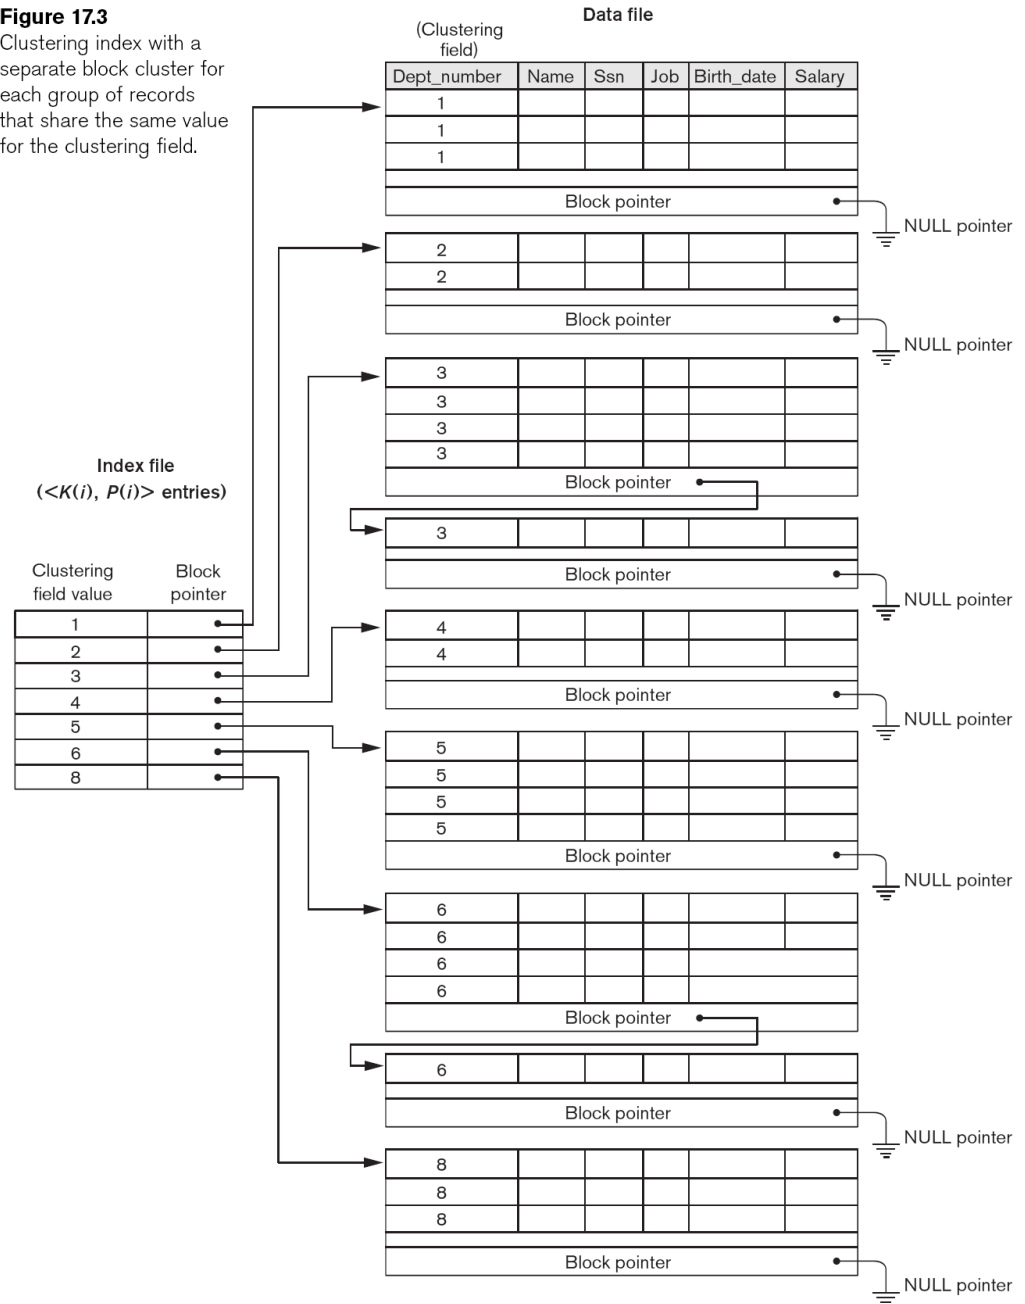

Secondary Index

- A secondary index provides a secondary means of accessing a file for which some primary access already exists
- The secondary index may be on a field which is a candidate key and has a unique value in every record, or a non-key with duplicate values


Secondary Index (cont'd.)

- The index is an ordered file with two fields
 - The first field is of the same data type as some **non-ordering field** of the data file that is an indexing field
 - The second field is either a **block** pointer or a record pointer
 - There can be *many* secondary indexes (and hence, indexing fields) for the same file
- Includes one entry *for each record* in the data file; hence, it is a *dense index*

Example of a Dense Secondary Index

Figure 17.4


A dense secondary index (with block pointers) on a nonordering key field of a file.

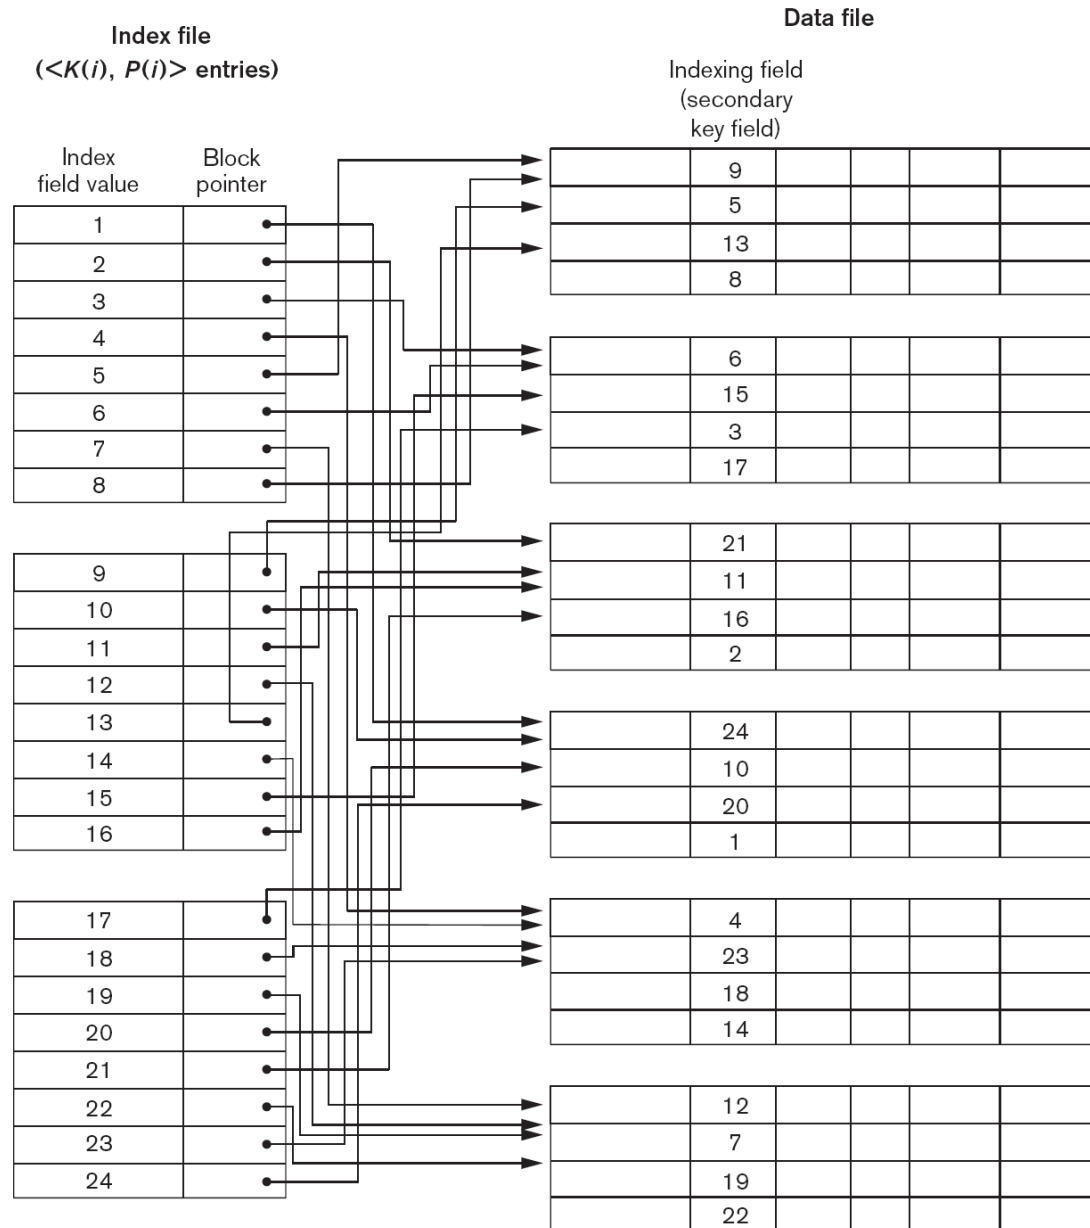

Example of Secondary Index

Figure 17.5

A secondary index (with record pointers) on a non-key field implemented using one level of indirection so that index entries are of fixed length and have unique field values.

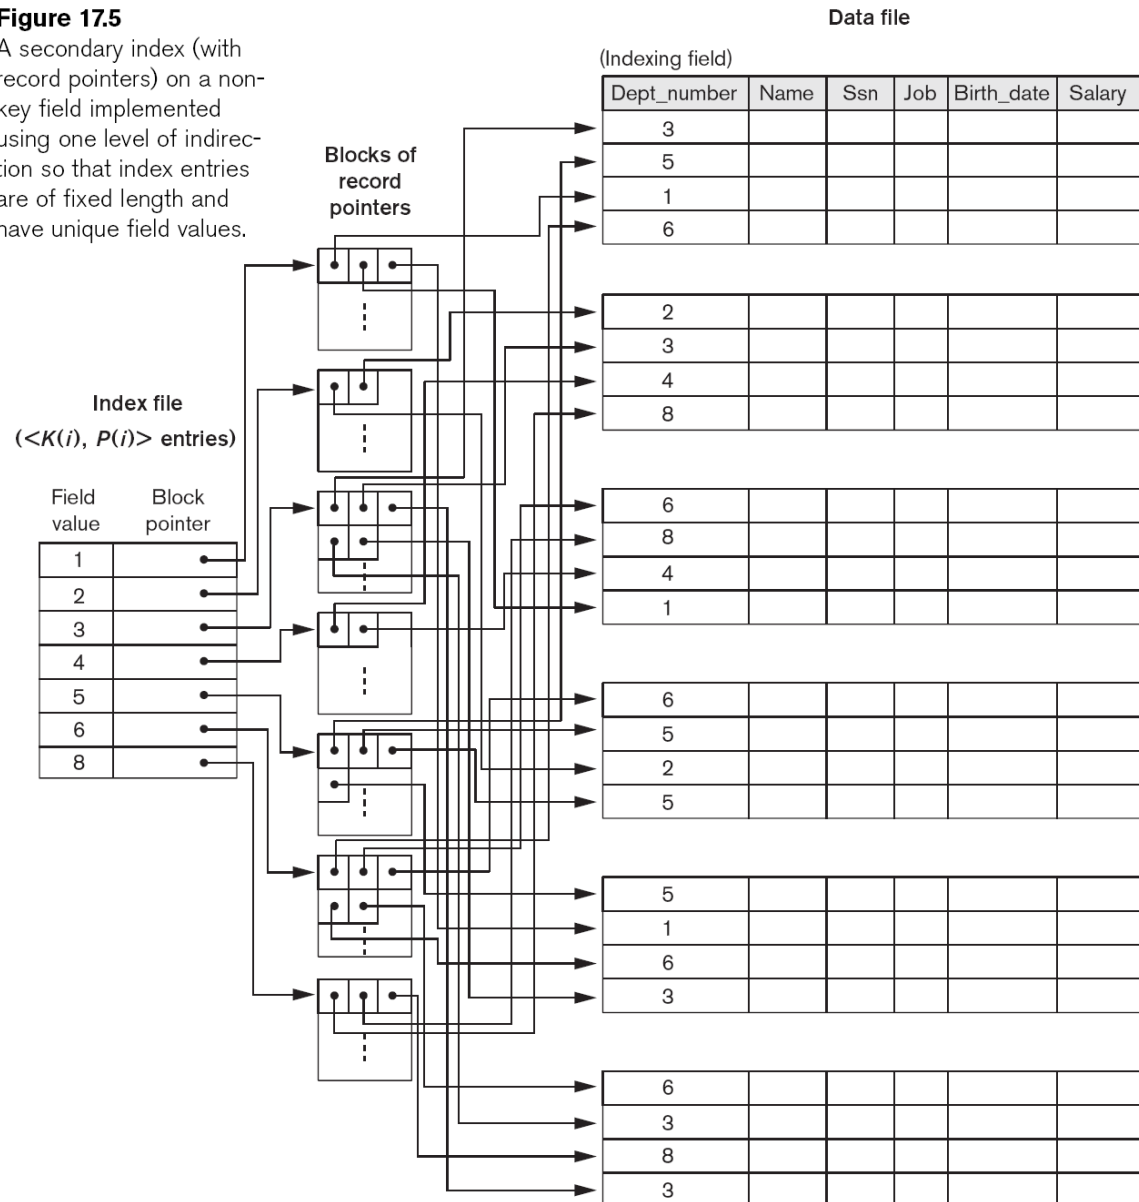

Properties of Index Types

Table 17.2 Properties of Index Types

| Type of Index | Number of (First-level) Index Entries | Dense or Nondense (Sparse) | Block Anchoring on the Data File |
|--------------------|--|----------------------------|----------------------------------|
| Primary | Number of blocks in data file | Nondense | Yes |
| Clustering | Number of distinct index field values | Nondense | Yes/no ^a |
| Secondary (key) | Number of records in data file | Dense | No |
| Secondary (nonkey) | Number of records ^b or number of distinct index field values ^c | Dense or Nondense | No |

^aYes if every distinct value of the ordering field starts a new block; no otherwise.

^bFor option 1.

^cFor options 2 and 3.

Multi-Level Indexes

- Because a single-level index is an ordered file, we can create a primary index *to the index itself*;
 - In this case, the original index file is called the *first-level index* and the index to the index is called the *second-level index*


Multi-Level Indexes (cont'd.)

- We can repeat the process, creating a third, fourth, ..., top level until all entries of the *top level* fit in one disk block
- A multi-level index can be created for any type of first-level index (primary, secondary, clustering) as long as the first-level index consists of *more than one* disk block

A Two-Level Primary Index

Figure 17.6

A two-level primary index resembling ISAM (Indexed Sequential Access Method) organization.

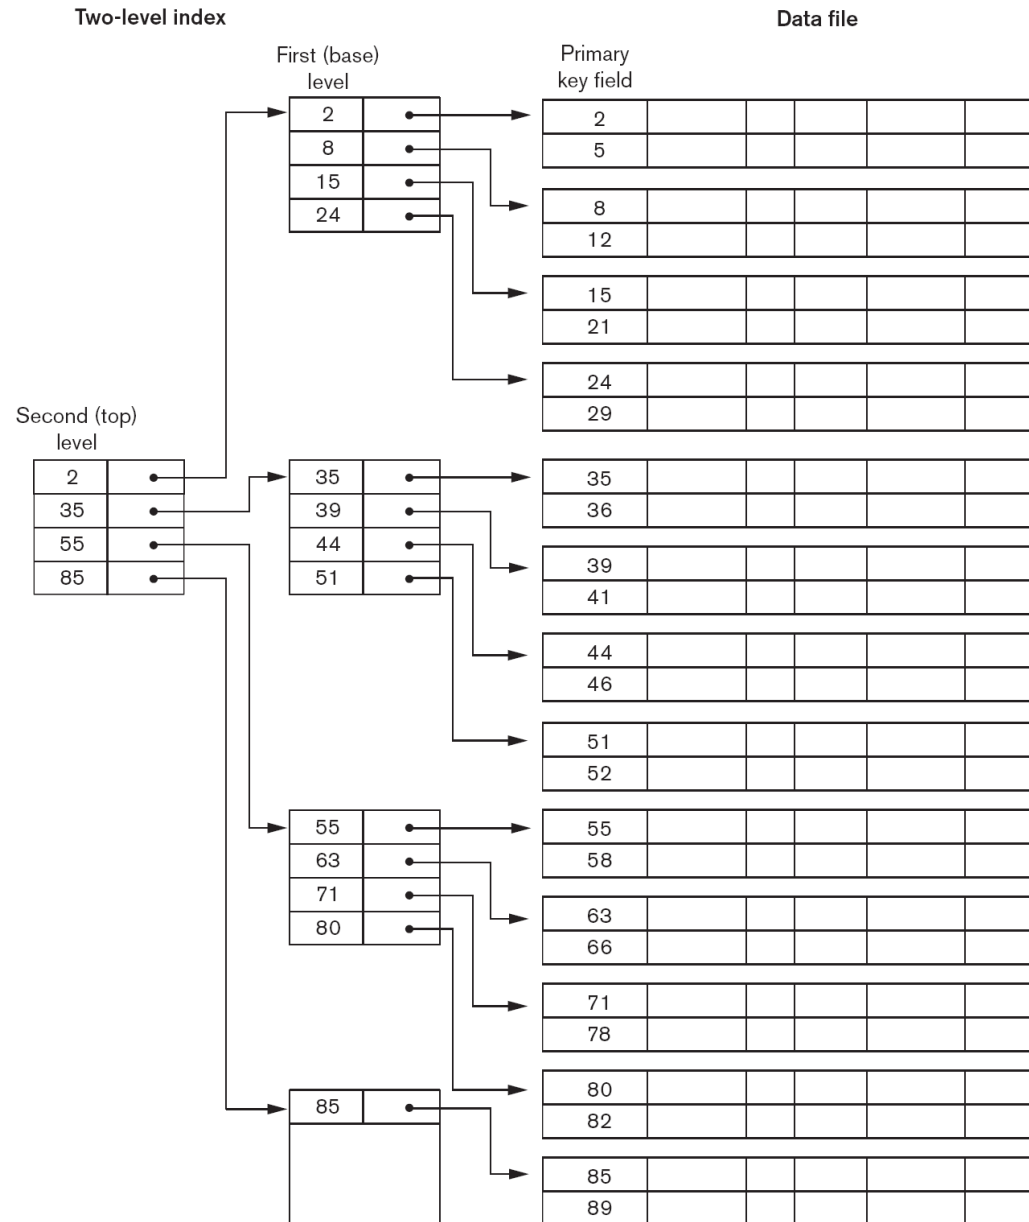

Multi-Level Indexes (cont'd.)

- Such a multi-level index is a form of *search tree*
 - However, insertion and deletion of new index entries is a severe problem because every level of the index is an *ordered file*

A Node in a Search Tree with Pointers to Subtrees Below It

Figure 17.8

A node in a search tree with pointers to subtrees below it.


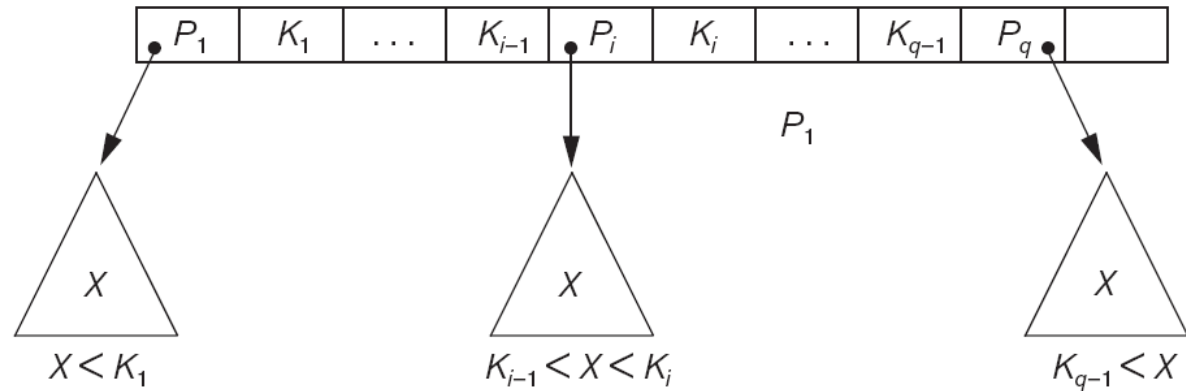


Figure 17.9

A search tree of
order $p = 3$.

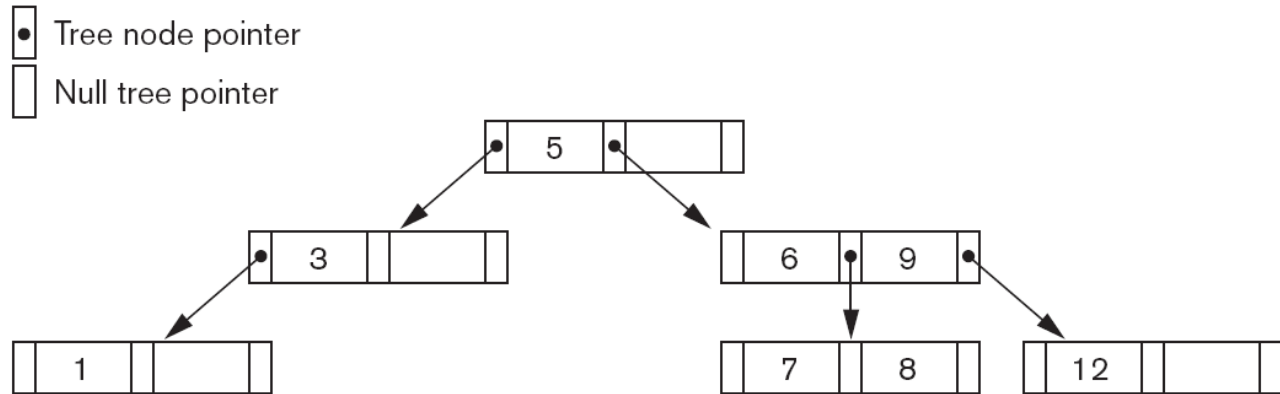

Dynamic Multilevel Indexes Using B-Trees and B⁺-Trees

- Most multi-level indexes use B-tree or B⁺-tree data structures because of the insertion and deletion problem
 - This leaves space in each tree node (disk block) to allow for new index entries
- These data structures are variations of search trees that allow efficient insertion and deletion of new search values

Dynamic Multilevel Indexes Using B-Trees and B⁺-Trees (cont'd.)

- In B-Tree and B⁺-Tree data structures, each node corresponds to a disk block
- Each node is kept between half-full and completely full
- An insertion into a node that is not full is quite efficient
 - If a node is full the insertion causes a split into two nodes

Dynamic Multilevel Indexes Using B-Trees and B⁺-Trees (cont'd.)

- Splitting may propagate to other tree levels
- A deletion is quite efficient if a node does not become less than half full
- If a deletion causes a node to become less than half full, it must be merged with neighboring nodes

Difference between B-tree and B⁺-tree

- In a B-tree, pointers to data records exist at all levels of the tree
- In a B⁺-tree, all pointers to data records exists at the leaf-level nodes
- A B⁺-tree can have less levels (or higher capacity of search values) than the corresponding B-tree

B-tree Structures

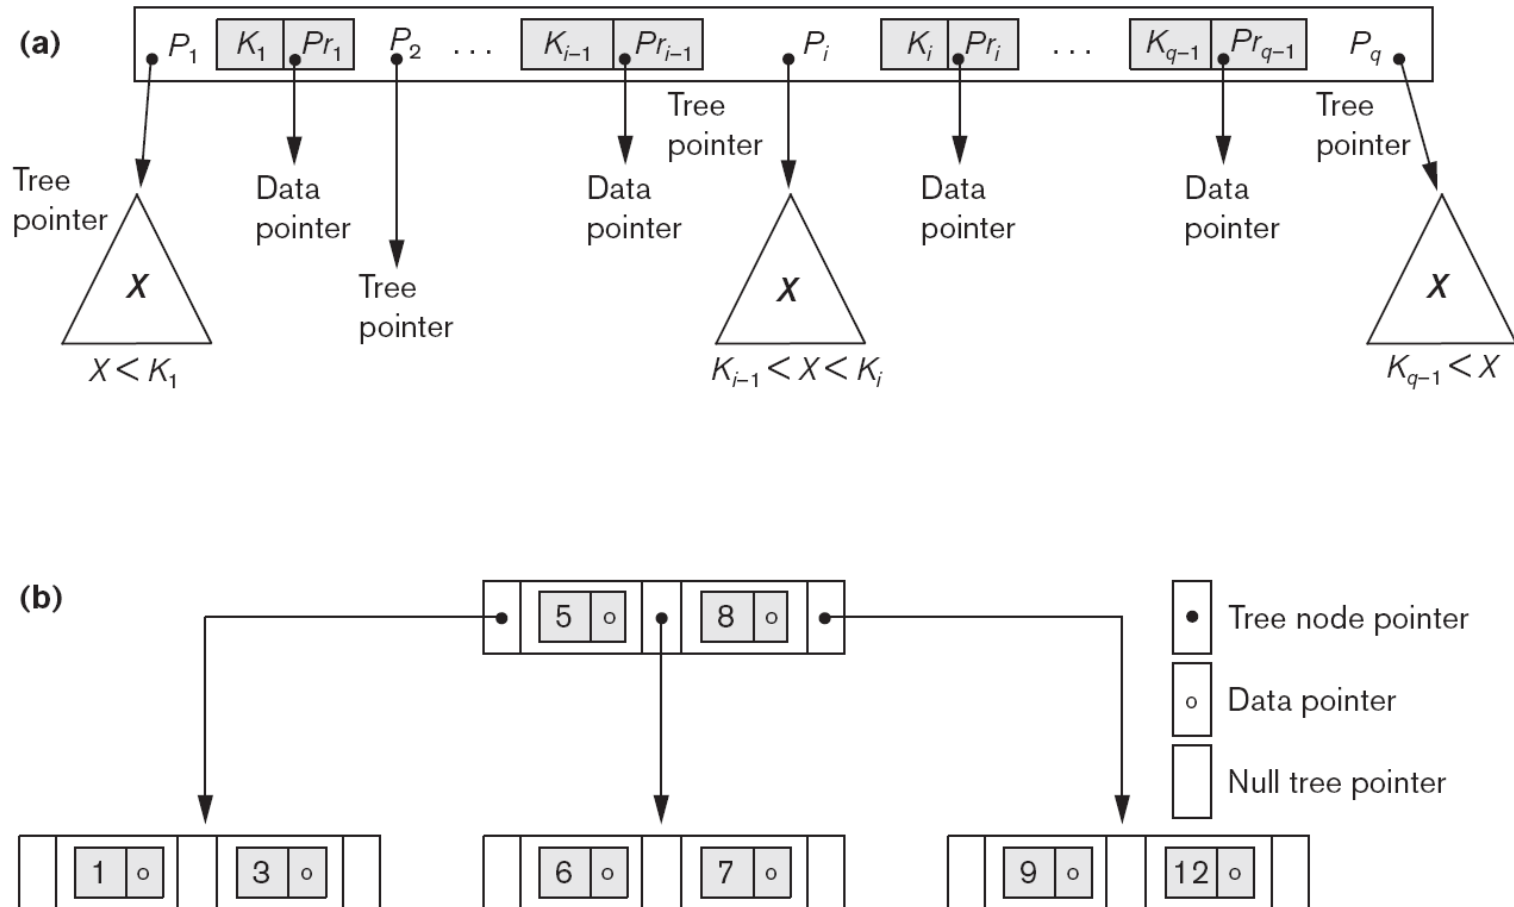


Figure 17.10


B-tree structures. (a) A node in a B-tree with $q - 1$ search values. (b) A B-tree of order $p = 3$. The values were inserted in the order 8, 5, 1, 7, 3, 12, 9, 6.

The Nodes of a B⁺-tree

Figure 17.11

The nodes of a B⁺-tree. (a) Internal node of a B⁺-tree with $q - 1$ search values.

(b) Leaf node of a B⁺-tree with $q - 1$ search values and $q - 1$ data pointers.

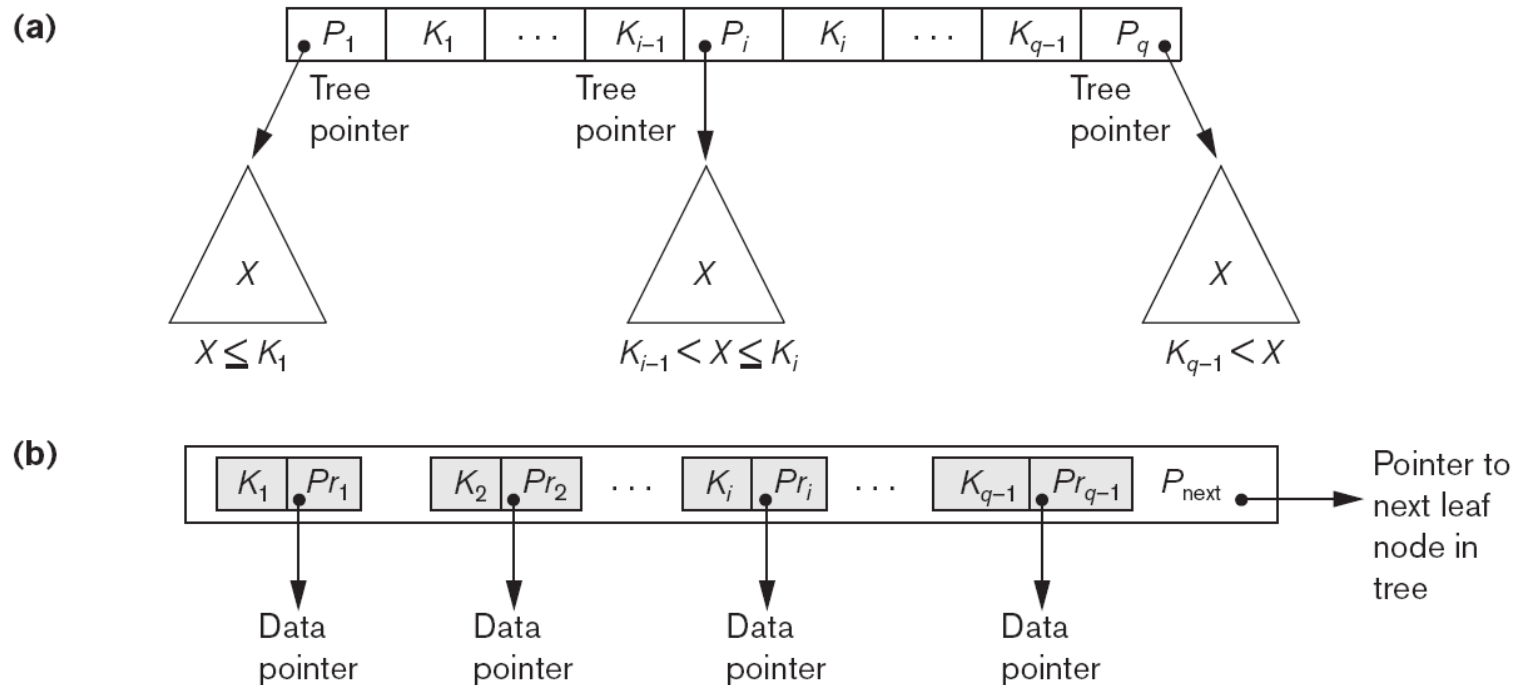

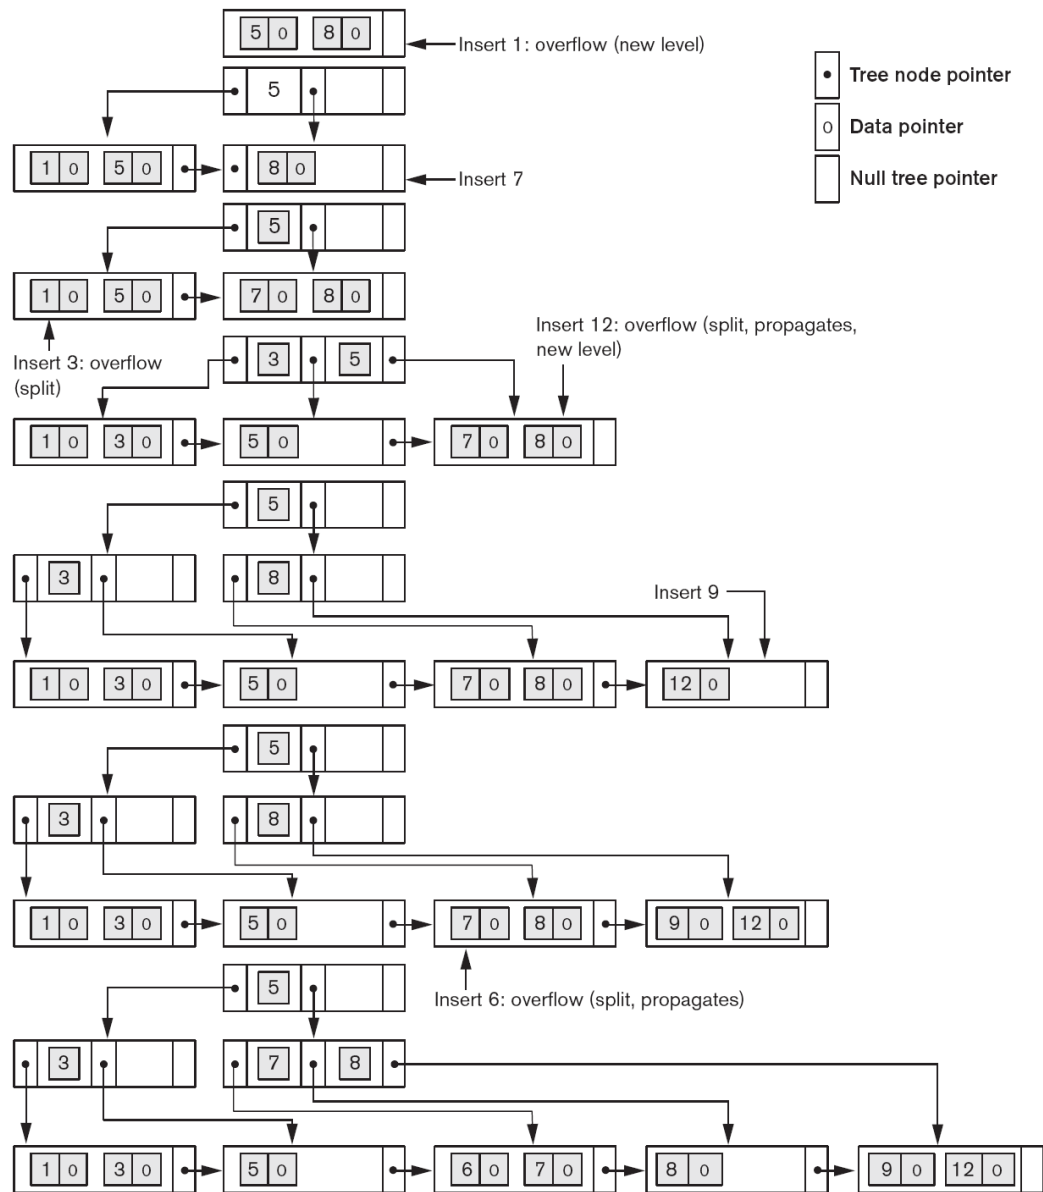


Figure 17.12

An example of insertion in a B⁺-tree with $p = 3$ and $p_{\text{leaf}} = 2$.

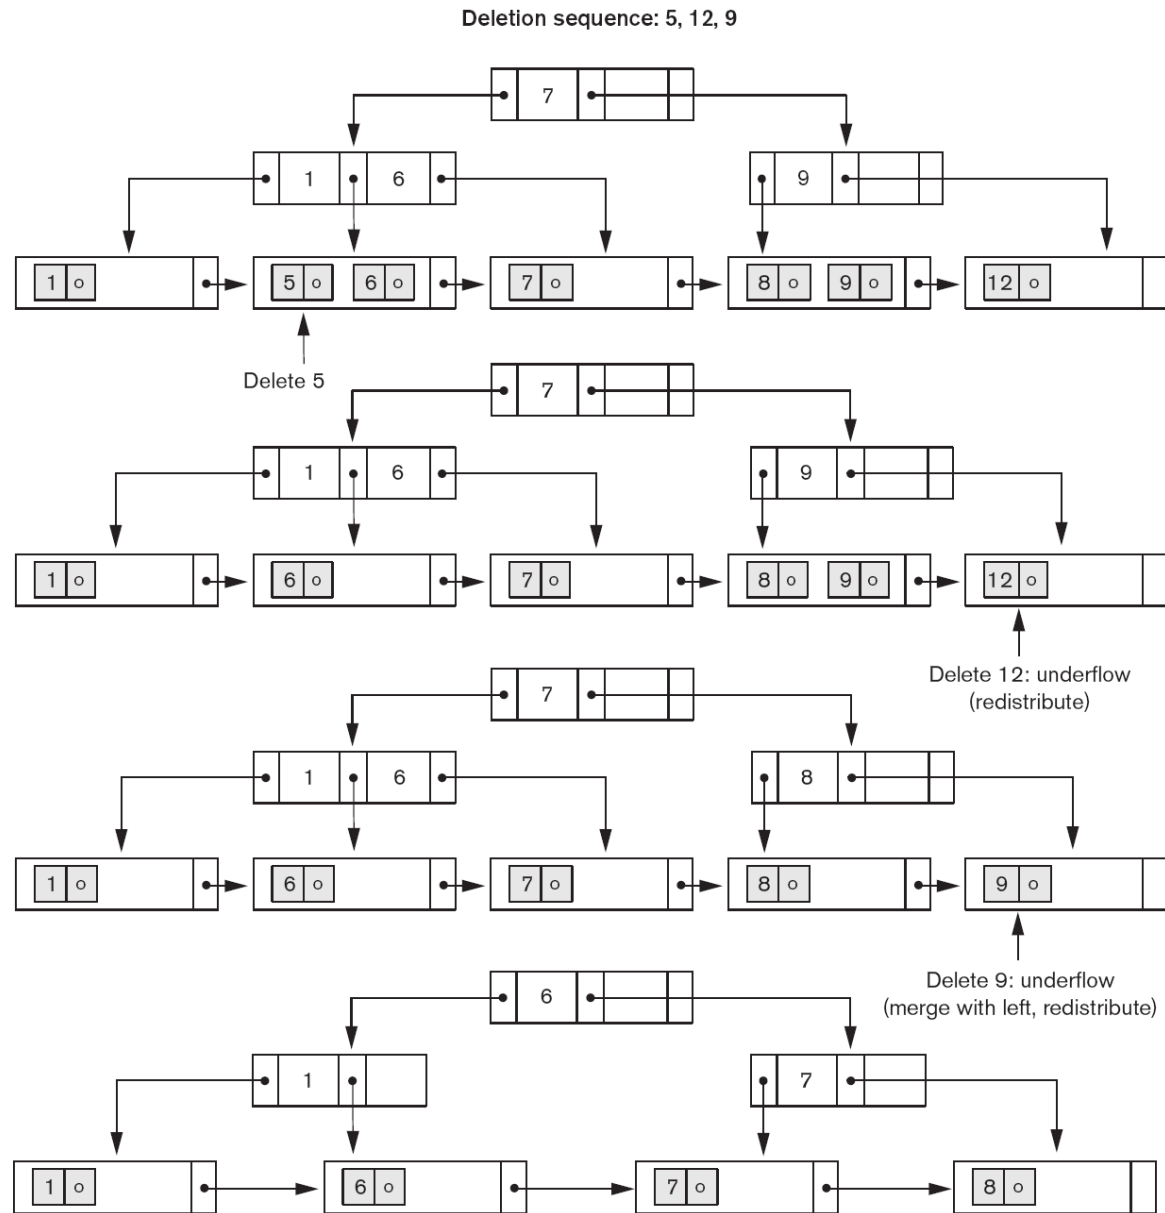


Figure 17.13

An example of deletion from a B⁺-tree.

Summary

- Types of Single-level Ordered Indexes
 - Primary Indexes
 - Clustering Indexes
 - Secondary Indexes
- Multilevel Indexes
- Dynamic Multilevel Indexes Using B-Trees and B⁺-Trees
- Indexes on Multiple Keys