

# Preparación del servidor Debian

En el servidor de Debian 12.12 Instalar los programas de la lista dada abajo:

Nota: para cada instalación capture la ventana que muestre el comando y el final del resultado.

## 1. Php

```
Creating config file /etc/php/8.4/mods-available/ctype.ini with new version
Creating config file /etc/php/8.4/mods-available/exif.ini with new version
Creating config file /etc/php/8.4/mods-available/fileinfo.ini with new version
Creating config file /etc/php/8.4/mods-available/fli.ini with new version
Creating config file /etc/php/8.4/mods-available/ftp.ini with new version
Creating config file /etc/php/8.4/mods-available/gettext.ini with new version
Creating config file /etc/php/8.4/mods-available/iconv.ini with new version
Creating config file /etc/php/8.4/mods-available/pdo.ini with new version
Creating config file /etc/php/8.4/mods-available/phar.ini with new version
Creating config file /etc/php/8.4/mods-available/posix.ini with new version
Creating config file /etc/php/8.4/mods-available/shmop.ini with new version
Creating config file /etc/php/8.4/mods-available/sockets.ini with new version
Creating config file /etc/php/8.4/mods-available/sysvmsg.ini with new version
Creating config file /etc/php/8.4/mods-available/sysvsem.ini with new version
Creating config file /etc/php/8.4/mods-available/sysvshm.ini with new version
Creating config file /etc/php/8.4/mods-available/tokenizer.ini with new version
Configurando php8.4-opcache (8.4.11-1) ...
Creating config file /etc/php/8.4/mods-available/opcache.ini with new version
Configurando php8.4-readline (8.4.11-1) ...
Creating config file /etc/php/8.4/mods-available/readline.ini with new version
Configurando php8.4-mysql (8.4.11-1) ...
Creating config file /etc/php/8.4/mods-available/mysqlnd.ini with new version
Creating config file /etc/php/8.4/mods-available/mysqli.ini with new version
Creating config file /etc/php/8.4/mods-available/pdo_mysql.ini with new version
Configurando php8.4-curl (8.4.11-1) ...
update-alternatives: utilizando /usr/bin/php8.4 para proveer /usr/bin/php (php) en modo automático
update-alternatives: utilizando /usr/bin/phar8.4 para proveer /usr/bin/phar (phar) en modo automático
update-alternatives: utilizando /usr/bin/phar.phar8.4 para proveer /usr/bin/phar.phar (phar.phar) en modo automático
Creating config file /etc/php/8.4/curl/php.ini with new version
Configurando php-mysql (2:8.4+96) ...
Configurando libapache2-mod-php8.4 (8.4.11-1) ...
Creating config file /etc/php/8.4/apache2/php.ini with new version
Module mpm_event disabled.
Enabling module mpm_prefork.
apache2_switch_mpm Switch to prefork
apache2_invoke: Enable module php8.4
Configurando libapache2-mod-php (2:8.4+96) ...
Configurando php8.4 (8.4.11-1) ...
Configurando php (2:8.4+96) ...
Procesando disparadores para man-db (2.13.1-1) ...
Procesando disparadores para libc-bin (2.41-12) ...
Procesando disparadores para php8.4-curl (8.4.11-1) ...
Procesando disparadores para libapache2-mod-php8.4 (8.4.11-1) ...
root@DebianServer2502NAG:~# php -v
PHP 8.4.11 (cli) (built: Aug  3 2025 07:32:21) (NTS)
Copyright (c) The PHP Group
Built by Debian
Zend Engine v4.4.11, Copyright (c) Zend Technologies
    with Zend OPcache v8.4.11, Copyright (c), by Zend Technologies
root@DebianServer2502NAG:~#
```

## 2. mariadb-server y crear una base de datos con el nombre **db\_wp**, usuario: **user\_wp**, y password: **1357\$Qetu**

```

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE db_up;
-> |
ERROR 1007 (HY000): Can't create database 'db_up': database exists
MariaDB [(none)]> SHOW DATABASES;
+-----+
| Database |
+-----+
| db_up    |
| information_schema |
| mysql    |
| performance_schema |
| sys      |
+-----+
5 rows in set (0.007 sec)

MariaDB [(none)]>
MariaDB [(none)]> CREATE USER 'user_up'@'localhost' IDENTIFIED BY '13579qetu';
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON db_up.* TO 'user_up'@'localhost';
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> EXIT;
bye
root@debianServer2502HAG:~# mariadb -u user_up -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 37
Server version: 11.0.3-MariaDB-0+deb3u1 from Debian -- Please help get to 10k stars at https://github.com/MariaDB/Server
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> SHOW DATABASES
-> |
+-----+
| Database |
+-----+
| db_up    |
| information_schema |
+-----+
2 rows in set (0.001 sec)

MariaDB [(none)]>

```

```

Configurando apache2-utils (2.4.65-2) ...
Configurando apache2-bin (2.4.65-2) ...
Configurando apache2 (2.4.65-2) ...
Enabling module mpm_event.
Enabling module authz_core.
Enabling module authz_host.
Enabling module authn_core.
Enabling module auth_basic.
Enabling module access_compat.
Enabling module authn_file.
Enabling module auth_user.
Enabling module alias.
Enabling module dir.
Enabling module autoindex.
Enabling module env.
Enabling module mime.
Enabling module negotiation.
Enabling module setenvif.
Enabling module filter.
Enabling module deflate.
Enabling module status.
Enabling module reqtimeout.
Enabling conf charset.
Enabling conf localized-error-pages.
Enabling conf other-vhosts-access-log.
Enabling conf security.
Enabling conf serve-cgi-bin.
Enabling site 000-default.
Created symlink '/etc/systemd/system/multi-user.target.wants/apache2.service' → '/usr/lib/systemd/system/apache2.service'.
Created symlink '/etc/systemd/system/multi-user.target.wants/apache-htcacheclean.service' → '/usr/lib/systemd/system/apache-htcacheclean.service'.
Procesando disparadores para man-db (2.13.1-1) ...
Procesando disparadores para libc-bin (2.41-12) ...
root@DebianServer2502WAAQ:~# systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
   Active: active (running) since Thu 2025-10-02 16:15:05 -05; 2min 1s ago
 Invocation: 19bb8a6d6f942babe08eba2fe8b8b71
    Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 1539 (apache2)
      Tasks: 65 (limit: 2327)
     Memory: 5.5M (peak: 5.0M)
        CPU: 124ms
    CGroup: /system.slice/apache2.service
            └─1539 /usr/sbin/apache2 -k start
              └─1540 /usr/sbin/apache2 -k start
                └─1542 /usr/sbin/apache2 -k start

oct 02 16:15:05 DebianServer2502WAAQ systemd[1]: Starting apache2.service - The Apache HTTP Server...
oct 02 16:15:05 DebianServer2502WAAQ systemd[1]: Started apache2.service - The Apache HTTP Server.
root@DebianServer2502WAAQ:~#

```

## 4. Phpmyadmin

```


Determining localhost credentials from /etc/mysql/debian.cnf: succeeded.
dbconfig-common: writing config to /etc/dbconfig-common/phpmyadmin.conf
Creating config file /etc/dbconfig-common/phpmyadmin.conf with new version
Creating config file /etc/phpmyadmin/config-db.php with new version
checking privileges on database phpmyadmin for phpmyadmin@localhost: user creation needed.
granting access to database phpmyadmin for phpmyadmin@localhost: success.
verifying access for phpmyadmin@localhost: success.
creating database phpmyadmin: success.
verifying database phpmyadmin exists: success.
populating database via sql... done.
dbconfig-common: flushing administrative password
Configurando libheif-plugin-david:amd64 (1.19.8-1) ...
Configurando libheif1:amd64 (1.19.8-1) ...
Configurando libgd3:amd64 (2.3.3-13) ...
Configurando libheif-plugin-libde265:amd64 (1.19.8-1) ...
Configurando libheif-plugin-x265:amd64 (1.19.8-1) ...
Configurando libheif-plugin-aomenc:amd64 (1.19.8-1) ...
Configurando php8.4-gd (8.4.11-1) ...
Creating config file /etc/php/8.4/mods-available/gd.ini with new version
Configurando php-gd (2:8.4.496) ...
Procesando disparadores para libc-bin (2.41-12) ...
Procesando disparadores para man-db (2.13.1-1) ...
Procesando disparadores para libapache2-mod-php8.4 (8.4.11-1) ...
Procesando disparadores para php8.4-cli (8.4.11-1) ...
root@DebianServer2502WAAQ:~# sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
   Active: active (running) since Thu 2025-10-09 11:25:28 -05; 1h 6min ago
 Invocation: 944344922e9c4d2b0e4c8cc25e84cbc5
    Docs: https://httpd.apache.org/docs/2.4/
   Process: 3068 ExecReload=/usr/sbin/apachectl graceful (code=exited, status=0/SUCCESS)
   Main PID: 827 (apache2)
      Tasks: 6 (limit: 2327)
     Memory: 21.3M (peak: 28.5M)
        CPU: 674ms
    CGroup: /system.slice/apache2.service
            └─827 /usr/sbin/apache2 -k start
              └─3073 /usr/sbin/apache2 -k start
                └─3075 /usr/sbin/apache2 -k start
                  └─3077 /usr/sbin/apache2 -k start
                    └─3078 /usr/sbin/apache2 -k start
                      └─3079 /usr/sbin/apache2 -k start

oct 09 11:25:28 DebianServer2502WAAQ systemd[1]: Starting apache2.service - The Apache HTTP Server...
oct 09 11:25:28 DebianServer2502WAAQ systemd[1]: Started apache2.service - The Apache HTTP Server.
oct 09 12:26:12 DebianServer2502WAAQ systemd[1]: Reloading apache2.service - The Apache HTTP Server...
oct 09 12:26:12 DebianServer2502WAAQ systemd[1]: Reloaded apache2.service - The Apache HTTP Server.
root@DebianServer2502WAAQ:~#

```

5.

6. wordpress colocando en el título Wordpress seguido de sus iniciales

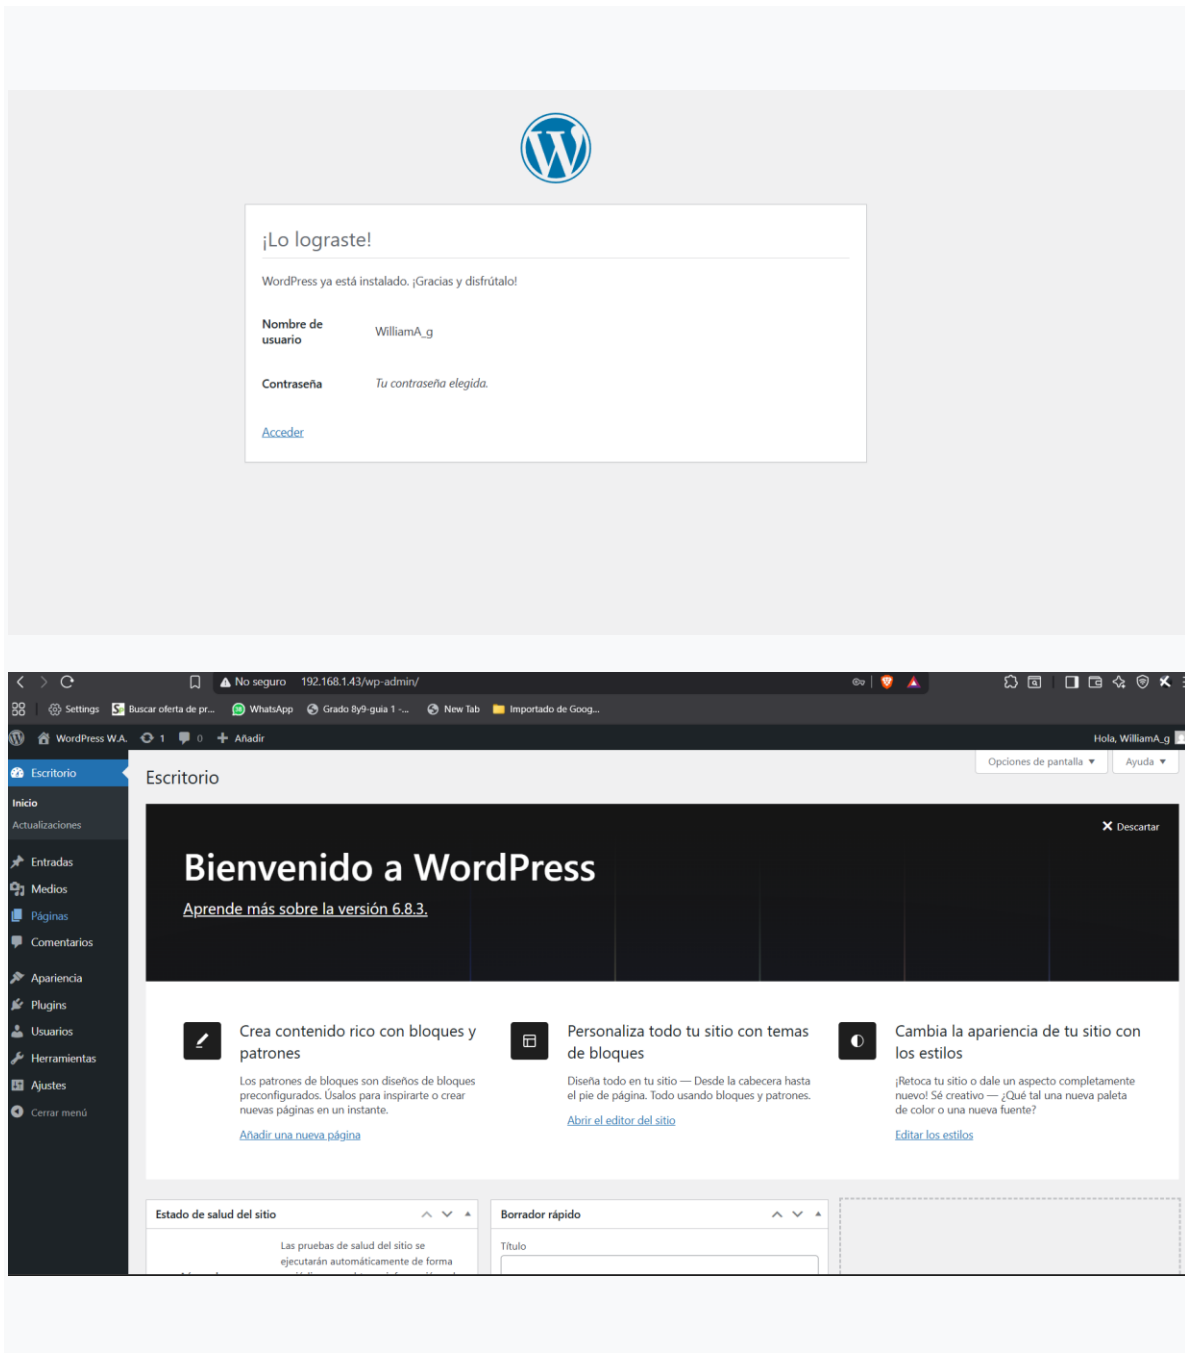

7. Habilitar https

Capturar las siguientes pantallas y subirlas en la entrega de esta tarea, se debe visualizar el título de la ventana.

1. En una ventana de terminal ejecutar el comando: **ip a**

```
sudo: chown: command not found
root@DebianServer2502WAG: /var/www/html# su -
root@DebianServer2502WAG:~# anaya2004
-bash: anaya2004: orden no encontrada
root@DebianServer2502WAG:~# chown -R www-data /var/www/html
root@DebianServer2502WAG:~# ls -l /var/www/html
total 26548
-rw-r--r-- 1 www-data root    10783 oct  2 16:15 index.html
-rw-r--r-- 1 www-data root      405 feb  6 2020 index.php
-rw-r--r-- 1 www-data root 26920488 sep 30 13:07 latest.tar.gz
-rw-r--r-- 1 www-data root   19903 mar  6 2025 license.txt
drwxrwxrwx 1 www-data root     21 oct  9 13:00 phpmyadmin -> /usr/share/phpmyadmin
-rw-r--r-- 1 www-data root   7425 mar  7 2025 readme.html
drwxr-xr-x 2 www-data root   4096 oct  9 13:12 wordpress
-rw-r--r-- 1 www-data root   7387 feb 13 2024 wp-activate.php
drwxr-xr-x 9 www-data root   4096 sep 30 12:30 wp-admin
-rw-r--r-- 1 www-data root    351 feb  6 2020 wp-blog-header.php
-rw-r--r-- 1 www-data root  2323 jun 14 2023 wp-comments-post.php
-rw-r--r-- 1 www-data root   3336 oct 15 2024 wp-config-sample.php
drwxr-xr-x 4 www-data root   4096 jul 15 13:17 wp-content
-rw-r--r-- 1 www-data root   5617 ago  2 2024 wp-cron.php
drwxr-xr-x 30 www-data root  12288 sep 30 12:30 wp-includes
-rw-r--r-- 1 www-data root   2502 nov 26 2022 wp-links-opml.php
-rw-r--r-- 1 www-data root   3937 mar 11 2024 wp-load.php
-rw-r--r-- 1 www-data root  51414 feb  3 2025 wp-login.php
-rw-r--r-- 1 www-data root   8727 feb  8 2025 wp-mail.php
-rw-r--r-- 1 www-data root  30081 mar  4 2025 wp-settings.php
-rw-r--r-- 1 www-data root  34516 mar 10 2025 wp-signup.php
-rw-r--r-- 1 www-data root   5102 oct 18 2024 wp-trackback.php
-rw-r--r-- 1 www-data root   3205 nov  8 2024 xmlrpc.php
root@DebianServer2502WAG:~# su -
root@DebianServer2502WAG:~# rm /var/www/html/index.html
root@DebianServer2502WAG:~# systemctl restart apache2
root@DebianServer2502WAG:~# "ip a
-bash: "ip: orden no encontrada
root@DebianServer2502WAG:~# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:37:43:ef brd ff:ff:ff:ff:ff:ff
    altname enx0800273743ef
    inet 192.168.1.43/24 brd 192.168.1.255 scope global dynamic noprefixroute enp0s3
        valid_lft 83219sec preferred_lft 72419sec
    inet6 fe80::b64c:ed35:8511:1516/64 scope link
        valid_lft forever preferred_lft forever
root@DebianServer2502WAG:~#
```

2. En un browser abrir una ventana del phpmyadmin ingresando las credenciales de la base de datos, mostrando el listado de tablas y el inicio del contenido de la tabla wp\_options
3. En una ventana del browser abrir wordpress en conexión segura, mostrando el inicio de la página