



Governing and Publishing Data in the Catalog

Generated on: 2026-05-02 12:17:56 GMT+0000

SAP Business Data Cloud | SHIP

Public

Original content: https://help.sap.com/docs/SAP_BUSINESS_DATA_CLOUD/08752d72ed8d4f3683b110d3e76689c3?locale=en-US&state=PRODUCTION&version=SHIP

Warning

This document has been generated from SAP Help Portal and is an incomplete version of the official SAP product documentation. The information included in custom documentation may not reflect the arrangement of topics in SAP Help Portal, and may be missing important aspects and/or correlations to other topics. For this reason, it is not for production use.

For more information, please visit <https://help.sap.com/docs/disclaimer>.

Governing Catalog Assets

Users with a catalog administrator role can set up governance for assets using hierarchical tags and business glossaries, create KPIs to measure progress towards company goals, and publish assets, glossary terms, and KPIs to the catalog.

→ Tip

Users with the **DW AI Consumer** role can use SAP Business AI to enrich catalog assets. To activate SAP Business AI for the catalog, see [Enable SAP Business AI for SAP Datasphere](#).

Enriching Asset Metadata

- [Enriching and Managing Catalog Assets](#)
- [Using Hierarchical Tags](#)
- [Manage Hierarchies and Tags](#)
- [Manage Tag Relationships for Assets](#)

Managing the Business Glossary

- [Using the Business Glossary](#)
- [Create and Manage a Glossary](#)
- [Create and Manage a Glossary Category](#)
- [Create and Manage Glossary Terms](#)

Managing Key Performance Indicators

- [Using Key Performance Indicators](#)
- [Create and Manage Key Performance Indicators](#)
- [Create and Manage Key Performance Indicator Categories](#)
- [Define the Key Performance Indicator Template](#)

Publishing Assets, Glossary Terms, and Key Performance Indicators

- [Publishing Content to the Catalog](#)

Enriching and Managing Catalog Assets

To help catalog users quickly find and evaluate assets, you can enrich the assets by editing their names, adding both short and long descriptions, and adding relationships with terms, KPIs, and tags. You can also review the functional and publication status of the assets to ensure they are well-maintained and accessible.

Prerequisites

To enrich and manage any (published, unpublished, and excluded) asset in the catalog, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— - -) - To access SAP Business Data Cloud cockpit.
- **Catalog Asset** (—RU— - M) - To edit an asset's name and short and long descriptions and add term, KPI, and tag relationships on the asset details page.
- **Catalog Glossary Object** (—R— - -) - To view terms.
- **Catalog KPI Object** (—R— - -) - To view KPIs.
- **Catalog Tag Hierarchy** (—R— - -) - To view tag hierarchies and tags.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Catalog assets are created by extracting metadata from the underlying data or analytic objects in your connected source systems. This brings a lot of useful information into the catalog about an asset that can help users understand what they are looking at. But often the information lacks the polish and consistency needed for a usable experience. Names of source system assets may be too technical in nature for business users, or not aligned with standard business language in your organization. Descriptions may not clearly communicate the business value or be outright missing.

You can use the tools on an asset's details page to improve and supplement the information that will curate a better discovery and evaluation experience for your users. After an asset is enriched, the date the asset was enriched on and the name of the user who made the change appears under the **Catalog Activity** section in the header.

i Note

If the status of an asset is **Unavailable** or **Remotely Deleted**, you cannot edit or enrich the asset.

Changing the Asset's Name and Adding a Custom Description

Context

On an asset details page, the header section provides an overview of the asset with information extracted from the source system. The name you see might not be easy to understand, and the summary may not clearly convey the business value. Additionally, the description under the **Documentation** tab might be missing entirely.

To help you better understand an asset and its usage, you can edit the information as follows:

- Change the asset's name to make it more useful and understandable.
- Add a summary and a custom description to provide a clearer idea of how the asset can be used.

→ Tip

As a best practice, include words in the summary and custom description that users might use to describe the asset. When users search for assets, the text in the name, summary, and description is scanned during the search.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).

2. On the catalog search page, use the filters or the search to find the asset you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).

3. On the asset details page, find the header toolbar and choose **Edit**.

The **Edit Catalog Details** dialog opens.

4. Change the asset's name to make it more understandable.

5. Enter a custom summary description.

If you leave the summary description empty and save the dialog, the description from the source system is the default that appears in the summary description to all catalog users.

6. Save your changes.

In the header of the asset details page, the name of the asset and summary description are updated.

7. Choose the **Documentation** tab.

8. Choose **Edit Content**.

9. Enter a custom description.

Use the tools to enhance your description, such as applying text formatting (for example, color, bold, and bullet list), adding multimedia content (images and links to videos), and so on.

i Note

Images must be hosted elsewhere and are not saved in the repository. When adding an image, you provide a link to the image, which can be accessed from the browser when viewing the description. The image will appear embedded in the description.

10. Save the description.

Results

The name, custom summary description, and custom long description for the asset are updated in the catalog. When users search for assets, the summary description appears in the search results to help users quickly see if the asset is what they want.

Managing Term, KPI, and Tag Relationships


Context



Editing the names and descriptions of your assets is a basic way to curate content in the catalog. However, you can also create tags, glossary terms, and key performance indicators (KPIs) that help you classify the content in your organization and get all data workers and consumers speaking the same language.

Once you have these objects in place, you can use them to enrich any asset by assigning glossary terms, KPIs, and tags. You can also create object relationships for the asset's detailed metadata (for example, columns, attributes, measures, dimensions, and properties specific to the data object).

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)   (**Search**).
2. On the catalog search page, use the filters or the search to find the asset you want and choose it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. On the asset details page, assign a term or KPI to the asset in one of the following ways:

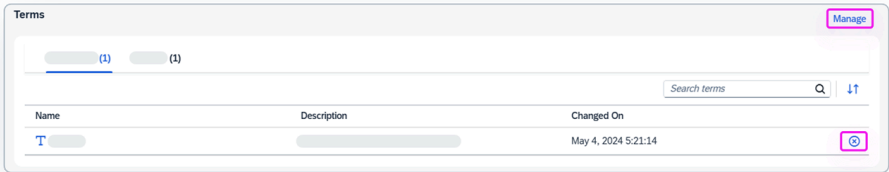Option	Steps
From the Semantic Enrichment tab	a. Choose the Semantic Enrichment tab and select the object type (term or KPI) you want to assign to the asset. For example, choose  Semantic Enrichment  Terms . Under the Semantic Enrichment tab section for terms, you can see which terms have already been assigned to the asset. b. To assign an object, do the following: ■ If no objects are assigned, choose the Assign button (for example Assign Term). ■ If you are adding more object relationships, choose the Manage button. For example, to add a term relationship to an asset that has two assigned terms, choose Manage.  c. (Optional) To filter on different options for the terms or KPIs, such as glossaries, KPI categories, or favorite or recent objects, choose  (<i>Show filters</i>). To change the view of the results, choose  (<i>Display as Table</i>) or  (<i>Display as List</i>). d. In the dialog, select the objects you want to add to the asset. e. Depending on the relationship you are adding, choose the Add to Related button. For example, in the dialog for adding terms, select the terms you want to add and then choose Add to Related Terms.

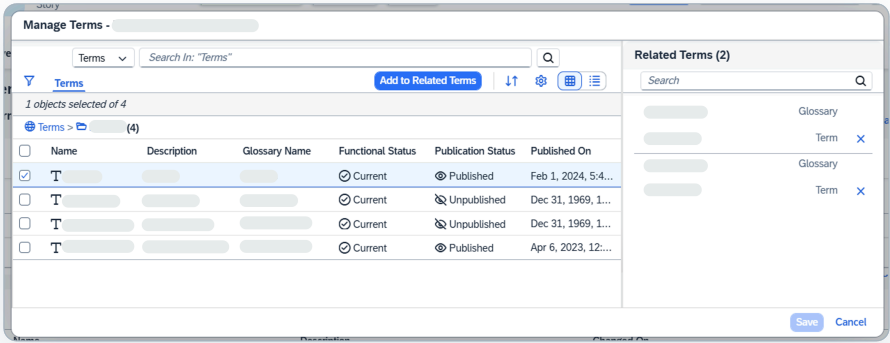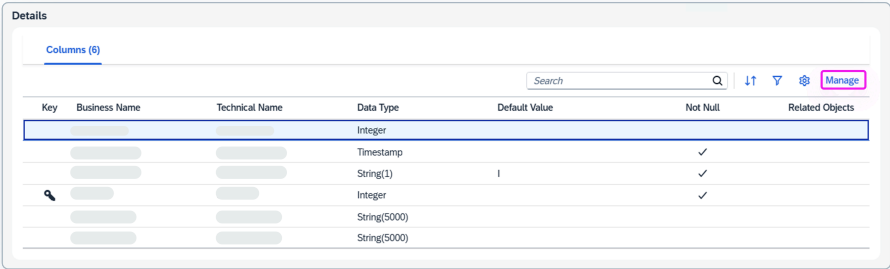Option	Steps
	 f. When you're done, save your changes.
From the Asset Details	a. In the tabs, choose Overview > Details. b. Choose the metadata tab that you want to enrich and in the table, select a row. c. Choose Manage.  d. In the dialog, use the filter to select which object relationship you want to create, Terms or KPIs. Depending on the type of metadata row selected, you can create relationships for terms, KPIs, or both. e. (Optional) To filter on different options for KPIs and terms, such as glossaries, KPI categories, or favorite or recent objects, choose Show filters. To change the view of the results, choose Display as Table or Display as List. f. Select the terms or KPIs you want to assign, and choose Add to Related Objects. g. When you're done, save your changes.

The lists in the term or KPI sections are updated with the object relationships you assigned. If you added terms from multiple glossaries, each glossary has a tab.

4. To assign a tag to the asset, choose **Semantic Enrichment** > **Tags**.

5. Choose one of the options depending on whether there are existing tag relationships.

- o If no tags are assigned and you want to add tags, choose the **Assign Tag** button.
- o If there are tag relationships, and you want to edit or remove tags, choose the **Manage** button.

6. In the **Hierarchy** list, expand the hierarchy that contains the tags that you want to assign and select the tags.

7. When you're done, save your changes.

The list in the tag section is updated with the tag relationships you assigned. If you added tags from multiple hierarchies, each tag hierarchy has a tab.

Results

In the **Semantic Enrichment** tab, the sections are updated with the term, KPI, and tag relationships you assigned. When users search for assets in the catalog, the search scans these relationships.

To remove a relationship, choose the  (*Delete*) button for the row.

Semantic Enrichment

Terms

Manage

(1)

(1)

Search terms

Q

↓↑

Name	Description	Changed On	
T		May 4, 2024 5:21:14	

KPIs

Manage

Search KPIs

Q

↓↑

Name	Description	Changed On	
		Nov 1, 2023 0:59:27	
		Jan 5, 2024 14:08:16	

Tags

Manage

(2)


Search tags

Q

↓↑

Name	Description	Changed On	
		Nov 27, 2024 22:26:36	
		Aug 16, 2024 8:19:14	

For the asset details, the **Related Objects** column is updated with the number of objects assigned to the row. You can select the number to see which objects are assigned. In the dialog that appears, you can choose  (*Edit*) to add or remove objects, or choose the link to view the term or KPI details.

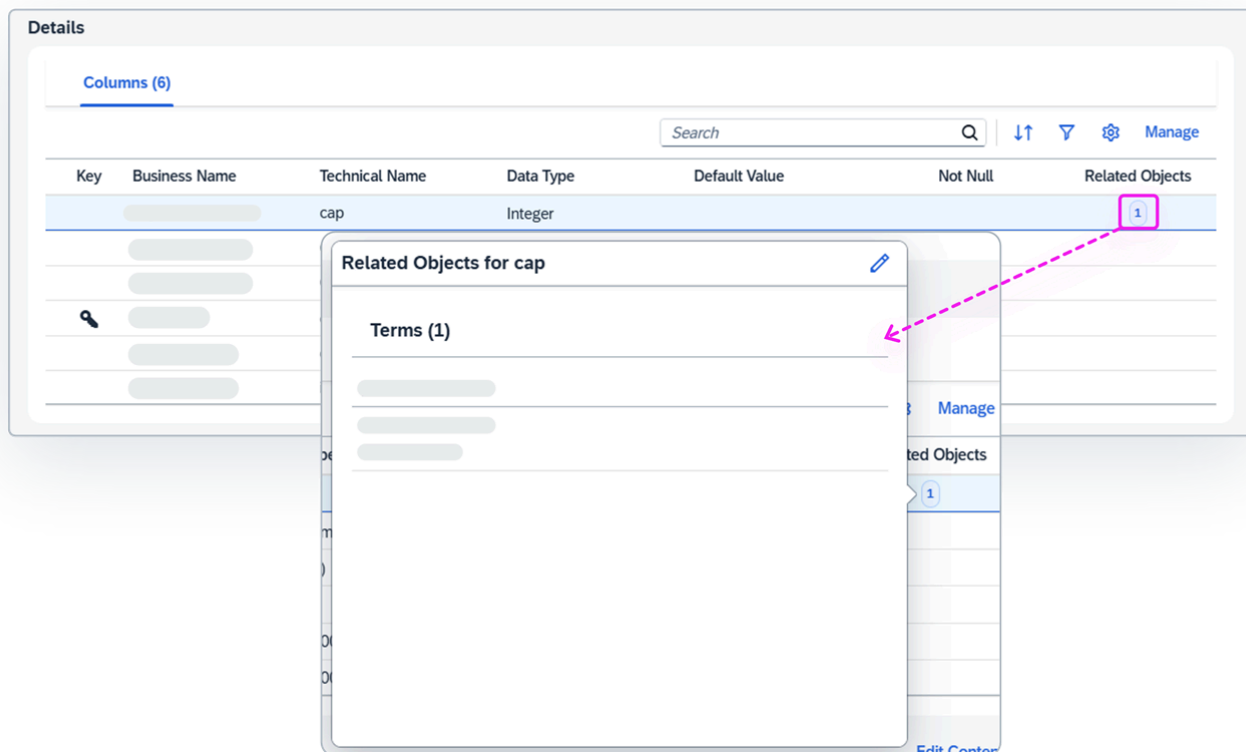

Reviewing Asset Statuses

The asset details page displays a variety of status labels specific to assets. You can review the functional and publication statuses of the catalog assets to decide what actions you need to take to keep them in good shape and available for your users. Assets have the **Extracted** status to indicate that the metadata for the underlying object has been extracted to the catalog.



On the catalog search page, you can filter your search results by using the **Publication Status** and **Functional Status** filter categories. If you're viewing the impact and lineage analysis diagram, you can see the publication and functional status of the assets.

Functional Status

The functional status label on an asset conveys important information that you can use to check the integrity of the asset in relation to its source system. This helps you decide what actions you may need to take to keep your catalog assets in good shape for your users.

Users with the **Catalog User** role are only able to see published assets that have a functional status of **Current** with the **Published** status. Users with the **Catalog Administrator** role can see assets for all functional states regardless of their publication status.

Review the following table for a description of the different functional states.

Asset Functional Status

If the functional status is	Then	Find out more
Current	The asset is in sync with its source system metadata and is up to date. If the asset is not published, you can enrich it and then publish it so all catalog users can discover it.	Enriching and Managing Catalog Assets Publishing Content to the Catalog
Outdated	The asset is out of sync with its source system metadata and is no longer up to date. Run a manual synchronization for this asset's source system.	Manually Synchronizing a System
Referenced Only	This asset is referenced and used by another asset in the catalog but has no extracted metadata in the catalog. Open the Impact and Lineage Analysis diagram to see how this asset is referenced.	Catalog Asset Details Understanding Different Methods for Extracting Metadata
Remotely Deleted	The underlying object on the source system has been deleted or moved to a location that the authorized user cannot access. However, the catalog asset is still referenced by another asset in the catalog. Open the Impact and Lineage Analysis diagram to see how this asset is referenced.	Catalog Asset Details Understanding Different Methods for Extracting Metadata
Unavailable	Metadata for the underlying object cannot be extracted and the asset is out of sync. The asset is not referenced by other assets and can safely be deleted from the catalog. An asset can become unavailable in one of the following situations: • The object on the source system has been deleted. • The object on the source system has been moved to a location that the authorized user cannot access. • The authorized user for metadata extraction has been changed and has different access permissions to the source system than the previous authorized user. • For a BW object, the InfoArea where the object is located is no longer selected for metadata extraction. • The source system's connection to the catalog has been deleted. Assets that are unavailable are automatically deleted from the catalog after 90 days from the date they were last updated in the catalog. You can manually delete an individual asset on the asset details page by choosing ☐ (<i>Delete</i>) or you can manually delete several assets on the catalog search page.	Understanding Different Methods for Extracting Metadata

Publication Status

When the catalog synchronizes with a source system, the objects in the source system become available as assets in the catalog. Depending on what the asset's publication status is, the asset can be available to all users who use the catalog or only to users with the [Catalog Administrator](#) role.

Review the following table for a description of the different publication states, including which actions change an asset to a new state.

Asset Publication Status

If the publication status is	Then	Find out more
Excluded	The asset can be searched for and viewed by users that have the Catalog Administrator role. For source systems that have automatic publishing enabled, the asset is excluded from being automatically published. You can publish an individual asset on the asset details page by choosing ► Publish Actions ► Publish ► or you can publish several assets on the catalog search page. You can unpublish an individual asset on the asset details page by choosing ► Publish Actions ► Unpublish ► or you can unpublish several assets on the catalog search page.	Publishing Content to the Catalog Searching for Data Products and Assets in the Catalog
Published	The asset can be searched for and viewed by all catalog users. For source systems that have automatic publishing enabled, the asset is automatically published. You can unpublish an individual asset on the asset details page by choosing ► Publish Actions ► Unpublish ► or you can unpublish several assets on the catalog search page. You can exclude an individual asset from automatic publishing on the asset details page by choosing ► Publish Actions ► Exclude ► or you can exclude several assets on the catalog search page.	Publishing Content to the Catalog Searching for Data Products and Assets in the Catalog
Unpublished	The asset can be searched for and viewed by users that have the Catalog Administrator role. For source systems that have automatic publishing enabled, the asset is automatically published and the status is updated to Publish. You can publish an individual asset on the asset details page by choosing ► Publish Actions ► Publish ► or you can publish several assets on the catalog search page. You can exclude an individual asset from automatic publishing on the asset details page by choosing ► Publish Actions ► Exclude ► or you can exclude several assets on the catalog search page.	Publishing Content to the Catalog Searching for Data Products and Assets in the Catalog

Related Information

[Using Hierarchical Tags](#)

[Using the Business Glossary](#)

[Using Key Performance Indicators](#)

[Monitoring Metadata Extractions](#)

[Understanding Different Methods for Extracting Metadata](#)


Using Hierarchical Tags

Tagging assets helps you understand your data and its relationships to other assets. The **Tag Hierarchies** page is where users with the appropriate privileges can view and manage tags.

Custom Tags

You can create and manage tags that your organization needs to consistently classify assets in the catalog into clear categories. Tagging assets helps you identify all sources with similar content.

A tag hierarchy is a multilevel grouping of tags. You assign tags to assets so you can search for all assets with that tag. Finding assets that share the same tags helps you govern data and make informed decisions about your assets.

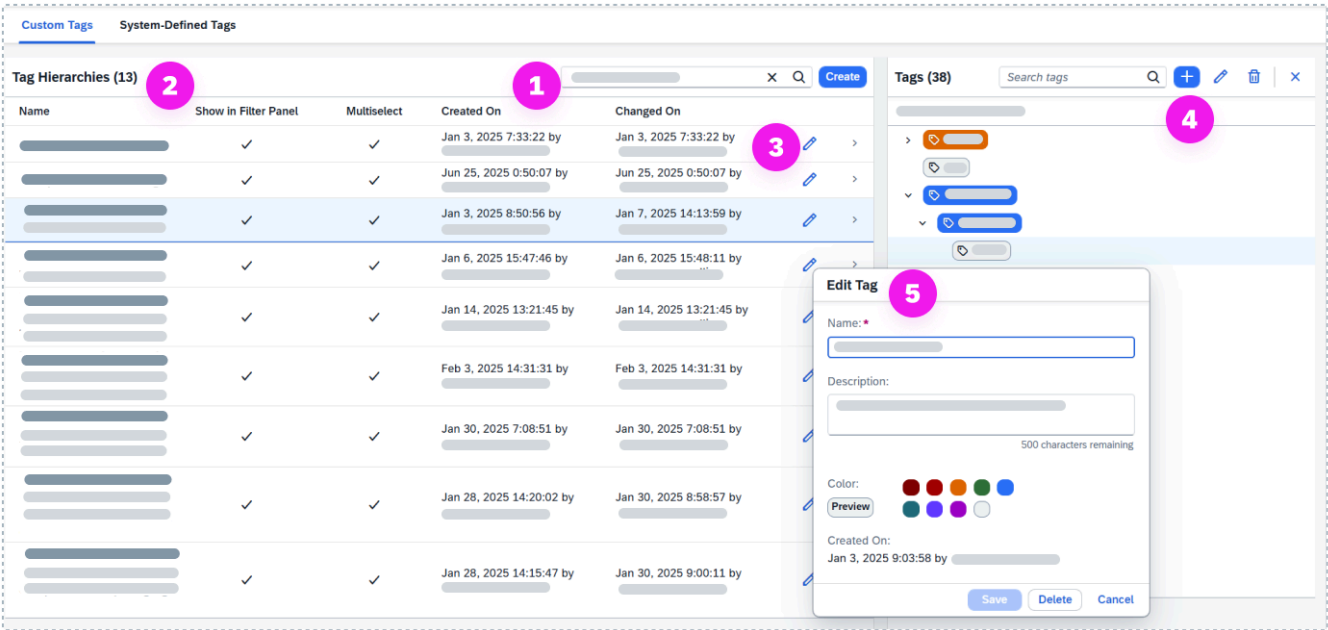

Key Page Features

Feature	Description
(1) Search	Allows free-text search in the tag hierarchies.
(2) Results	Shows a list of tag hierarchies with their descriptions and details. If you enter a search term, only the hierarchies that match the criteria are shown.
(3) Edit	Opens dialog where you edit the name and description of the tag hierarchy.
(4) Create Tag	Opens a dialog where you create a tag or a child tag under an existing higher-level tag.
(5) Edit Tag	Lets you to change the name, description, or color of the tag. You'll also see when the tag was created or changed and by which user.

❖ Example

You create a tag hierarchy for assets that are for various departments.

- Department
 - Sales
 - Quote
 - Orders
 - Invoices
 - Returns

- Purchasing
 - Requisitions
 - Purchase orders
 - Bills
- Inventory
 - Items
 - Stock Adjustments
 - Transfers
 - Counts

System-Defined Tags


The catalog provides system-defined tag hierarchies that are automatically applied to data products during metadata extraction. These tag hierarchies are available as read-only.

Data Protection and Privacy

The data protection and privacy tag hierarchy contains tags that help you quickly identify data products requiring strict access control.

- **Personal Data** is applied to data products that contain people's personal data. Personal data is information that can be used to identify an individual, either on its own or in combination with other data, directly or indirectly. For example, height, weight, eye and hair color.
- **Sensitive Personal Data** is applied to data products that contain people's sensitive data. Sensitive personal data contains any of the various categories of high-risk data as defined under different international data protection and privacy laws, including:
 - Data concerning vulnerable persons, such as children or differently abled individuals
 - Data to evaluate and predict a person's behavior
 - Passwords and answers security questions
 - Employment, professional, and education details, such as salary, trade union membership, or degrees or certifications obtained
 - Data revealing someone's personal details, such as political opinions, religious beliefs, marital status, or criminal convictions and offenses
 - Health data (for example, the US Health Insurance Portability and Accountability Act (HIPAA))
 - Financial information, such as bank account and credit card data

Processing personal data must be strictly controlled to ensure it is handled lawfully, fairly, and transparently in accordance with the laws and regulations in your country or region (for example, the European Union's General Data Protection Regulation (GDPR)).

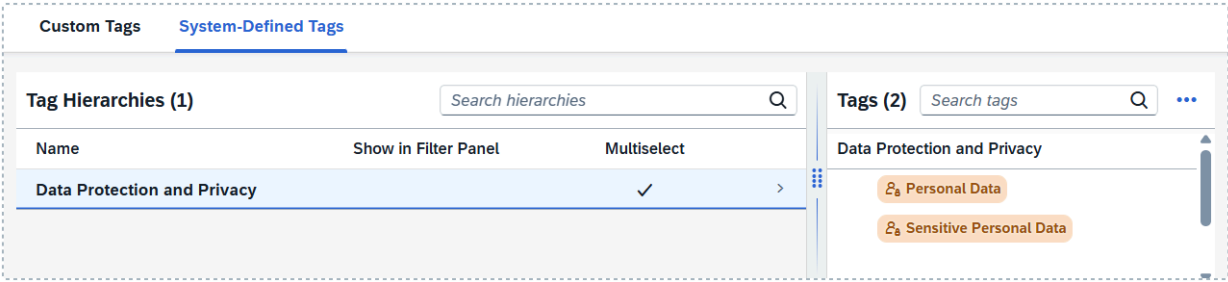


During metadata extraction, the catalog applies these tags to data products that contain personal data, sensitive personal data, or both. You can't manually create tag relationships to assets with data protection and privacy tags. Also, these tags aren't available in the filter panel.

i Note

The catalog can only identify whether a data product has personal data, sensitive personal data, or both. The catalog doesn't collect or store personal data or sensitive personal data.

❖ Example

The **Personal Data** is applied to data products that contain personal data, such as a person's name.

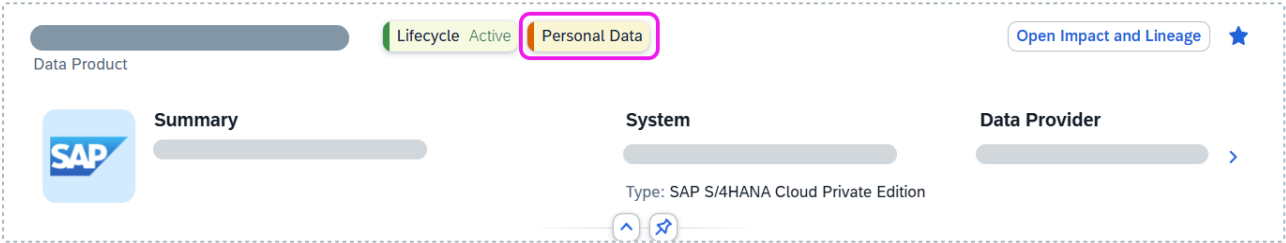

To see which specific objects in an API have this tag, select the API to view its details page. Choose **View Columns** to see which columns contain personal data.

API

Version 1.1.0 **Personal Data**

Overview | Documentation

Details

Available Objects (4)

Business Name	Technical Name	Container Path	Primary Key	Data Protection and Privacy	
			Detected	Personal Data	View Columns
			Detected	Personal Data	View Columns
			Detected	Personal Data	View Columns

SalesSchedulingAgreement

Columns (82)

Key	Business Name	Technical Name	Data Type	Not Null	Valid Values	Data Protection and Privacy
	Created By	CreatedByUser	String(12)	–		Personal Data
	Last Changed By	LastChangedByUser	String(12)	–		Personal Data
	Created On	CreationDate	Date	–		
	Created At	CreationTime	String(6)	–		

→ Tip

If you need to identify assets that have personal data, sensitive personal data, or both, you can create a custom tag hierarchy. For example, you have SAP Datasphere assets that contain personally identifiable information (PII) such as bank account numbers and government identification numbers. You can create a custom tag hierarchy similar to the following:

- PII
 - bank
 - name
 - birth date
 - address
 - account numbers
 - government
 - license
 - passport
 - state ID
 - government tax ID

Manage Hierarchies and Tags

Prerequisites

To manage tag hierarchies and tags, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— — -) - To access SAP Business Data Cloud cockpit.
- **Catalog Asset** (—RU— — M) - To edit an asset's name and short and long descriptions and add term, KPI, and tag relationships on the asset details page.
- **Catalog Tag Hierarchy** (CRUD— - -) - To add, edit, and delete tag hierarchies and tags.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Create a Hierarchy

Context

Create a hierarchy to group your tags at several levels.

To make sure your tag hierarchy is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the tag hierarchy to be available in just one specific formation, create it using the SAP Datasphere system for that particular formation.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).

2. On the catalog search page, choose **Manage Tags**.

The Tag Hierarchies page opens.

3. Choose the **Custom Tags** tab, and choose **Create**.

The **Create Tag Hierarchy** dialog opens.

4. Enter a name for the hierarchy.

5. (Optional) Enter a description.

6. (Optional) Enable or disable the option to assign multiple tags to an asset.

When selected, this option allows you to add multiple tags to an asset, while disabling this option allows for one tag only. For example, you wouldn't want to assign multiple tags to an account type. Typically, an account can only be one type such as a savings or checking account.

i Note

After the hierarchy is created, you cannot change this option.

7. (Optional) Enable or disable the option to expose the tag hierarchy in the search filters and to allow the SAP Business AI feature to assign tags from the hierarchy to assets.

When selected, the tag hierarchy is shown in the filter panel. You'll also be able to use the SAP Business AI feature to help you assign tags to assets.

While it's convenient to see the hierarchy in the filter panel, selecting more than 10 tag hierarchies reduces performance. As a best practice, limit to 10 or fewer tag hierarchies. If needed, you can change this option after the hierarchy is created.

8. Choose **Save** to create the hierarchy and close the dialog.

Create a Tag from the Tag Hierarchies Page

Context

Add tags to a hierarchy. Use these steps when you've created a hierarchy, and you want to immediately add tags.

You add tags to a hierarchy by accessing the catalog from the same system that was used when creating the hierarchy. For example, if you access the catalog from the SAP Business Data Cloud cockpit system to create a tag hierarchy, you must access the catalog from the same system to add a tag to that hierarchy.

Procedure

1. From **Custom Tags** tab on the **Tag Hierarchies** page, select a hierarchy.

A side panel opens.

2. Choose  (*Create Tag*).

3. Enter a name for the tag.

4. (Optional) Enter a description.

5. (Optional) Choose a color for the tag.

6. Choose **Save** to create the tag.

7. To create a child tag, select a tag and then choose  (*Create Tag*). To create a tag at the same level as the previous tag, choose  (*Create Tag*) without selecting any current tags. Repeat the steps in this section.

Create Tags from the Asset Details Page

Context

After looking at the details for an asset, you could think of additional tags that you want to include in the tag hierarchy.

To make sure your tag hierarchy and tags are available in all catalog views, it's best to create them using the SAP Business Data Cloud cockpit system. If you want the tag hierarchy and all tags to be available in just one specific formation, create them using the SAP Datasphere system for that particular formation.

Procedure

1. On the catalog search page, use the filters or the search to find an asset and select it.

The asset details page opens.

2. Select  **Semantic Enrichment** > **Tags** .

3. Choose one of the options depending on whether there are existing tag relationships.

- If no tags are assigned and you want to add tags, select the **Assign Tag** button.
- If there are tag relationships, and you want to add more tags, select the **Manage** button.

The **Manage Tags** dialog opens.

4. In the **Hierarchy** list, choose the hierarchy that contains the tags that you want to use.
5. Choose one of the options, depending on what level you want to create the tag.
 - o To create a top-level (parent) tag, choose **Create** next to the Search box.
 - o To create a child tag, select the tag that you want the new tag under, and then choose  (*Create Child Tag*).
6. In the **Hierarchy** list, expand the hierarchy that contains the tags that you want to assign and select the tags.

Edit or Delete a Hierarchy

Context

You can edit or delete a hierarchy by accessing the catalog from the same system that was used when it was created. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system and created a hierarchy, you must access the catalog from the same system to edit that hierarchy.

Procedure

1. From the **Tag Hierarchies** page, choose the **Custom Tags** tab and select a hierarchy.
2. Choose  (*Edit*) next to the hierarchy.
3. Choose one of the following:
 - o To edit the name or description, type the new text in each option, and then choose **Save**.

i Note

You cannot edit the **Multiselect** value.

- o Enable or disable the option to expose the tag hierarchy in the search filters.
- o To delete the hierarchy and the tags within the hierarchy, choose **Delete**. After the Delete Warning appears, choose **Yes** to confirm that you want to delete the hierarchy.

Edit or Delete a Tag

Context

You can edit or delete a tag by accessing the catalog from the same system that was used when creating the tag. For example, if you access the catalog from the SAP Business Data Cloud cockpit system and created a tag, you must access the catalog from the same system to edit that tag.

Procedure

1. From the **Tag Hierarchies** page, choose the **Custom Tags** tab and select a hierarchy.
2. Choose the tag name.
3. Choose one of the following:
 - o To edit the name or description, type the new text in each option. You can also select a new color for the tag. Choose **Save**.
 - o To delete the tag, choose **Delete**.

Manage Tag Relationships for Assets

On the **Semantic Enrichment** tab of the asset details page, you can add, edit, or remove tags.

Prerequisites

To manage tag relationships for assets, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— — -) - To access SAP Business Data Cloud cockpit.
- **Catalog Asset** (—RU— — M) - To edit an asset's name and short and long descriptions and add term, KPI, and tag relationships on the asset details page.
- **Catalog Tag Hierarchy** (CRUD— - -) - To add, edit, and delete tag hierarchies and tags.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Context

Add tags to your assets. When you're done, you'll be able to search for all the assets that contain that tag. You can add multiple tags from one or more hierarchies. However, if your hierarchy disabled the **Multiselect** value, then you can add one tag from that hierarchy only.

After the tags have been added to an asset, you can edit the tag (for example, change the tag color or name and description), or remove the tag from the asset. Removing the tag from the asset doesn't delete the tag from the hierarchy. You can edit or delete a tag by accessing the catalog in the same system that was used when it was created. For example, if you access the catalog from the SAP Business Data Cloud cockpit system to create a tag, you must access the catalog in the same system to edit or delete it.

Adding, Editing, or Removing Tags for Assets

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).
2. On the catalog search page, use the filters or the search to find the asset you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. On the asset details page, select  **Semantic Enrichment**  **Tags**.
4. Choose one of the options depending on whether there are existing tag relationships.
 - If no tags are assigned and you want to add tags, select the **Assign Tag** button.
 - If there are tag relationships, and you want to edit or remove tags, select the **Manage** button.
5. In the **Hierarchy** list, expand the hierarchy that contains the tags that you want to assign and select the tags.
6. When you're done, save your changes.

Results

The list is updated with the tags you assigned. To remove a tag, select the  (**Delete**) button for the row.

Using the Business Glossary

The business glossary provides a central and shared repository for defining terms and describing how and where they're used in the business.

A business glossary can promote a common, consistent understanding of business terms within your organization. The definitions provide context for the terms, and the term relationships provide additional meaning. Term relationships are links to other terms, KPIs, and assets. Aim to use the business glossary enterprise-wide or division-wide and make the terms as clear and understandable as possible. For example, what does "Sales" mean to your organization? Is it currency exchanged for goods or services? Is it a discounted price on a product? Both definitions are correct, and creating the correct definition for your organization helps reduce ambiguity.

A business glossary consists of three main areas:

- The glossary template defines guidelines and the additional information that is required or optional when the terms are defined.
- The categories group the terms.
- The defined terms provide clarity for the business.

When you create a glossary, you can choose a reference template or you can define the glossary without a template. A reference template pulls the definition and custom attributes from an existing glossary. Any changes in the definition or custom attributes are not changed in any other glossaries; rather, it is unique to this glossary that you created. After you save the glossary, it appears in the list of reference templates for any glossaries that are created in the future.

You can add all types of information in your term definition. For example, you can add links to external sites, pictures, and different fonts.

You can create a set of custom attributes for a term. The attributes can be free text or validated using minimum and maximum values or lookup tables. You can set the extra fields as required or optional. You can group the input fields into separate tabs or together on one tab. Create labels for the fields that add context and offer guidance for users when they create terms. For example, you can create a **Quality Assurance** group with defined custom attributes that contain a **Definition Date** option and require that the option is defined. You can also create an **Approved** attribute that is optional.

You can also define the category hierarchy. Subject matter experts create and define the terms, create term relationships, and place them in the categories. Then they publish the term so everyone in the organization can view the terms. When business users have questions about terms, they search the business glossary and find the definition and term relationships.

Categories and Terms

Create categories to group your terms and definitions. Make clear definitions for your terms and include keywords, synonyms, and relationships to provide additional context.

Example

For example, a business can have these categories, terms, and definitions within a Finance category:

Finance Subcategory	Term	Definition	Keyword	Synonym
Interest	Annual Percentage Yield	Percentage of the loan or savings amount including compounded interest.	APY, interest, rate	APR, Annual Percentage Rate

Finance Subcategory	Term	Definition	Keyword	Synonym
Interest	Annual Percentage Rate	Percentage of the loan or savings amount including other fees and costs.	APR, interest, rate	APY, Annual Percentage Yield
Interest	Compound Interest	Money that is earned and added to an account balance so the interest and principal both earn interest.	principal, interest	compounded interest, compounding, accrued interest
Funds	Mutual Fund	A mix of different stocks or bonds.	investment, stocks, bonds	bond fund, retirement,
Funds	Exchange-Traded Funds	A mutual fund traded like stocks on a stock exchange. ETF typically follows the performance of a particular index such as the S&P 500 Index.	ETF, stock, index	mutual fund, index fund

Create and Manage a Glossary

Add, edit, and delete a glossary.

Prerequisites

To manage glossaries, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— - -) - To access SAP Business Data Cloud cockpit.
- **Catalog Glossary** (CRUD— - -) - To add, edit, and delete glossaries.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Create a Glossary

Create one or more glossaries.

Context

You can create multiple business glossaries. Each business glossary can use a custom term template with its own criteria for term definitions, or you can copy a reference template from an existing glossary. A reference template copies the groups and the custom attributes in each group from an existing glossary. The changes you make in your new glossary are then saved as its own glossary. The template changes do not affect any other glossaries that use the template. The new glossary name appears as a reference template for another new glossary in the future. After you have saved the glossary, you cannot choose a different reference template. To learn more about defining a glossary and terms, see [Using the Business Glossary](#).

To make sure your glossary is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the glossary to be available in just one specific formation, create it using the DSP system for that particular formation.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)   (**Search**).

2. On the catalog search page, click [□ \(Create\)](#), and then choose **Glossary**.

The New Glossary page opens.

3. Enter a unique glossary name.

4. (Optional) Enter a description.

5. Choose one of these options:

- To use a blank term template, leave the **Reference Template** option blank.
- To use an existing template, choose it from the **Reference Template** list.

6. (Optional) Enter a definition with guidelines about what should be included in terms for this glossary. This definition appears as default text for each new term, so you can provide a template or describe any standards that term creators should follow.

7. (Optional) Click the **Add Custom Section** button at the top, right-side of the page to create your attributes.

a. Enter a name for your group of attributes.

b. (Optional) Select **Enable Rich Text Attribute** to include an attribute that is formatted to include features, such as applying text formatting (for example, color, bold, and bullet list), adding multimedia content (images and links to videos), and so on.

c. If you chose **Enable Rich Text Attribute**, enter a name and description, and enable the **Required** option if users must define the attribute before the term is valid.

8. Click **Add**. Optionally, you can add more sections by clicking **Add Section**. When you have finished adding sections, click **Confirm**.

9. Click **Add Attribute** in the section you created.

a. Enter a name for the attribute.

b. (Optional) Enter a description.

c. Choose the data type. Some data types have additional settings to complete.

Validation Type	Additional Settings
Boolean	N/A
Date	N/A
Decimal	Enter a Validation Type : ■ Any Value: Users can enter any decimal value. ■ List of Values: Enter a list of decimal values that the user can choose. If multiple values are acceptable, click Multiselect. ■ Range: Enter a range of decimal values that the user can choose.
Integer	Enter a Validation Type : ■ Any Value: Users can enter any integer value. ■ List of Values: Enter a list of integer values that the user can choose. If multiple values are acceptable, click Multiselect. ■ Range: Enter the Minimum and Maximum values that the user can choose.
String	Enter a Validation Type : ■ Any Value: Users can enter any integer value.

Validation Type	Additional Settings
	■ List of Values: Enter a list of string values that the user can choose. If multiple values are acceptable, click Multiselect.
URL	N/A

i Note

For those data types with the **Multiselect** option, you can initially set the **Multiselect** option to off, and then change it to on if needed. You can also change the validation type. However, if you initially set the **Multiselect** option to on, then you cannot turn it off or change the validation type after it is saved.

d. Choose whether you want the attribute in the **Left** or **Right** column in the **Display Column** option.

e. (Optional) Click **Required** if users must define the attribute before the term is valid.

f. Click **OK** to return to the template.

10. Repeat the last step for other attribute groups you created.

11. Click **Save** to return to the catalog. Updating custom attributes can change the state between **Current** and **Needs Repair**. Use the search functionality to find and fix those terms that have become invalid because the validation type or required options changed.

After you've created a glossary, you can create term categories or create terms. See [Create and Manage a Glossary Category](#) and [Create and Manage Glossary Terms](#).

Edit a Glossary

Context

You can edit a glossary by accessing the catalog from the same system that was used when creating the glossary. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system and created a glossary, you must access the catalog from the same system to edit that glossary.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).

2. On the catalog search page, click  **Edit**  **Glossary**  **Edit Glossary** .

The Select Glossary dialog opens.

3. Choose a glossary.

4. Edit the name, description, or definition.

5. To edit the attributes in a section, click the **Edit Custom Sections** button in the upper, right side of the page.

The **Edit Custom Sections** dialog opens.

6. Click  **Edit** next to the section with attributes that you want to change.

7. After completing your changes, click **Confirm** to return to the **Edit Custom Sections** dialog where you can edit other sections. When you've finished editing the sections, click **Close** to return to the **Edit Glossary** page.

8. Click **Save** to return to the catalog.

Delete a Glossary

Context

You can delete a glossary by accessing the catalog from the same system that was used when creating it. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system and created a glossary, you must access the catalog from the same system to delete it.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).
 2. Click the  **Edit**  **Glossary**  **Delete Glossary**.
- The **Select Glossary** dialog opens.
3. Choose the glossary that you want to delete.
 4. On the confirmation message, click **Delete** to remove the glossary and all the associated categories and terms.

Create and Manage a Glossary Category

Create categories to organize your terms.

Prerequisites

To manage glossary categories, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— - -) - To access SAP Business Data Cloud cockpit.
- **Catalog Glossary** (—R— - -) - To view the list of glossaries.
- **Catalog Glossary Object** (CRUD— -M) - To add, edit, and delete categories and terms for glossaries. Also, to publish or unpublish terms.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Create a Glossary Category

Prerequisites

Before creating categories, you must create a glossary. See [Create and Manage a Glossary](#).

Context

The business glossary categories are a hierarchical structure that contains the business terms. The business terms can be included in multiple categories. For example, a financial business that has the categories of Businesses Finance and Individual Finance can have the terms Customer ID and Budget in both categories.

You can add a category to a glossary accessing the catalog from the same system that was used when creating the glossary. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system to create a glossary, you must access the catalog from the same system to and add a category to that glossary.

Procedure

1. In the side navigation area, choose  (Catalog & Marketplace)  (Search).

2. On the catalog search page, click  Edit > Glossary > Manage Categories .

The **Select Glossary** dialog opens.

3. Click the glossary where you want to add categories.

The **Manage Categories** dialog opens.

4. Click  (Create Category) next to the **Search categories** box.

The **Create Category** popover opens.

5. Enter a category name.

6. (Optional) Enter a description.

7. Click **Save**.

8. To create a child category, select a category, and then click  (Create Child Category) in the same row as the category name. To create a category at the top level, click **Create Category** at the top of the dialog without selecting any current categories. Repeat the steps in this section to add more categories.

9. Click **Done** to return to the catalog.

Edit or Delete a Category

Context

You can edit or delete a category for a glossary by accessing the catalog from the same system that was used when creating it. For example, if you access the catalog from the SAP Business Data Cloud cockpit system to create a glossary category, you must access the catalog from the same system to edit the category.

Procedure

1. In the side navigation area, choose  (Catalog & Marketplace)  (Search).

2. On the catalog search page, click  Edit > Glossary > Manage Categories .

The **Select Glossary** dialog opens.

3. Click the glossary where you want to edit or delete categories.

The **Manage Categories** dialog opens.

4. Click  (Edit category) next to the category.

5. Choose one of the following:

- To edit the name or description, type the new text in each option, and then click **Save**.
- To delete the category and any child categories, click **Delete**.

6. Click **Done** to return to the catalog.

Create and Manage Glossary Terms

Glossary terms provide a business definition for assets, terms, and KPIs.

Prerequisites

To manage glossary terms, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— - -) - To access SAP Business Data Cloud cockpit.
- **Catalog Asset** (—RU— -M) - To edit an asset's name and short and long descriptions and add term, KPI, and tag relationships on the asset details page.
- **Catalog Glossary** (—R— - -) - To view the list of glossaries.
- **Catalog Glossary Object** (CRUD— -M) - To add, edit, and delete categories and terms for glossaries. Also, to publish or unpublish terms.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Create a Term

Context

When you create a term, make the definition as clear and complete as possible. Make sure the definition isn't so broad that it applies to all assets, nor too narrow that it applies to only a few assets.

The only required fields are **Term Name** and **Definition**, and any required custom attributes based on the reference template. You can add an optional description used as a short description of the term. When you add keywords, synonyms, term relationships, and categories, then you can more easily find and understand the term. Keywords can be descriptive names for the terms. For example, APY can be a keyword for the term Annual Percentage Yield. A synonym is a word or phrase that means nearly the same thing as the original term. For example, "deposit" is a synonym for "fund". Keywords and synonyms don't have to be terms defined in your glossary.

To make sure your term is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the term to be available in just one specific formation, create it using the DSP system for that particular formation.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).

2. On the catalog search page, click  (**Create**), and then choose **Term**.

The Select Glossary dialog opens.

3. Click the glossary where you want to add a term.

The **New Term** page opens.

4. Enter a term name.

5. (Optional) Enter a short description of the term.

6. (Optional) Select one or more categories where you want the term added. Select up to 25 categories, and then click **OK**.

7. (Optional) Enter up to 10 keywords or 10 synonyms by typing the words and pressing Enter after each word or phrase.

8. Enter a definition. Use the tools to enhance your definition, such as applying text formatting (for example, color, bold, and bullet list), adding multimedia content (images and links to videos), and so on. Images must be hosted elsewhere and are not saved in the repository. When adding an image, you provide a link to the image, which can be accessed from the browser when viewing the definition. The image will appear embedded in the definition.

9. (Optional) Set any custom attributes as defined in the glossary in the attribute sections.


10. (Optional) To add related objects, click **Save** and refer to [Manage a Term Relationship](#) for additional steps.

11. Click **Save** to view the completed term or click **Save and New** to create another term.

Results

The newly created term is saved and by default is unpublished. Only users with the **Catalog Administrator** role can search for and see all unpublished terms. For each term, you can see visible status labels that show its functional and publication statuses. Review the following table for what actions you can do for the different term statuses.

Term Status

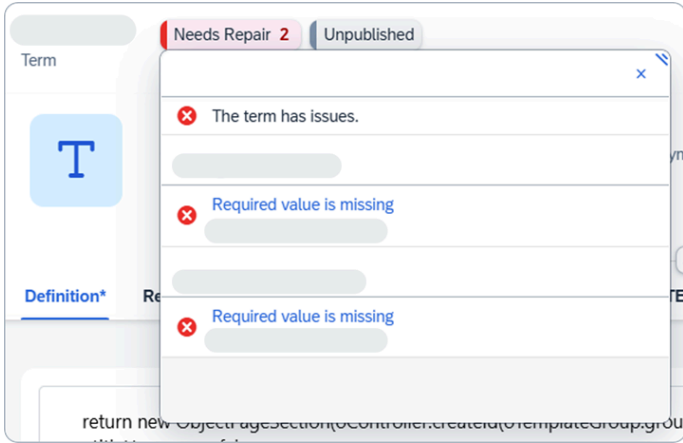If the term status is	Then	Find out more
Current	The term does not have any issues. You can publish the term and define object relationships for it. If needed, you can edit the term, such as change its name, description, keywords, and more.	Manage a Term Relationship Publishing Content to the Catalog Edit a Term
Needs Repair	The term has a warning or error that needs to be fixed. The term cannot be published until it is fixed. You can view the errors under Status on the term page: 	Edit a Term
Published	The term is visible to anyone who uses the catalog. You can unpublish an individual term on the term page by clicking Unpublish or you can unpublish several terms on the catalog search page.	Publishing Content to the Catalog
Unpublished	The term is visible only to users who have the Catalog Administrator role. You can publish an individual term on the term page by clicking Publish or you can publish several terms on the catalog search page.	Publishing Content to the Catalog

You can edit, delete, and publish a term by accessing catalog from the same system that was used when creating the term. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system and created the term, you must access the catalog from the same system to edit, delete, or publish the term.

Manage a Term Relationship

Context

You can add and remove term relationships to assets in one of the following ways:

- On the term's details page, you can add and remove relationships to assets, KPIs, and other terms. To do this, you must access the term's details page from the same system that was used to create the relationship. For example, if you access

the catalog from SAP Datasphere of a specific formation, you must use that same system to access the catalog when managing relationships.

- From the asset details page, you can go to the **Semantic Enrichment** tab to add term relationships to assets. Also, if you want to add relationships to an asset's attributes, measures, and dimensions, select **Overview** > **Details** to add those relationships.

When the assets have relationships with terms, you can gain more insight into the meaning of your data. You can also assign a term to a KPI, or another term. The list of relationships can give a complete picture of the term's relevance to the business.

Procedure

1. In the side navigation area, choose **Catalog & Marketplace** > **Search**.
 2. On the catalog search page, use the filters or the search to find the term you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
 3. Click the **Related Objects** tab.
 4. Click the **Manage Details** button.
- The **Manage Relationships** dialog opens with a list of terms, KPIs, and assets.
5. (Optional) In the search bar, select either **Assets**, **Terms**, or **KPIs** from the dropdown list for the object you want to create a relationship.
 6. (Optional) Enter all or part of the object name in the **Search** box to further refine the results.
 7. (Optional) To filter on different options for assets, KPIs, and terms, such as glossaries, KPI categories, or favorite or recent objects, click **Show filters**. To sort the list alphabetically, click **Sort**. To change the view of the results, click **Display as Table** or **Display as List**.
 8. Click the checkbox next to one or more objects, and then click the **Add to Related Objects** button.


The objects are placed in categories in the **Related Objects** panel on the right.

9. (Optional) To delete a related object, click the **X** next to the object in the **Related Objects** panel.
10. Click **Save** to return to the term.

→ Tip

You can manage term relationships for an asset by using the asset details page.

- Select **Semantic Enrichment** > **Terms**. If no terms are assigned, select **Assign Terms**. If you are adding or removing terms, select the **Manage** button. If you want to remove a term, select the **Delete** button for the row.

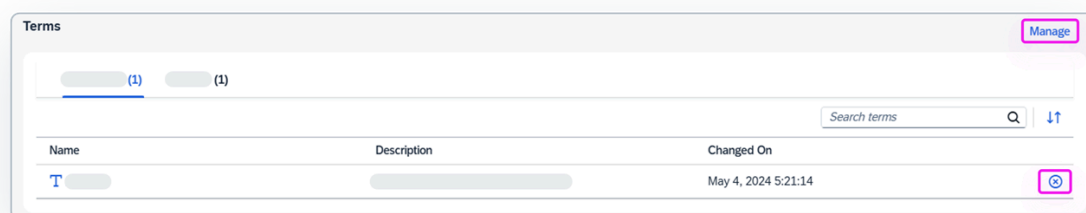

- Select **Overview** > **Details**. Select the metadata tab that you want to enrich and, in the table, select a row. In the toolbar for the table, select **Manage**.

Details

Columns (6)

Search

Q

↓↑

▼

⚙

Manage

Key	Business Name	Technical Name	Data Type	Default Value	Not Null	Related Objects
			Integer			
			Timestamp		✓	
			String(1)	I	✓	
🔑			Integer		✓	
			String(5000)			
			String(5000)			

Edit a Term

Context

You can edit a term by accessing the catalog from the same system that was used when creating it. For example, if you access the catalog from the SAP Business Data Cloud cockpit system to create a term, you must access the catalog from the same system to edit it.

Procedure

1. In the side navigation area, choose  (Catalog & Marketplace)  (Search).
2. On the catalog search page, use the filters or the search to find the term you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. Choose one or more options to edit the term.

Option	Description
Edit	At the top of the screen, click Edit to open a dialog to change the name, summary, categories, keywords, and synonyms.
Edit Definition	In the Definition area, click Edit Definition to change the term definition.
Manage Details	In the Related Objects area, click Manage Details to add or delete relationships with this term. If the relationship is indirect, you must open that object to remove the relationship.
Custom Attributes	If the term has custom attributes, click Edit in the area with your custom attribute name to make changes to those attributes.

4. Click **Save**.

Delete a Term

Context

You can delete a term by accessing the catalog from the same system that was used when creating it. For example, if you access the catalog from the SAP Business Data Cloud cockpit system to create a term, you must access the catalog from the same system to delete it.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)   (**Search**).
2. On the catalog search page, use the filters or the search to find the term you want. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. Click the checkbox next to the term you want to delete. You can delete multiple terms at the same time.
4. Click  (*Delete*).
5. Click **Delete** on the Confirmation dialog.

Related Information

[Enriching and Managing Catalog Assets](#)

Import Glossary Terms

Save time and reduce manual effort by importing glossary terms that were exported from other applications into the catalog. You can upload terms using a Microsoft Excel file, streamlining the process and ensuring consistency across your data landscape.

Prerequisites

To manage glossaries, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— - -) - To access SAP Business Data Cloud cockpit.
- **Catalog Glossary** (CRUD— - -) - To add, edit, and delete glossaries.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Context

Rather than creating glossaries manually, you can import your glossaries from other applications as long as they're in a Microsoft Excel XLSX file.

To make sure your glossary is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the glossary to be available in just one specific formation, create it using the SAP Datasphere system for that particular formation.

Using Delimiters and the Escape Character

You can use delimiters and the escape character to import your terms with attributes that have multiple values (for example, keywords, categories, value lists, or other attribute). Delimiters help separate these values, while escape characters manage any special characters within them.

You can choose any character as the delimiter to separate the attributes of terms. The following example uses categories to demonstrate how you can use delimiters.

Example

In the import template, set **List Separator** to comma (,) and **Hierarchy Field Separator** to slash (/). In your import file you have a term named **Compound Interest**.

- To assign the term to one category, enter a full path for the category. For example, **Finance/Interest**. The **Compound Interest** term will be assigned to the **Interest** category, where **Finance** is the top-level category and **Interest** is a child category.
- To assign the term to more than one category, enter a full path for each category you want the term to. For example, **Finance,Finance/Interest**. In this case, the **Compound Interest** term is assigned to two categories: the **Finance** category (top-level) and the **Interest** category (child).

→ Tip

If a category doesn't already exist, it'll be created during the import.

If your term's attribute has any values that contain the delimiters, you need to specify the escape character you want to use. To keep your import file simple, you can set the same values as the separators. The following example uses categories to demonstrate how to use the escape character.

❖ Example

In the import template, set **List Separator** to comma (,) and **Hierarchy Filed Separator** to slash (/). Also set **List Escape** to comma (,) and **Hierarchy Filed Escape** to slash (/). In your import file you have a term named **Compound Interest** and the following categories: **Finance** category (top-level) and the **Interest, Long/Term** category (child). The full path entry for the term is as follows:

- Finance,Finance/Interest,,Long//Term

The **Compound Interest** term is assigned to the a single category: **Finance/Interest, Long/Term** category.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)    (**Search**).

2. On the catalog search page, click  **Import**  **Terms** .

If you have never imported before, the **File Upload** dialog opens. If you have previously imported, the **Import Terms** dialog opens where you can see drafts of files available for import and files that have already been imported. For more information about the detailed status of existing import jobs, see [View Details About Glossary Term Import](#).

3. Click **Create Import**.

4. Select a glossary where you want the terms to go.

The **File Upload** dialog opens.

5. Either drag and drop your Microsoft Excel file or click  (**Browse**) to locate your file.

6. In the **Selected Sheet Number** list, choose the worksheet you want to import. If you've selected the incorrect sheet, you can choose the correct one on the next screen.

7. (Optional) If the first row of your worksheet contains header information, click **Use first row as column header**.

8. If you have mapped a similar worksheet in the past, you can choose the file in the **Mapping Template** list. Otherwise, choose **Use new mapping**.

9. Click **Upload**.

The **Import Terms** page opens and some options may be mapped. You can remove the default mapping by clicking the **Clear Mapping** button in the upper-right corner.

10. In the header area, you can set the options (such as **Selected Sheet** and **Column Header**) if they haven't defaulted to the correct option. For more information about the options, click  (**Help**). After making the changes, click **Update**.

11. In the **Default Attributes** and **Custom Sections** areas, map your source columns to the target attributes. To learn more about the mapping details, click the **>** arrow.

12. Click either **Save Draft** to come back later to complete the import, or click **Import** to begin the import process.

Results

A popup message appears informing you that the import has started and you're taken back to the catalog search page. After the import is completed, another message popup is displayed. Click the **Terms** tab to see the added terms. You can filter on the glossary name where you imported the terms to view only those terms. You can also return to **Import > Terms** to view the completed imports and their status information.

Related Information

[View Details About Glossary Term Import](#)

[Create and Manage Glossary Terms](#)

[Publishing Content to the Catalog](#)

Delete or Move a Term Import

Context

You can perform one of these tasks:

- Move the import file from the **Imports** section to the **Drafts** section
- Delete an imported file

i Note

Deleting or moving an imported file removes all imported terms from the glossary.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).
2. On the catalog search page, click **Import > Terms**.
The **Import Terms** dialog opens where you can see drafts of files available for import and files that have already been imported. For more information about the detailed status of existing import jobs, see [View Details About Glossary Term Import](#).
3. Select the import file or draft import file that you want to delete. Click  (**Delete**).
4. (Optional) To move a file from the **Imports** section to the **Drafts** section, select **Move import configuration to drafts (do not delete)**.
5. Click **OK**.
The file is either moved to the **Drafts** section, if you chose that option, or deleted from the system.
6. Click **Close** on the **Import Terms** dialog to return to the catalog.

View Details About Glossary Term Import

Importing glossaries allows you to view and manage the import process, including drafts and imported terms. This feature is useful for tracking the status of imported terms and addressing any issues that may arise during the import process.

To view import details:

1. In the side navigation area, choose  ([Catalog & Marketplace](#))  ([Search](#)).
2. On the catalog search page, click  [Import](#)  [Terms](#) . The [Import Terms](#) dialog opens where you can see drafts of files available for import and files that have already been imported.

The top portion of the dialog shows the draft imports. These may be imports that need additional changes to the template or the source file to import properly. These status messages may be shown:

- **Ready:** The file is ready for import.
- **Needs Repair:** The Microsoft Excel file has an issue with a term, or the glossary template needs to be adjusted in the catalog before it can be imported.
- **Expired:** The file expired after 90 days. It can no longer be run but may still be used as a mapping template.

The bottom portion of the dialog shows the imported terms for the glossary. These status messages may be shown:

- **In Progress:** The import is processing
- **Completed:** All terms were imported and are ready to use.
- **Completed with Issues:** The import was successful, but some terms may need repair before they can be used.
- **Partially Imported:** The import stopped because it timed out or the template changed. Some items were imported.
- **Failed:** The import was not successful due to a time-out issue or the template changed.

Click on a row in either the [Drafts](#) or [Imports](#) section to get more detailed information about the import. The [Review Imported Terms](#) page opens. On the [Summary of Terms](#) tab, you can see the terms that completed, completed with issues, have errors, or other information. For those terms with issues or errors, there is a link with more information in the [Status](#) column. You can also click the [Import Issues](#) tab to see more about the errors and warnings. Click the link to the term to edit it in the catalog.

Using Key Performance Indicators

A key performance indicator (KPI) measures progress towards a result, such as a goal or objective.

A goal or objective is the outcome that you want to achieve. Typically, goals use the SMART method of definition: specific, measurable, achievable, relevant, and time bound. KPIs, on the other hand, are a metric that indicate your progress in achieving the goal. The KPI is essentially the measurable part of the SMART goal.

A set of KPIs can track performance while providing an analytical basis for decision-making. For example, if you have one KPI indicating success, and another KPI indicating underperformance, then you can decide to allocate more attention or resources to examining the underperforming KPI to increase its chance for success.

Understanding how different types of measures and various metrics are used can increase knowledge and trust in KPI use.

i Note

The KPIs that you use to create a relationship to other assets do not perform any calculations on those assets.

To create a useful KPI, make sure that it's on a goal that can create quantitative or qualitative measures. For example, you can have a goal to improve the customer retention rate by 20% based on last year's retention rate. Use this product to find all the source systems and assets necessary so that you have all the customer data you need to work on this goal and measure it with this KPI.

After you have found the source systems, you can create relationships and link them to this KPI. While defining the KPI, you can specify that the calculation is "CRR=Number of customers at the beginning of a period / number of those customers that

remained customers at the end of a period". Then the detailed documentation can include the steps for finding the source systems and creating a workflow to get the data necessary for tracking each month.

KPI

Current Unpublished

Publish Edit Delete ☆

Summary
This KPI description can be up to 512 characters long. Click Edit to make changes.

General
Categories: —
Keywords: —

Catalog Activity
Created On: Feb 5, 2025 12:12:48 by —
Changed On: Feb 5, 2025 12:12:48 by —
Published On: —

Definition Documentation Related Objects

Properties
Type: —
Measure Type: —
Default Unit: —
Calculation: —

Threshold
-∞ 00

● Critical is between 0 (inclusive) and 69 (inclusive)
● Warning is between 70 (inclusive) and 89 (inclusive)
● OK is between 90 (inclusive) and 100 (inclusive)

Edit Definition

You can create another KPI that can be related to this KPI in the [Related Objects](#) tab. For example, you can have a KPI that tracks the number of new customers this year that uses the same source systems and does a comparison, and then you create a table with the new customer information.

Create and Manage Key Performance Indicators

Add, edit, or delete a key performance indicator (KPI).

Prerequisites

To manage KPIs, you must have a global role that grants you the following privileges:

- [BDC Data Packages](#) (—R— —) - To access SAP Business Data Cloud cockpit.
- [Catalog Asset](#) (—RU— —M) - To edit an asset's name and short and long descriptions and add term, KPI, and tag relationships on the asset details page.
- [Catalog KPI Object](#) (CRUD— —M) - To add, edit, and delete categories and KPIs. Also, to publish and unpublish KPIs.
- [Catalog KPI Template](#) (—R— —) - To view the KPI template.

You can apply the [Catalog Administrator](#) and the [BD Viewer](#) roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Create a Key Performance Indicator

Context

To make sure your KPI is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the KPI to be available in just one specific formation, create it using the DSP system for that particular formation.

Procedure

1. In the side navigation area, choose  (Catalog & Marketplace)  (Search).
2. On the catalog search page, click  (Create), and then choose **KPI**.

The New KPI page opens.

3. Enter the name of the KPI, and optionally, add a description.
4. (Optional) Add a category by clicking .

A dialog opens with all the KPI categories. Click the checkbox next to the categories that you want associated with this KPI, and then click **OK**. You can select up to 25 categories.

5. (Optional) Enter up to 10 keywords by typing the words and pressing **Enter** after each word.
6. (Optional) On the **Definition** tab, choose the KPI type.
7. (Optional) Select a type of measure.
8. (Optional) Select the unit of measure.
9. (Optional) Set one or more threshold ranges.
 - a. Click **+ Add Range**.
 - b. Choose a color and then assign a label for the value. For example, yellow could have a label of "Warning". You can change the default value. For example, you can change the green value of "OK" to "Pass".
 - c. Choose an operator from the table.


Operator	Example
between (inclusive)	Values 1 and 5. Returns the values 1, 2, 3, 4, and 5.
between (left inclusive)	Values 1 and 5. Returns the values 1, 2, 3, and 4.
between (right inclusive)	Values 1 and 5. Returns the values 2, 3, 4, and 5.
between (exclusive)	Values 1 and 5. Returns the values 2, 3, and 4.
equals	Value 5. Returns the value 5.
less than	Value 3. Returns the values 2 and less.
less than or equal to	Value 3. Returns the values 3 and less.
greater than	Value 3. Returns the values 4 and more.
greater than or equal to	Value 3. Returns the values 3 and more.

10. (Optional) Enter a calculation that represents the detailed definition. For example, the calculation could be $E=mc^2$ and the definition could be: E=energy, m=mass multiplied by c= the speed of light $2=squared$.
11. In the **Documentation** area, enter information about your KPI. Use the tools to enhance your definition, such as applying text formatting (for example, color, bold, and bullet list), adding multimedia content (images and links to videos), and so on. Images must be hosted elsewhere and are not saved in the repository. When adding an image, you provide a link to the image, which can be accessed from the browser when viewing the definition. The image will appear embedded in the definition.
12. (Optional) Set any custom attributes as defined in the KPI template.
13. (Optional) To add related objects, click **Save** and refer to [Manage a Key Performance Indicator Relationship](#) for additional steps.

14. Click **Save** to view the completed KPI or click **Save and New** to create another KPI.

Results

The newly created KPI is saved and by default is unpublished. Only users with the **Catalog Administrator** role can search for and see all unpublished KPIs. For each KPI, you can see visible status labels that show its functional and publication status. Review the following table for what actions you can do for the different KPI statuses.

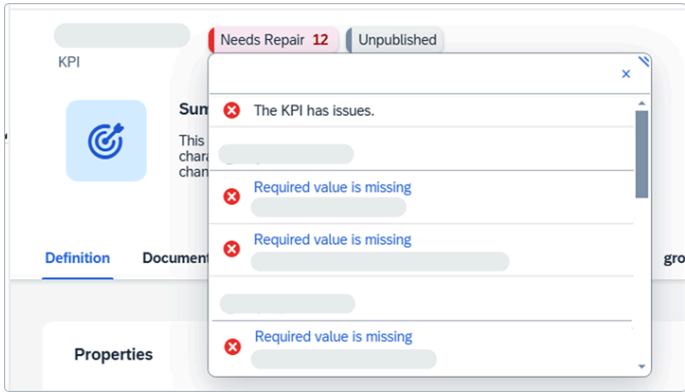KPI Status		
If the KPI status is	Then	Find out more
Current	The KPI does not have any issues. You can publish the KPI and define object relationships for it. If needed, you can edit the KPI, such as change its name, description, keywords, and more.	Manage a Key Performance Indicator Relationship Publishing Content to the Catalog Edit a Key Performance Indicator
Needs Repair	The KPI has a warning or error that needs to be fixed. The KPI cannot be published until it is fixed. You can view the errors under Status on the KPI page: 	Edit a Key Performance Indicator
Published	The KPI is visible to anyone who uses the catalog. You can unpublish an individual KPI on the KPI page by clicking Unpublish or you can unpublish several KPIs on the catalog search page.	Publishing Content to the Catalog
Unpublished	The KPI is visible only to users who have the Catalog Administrator role. You can publish an individual KPI on the KPI page by clicking Publish or you can publish several KPIs on the catalog search page.	Publishing Content to the Catalog

You can edit, delete, and publish the KPI in the catalog where it was created. For example, if you use SAP Business Data Cloud and access the catalog from the SAP Business Data Cloud cockpit system to create the KPI, use that catalog to edit, delete, or publish the KPI.

Manage a Key Performance Indicator Relationship

Context

You can add and remove KPI relationships for assets in one of the following ways:

- On the KPI's details page, you can add and remove relationships to assets, terms, and other KPIs. To do this, you must access the KPI's details page from the same system that was used to create it. For example, if you accessed the catalog

from a SAP Datasphere of a specific formation, you must use that same system to access the catalog when managing that relationship.

- Access the catalog from any system and open the asset details page. You can go to the **Semantic Enrichment** tab to add KPI relationships to assets. Also, if you want to add relationships to an asset's attributes, measures, and dimensions, select **►Overview ► Details ►** to add those relationships.

KPI relationships to other objects help you understand your business and make better decisions:

- Relationships with other KPIs let you compare and analyze related KPIs when tracking performance of an object.
- Relationships with glossary terms help you understand a KPI since you might not be familiar with the language used in the KPI.
- Relationships with assets help you measure an asset's progress towards a result, such as a goal or objective.

Procedure

1. In the side navigation area, choose **📁 (Catalog & Marketplace) ► ► 🔍 (Search)**.
2. On the catalog search page, use the filters or the search to find the KPI you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. Click **Edit**.
4. Click the **Related Objects** tab. Relationships can only be created on existing KPIs. If you're creating a KPI, you need to save the KPI before managing the relationship.
5. Click the **Manage Details** button.

The **Manage Relationships** dialog opens.

6. (Optional) In the search bar, select either **Assets** or **KPIs** from the dropdown list for the object you want to create a relationship.
7. (Optional) Enter all or part of the object name in the **Search** box to further refine the results.
8. (Optional) To filter on different options for assets and KPIs, or favorite and recent objects, click **⌵ (Show filters)**. To sort the list alphabetically, click **⌵ (Sort)**. To change the view of the results, click **📊 (Display as Table)** or **📋 (Display as List)**.
9. Click the checkbox next to one or more objects, and then click **Add to Related Objects**.

The objects are placed in categories in the **Related Objects** panel on the right.

10. (Optional) To delete a related object, click the **X** next to the object in the **Related Objects** panel.
11. Click **Save** to return to the KPI.


→ Tip

You can manage KPI relationships for an asset by using the asset details page.

- Select **►Semantic Enrichment ► KPIs ►**. If no KPIs are assigned, select **Assign KPIs**. If you are adding or removing KPIs, select **Manage**. If you just want to remove a KPI, select the **⌵ (Delete)** button for the row.

Name	Description	Changed On	
🔍		Nov 1, 2023 0:59:27	🔍
🔍		Jan 5, 2024 14:08:16	🔍

- Select **Overview** **Details**. Select the metadata tab that you want to enrich and in the table, select a row. In the toolbar for the table, select **Manage**

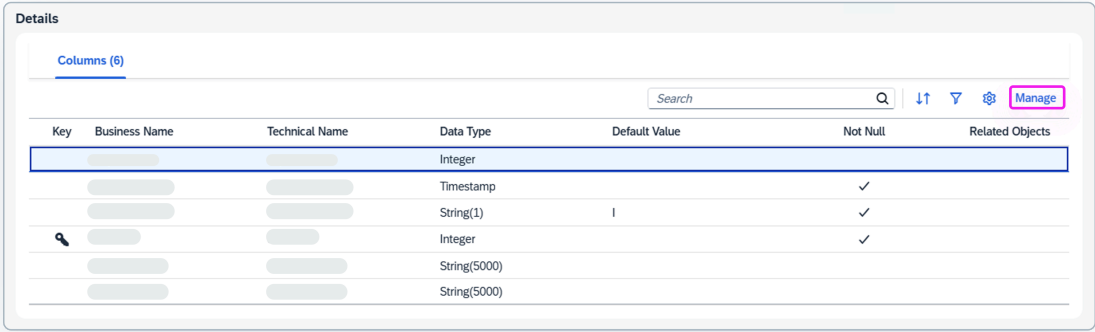

Edit a Key Performance Indicator

Make changes to your KPI.

Context

If a KPI has changed or needs repair, you can edit it. Changes can include editing its name, description, categories, and more.

You can edit a KPI by accessing the catalog from the same system that was used when creating it. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system to create a KPI, you must access the catalog from the same system to edit it. .

Procedure

1. In the side navigation area, choose **Catalog & Marketplace** **Search**.
2. On the catalog search page, use the filters or the search to find the KPI you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. Choose one or more options to edit the KPI.

Option	Description
Edit	At the top of the screen, click Edit to open a dialog to change the name, summary, categories and keywords.
Edit Definition	In the Definition area, click Edit Definition to change the property type, measure type, default unit or the calculation description. You can also add, remove, or change the threshold values.
Edit Content	In the Documentation area, click Edit Content to change the text. You can also change the font, add or remove links and more.
Manage Details	In the Related Objects area, click Manage Details to add or delete relationships with this KPI. If the relationship is indirect, you must open that object to remove the relationship.

Option	Description
Custom Attributes	If you have custom attributes, click Edit in the area with your custom attribute name to make changes to those attributes.

4. Click [Save](#).

Delete a Key Performance Indicator

Delete a KPI from the system.

Context

Deleting a KPI removes the relationships to and from other objects. The KPI is permanently removed from the catalog.

You can delete a KPI by accessing the catalog from the same system that was used when creating it. For example, if you accessed the catalog from the SAP Business Data Cloud cockpit system to create a KPI, you must access the catalog from the same system to delete it.

Procedure

1. In the side navigation area, choose  (Catalog & Marketplace)  (Search).
2. On the catalog search page, use the filters or the search to find the KPI you want and select it. For more information, see [Searching for Data Products and Assets in the Catalog](#).
3. Click the checkbox next to the KPI you want to delete. You can delete multiple KPIs at a time by selecting the checkboxes for other KPIs.
4. Click  (Delete).
5. On the confirmation dialog, click [Delete](#).

Related Information

[Enriching and Managing Catalog Assets](#)

Create and Manage Key Performance Indicator Categories

Create categories to organize your key performance indicators (KPIs).

Prerequisites

To manage KPI categories, you must have a global role that grants you the following privileges:

- [BDC Data Packages](#) (—R— - -) - To access SAP Business Data Cloud cockpit.
- [Catalog KPI Object](#) (CRUD— - M) - To add, edit, and delete categories and KPIs. Also, to publish and unpublish KPIs.
- [Catalog KPI Template](#) (—R— - -) - To view the KPI template.

You can apply the [Catalog Administrator](#) and the [BD Viewer](#) roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Context

Assign categories to your KPIs to organize them and help you find them later.

The KPI categories are separate from glossary categories, so you won't see any glossary category entries when creating or editing your KPI categories. The KPI categories are in a hierarchical structure. For example, see the following hierarchy:

- Customer Service
 - Tickets closed in 12 hours
 - Tickets closed in 48 hours
 - Customer satisfaction

When you search on a category, you can find the number of KPIs associated with the category in the search results. Categories can be assigned to multiple KPIs. If you assigned a child category to the KPI, but not the top-level category, you could still find the KPI when you search on the top-level category name. For example, if you assigned the category "Customer satisfaction", you could search on the phrase "Customer Service" and still return the KPI assigned with the "Customer satisfaction" category.

To make sure your category is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the category to be available in just one specific formation, create it using the DSP system for that particular formation.

To add or manage categories:

Procedure

1. In the side navigation area, choose  (Catalog & Marketplace)  (Search).
2. On the catalog search page, click  Edit > KPI > Manage Categories .
3. Choose one of these tasks:

KPI Task	Steps
Create a top-level category	a. Click the  <i>Create Category</i> button next to the Search categories box. b. Enter a name and description (optional), and then click Save .
Create a child category	a. Click the category where you want a category within it. b. Click  <i>Create child category</i> in the same row you highlighted (next to the pencil icon). c. Enter a name and description (optional), and then click Save .
Edit a category	a. Click the  <i>Edit category</i> button in the same row as the category that you want to edit. b. Edit the name or description, and then click Save .
Delete a category	a. Click the  <i>Edit category</i> button in the same row as the category that you want to edit. b. Click Delete .

4. Click **Done** to return to the catalog.

Define the Key Performance Indicator Template

Define the elements to be included in all your key performance indicators (KPIs).

Prerequisites

To define a KPI template, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— — —) - To access SAP Business Data Cloud cockpit.
- **Catalog KPI Template** (-RU— — —) - To edit the KPI template.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Context

The KPI template generates consistency for those individuals who create KPIs. By defining the KPI template, you determine the required elements and KPI standards. For example, you can create custom attributes so that a KPI must be reviewed by one or more people and have a sign-off date.

Within the template you can create custom types, measurement types, and units of measure. For example, you can have a measure type of "density" and a default unit of "grams per cubic centimeter" or "kilograms per cubic meter".

In the KPI definition, you can give guidelines for measuring KPIs. It can have specifications per department. For example, the customer service guidelines can say that the KPIs must reference customer satisfaction with the incident.

You can create custom attributes to create tabs that specify some optional and required parameters. For example, you can create a Governance tab that contains these attributes: Reviewed by, Date Reviewed, and Approved.

After the KPI template is set, all KPIs use the same template. If someone edits the KPI template and adds a required attribute after one or more KPIs have been created and published, then the KPIs have an error and should be updated with the required template value. Catalog Users are still able to view the published KPI. Any unpublished KPIs that have an error cannot be published until the errors are corrected. Use the search functionality to find and fix those KPIs that have become invalid because the template required options have changed.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).
2. On the catalog search page, click  **Edit**  **KPI**  **Edit Template** .
3. (Optional) In the **Definition** tab, you can see **KPI Type**, **Default Unit**, and **Measure Type**. To edit the values for those options, you can click  (**Delete**) to remove default or custom options, or click the **Create** button to add custom options. Click **Save**.

i Note

To restore these sections, click **Reset** and choose on of the following:

- **Remove Custom Values:** Delete any added values.
 - **Restore Default Values:** Recover the original list of default values and remove any custom values.
4. In the **Documentation** section, specify what a good KPI should contain. For example, the KPI should not be overly complex, should align with other KPIs, be relevant to the business, measurable, and so on.
 5. (Optional) Click the **Add Custom Section** button at the top, right-side of the page to create your attributes.

- a. Enter a name for your group of attributes.
 - b. (Optional) Select **Enable Rich Text Attribute** to include an attribute that is formatted to include features, such as applying text formatting (for example, color, bold, and bullet list), adding multimedia content (images and links to videos), and so on.
 - c. If you chose **Enable Rich Text Attribute**, enter a name and description, and enable the **Required** option if users must define the attribute before the term is valid.
 - d. Click **Add** to return to the **Edit Custom Sections** dialog.
6. Optionally, you can add more sections by clicking **Add Section**. When you have finished adding sections, click **Close** to return to the **Edit KPI Template** page.
 7. In the section you created, click the **Add Attribute** button.
 8. Enter a name for the attribute.
 9. (Optional) Enter a description.
 10. Choose the data type. Some data types have additional options to complete.

Validation Type	Additional Options
Boolean	N/A
Date	N/A
Decimal	Enter a Validation Type : - o Any Value: Users can enter any decimal value. - o List of Values: Enter a list of decimal values that the user can choose. If multiple values are acceptable, click Multiselect. - o Range: Enter a range of decimal values that the user can choose.
Integer	Enter a Validation Type : - o Any Value: Users can enter any integer value. - o List of Values: Enter a list of integer values that the user can choose. If multiple values are acceptable, click Multiselect. - o Range: Enter the Minimum and Maximum values that the user can choose.
String	Enter a Validation Type : - o Any Value: Users can enter any integer value. - o List of Values: Enter a list of string values that the user can choose. If multiple values are acceptable, click Multiselect.
URL	N/A

i Note

For those data types with the **Multiselect** option, you can initially set the **Multiselect** option to off, and then change it to on if you change your mind. You can also change the validation type. However, if you initially set the **Multiselect** option to on, then you cannot turn it off or change the validation type.

11. Choose whether you want the attribute in the **Left** or **Right** column in the **Display Column** option.
12. (Optional) Click **Required** if users must define the attribute before the term is valid.

13. Click **OK** to return to the template.

14. Click **Save** to return to the catalog.

Import Key Performance Indicators

Save time and reduce manual effort by importing key performance indicators (KPIs) that were exported from other applications into the catalog. Instead of manually creating KPIs, you can upload them using a Microsoft Excel file, streamlining the process and ensuring consistency across your data landscape.

Prerequisites

To manage KPIs, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— - -) - To access SAP Business Data Cloud cockpit.
- **Catalog Asset** (—RU— - M) - To edit an asset's name and short and long descriptions and add term, KPI, and tag relationships on the asset details page.
- **Catalog KPI Object** (CRUD— - M) - To add, edit, and delete categories and KPIs. Also, to publish and unpublish KPIs.
- **Catalog KPI Template** (—R— - -) - To view the KPI template.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

Context

Rather than creating KPIs manually, you can import them from other applications as long as they're in a Microsoft Excel XLSX file.

To make sure your KPI is available in all catalog views, it's best to create it using the SAP Business Data Cloud cockpit system. If you want the KPI to be available in just one specific formation, create it using the SAP Datasphere system for that particular formation.

Using Delimiters and the Escape Character

You can use delimiters and the escape character to import your KPIs with attributes that have multiple values (for example, keywords, categories, value lists, or other attribute). Delimiters help separate these values, while escape characters manage any special characters within them.

You can choose any character as the delimiter to separate the attributes of KPIs. The following example uses categories to demonstrate how you can use delimiters.

❖ Example

In the import template, set **List Separator** to comma (,) and **Hierarchy Field Separator** to slash (/). In your import file you have a KPI named **Lead Conversion Rate**.

- To assign the KPI to one category, enter a full path for the category. For example, **Sales/North America Location**. The **Lead Conversion Rate** KPI will be assigned to the **North America Location** category, where **Sales** is the top-level category and **North America Location** is a child category.

- To assign the KPI to more than one category, enter a full path for each category you want the KPI to. For example, **Sales,Sales/North America Location**. In this case, the **Lead Conversion Rate** KPI is assigned to two categories: the **Sales** category (top-level) and the **North America Location** category (child).

→ Tip

If a category doesn't already exist, it'll be created during the import.

If your KPI's attribute has any values that contain the delimiters, you need to specify the escape character you want to use. To keep your import file simple, you can set the same values as the separators. The following example uses categories to demonstrate how to use the escape character.

❖ Example

In the import template, set **List Separator** to comma (,) and **Hierarchy Filed Separator** to slash (/). Also set **List Escape** to comma (,) and **Hierarchy Filed Escape** to slash (/). In your import file you have a KPI named **Lead Conversion Rate** and the following categories: **Sales** category (top-level) and the **North, America/Location** category (child). The full path entry for the KPI is as follows:

- Sales,Sales/North,,America//Location

The **Lead Conversion Rate** KPI is assigned to the a single category: **Sales/North, America/Location** category.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)   (**Search**).

2. On the catalog search page, click  **Import** .

If you have never imported before, the **File Upload** dialog opens. If you have previously imported, the **Import KPIs** dialog opens where you can see drafts of files available for import and files that have already been imported. For more information about the detailed status of existing import jobs, see [View Details About Key Performance Indicator Import](#).

3. Click **Create Import**.

4. Either drag and drop your Microsoft Excel file or click  (**Browse**) to locate your file.

5. In the **Selected Sheet Number** list, choose the worksheet you want to import. If you've selected the incorrect sheet, you can choose the correct one on the next screen.

6. (Optional) If the first row of your worksheet contains header information, click **Use first row as column header**.

7. If you have mapped a similar worksheet in the past, you can choose the file in the **Mapping Template** list. Otherwise, choose **Use new mapping**.

8. Click **Upload**.

The **Import KPIs** page opens and some options may be mapped. You can remove the default mapping by clicking the **Clear Mapping** button in the upper-right corner.

9. In the header area, you can set the options (such as **Selected Sheet** and **Column Header**) if they haven't defaulted to the correct option. For more information about the options, click  (**Help**). After making the changes, click **Update**.

10. In the **Default Attributes** and **Custom Sections** areas, map your source columns to the target attributes. To learn more about the mapping details, click the **>** arrow.

11. Click either **Save Draft** to come back later to complete the import, or click **Import** to begin the import process.

Results

A popup message appears informing you that the import has started and you're taken back to the catalog search page. After the import is completed, another message popup is displayed. Click the **KPIs** tab to see the added KPIs. You can also return to  **Import**  to view the completed imports and their status information.

Related Information

[View Details About Key Performance Indicator Import](#)

[Create and Manage Key Performance Indicators](#)

[Publishing Content to the Catalog](#)

Delete or Move a Key Performance Indicator Import

Context

You can perform one of these tasks:

- Move the import file from the **Imports** section to the **Drafts** section
- Delete an imported file

i Note

Deleting an imported file removes all imported KPIs.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).

2. On the catalog search page, click .

The **Import KPIs** dialog opens where you can see drafts of files available for import and files that have already been imported. For more information about the details status of existing import jobs, see [View Details About Key Performance Indicator Import](#).

3. Select the import file that you want to delete. Click  (**Delete**).

4. (Optional) To move a file from the **Imports** section to the **Drafts** section, select **Move import configuration to drafts (do not delete)**.

5. Click **OK**.

The file is either moved to the **Drafts** section, if you chose that option, or deleted from the system.

6. Click **Close** on the **Import KPIs** dialog to return to the catalog.

View Details About Key Performance Indicator Import

Importing key performance indicators (KPIs) allows you to view and manage the import process, including drafts and imported KPIs. This feature is useful for tracking the status of imported KPIs and addressing any issues that may arise during the import process.

To view import details:

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Search**).

2. On the catalog search page, click . The **Import KPIs** dialog opens where you can see drafts of files available for import and files that have already been imported.

The top portion of the dialog shows the draft imports. These may be imports that need additional changes to the template or the source file to import properly. These status messages may be shown:

- **Ready:** The file is ready for import.
- **Needs Repair:** The Microsoft Excel file has an issue with the KPI definition or the KPI template needs to be adjusted in the catalog before it can be imported.
- **Expired:** The file expired after 90 days. It can no longer be run but may still be used as a mapping template.

The bottom portion of the dialog shows the imported KPIs. These status messages may be shown:

- **In Progress:** The import is processing
- **Completed:** All KPIs were imported and are ready to use.
- **Completed with Issues:** The import was successful, but some KPIs may need repair before they can be used.
- **Partially Imported:** The import stopped because it timed out or the template changed. Some items were imported.
- **Failed:** The import was not successful due to a time-out issue or the template changed.

Click on a row in either the **Drats** or **Imports** section to get more detailed information about the import. The **Review Imported KPIs** page opens. On the **Summary of KPIs** tab, you can see the KPIs that completed, completed with issues, have errors or other information. For those KPIs with issues or errors, there is a link with more information in the **Status** column. You can also click the **Import Issues** tab to see more about the errors and warnings. Click the link to the KPI to edit in the catalog.

Publishing Content to the Catalog

When you publish assets, terms, and key performance indicators (KPIs) to the catalog, you determine what content is available for catalog users to discover. You can set source systems to automatically publish assets, or you can be more involved and manually publish individual assets from the asset details page or manually publish small groups of assets from the catalog search page.

Prerequisites

To publish content to the catalog, you must have a global role that grants you the following privileges:

- **BDC Data Packages** (—R— — —) - To access SAP Business Data Cloud cockpit.
- **Catalog Asset** (—R— — —M) - To publish or unpublish assets or exclude assets from automatic publishing.
- **Catalog Glossary Object** (CRUD— —M) - To add, edit, and delete categories and terms for glossaries. Also, to publish or unpublish terms.
- **Catalog KPI Object** (CRUD— —M) - To add, edit, and delete categories and KPIs. Also, to publish and unpublish KPIs.

You can apply the **Catalog Administrator** and the **BD Viewer** roles together, for example, to grant these privileges (see [Standard Roles Delivered with SAP Business Data Cloud](#) and [Privileges and Permissions in SAP Business Data Cloud](#)).

→ Tip

Before publishing an asset to the catalog, you can improve its overall quality by editing its name, adding a custom description, and enriching its metadata by managing its relationships to tags, glossary terms, and KPIs. For information, see [Enriching and Managing Catalog Assets](#).

Enabling Automatic Publishing for Assets

Context


Organizations that don't need separate enrichment and publishing steps for assets can choose to automatically publish them from the source system to the catalog.

i Note

As a best practice before you enable automatic publishing for an existing source system, set the publication status for any assets that you don't want to be automatically published to **Excluded**. Excluded assets are not visible to catalog users and cannot be discovered. These assets will not be published until you change the publication setting.

Procedure

1. In the side navigation area, choose  (**Catalog & Marketplace**)  (**Metadata Extractions**).
2. Set the automatic publishing option for a new or existing source system.
 - o New source system: In the **Remote Systems** table, choose **Create**.
 - o Existing source system: In the **Systems** list, select the source system you want and choose **Edit**.
3. In the dialog for creating or editing a source system, select the **Enable Auto Publishing to the Catalog** checkbox.

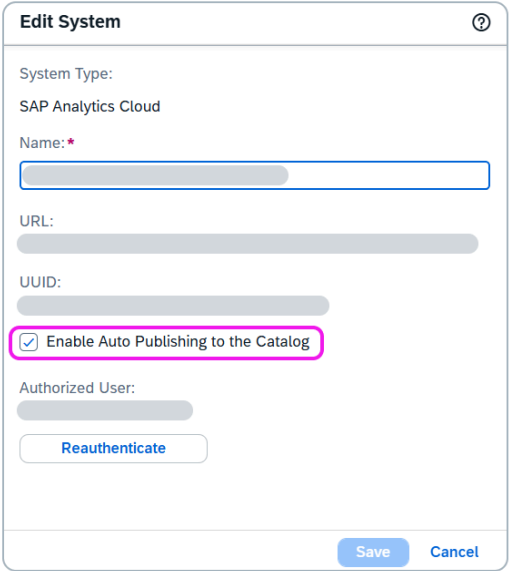

Edit System ⓘ

System Type:
SAP Analytics Cloud

Name: *

URL:

UUID:

☒ Enable Auto Publishing to the Catalog

Authorized User:

[Reauthenticate](#)

[Save](#) [Cancel](#)

4. Choose **Create** to create the connection or choose **Save** to save the changes to the existing connection.
Review the warning message, and if you still want to enable automatic publishing, you can finish creating the connection or saving the changes.
5. For newly created source system connections, run a manual synchronization. For existing source systems, running a manual synchronization is optional.

Results


For newly created source system connections, after the manual synchronization finishes, all objects are published as assets to the catalog. Also, as part of the ongoing catalog monitoring of the source system, all new objects that are added to the source system are automatically extracted and published. The publication status of all assets automatically published to the catalog is set to **Published**.

For existing source system connections, the assets are updated immediately after the changes are saved.


- Objects that are newly created in the source system are published. The publication status of these assets is set to **Published**.
- Existing assets that have the **Unpublished** and **Current** statuses are published and their publication statuses are updated to **Published**.
- Existing assets that have the **Published** status remain published and the publication status is unchanged.
- Existing assets that have the **Exclude** status remain hidden to catalog users and the publication status is unchanged.

If there are assets that you don't want published, search for those assets and set their publication status to **Excluded**.

- On the catalog search page, select the checkboxes for several assets and then choose **Publish Actions** > **Exclude**.

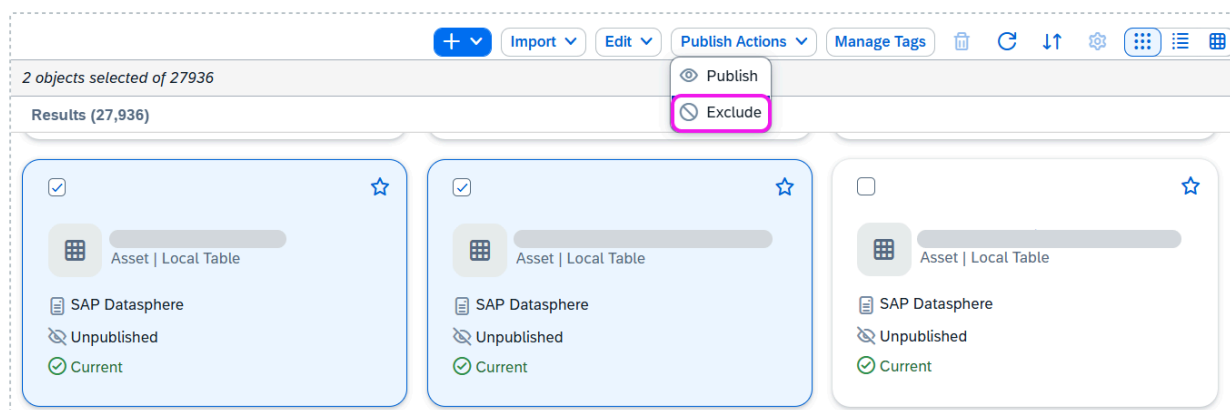

- On the asset details page, choose the **Publish Actions**, and choose **Exclude**.

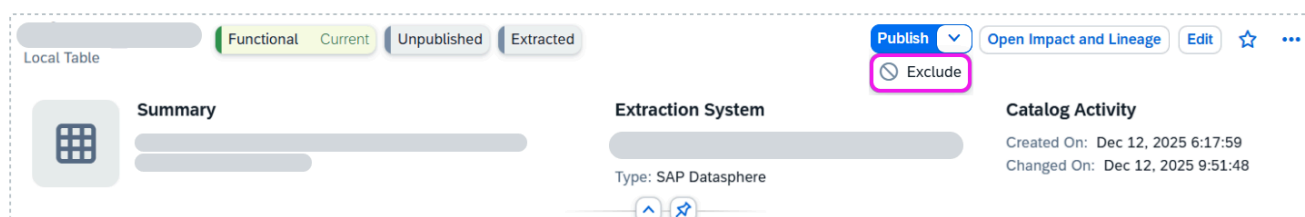


These assets remain in the catalog, but are hidden to users with the **Catalog User** role. You can see which assets have the **Excluded** publication status by viewing the icons on its catalog preview or impact and lineage analysis diagram or by reviewing the asset details page. To find all excluded assets, use the filters and select the **Excluded** publication status.

Publishing from the Catalog Search Page

Procedure

1. In the side navigation area, choose **(Catalog & Marketplace)** > **(Search)**.
2. On the catalog search page, select one or more assets, terms, or KPIs by selecting their checkboxes in **Grid**, **List**, or **Table** view.

In **Grid** view, different visibility icons tell you what is published, and therefore visible to anyone who uses the catalog, compared to unpublished objects:

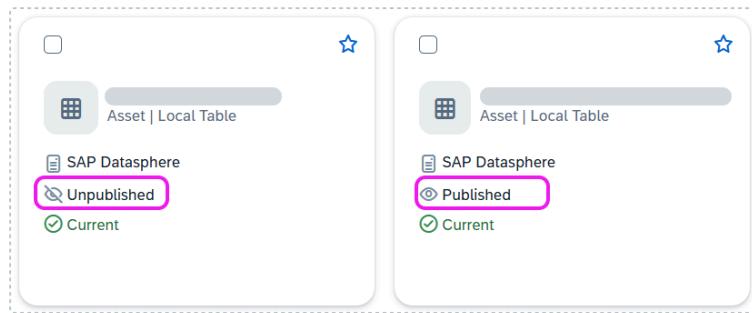

In **List** and **Table** views, check the **Publication Status** field.

3. On the top toolbar, choose **Publish Actions** > **Publish**.

Results

The status of the object changes to **Published**, and it can be discovered by all users in the catalog. The date and time when an object is published appears in the header under the **Catalog Activity** section. If you need to temporarily hide assets, terms, or KPIs from catalog users, select one or more objects and choose **Publish Actions** > **Unpublish** to unpublish the objects so they are no longer discoverable.

Publishing from the Object Details Page

Context

When you finishing enriching an asset or you finish creating and editing a term or KPI, you can publish the object directly from its details page.

Procedure

1. In the side navigation area, choose **Catalog & Marketplace** > **Search**.
2. Open the page for an unpublished asset, term, or KPI.
3. In the top-right corner, choose the **Publish** button.

Results

The status of the object changes to **Published**, and it can be discovered by all users in the catalog. The date and time when an object is published appears in the header under the **Catalog Activity** section. If you need to temporarily hide the asset, term, or KPI from catalog users, choose the **Unpublish** button to unpublish the object so it's no longer discoverable.

Next Steps

From time to time, the status of an object changes. For example, the functional status of an asset might show that it's no longer current. To ensure that all assets, terms, and KPIs are in good shape for your users, review statuses of the objects and decide what you need to do to fix the ones that have issues.

Related Information

[Understanding Different Catalog Views](#)

[Searching for Data Products and Assets in the Catalog](#)

[Create and Manage Glossary Terms](#)

