a Condition coding layers

208 historical condition units

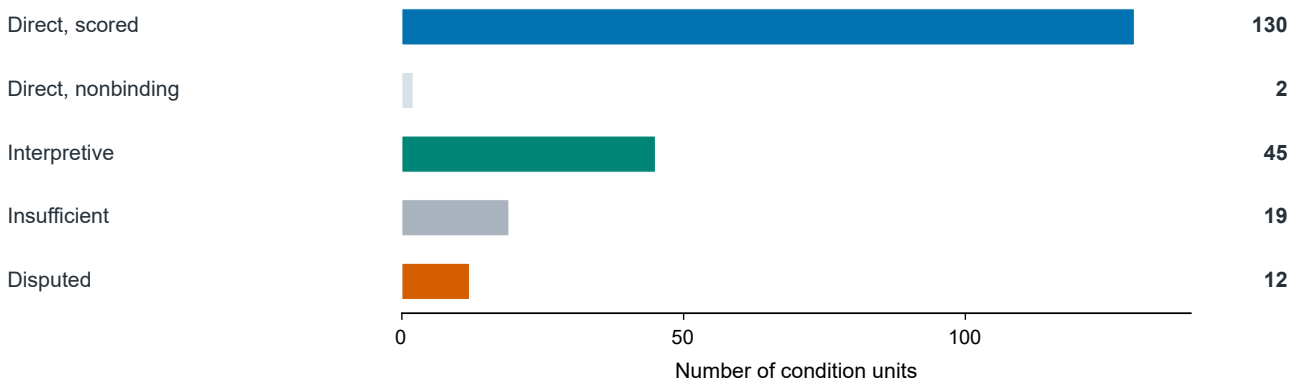

b Direct-text policy before and after source restoration

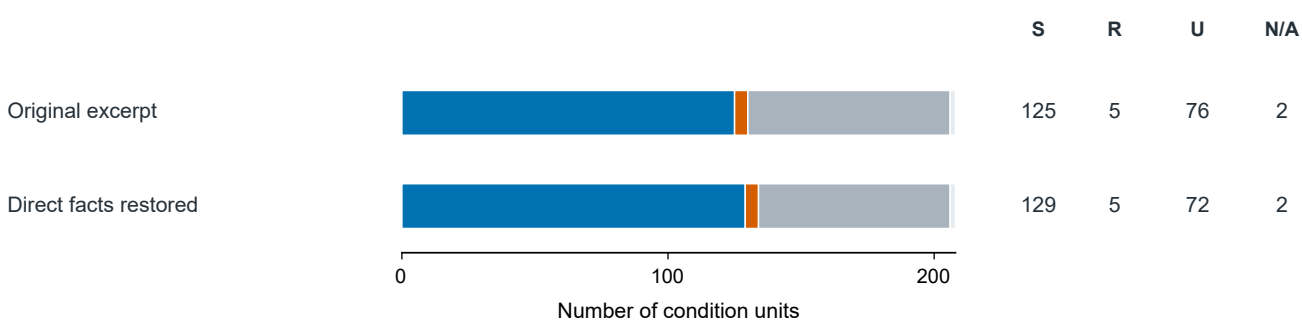

Four attributes recovered in three cases; none alone resolves the full case.

S, supported; R, refuted; U, unknown. Two units are nonbinding examples or permissions.